


IC100 from SDA to SD1
EN_PM ctrl
CTrl power 3V I2C ADC and IO with 3VP
Replace NH3 with SGX CAN sensor PStat
NH3 from SD7 to SD1
NH3 IR Ch2

Weather shield VH
Page 1/5
APR 2024
CHRISTIAN FIOT

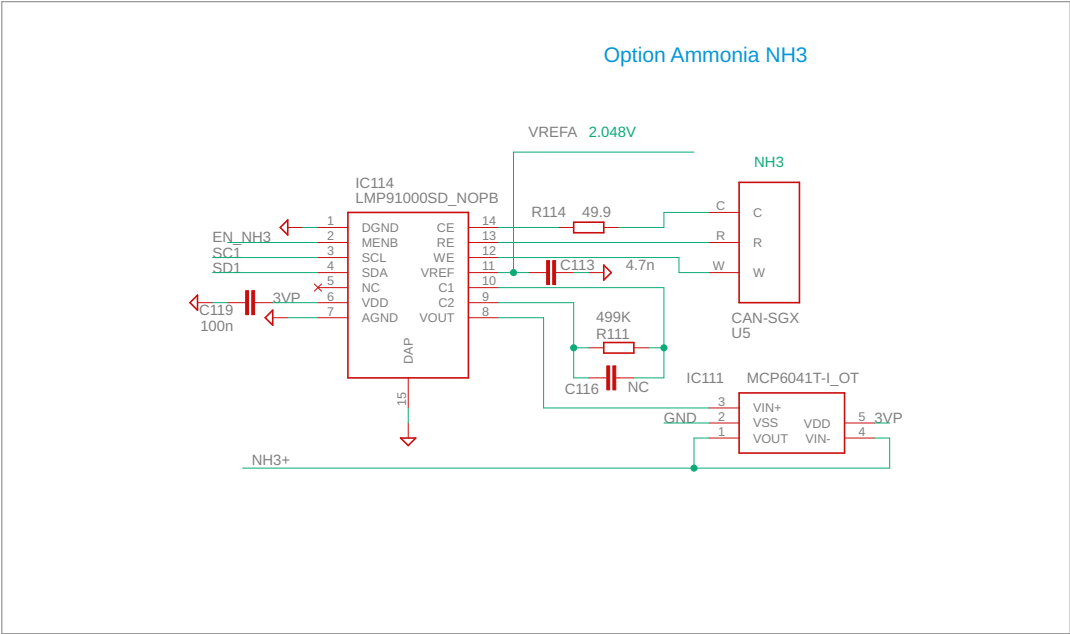

Temp / Humidity / Pressure	OPTION:	OPTION:
SKU 101020193 Seeed \$17	TEMPERATURE	VOC eCO2
BME280 \$6.34	PRESSURE	
BME680 \$10.75	HUMIDITY	

VOC_TEMP VA

22-23-2061
20021121-00006T4LF
N2506-6002RB

J6
929975-01-03-RK-REV

SC2	1	2	SD2
SC3	3	4	SD3
GND	5	6	3VP

x y


spec	0.42	0.19
NH3	0.43	0.19
temp	0.42	0.19

Weather shield VH

Page 2/5

APR 2024

CHRISTIAN FIOT






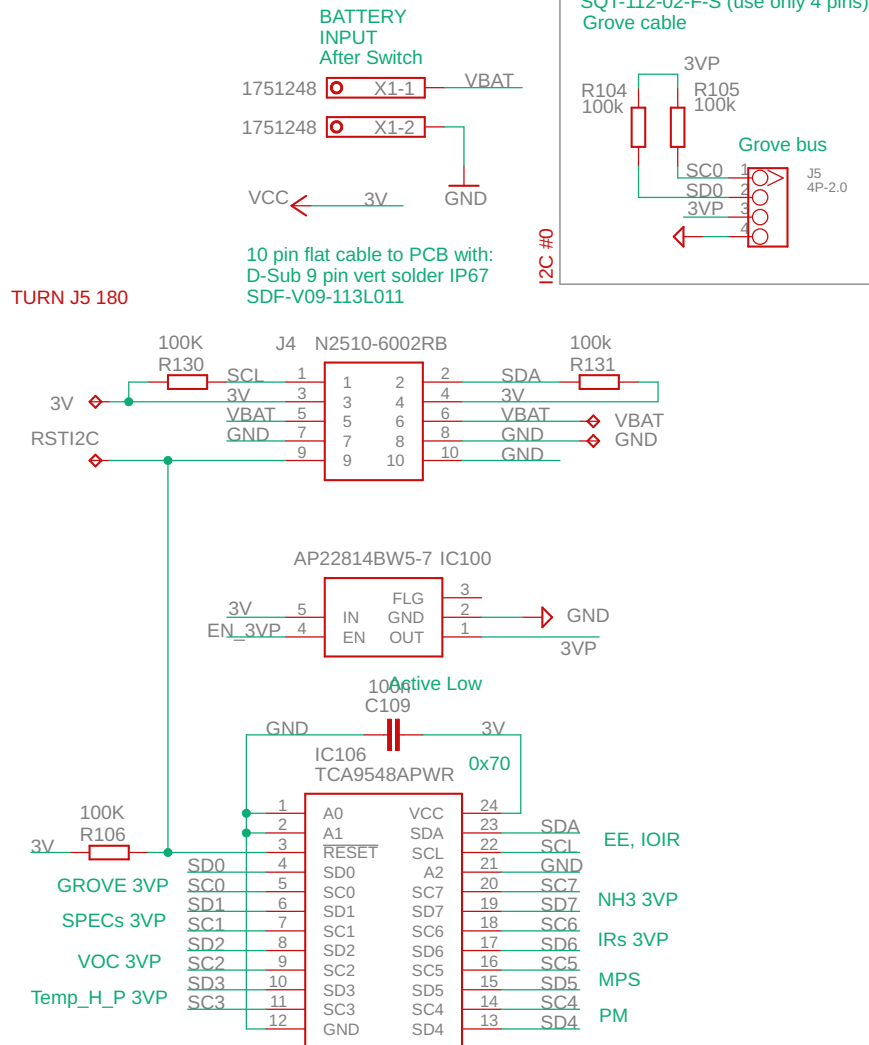


Weather shield VH2

Page 4/5

JUNE 2024

CHRISTIAN FIOT

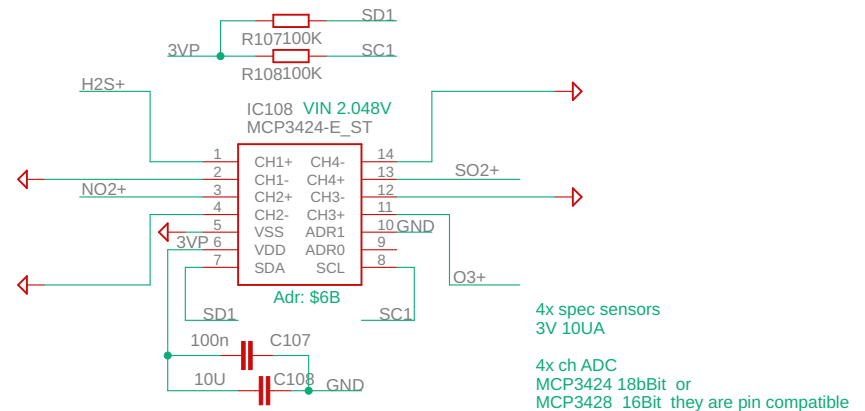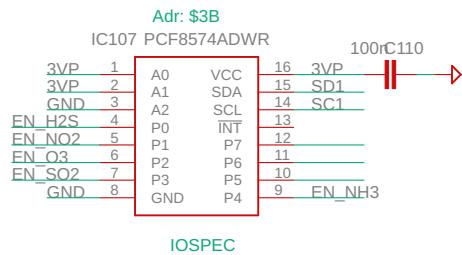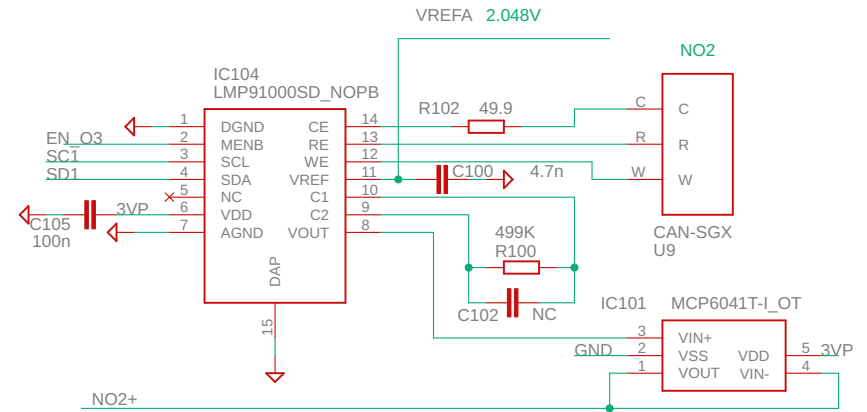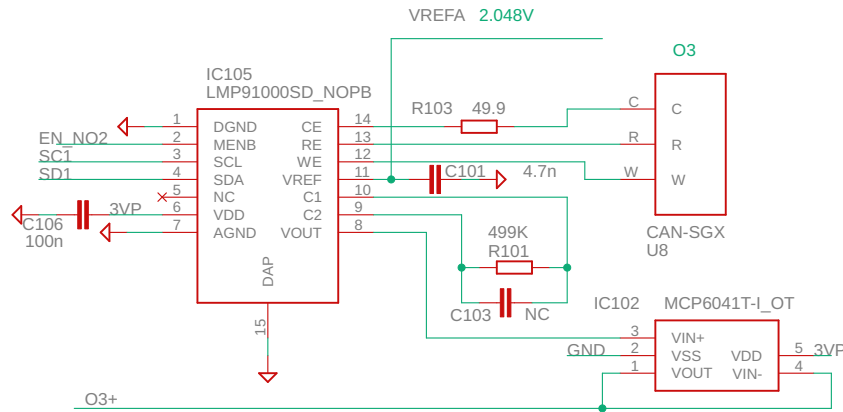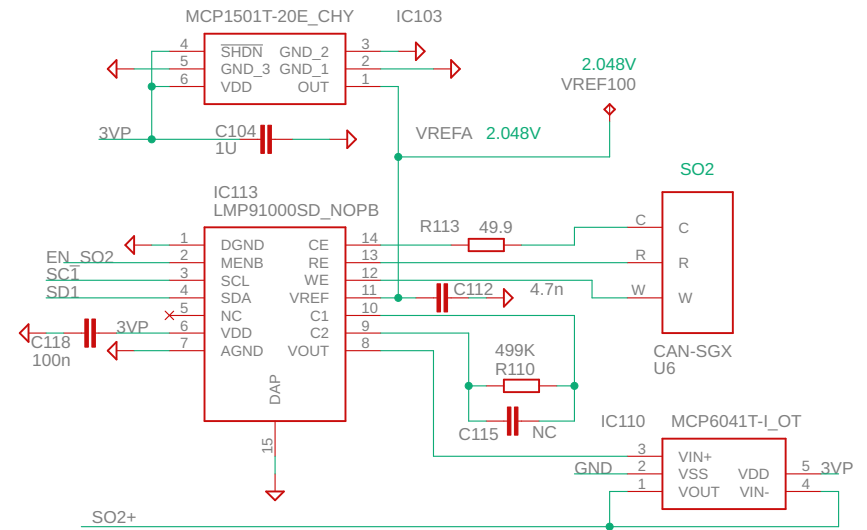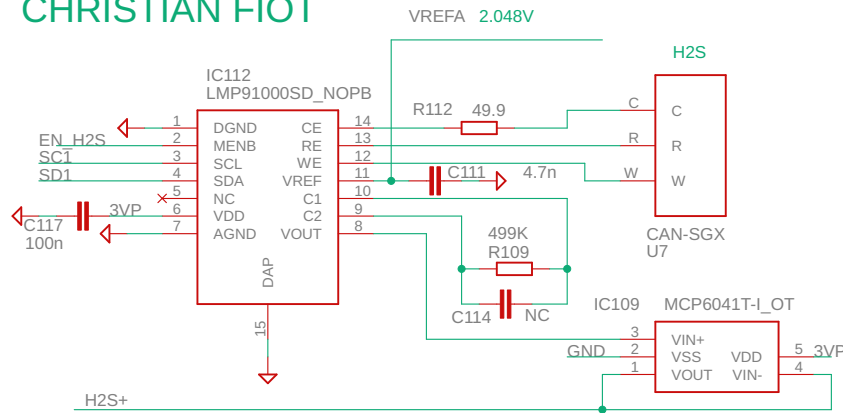

Common VREF
I2C #1

SENSORS BOARD

https://wiki.dfrobot.com/MCP3424_18-Bit_ADC-4_Channel_with_Programmable_Gain_Amplifier__SKU_DFR0316_

<https://github.com/Sensirion/embedded-sps/tree/master/sps30-i2c>

VF2

I2C ON always

SGP40 instead SGP30

4x SPEC

SPEC sensor ON always

SPEC sensor dedicated ADC 18b

ADC DIFF against VREF

Power supply VBat to 3V

Weather shield

La Crosse Technology

Part #925-1418 \$22

2.2" diam 5.8" deep

3x IR or PID

IR sensors Individual Power Ctrl

MPS with Power Ctrl

N3 Power Ctrl

PM sensor changed to SPS30

0x20 IO_0 8574 Wind - Feather

0x21 IO_1 8574 - Feather

0x22 IO_2 8574

0x36 BatGauge - Feather //

0x38 IO_0 8574A Wind - Feather //

0x39 IO_1 8574A - Feather //

0x3A IO_2 8574A IR sensors //

0x3B IO_3 8574A SPEC sensors //

0x40 MPS ATTiny - Feather - ToBeDetermined

0x48 LMP91000 SPECS

0x50 EEPROM - Weather Shield //

0x52 EEPROM LTE module

0x53 EEPROM LTE module

0x59 VOC - SGP40 //

0x68 RTC - Feather Base //

0x69 PM - SPS30

0x6A NH3 - ADC //

0x6B SPECS - ADC //

0x6C IRs - ADC //

0x70 MX I2C //

0x76 TEMP/RH/ATM - BME280 or BME680