

SAMSUNG

PORTABLE DIGITAL AUDIO PLAYER YH-925GS

* Application Model:


YH-925GS/AAW,ELS,HAO,TSE,XAC,XXH

YH-925GS/XAP,XAX,XEU,XFA,XFO,XSA

YH-925GS/XSE,XSG,XSP

SERVICE Manual

PORTABLE DIGITAL AUDIO PLAYER

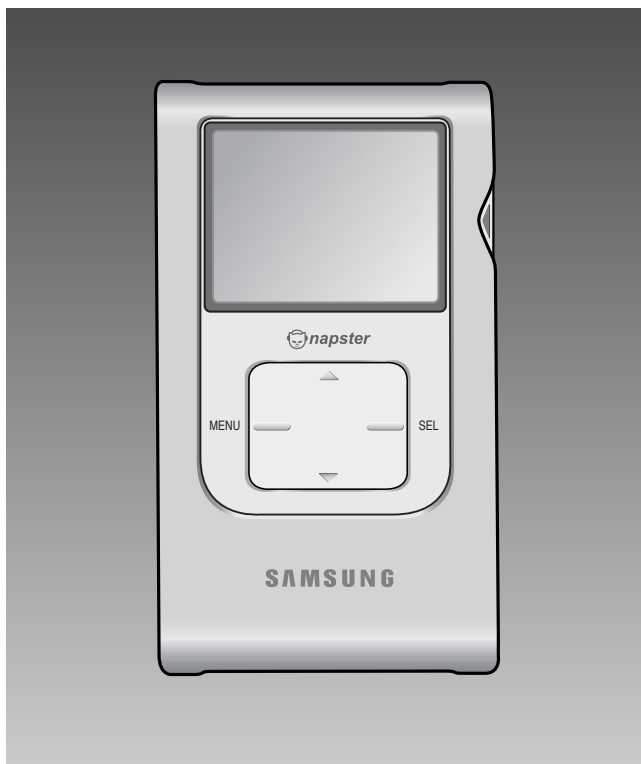


CONTENTS

1. Exploded Views and Parts List
2. Electrical Parts List
3. Block Diagrams
4. Schematic Diagrams

Notice !!

You can search for the updated part code through ITSELF web site.
URL; <http://itself.sec.samsung.co.kr>

- Confidential -

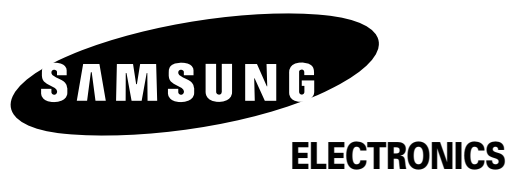


This Service Manual is a property of Samsung Electronics Co.,Ltd.
Any unauthorized use of Manual can be punished under applicable
international and/or domestic law.

© Samsung Electronics Co.,Ltd. DEC. 2004
Printed in Korea
Code no. AH68-01654E

1.Exploded Views and Parts List

1-1 Total Exploded View and Parts List

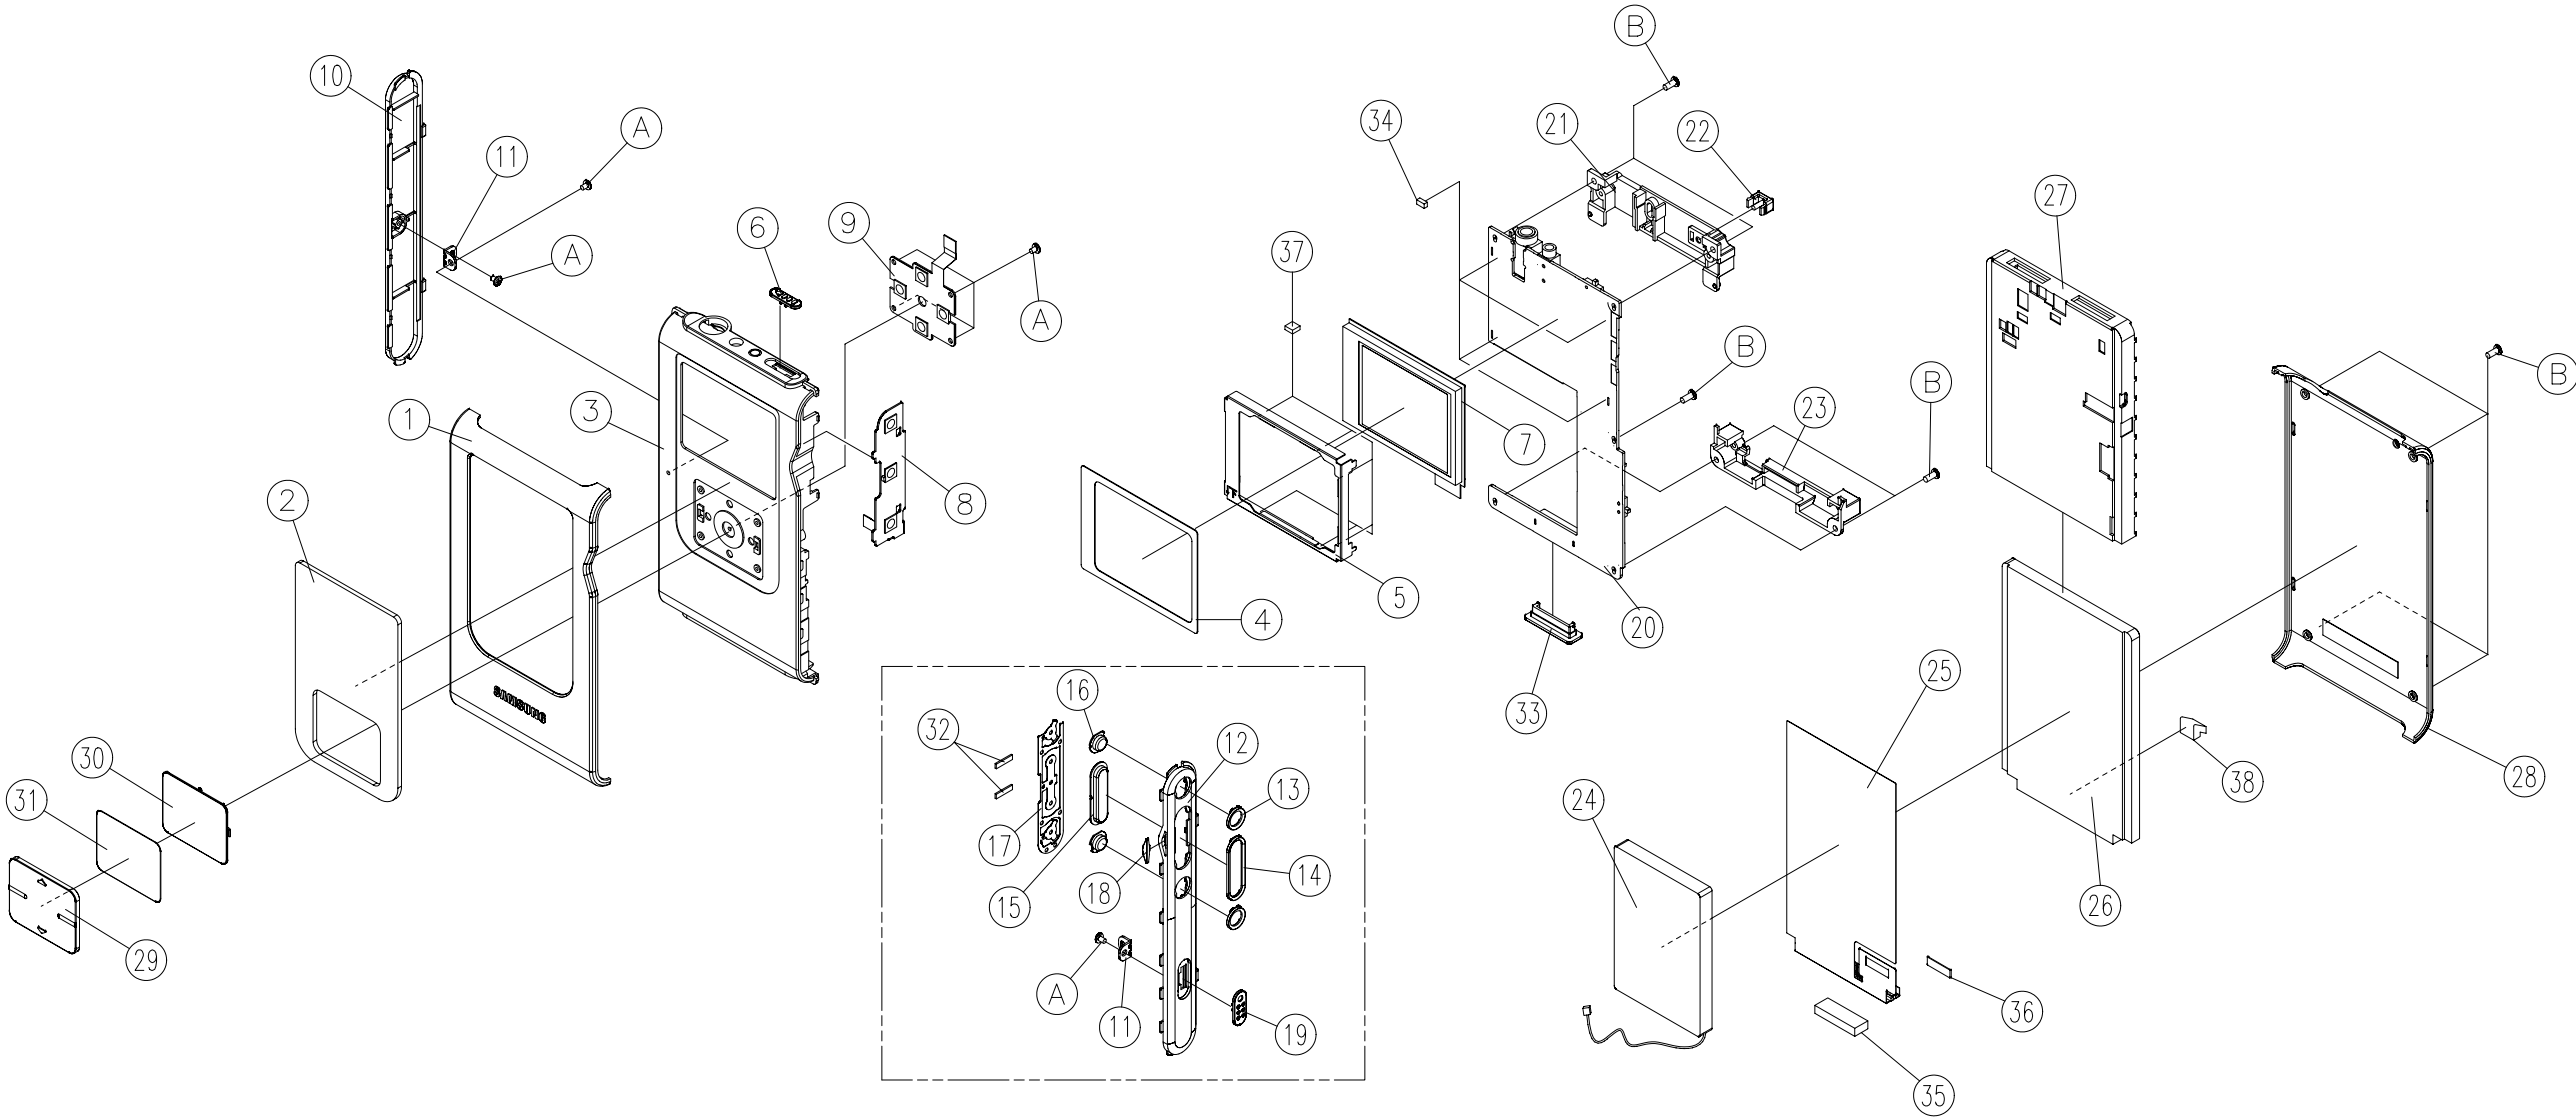

* Parts List of Exploded View

No.	Code No.	Description	Specification	Q'ty	REMARK
1	AH64-03004A	CABINET-TOP	ALP 5052(t0.8)/ANODIZING(SILVER)/DIA CUT	1	
2	AH64-03257A	WINDOW-LCD	ACRYL PLATE(t1.5)CLEAR / HARF MIRROR / HOLOGRAM	1	
3	AH61-01793A	FRAME-TOP	PC WHITE/SPRAY/SILK/INNKNING/UV Half Coating	1	
4	AH63-00898A	SHEET-LCD	PC t0.14(COLOR:NONE)	1	
5	AH61-01819A	BRACKET-LCD	SPTE, T0.3	1	
6	AH64-03011A	KNOB-HOLD	PC WHITE/SPRAY/UV Half Coating	1	
7	AH07-00147A	TFT-LCD	1.79 TFT-color display LCD	1	
8	AH92-02271A	ASSY-SIDE PCB		1	
9	AH92-02270A	ASSY-FRONT PCB		1	
10	AH64-03018B	DECO-SIDE L	PC WHITE/SPRAY/SILK/UV Half Coating	1	
11	AH61-01748A	BRACKET-DECO SIDE	EGI t0.6	2	
12	AH64-03007A	DECO-SIDE R	PC WHITE/SPRAY/SILK/UV Half Coating	1	
13	AH64-03148A	DECO-FF REW	ABS NATURAL(GROSS Cr-PLATING)	2	
14	AH64-03009A	DECO-PLAY	ABS NATURAL(GROSS Cr-PLATING)	1	
15	AH64-03013A	KNOB-PLAY	PC WHITE/SPRAY/SILK/UV Half Coating	1	
16	AH64-03192A	KNOB-FF REW	PC WHITE/SPRAY/SILK/UV Half Coating	2	
17	AH61-01620A	BRKT-KNOB	SUS T0.15	1	
18	AH67-00291A	LENS-PLAY	ACRYL MILKY	1	
19	AH64-03014A	KNOB-REC	PC WHITE/SPRAY/INNKNING/UV Half Coating	1	
20	AH92-02262A	ASSY-MAIN PCB		1	
21	AH61-01794A	HOLDER-JACK	PC WHITE	1	
22	AH64-03021A	KNOB-RESET	PC WHITE	1	
23	AH61-01625A	HOLDER-USB	PC WHITE	1	
24	4301-001045	BATTERY	Li-ion : 900 mA	1	
25	AH92-02272A	ASSY-PCB CONNECTOR		1	
26	AH59-01259A	HDD	KOREA`æ	1	
27	AH61-01624A	HOLDER-HDD	ELASTOMER(WHITE)	1	
28	AH64-03005A	CABINET-BOTTOM	ALP 5052(t0.8)/ANODIZING(SILVER)/SILK	1	
29	AH64-03275A	DECO-NAVI	Ni(t0.25)/ElectroForming	1	
30	AH64-03012A	KNOB-NAVI	PC WHT	1	
31	AH63-00902A	SHEET-NAVI	3M DOUBLE TAPE / PET / 3M DOUBLE TAPE , t0.4	1	
32	AH63-00768A	SHEET-LENS	3M 471	2	
33	AH63-00740A	COVER-USB	ELASTOMER(WHITE)	1	
34	AH63-00903A	CUSHION-LCD	PORON t1.2 (BLACK)	4	
35	AH69-01344A	CUSHION-HDD	PORON t2.0	1	
36	AH63-00907A	CUSHION-CONNECTOR	SILICON t0.6	1	
37	AH63-00903B	CUSHION-BRACKET	PORON t1.3	6	
38	AH63-00869A	CUSHION-CONDUCTIVE	ELASTOMER SPRONGE + Ni Plating	1	
A	6003-001258	SCREW-TAP TITE	TAPTIPE,PH,+,M1.4,B,L2,NI PLT	7	
B	6003-001331	SCREW-TAP TITE	TAPTIPE,BH,+,M1.7,B,L5,Cr PLT	9	

2. Electrical Parts List

*S.N.A. : Service Not Available


Location no.	Code no.	Description & Specification	Remarks	Location no.	Code no.	Description & Specification	Remarks
**** YH-925GS Parts List ****							
	AH92-02270A	ASSY PCB-FRONT:YH-925,FRONT FPCB		R700	2007-000144	R-CHIP;5.1KOHM,5%,1/16W,TP,1005	
	AH92-02271A	ASSY PCB-SIDE:YH-925,SIDE FPCB		R301	2007-000146	R-CHIP;6.8KOHM,5%,1/16W,TP,1005	
	AH92-02272A	ASSY PCB-HDD CON FPCB;YH-925,HDD CON FPC		RD37	2007-000148	R-CHIP;10Kohm,5%,1/16W,DA,TP,1005	
				RD34	2007-000148	R-CHIP;10Kohm,5%,1/16W,DA,TP,1005	
				R924	2007-000148	R-CHIP;10Kohm,5%,1/16W,DA,TP,1005	
				R923	2007-000148	R-CHIP;10Kohm,5%,1/16W,DA,TP,1005	
				R107	2007-000148	R-CHIP;10Kohm,5%,1/16W,DA,TP,1005	
				R108	2007-000148	R-CHIP;10Kohm,5%,1/16W,DA,TP,1005	
				R217	2007-000148	R-CHIP;10Kohm,5%,1/16W,DA,TP,1005	
				R502	2007-000148	R-CHIP;10Kohm,5%,1/16W,DA,TP,1005	
				R218	2007-000152	R-CHIP;20KOHM,5%,1/16W,TP,1005	
				R185	2007-000154	R-CHIP;24Kohm,5%,1/16W,DA,TP,1005	
				RD25	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	
				R205	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	
				R204	2007-000157	R-CHIP;47Kohm,5%,1/16W,TP,1005	
				R960	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R961	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R963	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R964	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R965	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R959	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R920	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R948	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R956	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R957	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R958	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				RD22	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				RD30	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				RD43	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				RD44	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				RD47	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				RD18	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R972	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R973	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R975	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				RD11	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				RD16	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R162	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R164	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R165	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R167	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R170	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R139	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R1	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R10	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R129	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R133	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R137	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R48	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R7	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R9	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R918	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R919	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R402	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R212	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R213	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R216	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R300	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				R401	2007-000162	R-CHIP;100Kohm,5%,1/16W,DA,TP,1005	
				RD20	2007-000164	R-CHIP;150Kohm,5%,1/16W,DA,TP,1005	
				R103	2007-000164	R-CHIP;150Kohm,5%,1/16W,DA,TP,1005	
				R974	2007-000170	R-CHIP;1MOHM,5%,1/16W,TP,1005	
				R505	2007-000170	R-CHIP;1MOHM,5%,1/16W,TP,1005	
				R222	2007-000170	R-CHIP;1MOHM,5%,1/16W,TP,1005	
				R105	2007-000170	R-CHIP;1MOHM,5%,1/16W,TP,1005	
				R181	2007-000170	R-CHIP;1MOHM,5%,1/16W,TP,1005	
				R182	2007-000170	R-CHIP;1MOHM,5%,1/16W,TP,1005	
				RD48	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	
				R971	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	
				R932	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	
				R101	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	
				R100	2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	
				R967	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	
				R968	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	
				RD40	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	
				RD41	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	
				R943	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	
				R200	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	
				R201	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	
				R929	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	
				R930	2007-000172	R-CHIP;10ohm,5%,1/16W,TP,1005	
				RD31	2007-000758	R-CHIP;330KOHM,5%,1/16W,TP,1005	
				RD29	2007-000758	R-CHIP;330KOHM,5%,1/16W,TP,1005	
				RD10	2007-000758	R-CHIP;330KOHM,5%,1/16W,TP,1005	
				R102	2007-000758	R-CHIP;330KOHM,5%,1/16W,TP,1005	
				RD23	2007-000775	R-CHIP;33Kohm,5%,1/16W,DA,TP,1005	
				R109	2007-000982	R-CHIP;5.6KOHM,5%,1/16W,TP,1005	
				R221	2007-001119	R-CHIP;680OHM,5%,1/16W,TP,1005	
				R183	2007-001244	R-CHIP;91Kohm,5%,1/16W,DA,TP,1005	
MIC1	3003-001087	MIC-CONDENSOR;2V,500UA,-44DB,2.2KOHM					
LCD1	AH07-00147A	LCD;VG12E28-TLTA-YH-925,128X RGBX					
	AH61-01819A	BRACKET-LCD;YH-925,SPT;E 0.3,-,-,-					
UNDER LCD	AH63-00903A	CUSHION-LCD;YH-925,PORON,T1.3,-,-,BLACK,					
	AH63-00903B	CUSHION-BRACKET;YH-925,PORON,T1.3,-,-,NO					
D1	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SOD-323					
D2	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SOD-323					
D21	0401-001090	DIODE-SWITCHING;1SS355,80V,100MA,SOD-323					
DD3	0402-001075	DIODE-RECTIFIER;MBR0520L,20V,0.5A,SOD-12					
DD1	0404-001203	DIODE-SCOTTKY;B240A,40V,2000MA,SMA,TP					
D7	0406-001005	DIODE-TVS;SM05,6V/1mA,300,SOT-23					
D20	0406-001005	DIODE-TVS;SM05,6V/1mA,300,SOT-23					
D19	0406-001005	DIODE-TVS;SM05,6V/1mA,300,SOT-23					
D18	0406-001005	DIODE-TVS;SM05,6V/1mA,300,SOT-23					
D6	0406-001128	DIODE-TVS;MLVS-0603-E08,50V,-,-					
D8	0406-001128	DIODE-TVS;MLVS-0603-E08,50V,-,-					
D9	0406-001128	DIODE-TVS;MLVS-0603-E08,50V,-,-					
LD9	0406-001128	DIODE-TVS;MLVS-0603-E08,50V,-,-					
D5	0406-001128	DIODE-TVS;MLVS-0603-E08,50V,-,-					
D10	0406-001128	DIODE-TVS;MLVS-0603-E08,50V,-,-					
D11	0406-001128	DIODE-TVS;MLVS-0603-E08,50V,-,-					
D16	0406-001128	DIODE-TVS;MLVS-0603-E08,50V,-,-					
D17	0406-001128	DIODE-TVS;MLVS-0603-E08,50V,-,-					
Q17	0501-000730	TR-SMALL SIGNAL;2SA1577,PNP,200MW,SOT-32					
Q16	0501-000730	TR-SMALL SIGNAL;2SA1577,PNP,200MW,SOT-32					
Q2	0504-000211	TR-DIGITAL;DTC143TUN,NPN,200mW,4.7K,SC-70					
Q21	0504-001011	TR-DIGITAL;NPN,200mW,4.7K,10K,SC-70,TP					
Q9	0505-001426	FET-SILICON;IRLML6401,P-12V,-4.3A,0.05oh					
Q22	0505-001426	FET-SILICON;IRLML6401,P-12V,-4.3A,0.05oh					
Q20	0505-001426	FET-SILICON;IRLML6401,P-12V,-4.3A,0.05oh					
Q19	0505-001426	FET-SILICON;IRLML6401,P-12V,-4.3A,0.05oh					
Q15	0505-001426	FET-SILICON;IRLML6401,P-12V,-4.3A,0.05oh					
Q14	0505-001845	FET-SILICON;S2312DS,N,20V,3.77A,0.051oh					
U1	0902-001744	IC-MICROPROCESSOR;PP5020-TF,24MHZ,16BIT,					
U5	0909-001031	IC-REAL TIME CLOCK;8563,-,TSSOP,8P,118MI					
U4	1105-001385	IC-DRAM;K4S561633,4X4MX16BIT,CSP,54P,-					
U3	1107-001329	IC-FLASH MEMORY;29LV400,512Kx8/256Kx16,F					
U15	1202-001061	IC-VOLTAGE COMP;LMV331M5,SOT-23,5P,3X1					
U11	1203-003254	IC-DC/DC CONVERTER;LTC3455,QFN,24P,4X4MM					
U13	1203-003257	IC-DC/DC CONVERTER;XC9103,SOT-25,5P,2.9X					
U7	1203-003442	IC-VOL DETECTOR;XC61FC2842MR,SOT-23,3P,					
U16	1203-003530	IC-POSIFIXED REG;XC62RP,SOT-23,3P,2.9x					
U2	1205-002404	IC-CODEC;AK4537VN,QFN,52P,7.2X7.2MM,PLA					
U12	1205-002517	IC-SWITCH;TPS2020D,SQ,8P,-,-,5.5V,725mW,					
R121	2007-000074	R-CHIP;100ohm,5%,1/10W,TP,1608					
R160	2007-000113	R-CHIP;33ohm,5%,1/10W,TP,1608					
R577	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005					
R123	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005					
R122	2007-000138	R-CHIP;100ohm,5%,1/16W,TP,1005					
R225	2007-000139	R-CHIP;220OHM,5%,1/16W,TP,1005					
R224	2007-000139	R-CHIP;220OHM,5%,1/16W,TP,1005					
R220	2007-000139	R-CHIP;220OHM,5%,1/16W,TP,1005					
R134	2007-000139	R-CHIP;220OHM,5%,1/16W,TP,1005					
RD28	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005					
RD27	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005					
RD26	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005					
R970	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005					
RD33	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005					
RD35	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005					
RD36	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005					
RD45	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005					
RD7	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005					
R110	2007-000140	R-CHIP;1Kohm,5%,1/16W,TP,1005					
R120	2007-						

Location no.	Code no.	Description & Specification	Remarks	Location no.	Code no.	Description & Specification	Remarks
R180	2007-001292	R-CHIP:330HM,5%,1/16W,TP:1005		C732	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
RD14	2007-001325	R-CHIP:3.3Kohm,5%,1/16W,TP:1005		CD15	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R112	2007-003001	R-CHIP:120HM,5%,1/16W,DA,TP:1005		CD16	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R202	2007-003025	R-CHIP:6.80HM,5%,1/16W,DA,TP:1005		CD17	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R203	2007-003025	R-CHIP:6.80HM,5%,1/16W,DA,TP:1005		CD24	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R227	2007-007001	R-CHIP:3.9KOHM,5%,1/16W,DA,TP:1005		CD26	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R226	2007-007001	R-CHIP:3.9KOHM,5%,1/16W,DA,TP:1005		CD27	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R206	2007-007001	R-CHIP:3.9KOHM,5%,1/16W,DA,TP:1005		CD28	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R104	2007-007099	R-CHIP:2MOHM,5%,1/16W,DA,TP:1005		CD30	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
RD3	2007-007107	R-CHIP:100Kohm,1%,1/16W,TP:1005		C731	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
RD13	2007-007156	R-CHIP:10HM,5%,1/16W,TP:1005		C716	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
RD12	2007-007156	R-CHIP:10HM,5%,1/16W,TP:1005		C717	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
RD4	2007-007488	R-CHIP:75Kohm,1%,1/16W,DA,TP:1005		C718	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
RD5	2007-008453	R-CHIP:1.24KOHM,1%,1/16W,TP:1005		C719	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
RD2	2007-008676	R-CHIP:80.6KOHM,1%,1/16W,TP:1005		C721	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
RD6	2007-008697	R-CHIP:2.49KOHM,1%,1/16W,TP:1005		C723	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
RD8	2007-008697	R-CHIP:2.49KOHM,1%,1/16W,TP:1005		C724	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
RD21	2007-008780	R-CHIP:0.1OHM,1%,1/16W,TP:1005		C729	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
RD1	2007-009079	R-CHIP:255Kohm,1%,1/16W,TP:1005		C730	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R950	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C13	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R949	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C14	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R945	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C15	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R944	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C16	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R951	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C17	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R952	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C18	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R953	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C21	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R954	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C212	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R955	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C214	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R933	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C12	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R935	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C10	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R936	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C100	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R937	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C101	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R938	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C103	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R942	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C104	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R941	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C106	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R940	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C107	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R939	2011-001262	R-NET:220HM,5%,1/16W,L,CHIP8PT,TP2.		C11	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R947	2011-001394	R-NET:100KOHM,5%,1/16W,L,CHIP8PT,TP		C119	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R946	2011-001394	R-NET:100KOHM,5%,1/16W,L,CHIP8PT,TP		C25	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R928	2011-001394	R-NET:100KOHM,5%,1/16W,L,CHIP8PT,TP		C26	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R927	2011-001394	R-NET:100KOHM,5%,1/16W,L,CHIP8PT,TP		C28	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
R925	2011-001394	R-NET:100KOHM,5%,1/16W,L,CHIP8PT,TP		C29	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C727	2203-000138	C-CER,CHIP:1.5nF,10%,50V,X7R,TP:1005,-		C30	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C726	2203-000138	C-CER,CHIP:1.5nF,10%,50V,X7R,TP:1005,-		C300	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
CD21	2203-000233	C-CER,CHIP:0.1nF,5%,50V,COG,-,1005		C301	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
CD20	2203-000233	C-CER,CHIP:0.1nF,5%,50V,COG,-,1005		C31	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
CD1	2203-000233	C-CER,CHIP:0.1nF,5%,50V,COG,-,1005		C32	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C701	2203-000233	C-CER,CHIP:0.1nF,5%,50V,COG,-,1005		C24	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
CD3	2203-000278	C-CER,CHIP:0.01NF,0.5PF,50V,COG,TP:1005		C216	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C705	2203-000278	C-CER,CHIP:0.01NF,0.5PF,50V,COG,TP:1005		C22	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C704	2203-000278	C-CER,CHIP:0.01NF,0.5PF,50V,COG,TP:1005		C221	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C219	2203-000278	C-CER,CHIP:0.01NF,0.5PF,50V,COG,TP:1005		C225	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C218	2203-000278	C-CER,CHIP:0.01NF,0.5PF,50V,COG,TP:1005		C226	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C710	2203-000330	C-CER,CHIP:0.012NF,5%,50V,COG,TP:1005		C234	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C709	2203-000330	C-CER,CHIP:0.012NF,5%,50V,COG,TP:1005		C233	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C504	2203-000330	C-CER,CHIP:0.012NF,5%,50V,COG,TP:1005		C230	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C503	2203-000330	C-CER,CHIP:0.012NF,5%,50V,COG,TP:1005		C23	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005	
C725	2203-000438	C-CER,CHIP:1nF,10%,50V,X7R,1005		C700	2203-002982	C-CER,CHIP:6.8nF,10%,50V,X7R,TP:1005	
C227	2203-000438	C-CER,CHIP:1nF,10%,50V,X7R,1005		C720	2203-005065	C-CER,CHIP:1000nF,+80-20%,10V,Y5V,-,1608	
C8	2203-000812	C-CER,CHIP:0.033NF,5%,50V,COG,TP:1005		C209	2203-005172	C-CER,CHIP:47nF,+80-20%,25V,Y5V,TP:1005	
C6	2203-000812	C-CER,CHIP:0.033NF,5%,50V,COG,TP:1005		C231	2203-005172	C-CER,CHIP:47nF,+80-20%,25V,Y5V,TP:1005	
C5	2203-000812	C-CER,CHIP:0.033NF,5%,50V,COG,TP:1005		C223	2203-005384	C-CER,CHIP:4700nF,+80-20%,10V,Y5V,TP:201	
C2	2203-000812	C-CER,CHIP:0.033NF,5%,50V,COG,TP:1005		CD7	2203-005386	C-CER,CHIP:10000nF,80-20%,10V,Y5V,TP:321	
C3	2203-000812	C-CER,CHIP:0.033NF,5%,50V,COG,TP:1005		CD9	2203-005493	C-CER,CHIP:220nF,+80-20%,16V,Y5V,1005	
C4	2203-000812	C-CER,CHIP:0.033NF,5%,50V,COG,TP:1005		CD13	2203-005493	C-CER,CHIP:220nF,+80-20%,16V,Y5V,1005	
C222	2203-000885	C-CER,CHIP:4.7nF,10%,25V,X7R,TP:1005,-		C201	2203-005493	C-CER,CHIP:220nF,+80-20%,16V,Y5V,1005	
CD12	2203-000995	C-CER,CHIP:0.047NF,5%,50V,COG,TP:1005		C200	2203-005493	C-CER,CHIP:220nF,+80-20%,16V,Y5V,1005	
C211	2203-000995	C-CER,CHIP:0.047NF,5%,50V,COG,TP:1005		C224	2203-005900	C-CER,CHIP:1000NF,+80-20%,10V,Y5V,1005	
C210	2203-000995	C-CER,CHIP:0.047NF,5%,50V,COG,TP:1005		C232	2203-005900	C-CER,CHIP:1000NF,+80-20%,10V,Y5V,1005	
C205	2203-000995	C-CER,CHIP:0.047NF,5%,50V,COG,TP:1005		C250	2203-005900	C-CER,CHIP:1000NF,+80-20%,10V,Y5V,1005	
C204	2203-000995	C-CER,CHIP:0.047NF,5%,50V,COG,TP:1005		C208	2203-005900	C-CER,CHIP:1000NF,+80-20%,10V,Y5V,1005	
C502	2203-001201	C-CER,CHIP:0.007nF,0.5pF,50V,NP0,TP:1005		C150	2203-005900	C-CER,CHIP:1000NF,+80-20%,10V,Y5V,1005	
C501	2203-001201	C-CER,CHIP:0.007nF,0.5pF,50V,NP0,TP:1005		C206	2203-005900	C-CER,CHIP:1000NF,+80-20%,10V,Y5V,1005	
C105	2203-001201	C-CER,CHIP:0.007nF,0.5pF,50V,NP0,TP:1005		C207	2203-005900	C-CER,CHIP:1000NF,+80-20%,10V,Y5V,1005	
C60	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		CD11	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C59	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		CD14	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C58	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		CD2	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C57	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		CD29	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C711	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		CD4	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C712	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		CD8	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C713	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		CD10	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C714	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		C19	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C715	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		C213	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C56	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		C215	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C33	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		C217	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C34	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		C235	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C38	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		C27	2203-006143	C-CER,CHIP:22000NF,20%,6.3V,X5R,TP:3216	
C500	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		CD6	2203-006144	C-CER,CHIP:4700NF,10%,16V,X7R,TP:3216	
C51	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		C220	2404-000175	C-TA,CHIP:2.2uF,20%,6.3V,-,TP:3216,1.1mm	
C52	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		CD22	2404-001134	C-TA,CHIP:100uF,20%,6.3V,LZ,TP:4028	
C53	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		C108	2404-001134	C-TA,CHIP:100uF,20%,6.3V,LZ,TP:4028	
C54	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		C401	2404-001222	C-TA,CHIP:22uF,20%,10V,LZ,TP:3216	
C55	2203-002709	C-CER,CHIP:100nF,+80-20%,16V,Y5V,-,1005		C722	2404-001247	C-TA,CHIP:22uF,20%,4V,WT,TP:2012	

Location no.	Code no.	Description & Specification	Remarks	Location no.	Code no.	Description & Specification	Remarks
C229	2404-001247	C-TA,CHIP;22UF,20%,4V,WT,TP,2012					
C228	2404-001247	C-TA,CHIP;22UF,20%,4V,WT,TP,2012					
C102	2404-001247	C-TA,CHIP;22UF,20%,4V,WT,TP,2012					
C203	2404-001338	C-TA,CHIP;220UF,20%,4V,WT,TP,3528					
C202	2404-001338	C-TA,CHIP;220UF,20%,4V,WT,TP,3528					
L2	2703-001167	INDUCTOR-SMD;8.2nH,5%,1608					
L1	2703-001167	INDUCTOR-SMD;8.2nH,5%,1608					
L14	2703-001871	INDUCTOR-SMD;10uH,20%,6060					
LD1	2703-001873	INDUCTOR-SMD;4.7uH,20%,6060					
LD2	2703-001873	INDUCTOR-SMD;4.7uH,20%,6060					
L12	2704-000005	INDUCTOR-SMD-ARRAY;90OHM,50V,370MA,-,0.3					
Y2	2801-003856	CRYSTAL-SMD;0.032768MHz,20ppm,28-ACF,7pF					
Y1	2801-004277	CRYSTAL-SMD;24MHz,50ppm,28-ACF,12pF,50oh					
Y3	2801-004318	CRYSTAL-SMD;12MHz,20ppm,-,12PF,80ohm,TP					
L21	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L25	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L3	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L30	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L33	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L40	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L8	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L11	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L15	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L16	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L17	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L20	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L19	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L18	3301-001262	BEAD-SMD;1000ohm,1.6x0.8x0.8mm,190mA,,,					
L4	3301-001477	BEAD-SMD;60ohm,2.0x1.2x0.6mm,3000mA,TP,					
LD3	3301-001477	BEAD-SMD;60ohm,2.0x1.2x0.6mm,3000mA,TP,					
LD4	3301-001477	BEAD-SMD;60ohm,2.0x1.2x0.6mm,3000mA,TP,					
LD5	3301-001477	BEAD-SMD;60ohm,2.0x1.2x0.6mm,3000mA,TP,					
LD8	3301-001477	BEAD-SMD;60ohm,2.0x1.2x0.6mm,3000mA,TP,					
L29	3301-001477	BEAD-SMD;60ohm,2.0x1.2x0.6mm,3000mA,TP,					
L31	3301-001477	BEAD-SMD;60ohm,2.0x1.2x0.6mm,3000mA,TP,					
L32	3301-001477	BEAD-SMD;60ohm,2.0x1.2x0.6mm,3000mA,TP,					
L38	3301-001477	BEAD-SMD;60ohm,2.0x1.2x0.6mm,3000mA,TP,					
L39	3301-001477	BEAD-SMD;60ohm,2.0x1.2x0.6mm,3000mA,TP,					
SW11	3404-001143	SWITCH-TACT;12VDC,20mA,180gf,3.2x4.9x1.7					
SW8	3408-001038	SWITCH-SLIDE;4V,300mA,SPST,ON-ON,-					
SW10	3408-001038	SWITCH-SLIDE;4V,300mA,SPST,ON-ON,-					
J10	3708-001912	CONNECTOR-FPC/FFC/PIC;9P,0.5mm,SMD-A,AU,					
J12	3708-001912	CONNECTOR-FPC/FFC/PIC;9P,0.5mm,SMD-A,AU,					
J4	3708-001919	CONNECTOR-FPC/FFC/PIC;20P,0.5MM,SMD-A,AU,					
J5A	3710-001942	CONNECTOR-INTERFACE;24P,1R,0.5MM,SMD-A,A					
J2	3711-002162	CONNECTOR-HEADER-BOX;2P,1R,1.25MM,SMD-S,					
J30	3711-005183	CONNECTOR-HEADER-BOX;40P,2R,0.4MM,SMD-S,					
J6	3722-001953	JACK-EAR PHONE;6P,-,AG,BLACK,-					
J7	3722-001979	JACK-EAR PHONE;6P,-,AG,BLK,-					

3. Block Diagram

YH-925 BLOCK DIAGRAM

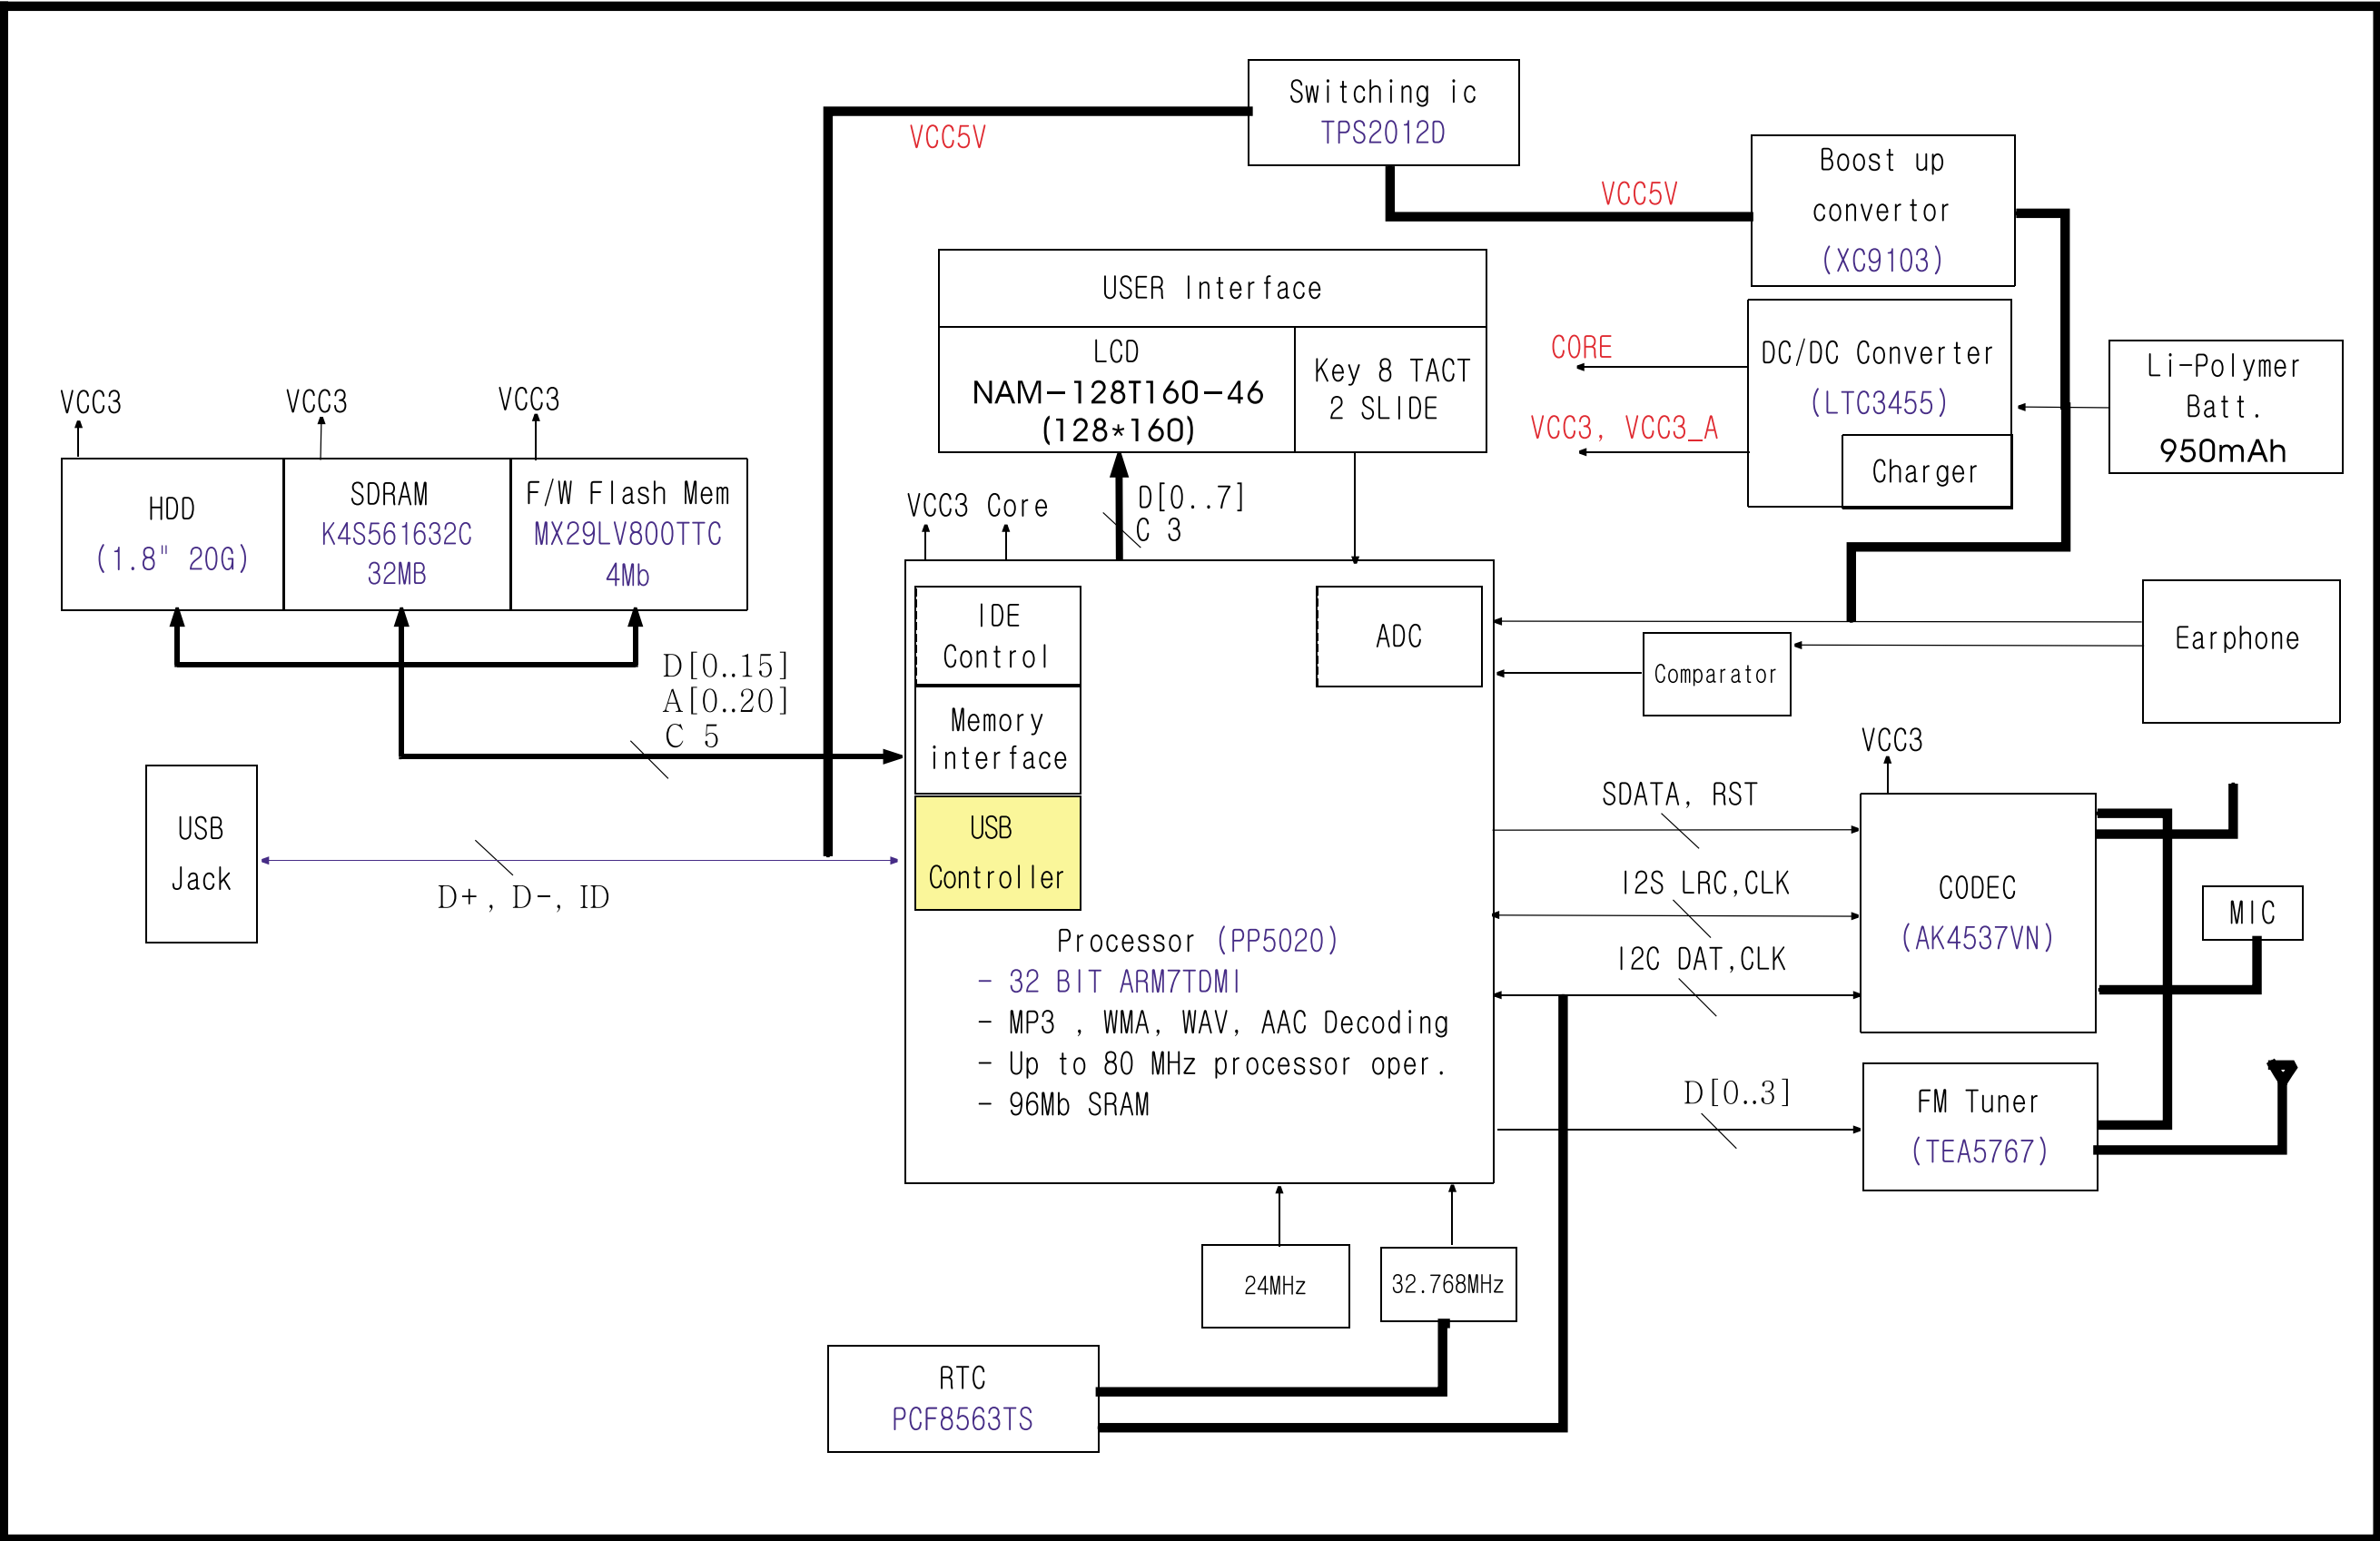

4. Schematic Diagram

- This Document can not be used without Samsung's authorization -

4-1 Main

