

THE SUNESTA - Increase your outdoor living area and create the perfect day with a customizable Sunesta retractable awning. An overhead retractable not only adds shade, it adds beauty and value to your property. Featuring multiple add-on options and availability, The Sunesta is offered with 7 different projections, up to 40' width.

FRAME

Mounting Bar: One piece cold roll from steel 40x40x40x40mm profile wall thickness 1/16". Hot dip coated strip powdercoated.
Arms: Constructed of extruded aluminum profiles. Electrostatic powder coated. Hinged by 4 PVC coated steel cables. Cables are connected to up to 3 tension springs.
Fabric Tube Support Brackets: Constructed of one piece extruded aluminum profile wall thickness 1/4". Electrostatic powdercoated.
Smartcase: Cassette constructed of 2 piece extruded aluminum profile. Electrostatic powdercoated.
Fabric tube: Constructed of galvanized steel, ø 85 mm with groove for the attachment of the fabric, mounted maintenance-free to the lateral parts.
Front bar: One piece extruded aluminum profile wall thickness 1/16". Electrostatic powdercoated.
Shoulder: Aluminum shoulder mechanism with an adjustable tilting range of 0-45 degrees. Electrostatic powdercoated.
Hardware: A2 stainless steel

FRAME COLORS

The Sunesta frame is available in white, beige, brown, & clay.

White: RAL 9010 Beige: RAL 1015 Brown: RAL 8019 Clay: RAL 1019

MOUNTING BRACKETS

The Sunesta can be mounted with any of the following extruded aluminum electrostatic powdercoated brackets:
 Wall bracket, Ceiling bracket, Roof bracket.
 The number of mounting brackets recommended will be based up overall width of unit specified by manufacturer.

GEAR / MOTOR

The Sunesta is equipped with a manual 3:1 or 7.8:1 gear depending on size of unit.
 The Sunesta can be optionally equipped with a 50 Nm wired or wireless SOMFY motor. Motor can be mounted on left or right side of the fabric roller tube.
Wired standard motor: SOMFY 550
Wired manual override motor: SOMFY 550-CMO
Wireless standard motor: SOMFY 550-ALTUS
Wireless manual override motor: SOMFY 550-RTS-CMO

FABRIC COVER

Fabric: The Sunesta can be equipped with any standard awning and marine grade acrylic fabrics or fire retardant fabrics. Specific fabrics may be available upon request by specifier and approved by manufacturer.
Thread: Thread to be PTFE GORE TENARA when using acrylic or fire retardant fabrics.

MAXIMUM DIMENSIONS

Dimensions: The Sunesta can be built to the inch up to 40' wide and has available projections of 5', 6'8", 8'3", 10', 11'6", 13', & 14'8".
Weight: Complete unit with fabric is 13lbs/linear ft.

WIND RESISTANCE


The Sunesta has the following wind resistance class ratings:

Projection	Wind Force	Wind Speed
8'3"	6 (according to Beaufort wind scale)	24-30 mph
10'	6 (according to Beaufort wind scale)	24-30 mph
11'6'	6 (according to Beaufort wind scale)	24-30 mph
13'0"	6 (according to Beaufort wind scale)	24-30 mph
14'8"	5 (according to Beaufort wind scale)	17-23 mph

WARRANTY

Frame: 15 years Motor: 5 years Fabric: 10 years

1. Failure strength of arm:

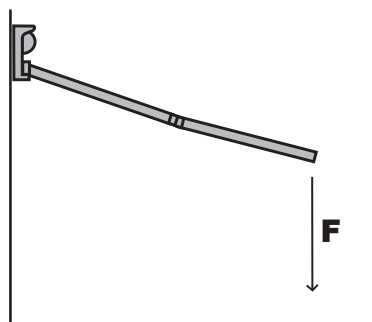


Projection	Failure Value (F)
8'-3"	159 lb
10'-0"	132 lb
11'-6"	176 lb
13'-0"	154 lb
14'-8"	136 lb

F = Failure value per arm
(with the weight on the arm end)

2. Strength of steel cables (PVC covered):

Cable diameter:	0.10 inches
Number of cables:	4
Failure load:	4 x 1,083 lb = 4,332 lb
Working life of cables:	80,000 movements


3. Number and strength of tension springs in arms:

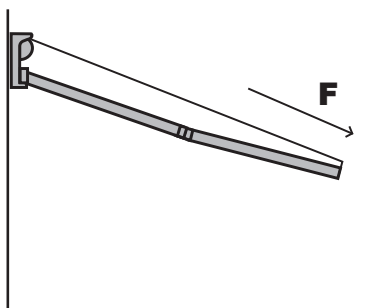

Projection	Number of Springs p/Arm	Tensional Force (F)
8'-3"	2	176 lb
10'-0"	2	200 lb
11'-6"	3	218 lb
13'-0"	3	220 lb
14'-8"	3	198 lb

F = Tensional force of one pair of arms
on the fabric for an open awning


4. Arm profile & dimensions:

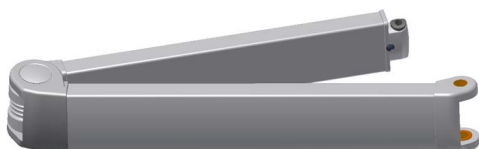


Front Profile	Up to 10' Arm	11'6", 13', & 14'8" Arm
Height:	2.42 in	2.44 in
Width:	1.24 in	1.26 in
Wall Thickness:	0.06 to 0.08 in	0.07 to 0.09 in
Weight:	0.54 lb p/ft	0.63 lb p/ft

Rear Profile	Up to 10' Arm	11'6", 13', & 14'8" Arm
Height:	2.72 in	2.80 in
Width:	1.34 in	1.38 in
Wall Thickness:	0.06 to 0.16 in	0.08 to 0.20 in
Weight:	0.67 lb p/ft	0.88 lb p/ft


SUNESTA COMPONENTS & DIMENSIONS

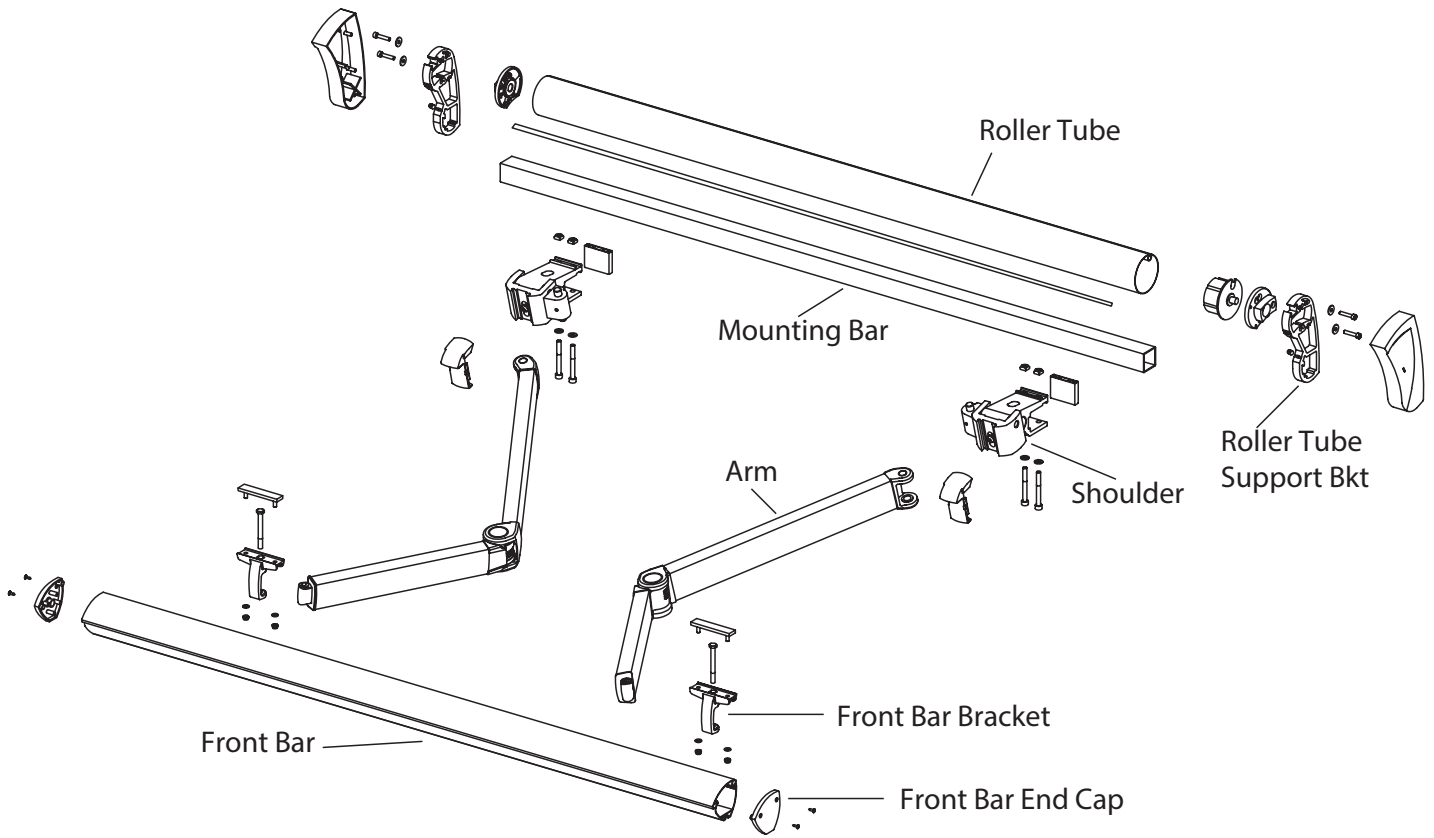


SUNESTA MOUNTING DIMENSIONS

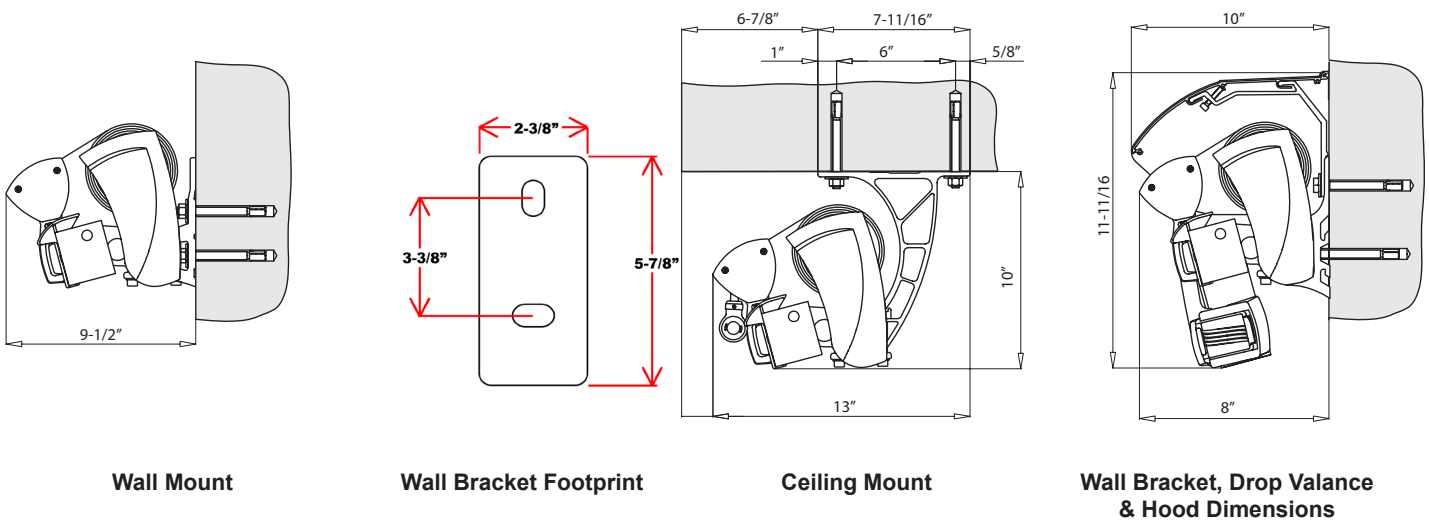


SUNESTA with SMARTCASE COMPONENTS (OPTIONAL)

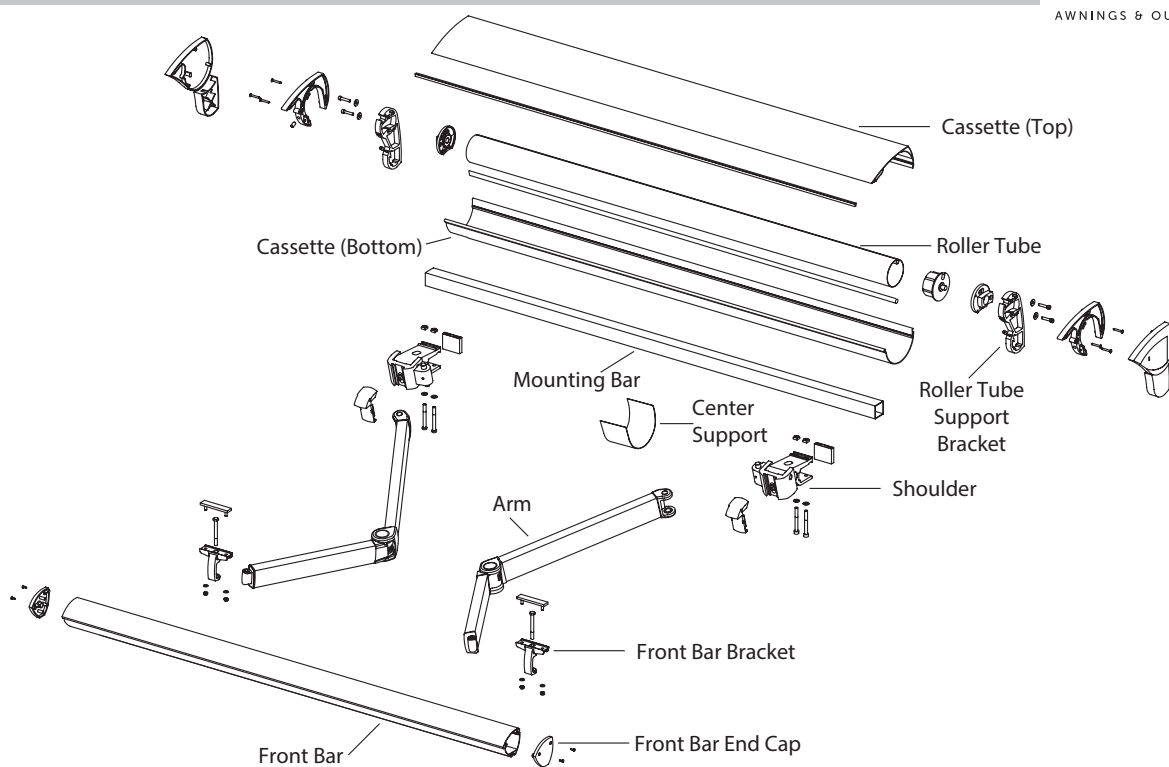


MOUNTING OPTIONS

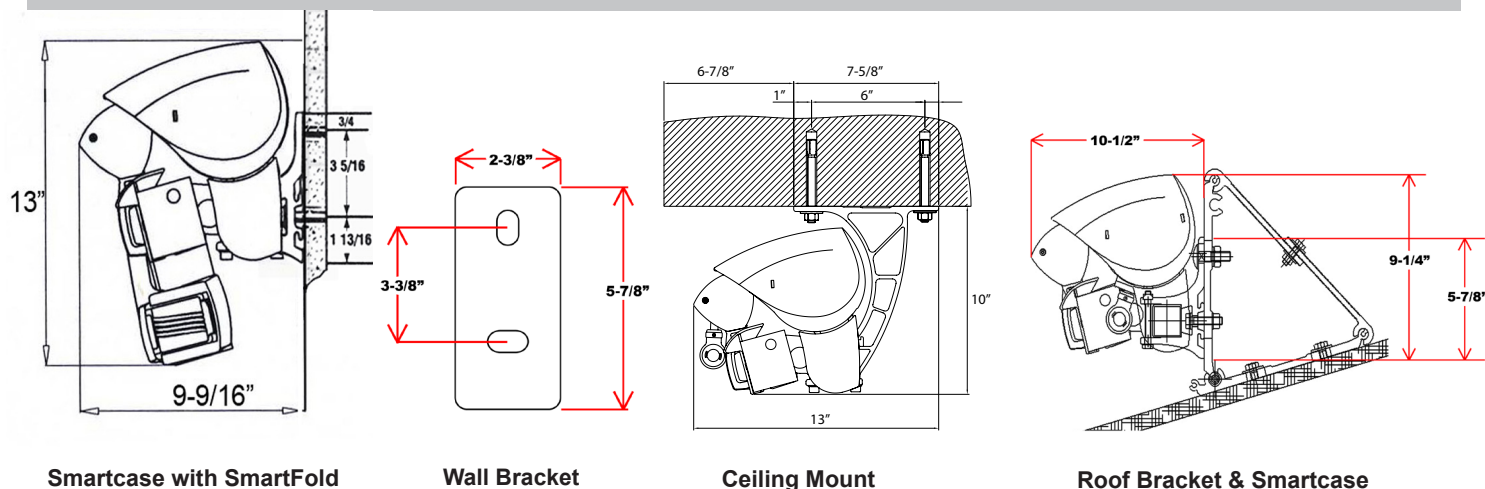

SUNESTA DROP VALANCE COMPONENTS (OPTIONAL)

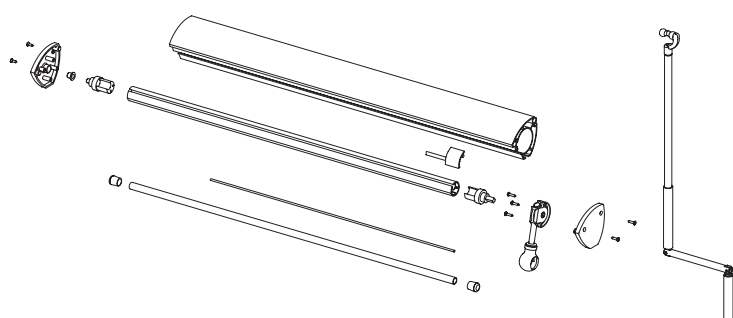

Manual

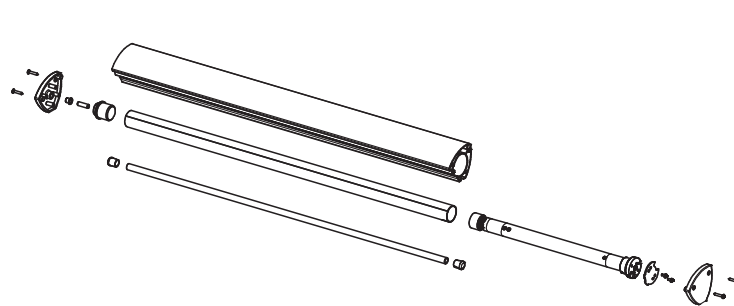

Motorized