


The Sunlight Retractable Awning

Specification Sheet

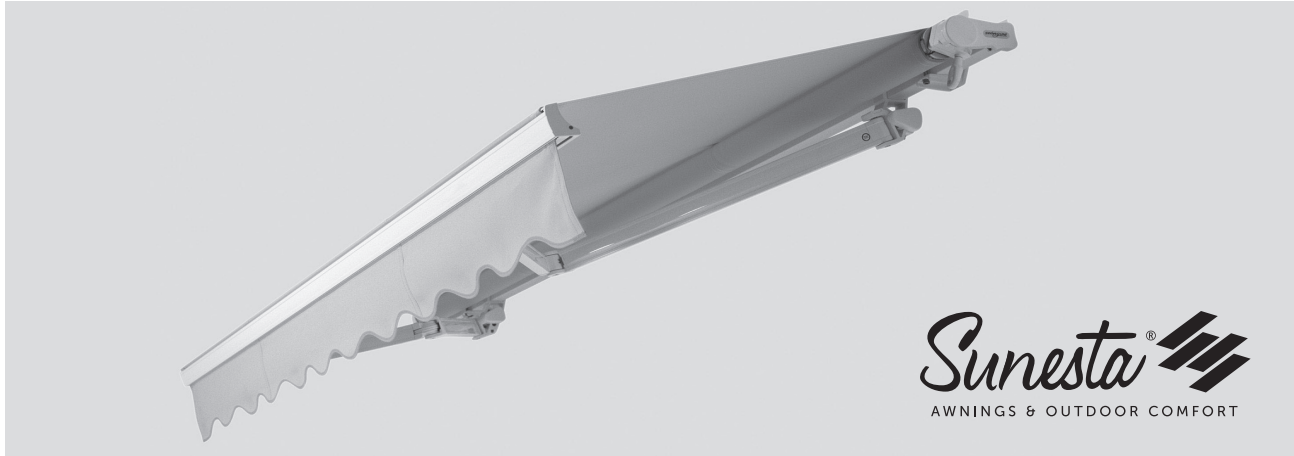

THE SUNESTA SUNLIGHT - Increase your outdoor living area and create the perfect day with a customizable Sunlight retractable awning. An overhead retractable not only adds shade, it adds beauty and value to your property. Featuring multiple add-on options and availability in five different projections up to 10 feet, the Sunlight offers complete sun control for your perfect retreat.

Mounting Bar: One piece cold roll form steel 40x40x40x40mm profile wall thickness 1/16". Hot dip coated strip powdercoated.

Fabric Tube Support Brackets: Constructed of one piece extruded aluminum profile wall thickness 1/4". Electrostatic powdercoated.

Fabric tube: Constructed of galvanized steel, ø 85 mm with groove for the attachment of the fabric, mounted maintenance-free to the lateral parts.

Front bar: One piece extruded aluminum profile wall thickness 1/16". Electrostatic powdercoated.

Shoulder: Aluminum shoulder mechanism with an adjustable tilting range of 0-60 degrees. Electrostatic powdercoated.

Hardware: A2 stainless steel

FRAME COLORS

The Sunlight frame is available in white, beige, & clay.

White: RAL 9010 Beige: RAL 1015 Clay: RAL 1019

MOUNTING BRACKETS

The Sunlight can be mounted with any of the following extruded aluminum electrostatic powdercoated brackets:

Wall bracket, Ceiling bracket, Roof bracket, Universal bracket, or Rafter bracket.

The number of mounting brackets recommended will be based upon overall width of unit and specified by manufacturer.

GEAR / MOTOR

The Sunlight is equipped with a manual 7:1 gear.

The Sunlight can be optionally equipped with a 25 Nm wired or wireless SOMFY motor. Motor can be mounted on left or right side of the fabric roller tube.

Wired standard motor: SOMFY 525A2

Wired manual override motor: SOMFY 525A2-CMO

Wireless standard motor: SOMFY 525A2-ALTUS

Wireless manual override motor: SOMFY 525A2-RTS-CMO

FABRIC COVER

Fabric: The Sunlight can be equipped with any of the standard acrylic fabrics, fire retardant fabrics, or shade fabrics.

Specific fabrics may be available upon request by specifier and approved by manufacturer.

Thread: Thread to be PTFE GORE TENARA when using acrylic or fire retardant fabrics.

MAXIMUM DIMENSIONS

The Sunlight can be built to the inch up to 24' wide.

The Sunlight has available projections of 8'3" & 10'.

DIMENSIONS & WEIGHT

Dimensions: The Sunlight can be built to the inch up to 24' wide and has available projections of 8'3" & 10'.

Weight: Complete unit with fabric is 10lbs/linear ft.

Projection	Wind Force	Wind Speed
8'3"	5 (according to Beaufort wind scale)	17-23 mph
10'	5 (according to Beaufort wind scale)	17-23 mph


WARRANTY

Frame: 10 years

Motor: 5 years

Fabric: 10 years

1. Failure strength of arm:

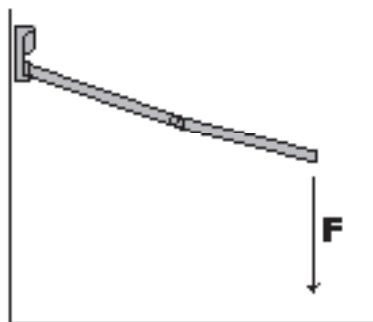


Projection	Failure Value (F)
8'-3"	95 lb
10'-0"	80 lb

F = Failure value per arm
(with the weight on the arm end)

2. Strength of steel cables (PVC covered):

Cable diameter:	0.12 inches
Number of cables:	2
Failure load:	2 x 1,562 lb = 3,124 lb
Working life of cables:	25,000 movements

3. Number and strength of tension springs in arms:

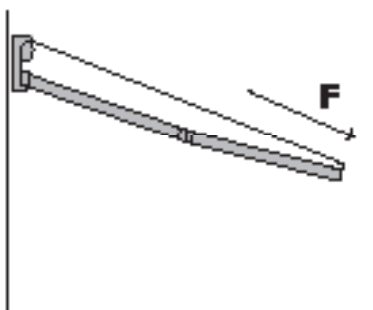

Projection	Number of Springs p/Arm	Tensional Force (F)
8'-3"	2	163 lb
10'-0"	2	172 lb


F = Tensional force of one pair of arms
on the fabric for an open awning

4. Arm profile & dimensions:




Front Profile	Up to 10' Arm
Height:	1.97 in
Width:	0.99 in
Wall Thickness:	0.06 to 0.11 in
Weight:	0.47 lb p/ft


Rear Profile	Up to 10' Arm
Height:	2.28 in
Width:	1.10 in
Wall Thickness:	0.06 to 0.12 in
Weight:	0.57 lb p/ft

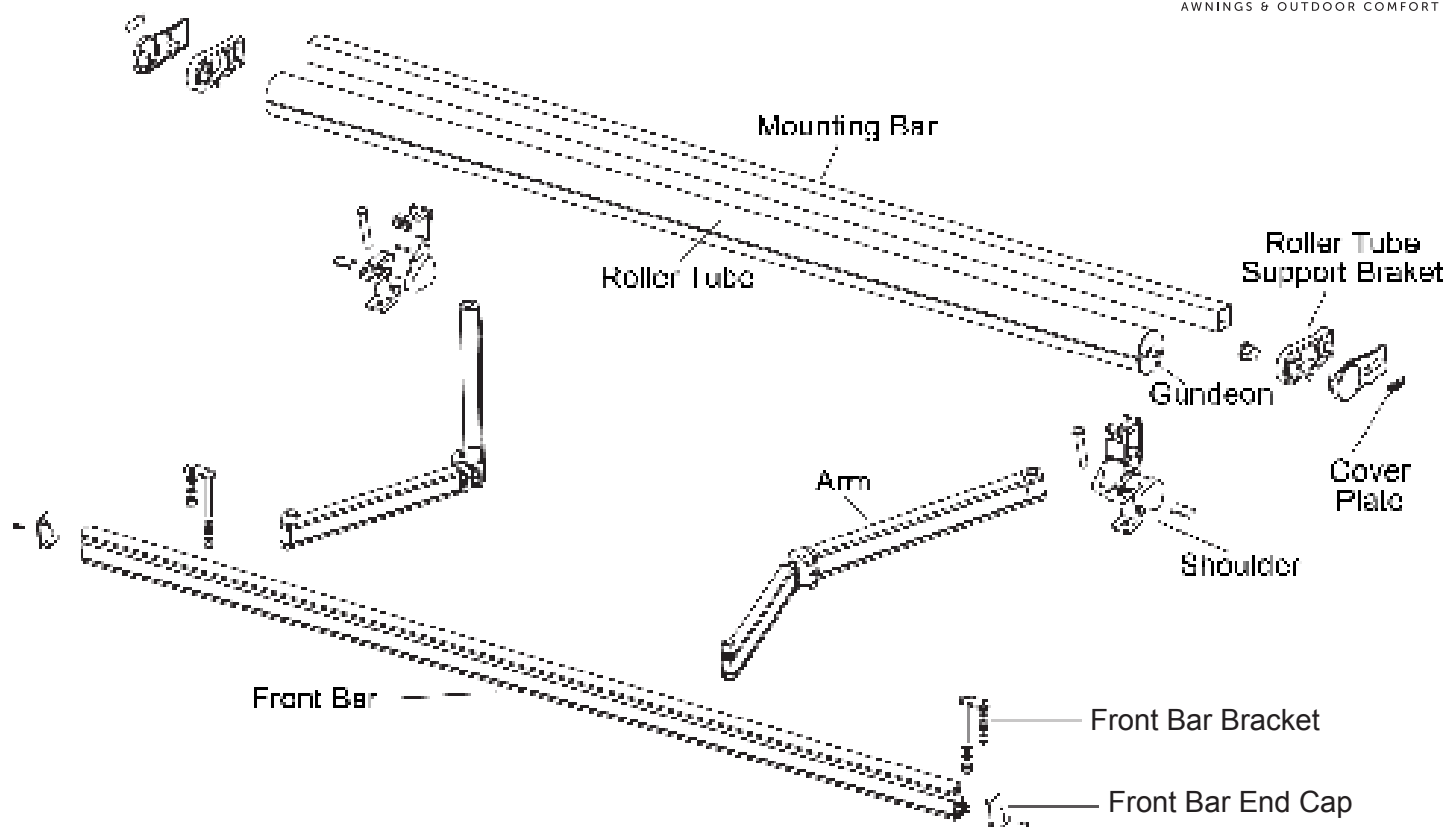


MOUNTING OPTIONS

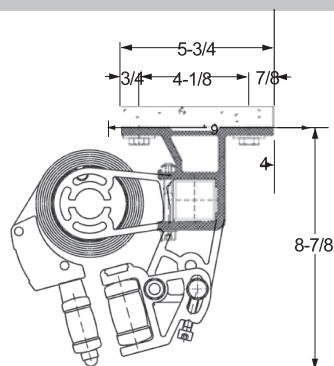


Sunlight Ceiling Bracket

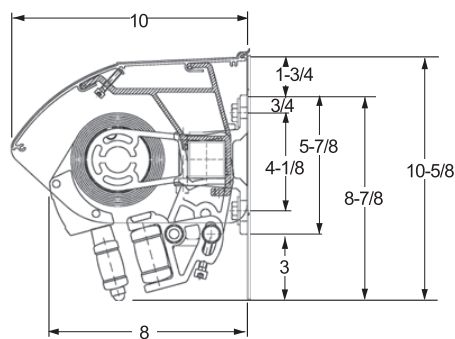

Sunlight Wall Bracket With Hood

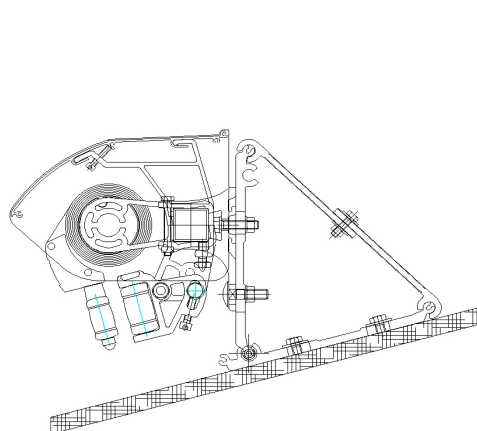

Sunlight Roof Bracket Kit
with Hood

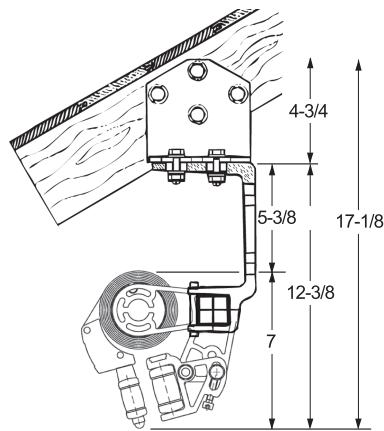

Sunlight Rafter Bracket
With Universal Bracket