



THE SUNSTYLE- Increase your outdoor living area and create the perfect day with a customizable Sunstyle retractable awning. An overhead retractable not only adds shade, it adds beauty and value to your property. Featuring multiple add-on options and availability, The Sunstyle is offered with 4 different projections, up to 40' width.

FRAME

Mounting Bar: One piece cold roll from steel 40x40x40x40mm profile wall thickness 1/16". Hot dip coated strip powdercoated.
Arms: Constructed of extruded aluminum profiles. Electrostatic powder coated. Hinged by 4 PVC coated steel cables. Cables are connected to up to 3 tension springs.
Fabric Tube Support Brackets: Constructed of one piece extruded aluminum profile wall thickness 1/4". Electrostatic powdercoated.
Smartcase: Cassette constructed of 1 piece extruded aluminum profile. Electrostatic powdercoated.
Fabric tube: Constructed of galvanized steel, ø 85 mm with groove for the attachment of the fabric, mounted maintenance-free to the lateral parts.
Front bar: One piece extruded aluminum profile wall thickness 1/16". Electrostatic powdercoated.
Shoulder: Aluminum shoulder mechanism with an adjustable tilting range of 5-45 degrees. Electrostatic powdercoated.
Hardware: A2 stainless steel

FRAME COLORS

The Sunstyle frame is available in white, beige, brown, & clay.

White: RAL 9010 Beige: RAL 1015 Brown: RAL 8019 Clay: RAL 1019

MOUNTING BRACKETS

The Sunstyle can be mounted with any of the following extruded aluminum electrostatic powdercoated brackets:

Wall bracket, Ceiling bracket, Roof bracket, Universal bracket, or Rafter bracket.

The number of mounting brackets recommended will be based up overall width of unit specified by manufacturer.

GEAR / MOTOR

The Sunstyle is equipped with a manual 7:1 gear.

The Sunstyle can be optionally equipped with a 50 Nm wired or wireless SOMFY motor. Motor can be mounted on left or right side of the fabric roller tube.

Wired standard motor: SOMFY 550
 Wired manual override motor: SOMFY 550-CMO
 Wireless standard motor: SOMFY 550-ALTUS
 Wireless manual override motor: SOMFY 550-RTS-CMO

FABRIC COVER

Fabric: The Sunstyle can be equipped with any standard awning and marine grade acrylic fabrics or fire retardant fabrics.

Specific fabrics may be available upon request by specifier and approved by manufacturer.

Thread: Thread to be PTFE GORE TENARA when using acrylic or fire retardant fabrics.

MAXIMUM DIMENSIONS

Dimensions: The Sunstyle can be built to the inch up to 40' wide and has available projections of 5', 6'8", 8'3", 10', & 11'6".

Weight: Complete Sunstyle unit with fabric is 11 lbs/linear ft. Complete Sunstyle Smartcase unit with fabric is 14lbs/linear ft.

WIND RESISTANCE


The Sunstyle has the following wind resistance class ratings:

Projection	Wind Force	Wind Speed
8'3"	6 (according to Beaufort wind scale)	24-30 mph
10'	5 (according to Beaufort wind scale)	17-23 mph
11'6"	5 (according to Beaufort wind scale)	17-23 mph

WARRANTY

Frame: 12 years Motor: 5 years Fabric: 10 years

1. Failure strength of arm:

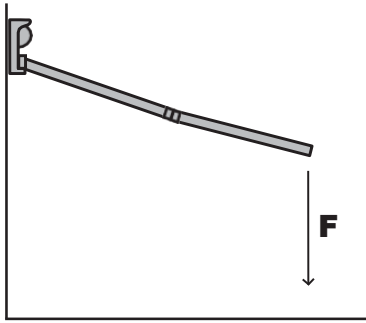


Projection	Failure Value (F)
8'-3"	119 lb
10'-0"	99 lb
11'-6"	86 lb

F = Failure value per arm
(with the weight on the arm end)

2. Strength of steel cables (PVC covered):

Cable diameter:	0.10 inches
Number of cables:	4
Failure load:	4 x 1,083 lb = 4,332 lb
Working life of cables:	80,000 movements


3. Number and strength of tension springs in arms:

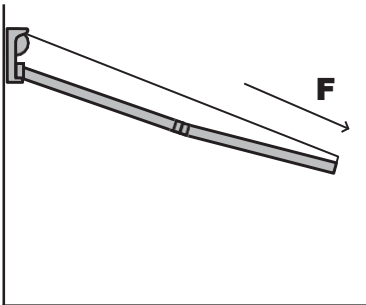

Projection	Number of Springs p/Arm	Tensional Force (F)
8'-3"	2	172 lb
10'-0"	2	185 lb
11'-6"	2	172 lb

F = Tensional force of one pair of arms
on the fabric for an open awning


4. Arm profile & dimensions:

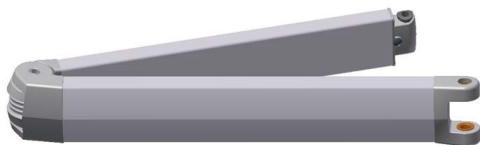


Front Profile	Up to 11'6" Arm
Height:	2.21 in
Width:	1.12 in
Wall Thickness:	0.09 in
Weight:	0.67 lb p/ft

Rear Profile	Up to 11' 6" Arm
Height:	2.48 in
Width:	1.30 in
Wall Thickness:	0.06 to 0.14 in
Weight:	0.67 lb p/ft


SUNSTYLE COMPONENTS

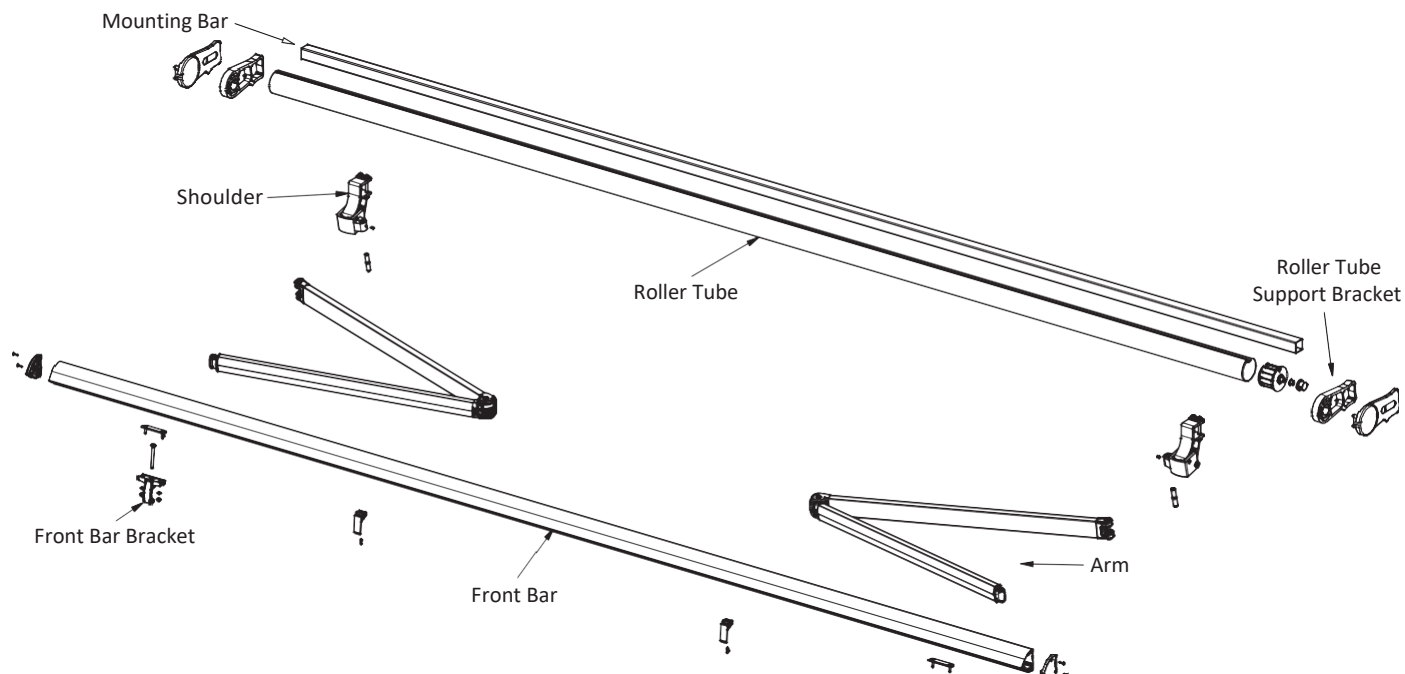


SUNSTYLE MOUNTING OPTIONS

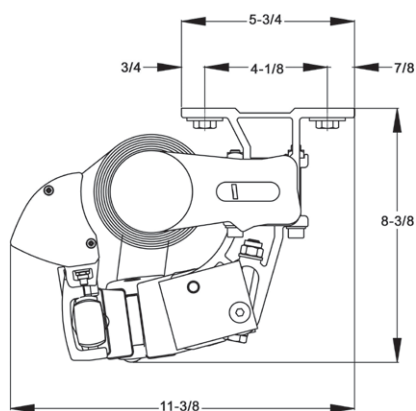

Sunstyle Ceiling Bracket

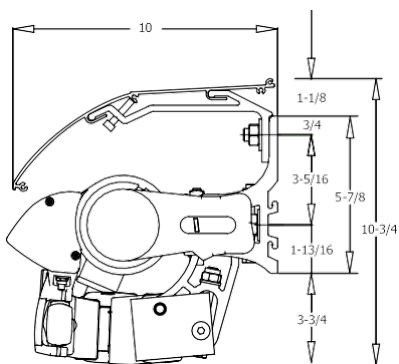


Sunstyle Wall Bracket With Hood

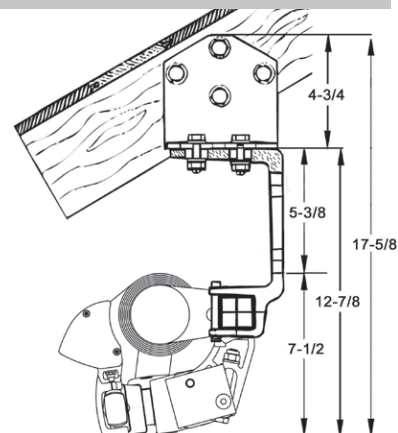


Sunstyle Rafter Bracket With Universal Bracket


SUNSTYLE with SMARTCASE COMPONENTS(OPTIONAL)

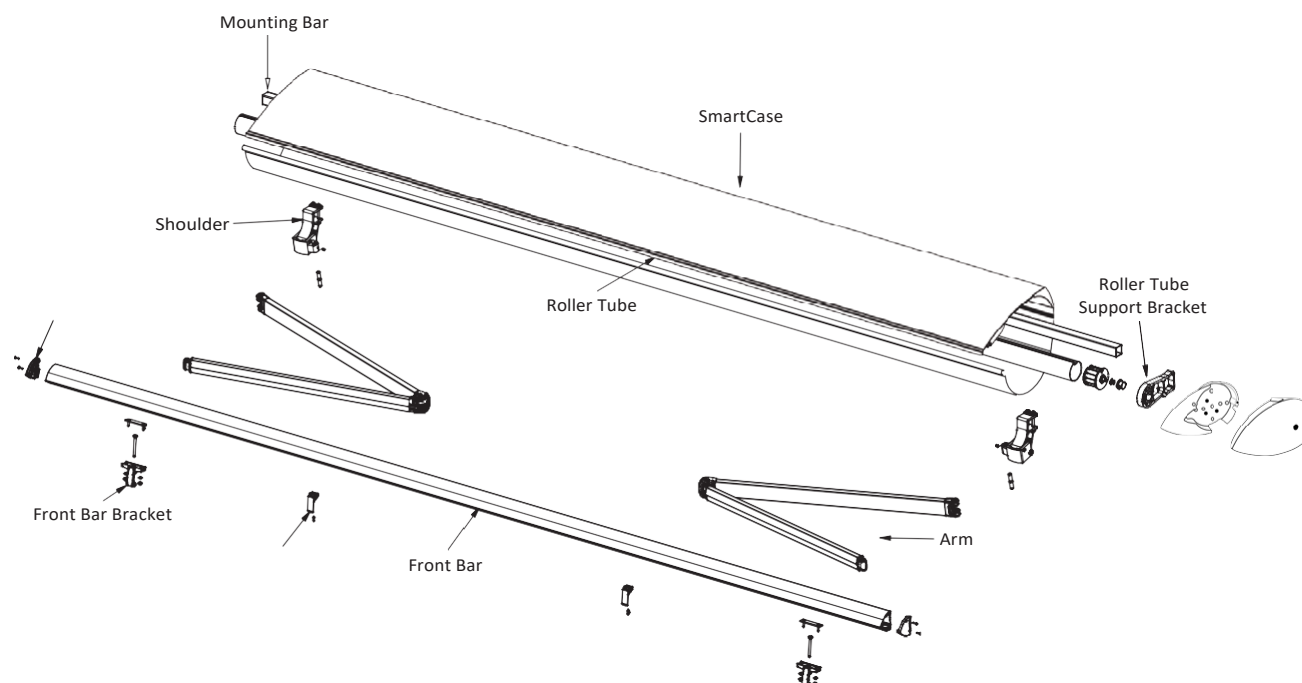


SUNSTYLE with SMARTCASE MOUNTING OPTIONS

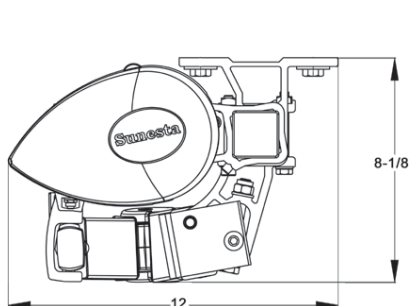

Sunstyle Ceiling Bracket Kit With SmartCase™

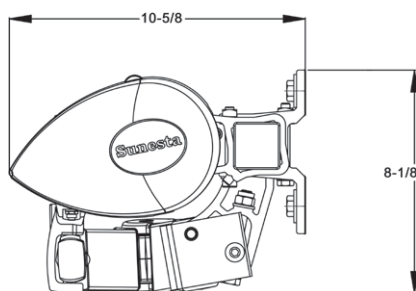

Sunstyle Wall Bracket Kit With SmartCase™

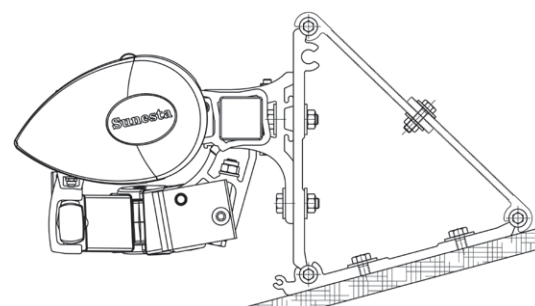

Sunstyle Roof Bracket Kit With SmartCase™