

REV	DESCRIPTION OF CHANGE	REV BY	DATE

PIN DEFINITION

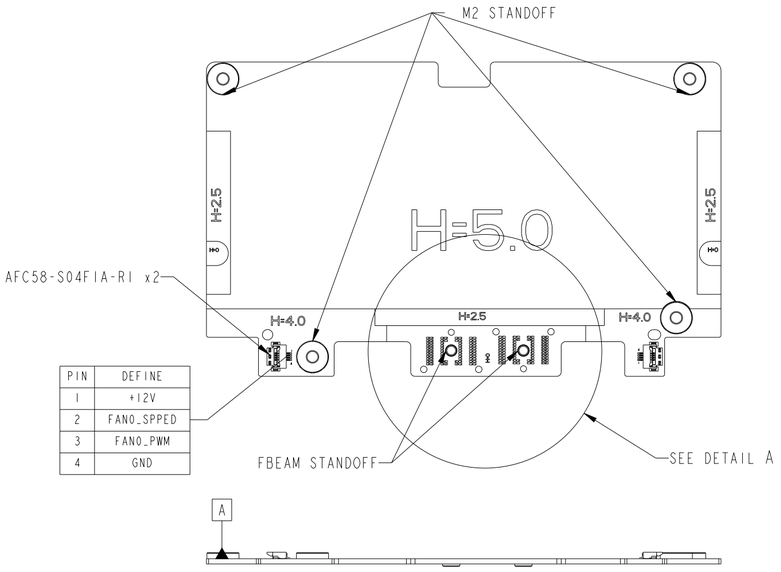

PIN	DEFINE
1	+12V
2	FAN0_SPPED
3	FAN0_PWM
4	GND

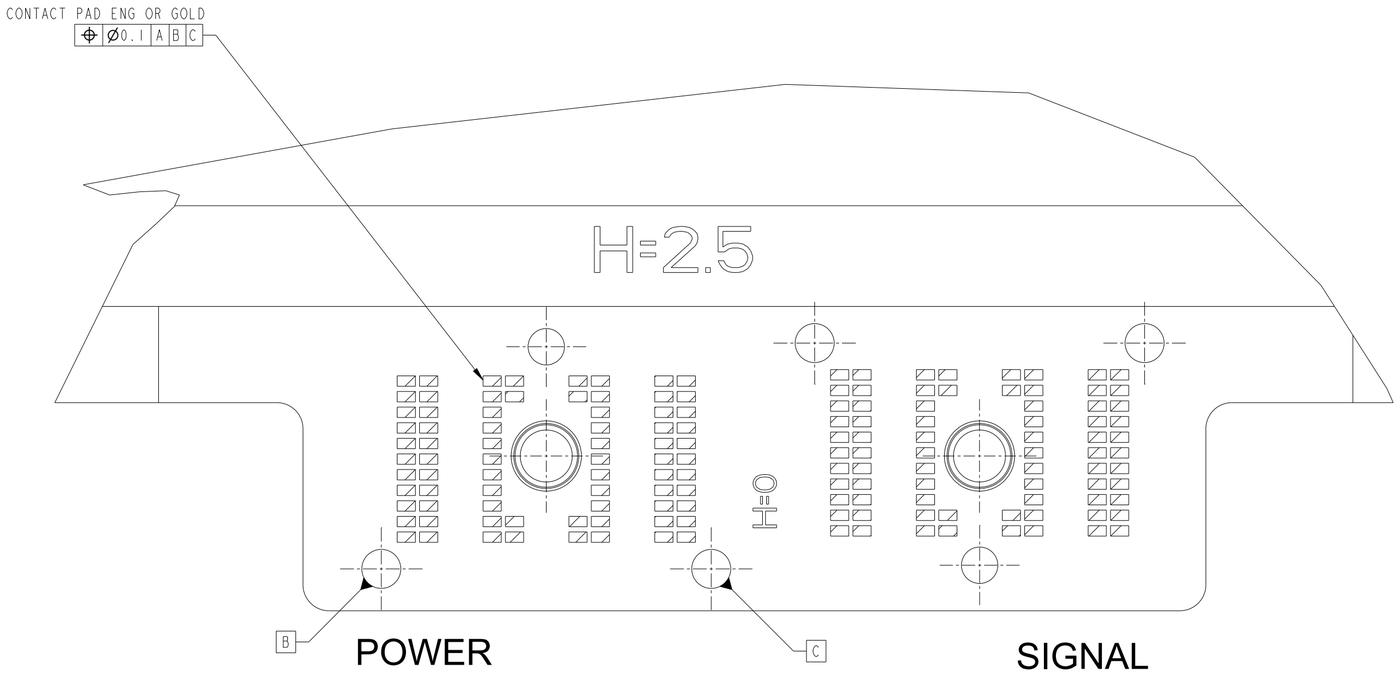

	8	7	6	5	4	3	2	1
PA	VSYS_GPU	VSYS_GPU	GND	3.3V_ALW	3.3V_ALW	GND	VADP_GPU	VADP_GPU
PB	VSYS_GPU	VSYS_GPU	GND	3.3V_ALW	3.3V_ALW	GND	VADP_GPU	VADP_GPU
PC	VSYS_GPU	VSYS_GPU	GND			I2C_CLK_ALW	VADP_GPU	VADP_GPU
PD	VSYS_GPU	VSYS_GPU	GND			I2C_DAT_ALW	GND	GND
PE	VSYS_GPU	VSYS_GPU	GND			GND	GND	GND
PF	VSYS_GPU	VSYS_GPU	GND			I2C_CLK_VS	I2C_INT_ALW	GND
PG	VSYS_GPU	VSYS_GPU	GND			I2C_DAT_VS	I2C_INT_VS	GPIO0_EC
PH	GND	GND	GND			GND	FAN0_SPEED	GPIO1_EC
PJ	GND	GND	GND			USB+	FAN1_SPEED	ID0
PK	5V_ALW	5V_ALW	GND	FAN1_PWM	GND	USB-	PWR_EN	DDS_SDA
PL	5V_ALW	5V_ALW	GND	FAN0_PWM	12V_FAN	GND	DDS_CLK	PWR_GOOD

POWER

	8	7	6	5	4	3	2	1
SA	PEX_RX1N	DP_A_HPD	PEX_RX3N	PEX_RST#	PEX_CLK_REQ	PEX_RX4P	GPIO2_EC	PEX_RX6P
SB	PEX_RX1P	GND	PEX_RX3P	TH_ALERT#	DGPU_PWM_SEL	PEX_RX4N	GND	PEX_RX6N
SC	GND	DP_A_L1#	GND		DETAIL A SCALE 6.000	GND	PEX_REFCLK	GND
SD	PEX_RX0N	DP_A_L1	PEX_RX2N			PEX_RX5P	PEX_REFCLK#	PEX_RX7P
SE	PEX_RX0P	GND	PEX_RX2P			PEX_RX5N	GND	PEX_RX7N
SF	GND	DP_A_L0#	GND			GND	DP_A_L3#	GND
SG	PEX_TX0N	DP_A_L0	PEX_TX2N			PEX_TX5P	DP_A_L3	PEX_TX7P
SH	PEX_TX0P	GND	PEX_TX2P			PEX_TX5N	GND	PEX_TX7N
SJ	GND	DP_A_AUX#	GND			GND	DP_A_L2#	GND
SK	PEX_TX1N	DP_A_AUX	PEX_TX3N	PNL_PWR_EN	PNL_BL_PWM	PEX_TX4P	DP_A_L2	PEX_TX6P
SL	PEX_TX1P	GPIO3_EC	PEX_TX3P	TH_OVERT#	PNL_BL_EN	PEX_TX4N	ID1	PEX_TX6N

SIGNAL

framework

UNLESS SPECIFIED TOLERANCE ARE:
300 ABOVE : ± 0.20
300 ≥ X ≥ 150 : ± 0.15
150 > X ≥ 50 : ± 0.10
50 > X ≥ 20 : ± 0.075
20mm BELOW : ± 0.05
ANGLES : ± 1°
FLATNESS : ▱ 0.20
CONCENTRICITY : ± 0.05

MODEL

THIRD ANGLE PROJECTION

DESIGNED BY	DRAWN BY
CHECKED BY	APPROVED BY
ISSUED DATE: Aug-07-23	SCALE: 1.000 / UNIT: mm
DRAWING FILE NAME: FW_EXPANSION_BAY_PCB	
SIZE: A2 / SHEET: 2 OF 3	REVISION: 01 / VERSION: 0