

# SunPower PVS Local Monitoring

By u/thedmpd

This will be a series of guides for those who wish to connect their SunPower(RIP) PVS to Home Assistant locally. This is only made possible by the many contributions from the community at large. Huge thanks to everyone out there working to make this as easy as it can be.

## HUGE THANKS

- [The amazing work done for the HACS SunPower project!](#)
  - Seriously, create a github account and give them a star!
  - This all would be a moot point without them!
  - It would be a painful undertaking for every individual to set up!
- [The amazing resources & inspiration for this guide on this thread!](#)
  - This guide is just taking the steps there and simplifying them - I hope
- The community on [reddit](#) that keeps trying to make this work for folks and answer questions when they come up. Real shoutout to you peeps!
  - I want to name a few but I will ask permission first!
  - Though I will say some of you really...




- [The pretty energy cards!](#) Give them a star if you end up using them!

# SunPower PVS Local Monitoring

By u/thedmpd

## Required Parts:

- A PC or 2
  - Easier with a laptop because wifi can be used to connect to the LAN of the Mango & your home network as you switch
- Ethernet cables
- The bridge:
  - a OpenWrt system like the [Mango by GL.iNet](#)
- Home Assistant
  - Support the team behind the project by purchasing [this](#)
  - OR repurposing an old computer
  - OR grabbing [one from ebay for around \\$30-40](#)
- Your home router:
  - Know how to access it
  - Know how to check for device leases so you can get the ipv4 address of the mango
- Your PVS:
  - Does it have an ethernet port?
    - Should look like this:

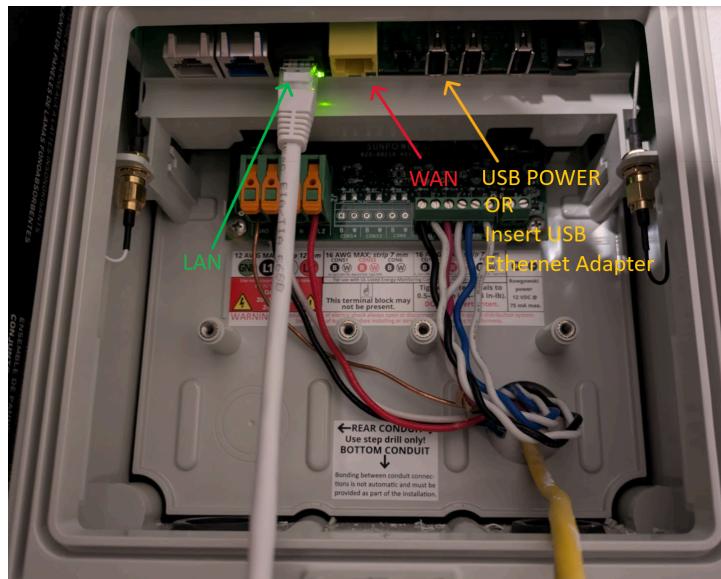

- If you have a version with just the USB ports

# SunPower PVS Local Monitoring

By u/thedmpd



[Above image stolen from Brett Durrett](#)

- If you have the version without ethernet ports you will need to grab a USB dongle; you don't need anything better than a fast ethernet dongle but I will update this with a list from the community as I get ones that have been confirmed to work.

You can follow the steps in the images below once you have your equipment if all you want is the "short" and dirty. If you want the why then I will provide commentary along the steps and pictures but the pictures will be the "short" way of getting it done.

## Why do we need to do this?

In simple terms, we are unable to plug the PVS straight into our home networks. That is because the PVS has a dhcp server of its own, this is the service that assigns an address to anything that connects to a network. Your home router does this and so does the PVS, put them together in the same room and chaos will ensue. Nothing will work, or it might for a bit but then it won't and you'll be wanting to tear your hair out as your loved ones ask why they can't watch the latest youtube video or netflix show. So what is one to do?

## Enter the dual license driver


Imagine you need to deliver a package across 2 countries but you can't be bothered to get a license in each country so you turn to a delivery driver that has licenses across both countries. This is our Mango, they hold dual licenses after this guide is done (1 for your home network and 1 for the PVS' network) and can traverse freely delivering packages back and forth from the PVS to your Home Assistant. This guide is focused on getting the Mango device to act as your delivery agent for your home network and the PVS' network. SPECIFICALLY we want the Mango to only HOLD licenses and not become an issuing party [I suspect this is why some encounter issues with the old guides because they leave the DHCP service on the Mango on].

# SunPower PVS Local Monitoring

By u/thedmpd

## Steps


- Power up your Mango router
- Connect to the Mango router from
  - **YOUR PC ONLY AFTER YOU TURN OFF**
    - **WIFI if plugging the ethernet cable**
    - **Disconnect from your home Wifi to obviously pick the Mango's**
  - **[DO NOT PLUG IT INTO THE PVS YET]**
  - Insert a ethernet cable from the **LAN** port of the Mango router to your PC
  - **OR**
  - Connect to the wifi (address and password on bottom of Mango)
- Go to the address of the Mango (IP on the bottom - should be 192.168.8.1)
  - note the .8.1 ending so you don't fall for the regular 192.168.0.1
  - It's unclear to me if all Mango's are provisioned the same (for now we assume)
- Select your language

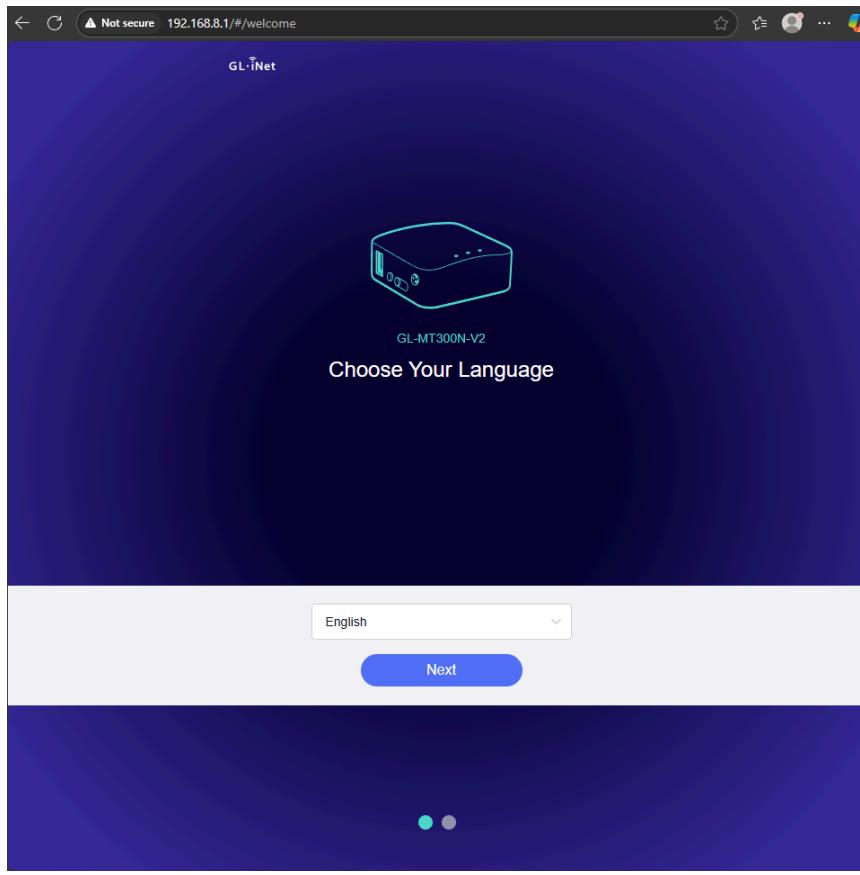

- Setup a password

# SunPower PVS Local Monitoring


By u/thedmpd

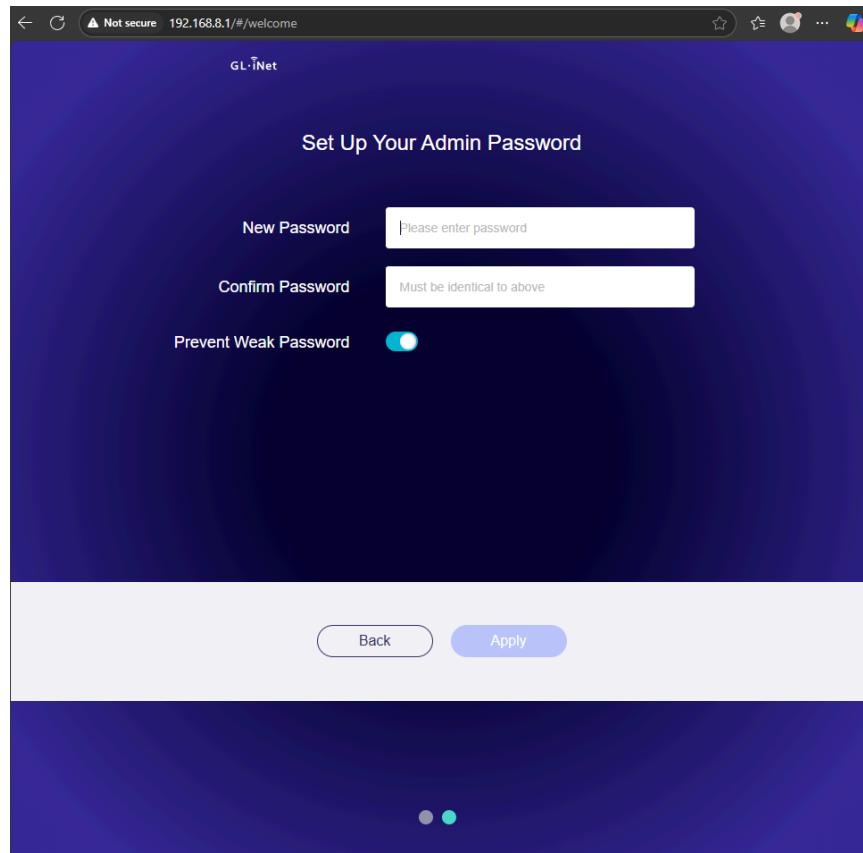

- You should see it showing your PC (client) connected to the LAN

# SunPower PVS Local Monitoring


By u/thedmpd

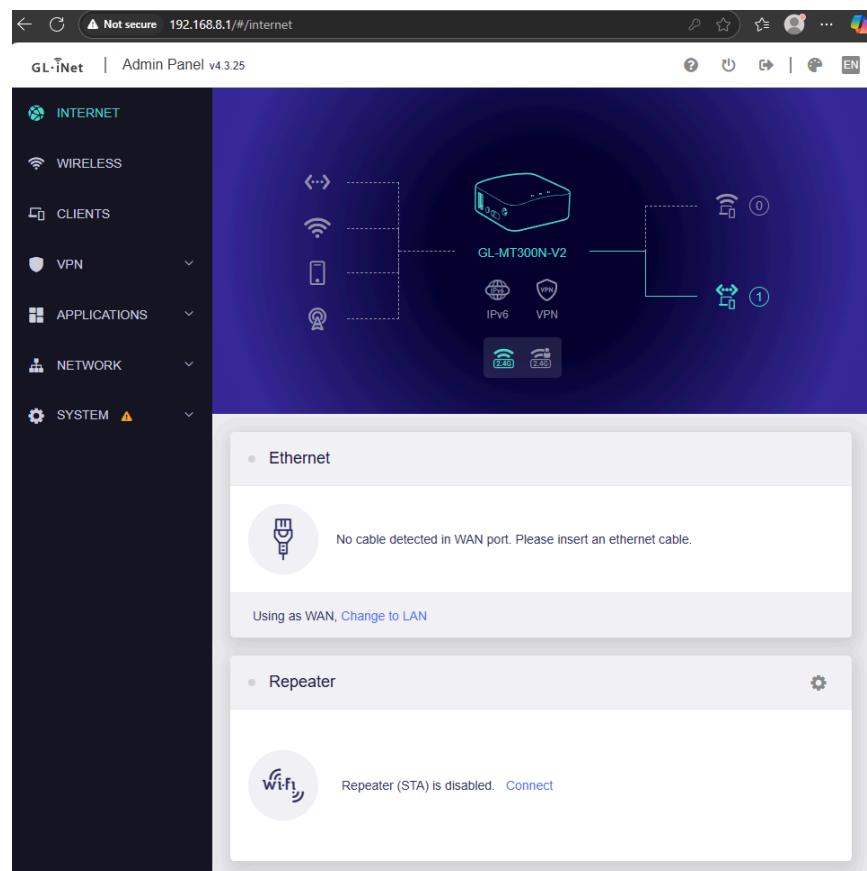

- Left side locate **NETWORK** and click it

# SunPower PVS Local Monitoring

By u/thedmpd

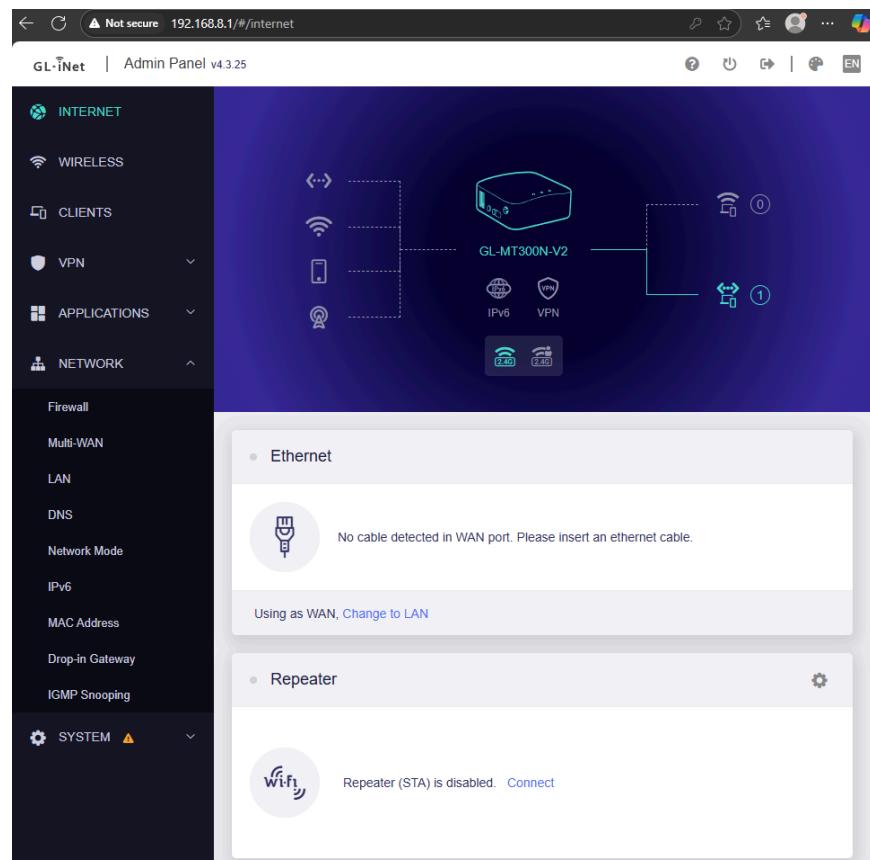

- Locate the Firewall and click it

# SunPower PVS Local Monitoring

By u/thedmpd

The screenshot shows the GL.iNet Admin Panel interface. At the top, it displays the URL [192.168.8.1/#/firewallview](http://192.168.8.1/#/firewallview). The main header says "GL.iNet Admin Panel v4.3.25". On the left, there is a sidebar with the following navigation items:

- INTERNET
- WIRELESS
- CLIENTS
- VPN
- APPLICATIONS
- NETWORK

Under the NETWORK category, the following sub-options are listed:

- Firewall
- Multi-WAN
- LAN
- DNS
- Network Mode
- IPv6
- MAC Address
- Drop-in Gateway
- IGMP Snooping

At the bottom of the sidebar, under SYSTEM, there is a yellow warning icon.

The main content area is titled "Firewall" and contains three tabs: "Port Forwards" (selected), "Open Ports on Router", and "DMZ". A tooltip for "Port Forwards" explains: "Port Forwarding lets remote computers connect to a local computer or server behind the firewall in the LAN network (such as Web servers, FTP servers, etc.)". Below the tabs is a blue "+ Add" button.

At the bottom right of the main content area, it says "Copyright © 2025 GL.iNet. All Rights Reserved".

- On the TOP of the page click **Open Ports on Router**

# SunPower PVS Local Monitoring

By u/thedmpd

No Internet Connection! Find a network to reconnect.

**Firewall**

Port Forwards   Open Ports on Router   DMZ

The router's services, such as Web and FTP, require opening their respective router ports in order to be publicly reachable.

+ Add

INTERNET   WIRELESS   CLIENTS   VPN   APPLICATIONS   NETWORK

Firewall

- Multi-WAN
- LAN
- DNS
- Network Mode
- IPv6
- MAC Address
- Drop-in Gateway
- IGMP Snooping


SYSTEM

Copyright © 2025 GL.iNet. All Rights Reserved

- Click the **+ Add** button

# SunPower PVS Local Monitoring


By u/thedmpd

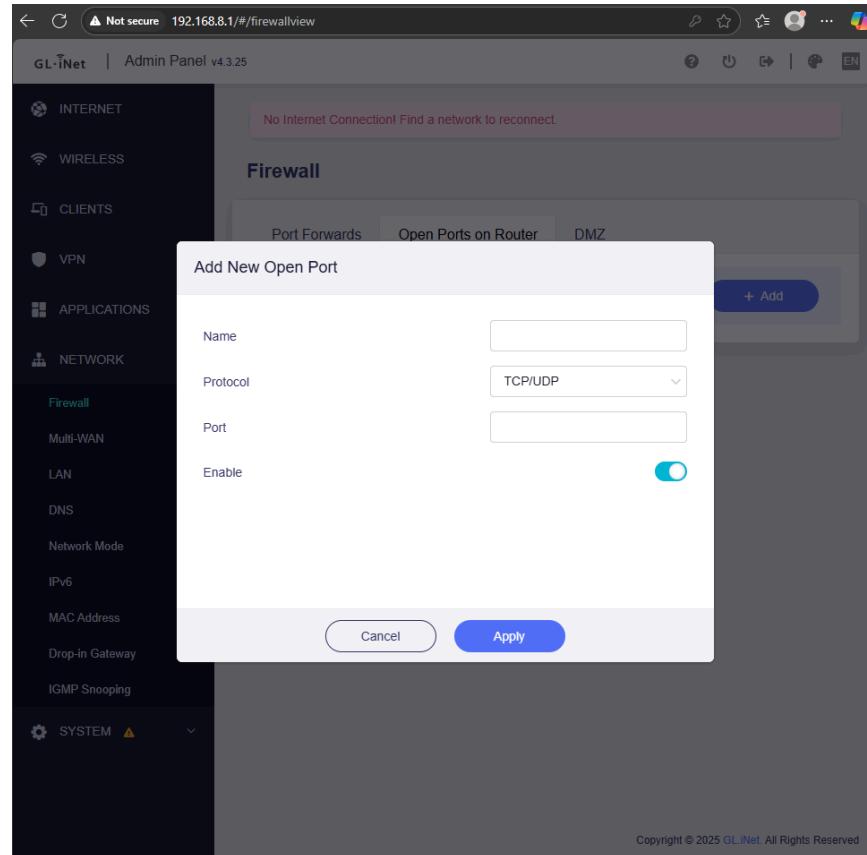

- Fill out the following fields:
  - Name | Admin
  - Port | 80
- Click Apply

# SunPower PVS Local Monitoring


By u/thedmpd

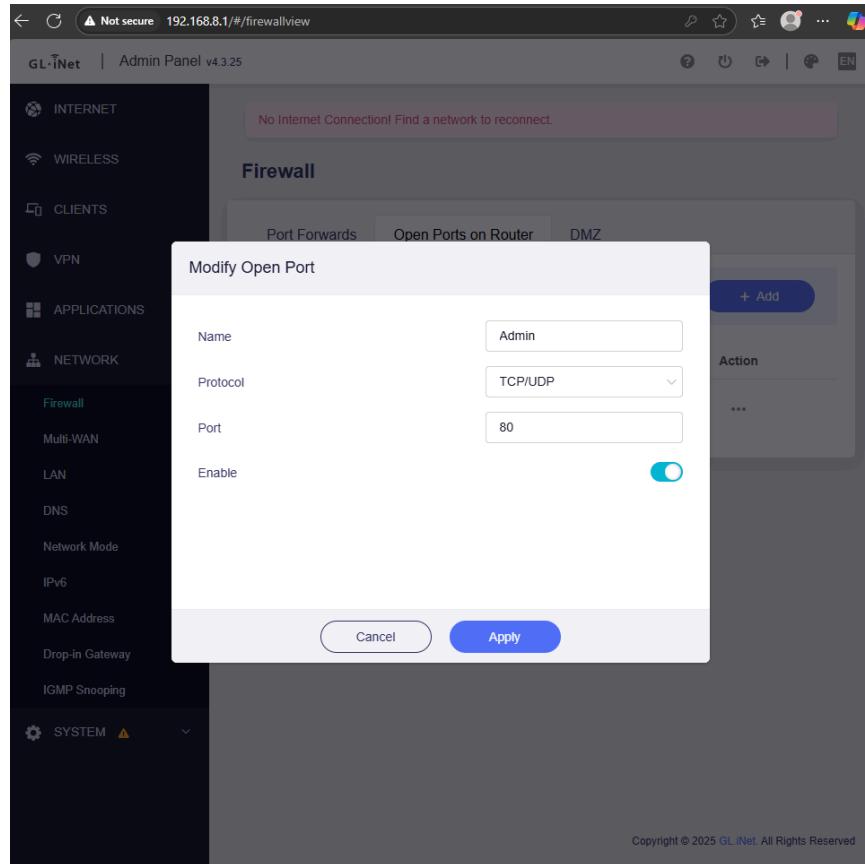

- Click the **+ Add** button AGAIN
- Fill out the following fields:
  - Name | SunPower PVS
  - Port | 8080
- Click Apply

# SunPower PVS Local Monitoring


By u/thedmpd

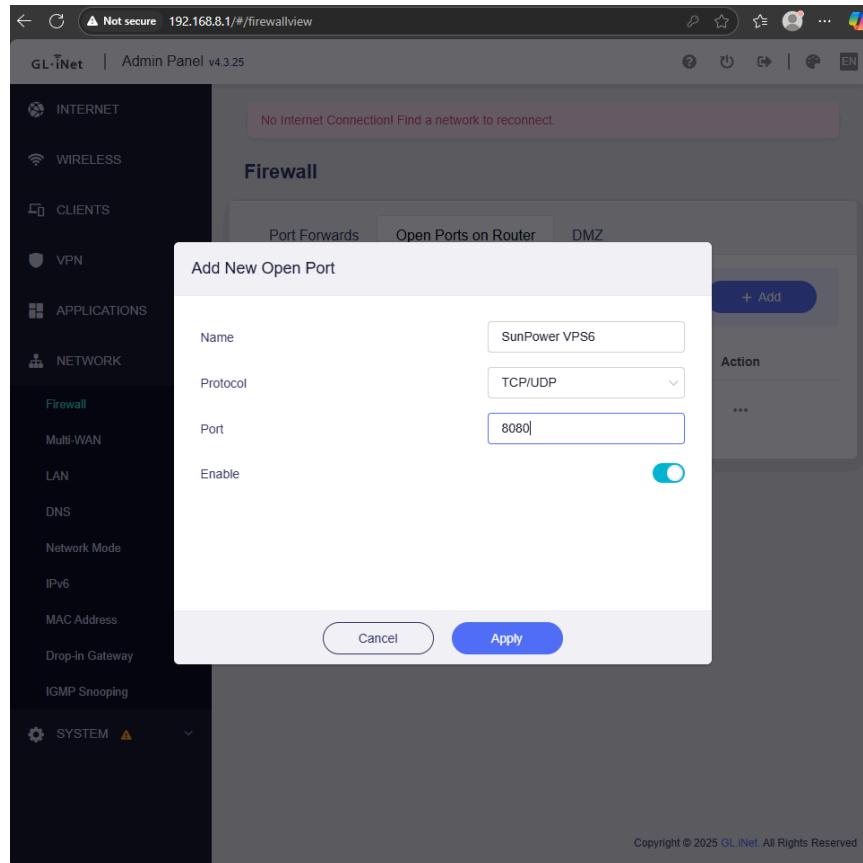

- AWESOME! You have just opened up the 2 ports on the Mango that will allow our Home Assistant instance to communicate with our SunPower PVS!
  - Well, technically only port 8080 will be used between Home Assistant & PVS
  - Port 80 is for us to access the Mango's admin panel from our home network
- **Unplug/Disconnect from the Wifi** of the Mango from your PC
- **Plug the WAN side of the Mango into your Home Network**
- Now for the part I hate:
  - I don't have access to every home router, I wish I did but I don't
  - However, that is where as part of the community **YOU** can come in!
  - If you want and are able to, please send me the details of your home router [make & software] and some screenshots of the Menu to get to the ipv4 leases [these are the addresses your router gives each client(aka computer) on its network] and I'll update this guide
  - Please ensure that your MAC addresses are covered. We really only care about the Menu to get to the leases. Practice good network hygiene.
- On OPNSense this is where you can find the leases:

# SunPower PVS Local Monitoring

By u/thedmpd

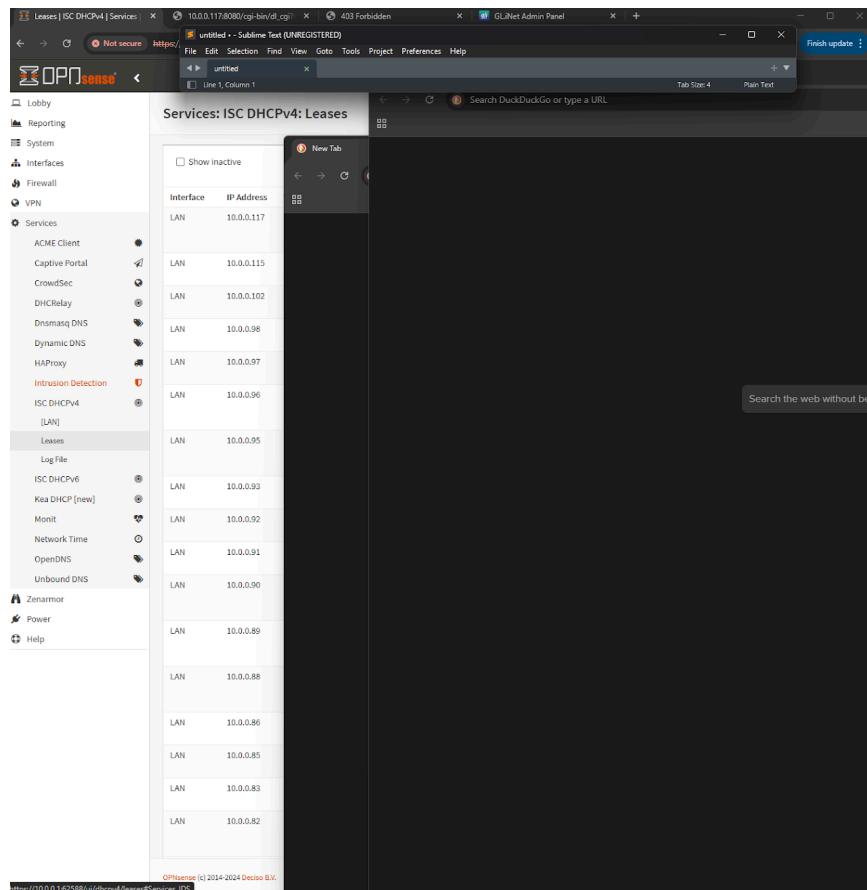

- Locate your Mango and make note of its given address!


A screenshot of a web browser displaying the "Services: ISC DHCPv4: Leases" table. The table has columns: Interface, IP Address, Hostname, Description, Start, End, Status, State, and Lease Type. One row is highlighted, showing:

Interface	IP Address	Hostname	Description	Start	End	Status	State	Lease Type
LAN	10.0.0.117	GL-MT300N-	GL Technologies (Hong Kong) Limited	2025/06/19 14:45:10	2025/06/19 16:45:10	active	dynamic	<a href="#">+</a> <a href="#">-</a>

- Open 3 tabs & these will be:
  - IP\_OF\_YOUR\_MANGO\_HERE:80
  - IP\_OF\_YOUR\_MANGO\_HERE:8080
  - IP\_OF\_YOUR\_MANGO\_HERE:8080/cgi-bin/dl\_cgi?Command=DeviceList


# SunPower PVS Local Monitoring

By u/thedmpd

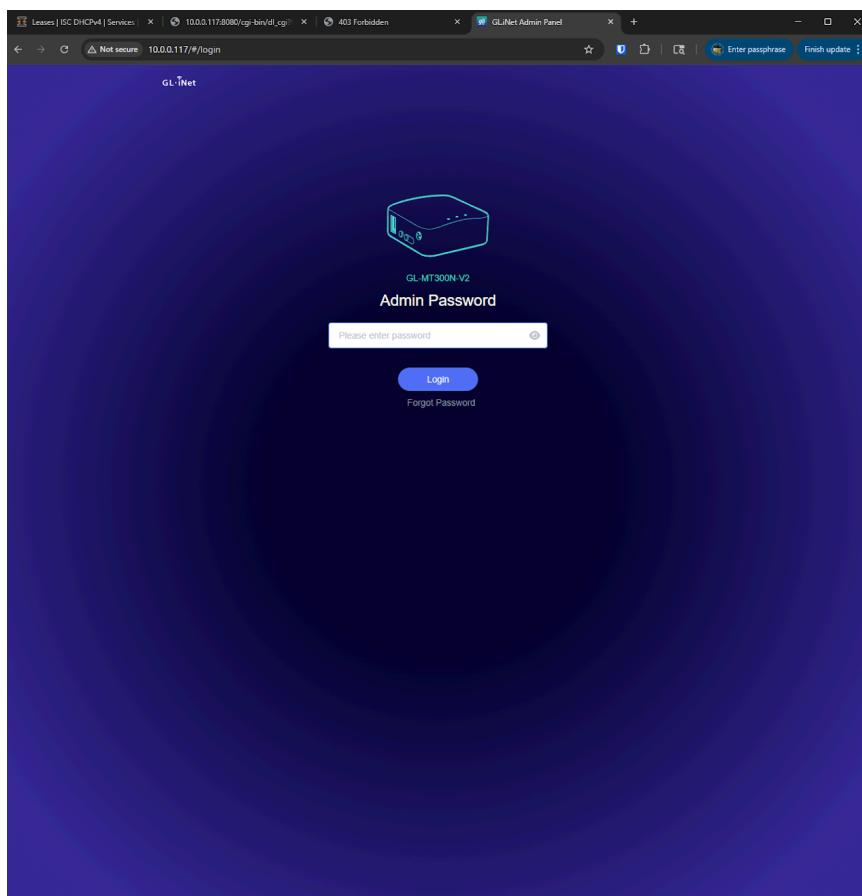

# SunPower PVS Local Monitoring

By u/thedmpd

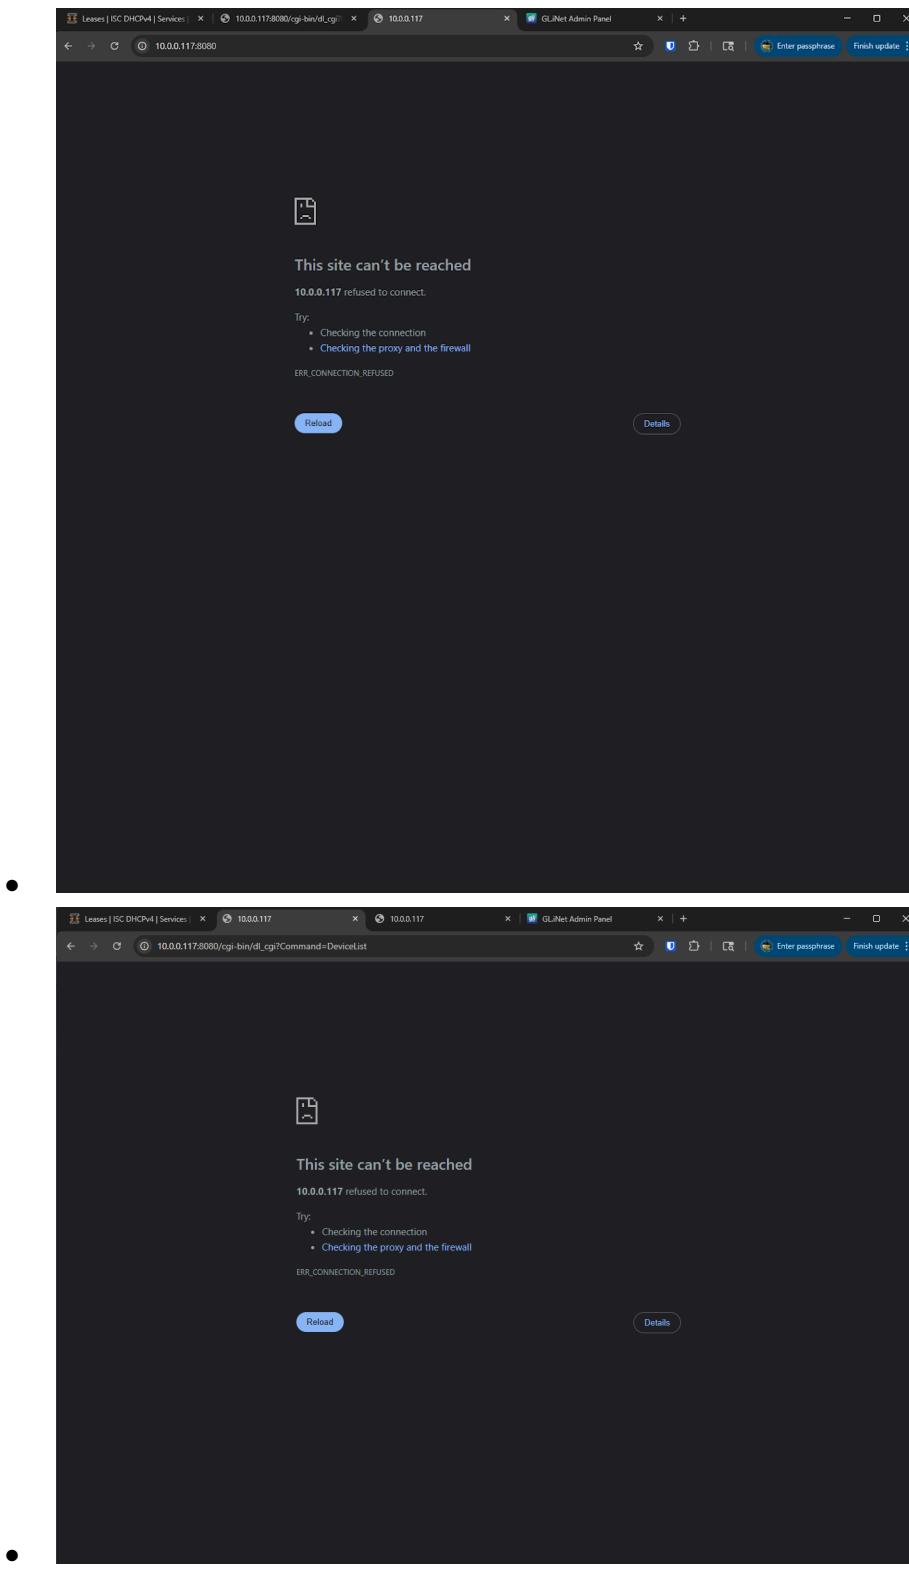


- Don't stress that the last 2 of the list don't get us anywhere. **That's on purpose;** it's how we will test to ensure we have everything in order once we finish the setup
- Enter your password on the admin page: **IP\_OF\_YOUR\_MANGO\_HERE:80**


# SunPower PVS Local Monitoring

By u/thedmpd

- **Bottom Left - SYSTEM** click it
- **Advanced Settings** click it

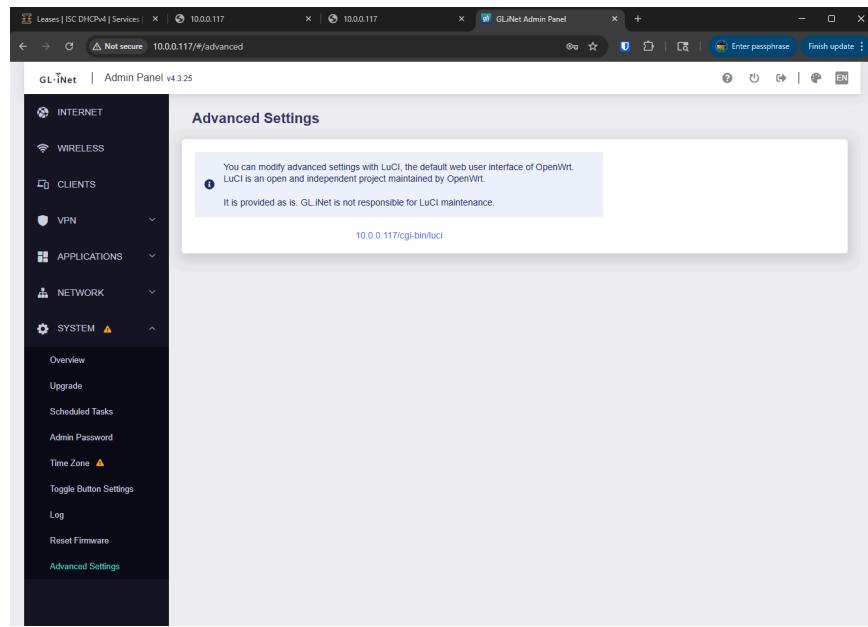

- Center of the page on the bottom of the white:
  - **IP\_OF\_YOUR\_MANGO\_HERE/cgi-bin/luci**
  - Click it

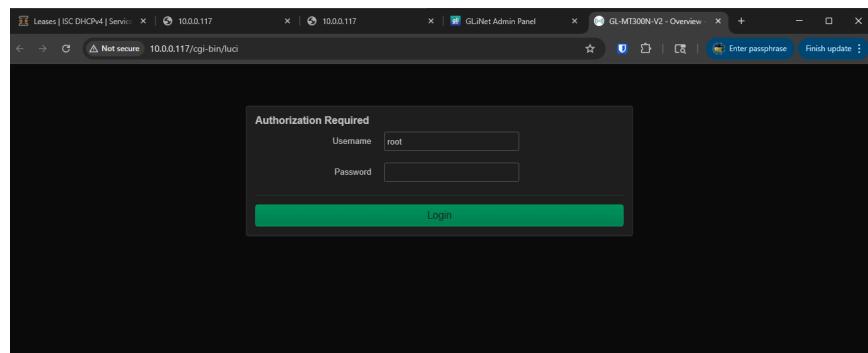

- Enter the same password that you setup for your Mango

# SunPower PVS Local Monitoring

By u/thedmpd

This screenshot shows the 'Overview' page of the GL-MT300N-V2 router's web interface. The page is divided into several sections:

- Status**: Displays basic system information like Hostname (GL-MT300N-V2), Model (GL-MT300N-V2), Architecture (MediaTek MT7628AN ver.1 eco.2), Target Platform (ramips/mf76x8), Firmware Version (OpenWrt 22.03.4 r20123-38cc47687 / LuCI openwrt-22.03 branch git-23.093.57104-ce20b4a), Kernel Version (5.10.176), Local Time (2025-06-19 23:08:53), Uptime (0h 27m 29s), and Load Average (0.56, 0.33, 0.44).
- Memory**: Shows memory usage statistics: Total Available (73.21 MB / 119.10 MB, 61%), Used (57.26 MB / 119.10 MB, 48%), Buffered (52.00 KB / 119.10 MB, 0%), Cached (26.42 MB / 119.10 MB, 22%).
- Storage**: Displays disk space usage: Disk space (392.00 KB / 1.63 MB, 23%) and Temp space (548.00 KB / 59.55 MB, 0%).
- Network**: Shows network configuration for IPv4 Upstream, including Protocol (DHCP client), Address (10.0.0.117/24), Gateway (10.0.0.1), DNS (10.0.0.1), Expires (1h 49m 57s), and Connected (0h 10m 3s). It also lists the device Software VLAN "eth0.2".

- Top Right Corner to the left of the Logout button - Network - click it

This screenshot shows the 'Overview' page of the GL-MT300N-V2 router's web interface. The 'Network' section has a dropdown menu open, listing the following options:



- Interfaces
- Wireless
- Switch
- Routing
- DHCP and DNS
- Diagnostics
- Firewall

The rest of the page displays the same system status, memory, storage, and network configuration information as the previous screenshot.

- **Interfaces** click it
- Scary warning - **CONTINUE** - click it


# SunPower PVS Local Monitoring

## By u/thedmpd

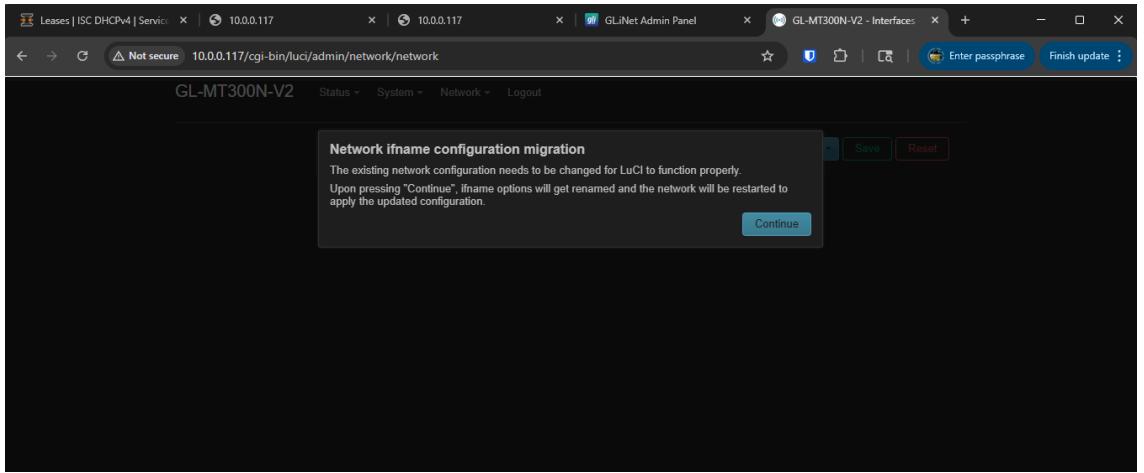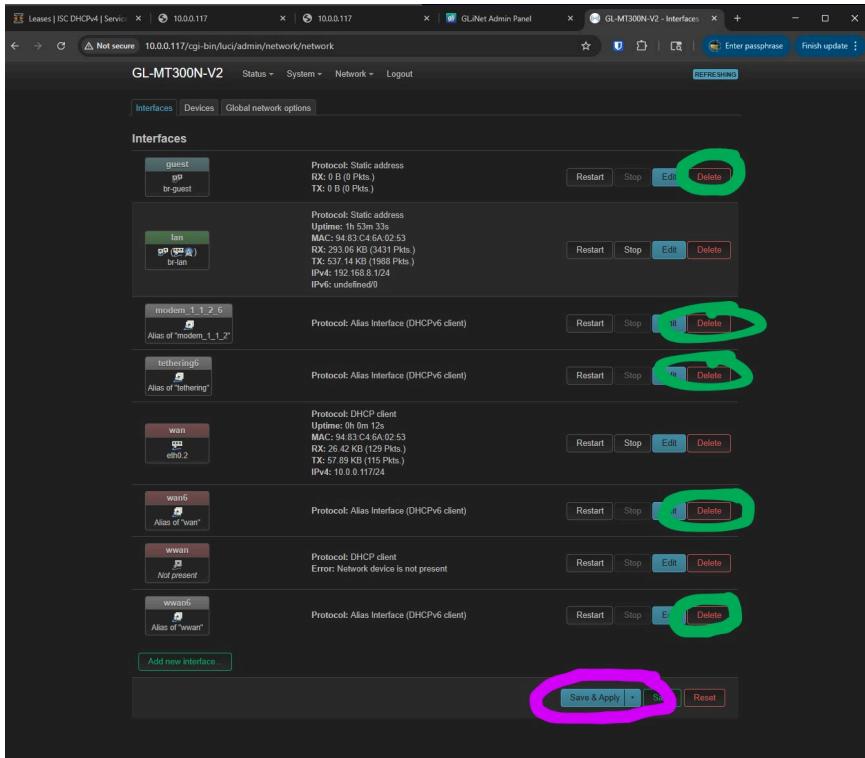- 
- Delete all the following interfaces:
  - Guest
  - Modem\_bla\_bla
  - Tethering6
  - Wan6
  - wwan6
- 

# SunPower PVS Local Monitoring

By u/thedmpd

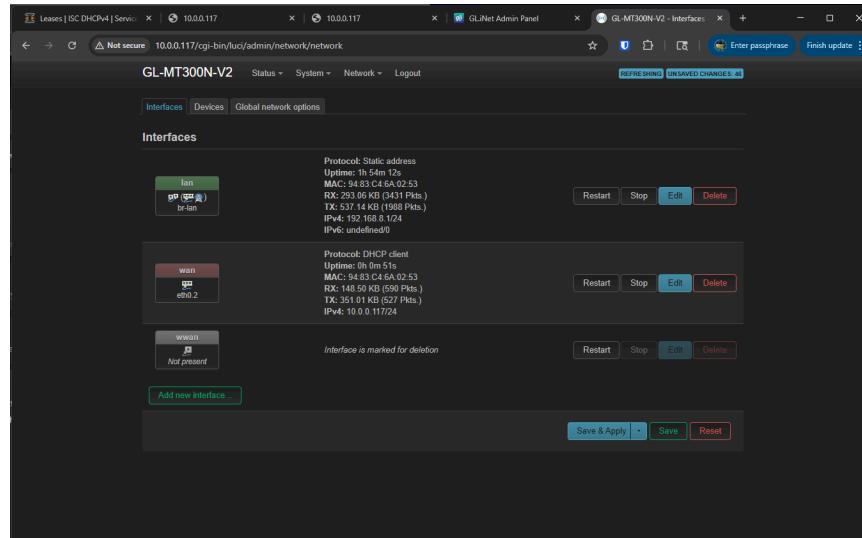


- [REDACTED]
- **Save & Apply** click it
- **TBD for WWan setup to configure for wireless wan option**
  - This will allow for your home network to connect to the WAN side of the wireless of the Mango instead of having ethernet.
  - I have not fleshed this out. Will update once I do.
  - For now we're on WIRED ethernet connections baby!




# SunPower PVS Local Monitoring

By u/thedmpd

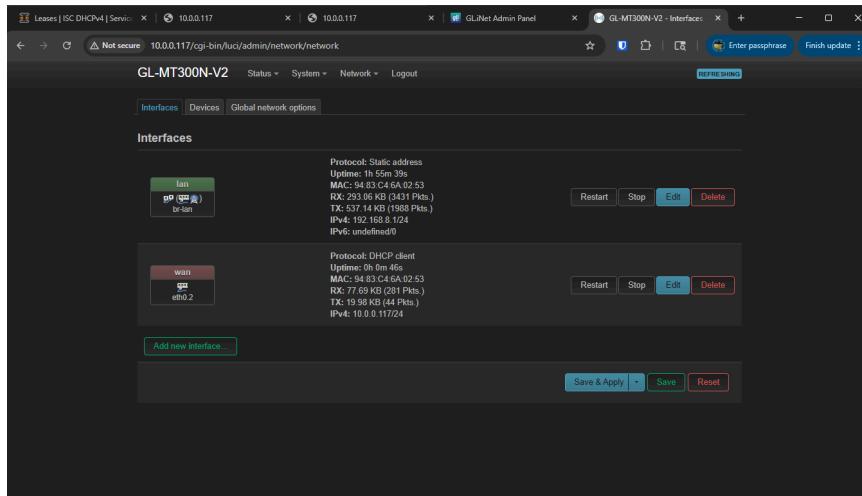


- On the LAN interface -> **Edit** click it

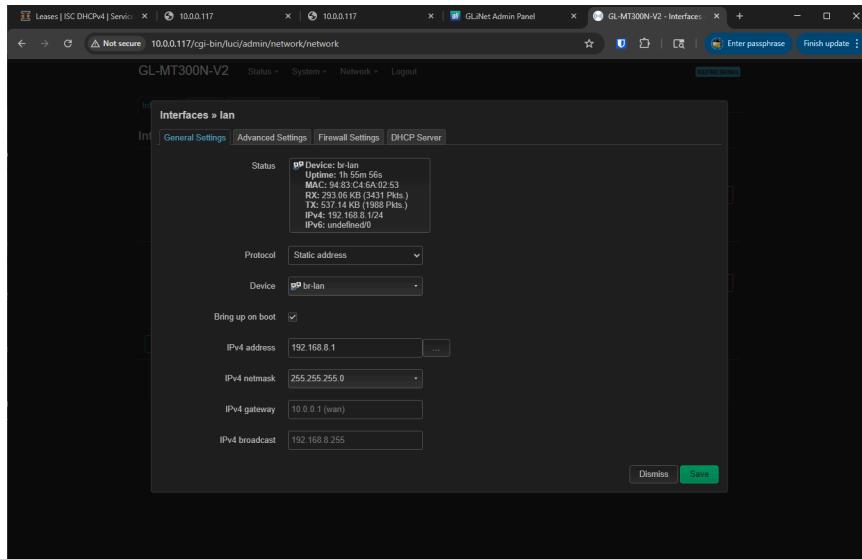


- Second Field from the TOP - **PROTOCOL** click it
- Change from Static address to **DHCP Client**

# SunPower PVS Local Monitoring

By u/thedmpd

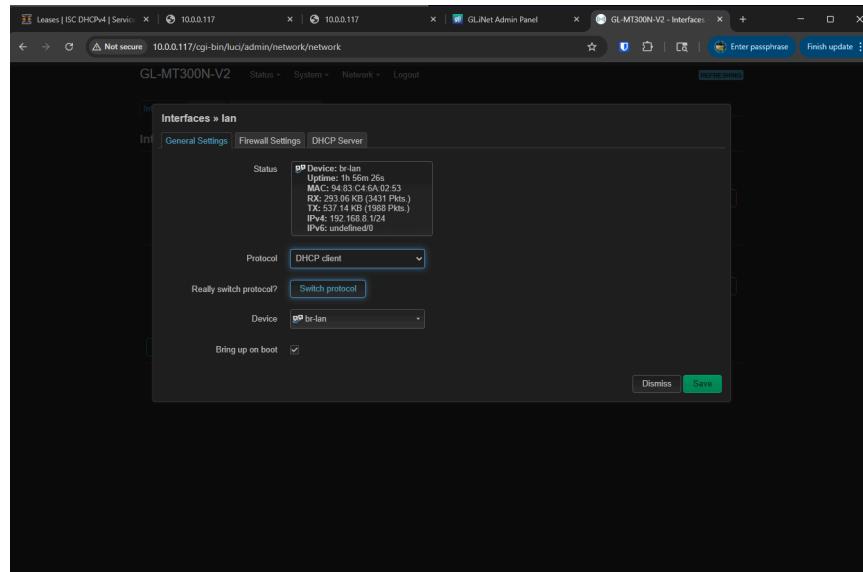


- 
- Really Switch protocol? **SWITCH PROTOCOL** click it
- Within the LAN interface rightmost tab DHCP Server

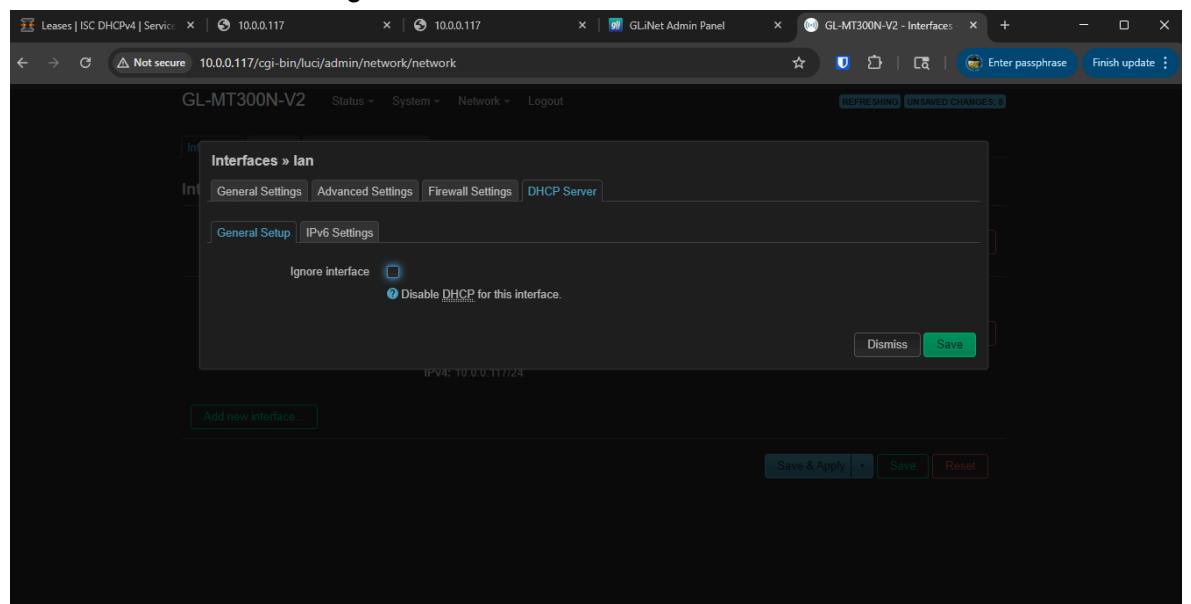


- 
- **IGNORE INTERFACE** click it

# SunPower PVS Local Monitoring


By u/thedmpd

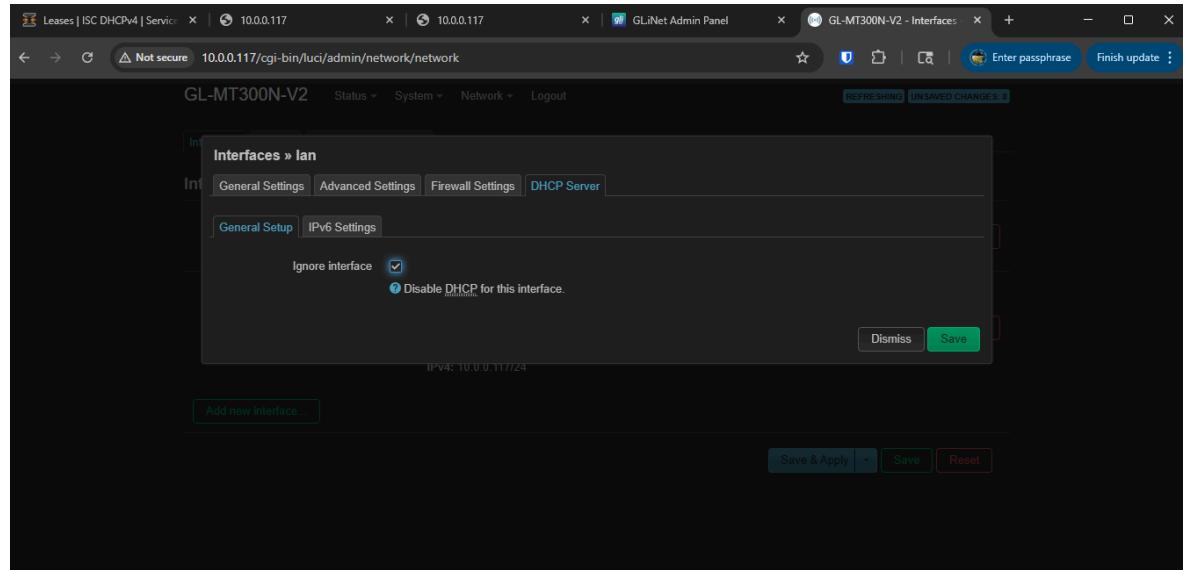

- 
- **SAVE click it**

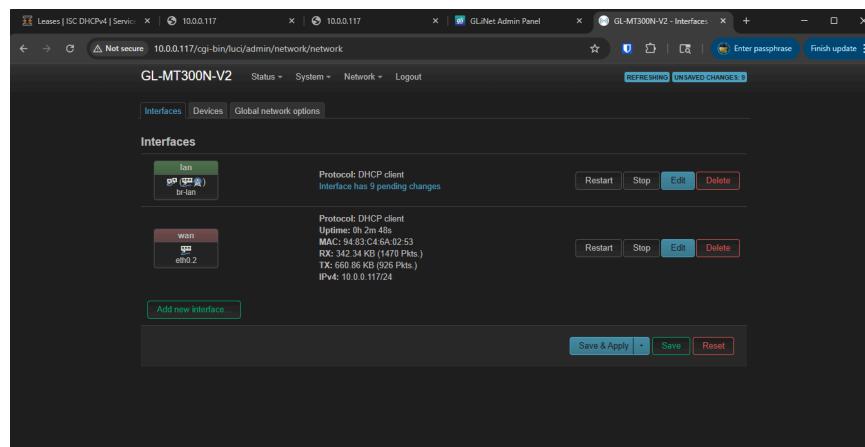

- 
- **SAVE & APPLY click it**

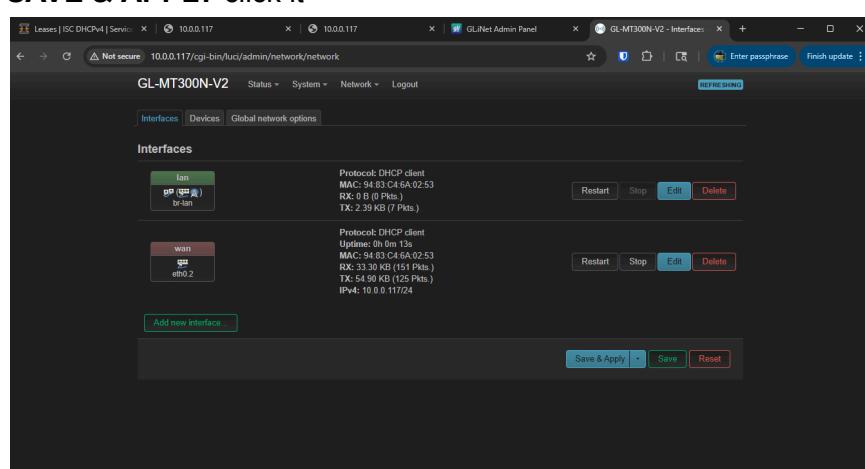


- 
- Alright, for those trying to just go through. Go ahead and proceed.
- For those who are wondering: WTF did I just do???
- We deleted all those interfaces for a few reasons:

# SunPower PVS Local Monitoring

By u/thedmpd

- To clean things up - let's only leave the interfaces we will use
- If you're putting this outside, it prevents someone from plugging in a SIM or their phone to gain access to your system. Hardening things up a bit.
- But mainly to clean things up
- We set the MANGO's LAN environment to not be an ISSUING authority. Remember the delivery driver mentioned at the beginning of this guide? Yeah, we don't need yet **another** damn entity trying to tell the network what addresses the things connected to it need to be. We already have 2 divas, we don't need a third! This Mango ain't no Mariah Carey! That was that last step of disabling the DHCP for the interface.
- Switching it from a static address to a dhcp client means that the Mango will ask whatever gets plugged into its LAN environment for an address. In our driver speak, it will get a license from the PVS as the issuing authority from the LAN side while on the WAN side it has already asked our home router for one. Now when we plug the PVS into the MANGO's LAN we will have a delivery driver with 2 licenses that will fetch and deliver all of our requests! HURRAY NETWORKING!!!
- That said....
- **PLUG the ethernet cable from the PVS into the MANGO LAN**
- You should see the PVS give your Mango an address.
  - **If this doesn't happen within 1 minute**
  - **Flip the breaker for the PVS, wait 30 seconds, then power it back up**
- Should go from this

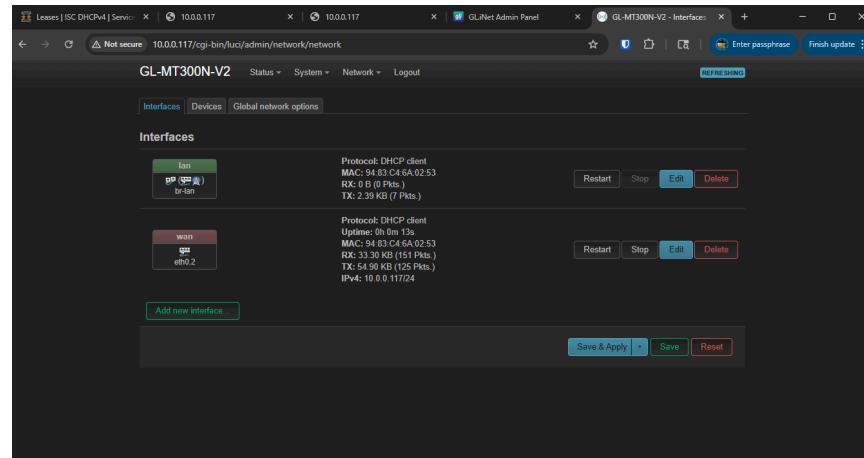

- To this

# SunPower PVS Local Monitoring

By u/thedmpd

The screenshot shows the 'Interfaces' section of the GL-MT300N-V2 Admin Panel. It lists two interfaces: 'lan' and 'wan'. The 'lan' interface is highlighted in green and shows the following details:

Protocol:	DHCP client
Uptime:	0h 0m 9s
MAC:	94:83:C4:6A:02:53
RX:	1.55 KB (15 Pkts.)
TX:	1.03 KB (34 Pkts.)
IPv4:	172.27.153.154/24

Buttons for 'Restart', 'Stop', 'Edit', and 'Delete' are available for the lan interface. Below the interfaces, there is a button 'Add new interface'. At the bottom right, there are buttons for 'Save & Apply', 'Save', and 'Reset'.


- Notice the IPv4 field in the LAN interface?




- Switch to the Mango's regular Admin Panel & Refresh the page

# SunPower PVS Local Monitoring

By u/thedmpd

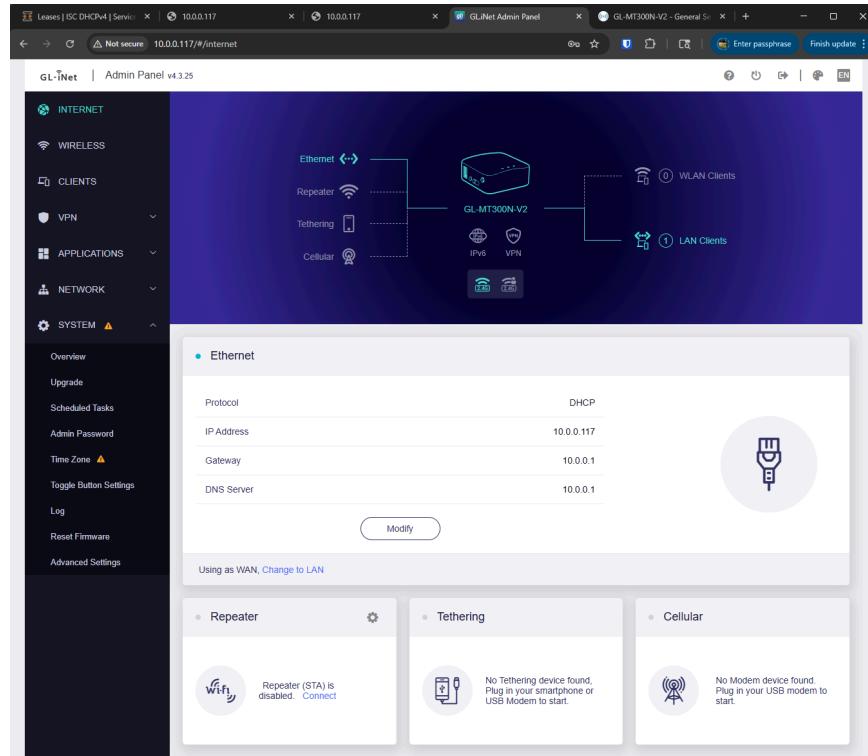

- See the 1 on the LAN Clients [Right Corner of the purple] - click it

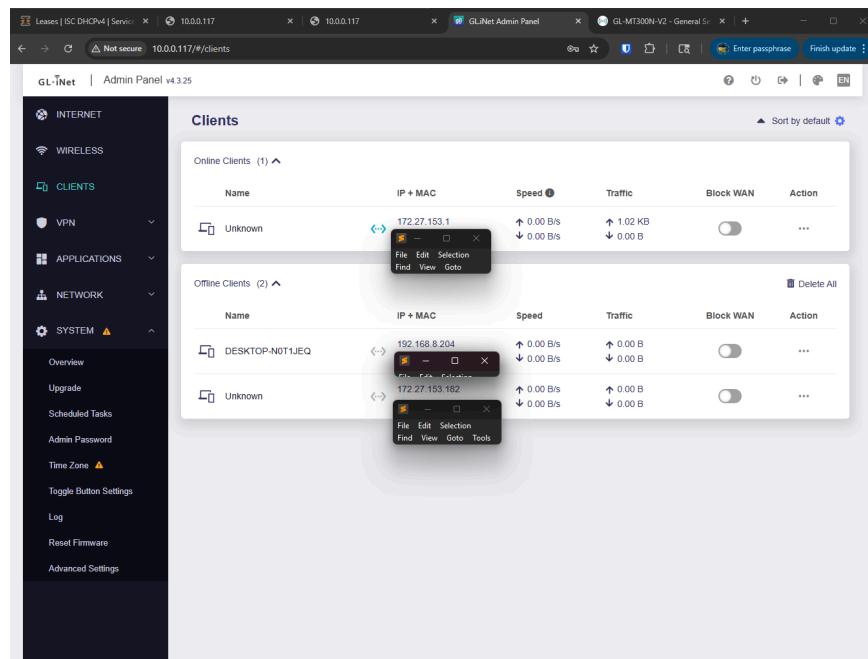

- You should see an Online Client that matches the PVS' IP @ 172.27.153.1
- Outstanding! Back to the advanced tab!
- Network -> Firewall click it

# SunPower PVS Local Monitoring

By u/thedmpd

The image shows two screenshots of the GL-MT300N-V2 web interface. The top screenshot displays the 'Interfaces' section under 'Network'. It lists two interfaces: 'lan' (status up, IP 172.27.153.194/24) and 'wan' (status up, IP 10.0.0.117). Below these are buttons for 'Restart', 'Stop', 'Edit', and 'Delete'. A 'DHCP and DNS' link is visible in the sidebar. The bottom screenshot shows the 'Firewall - Zone Settings' section. It includes 'General Settings' (SYN-flood protection enabled), 'Routing/NAT Offloading' (experimental feature, software flow offloading selected), and a 'Zones' table. The 'Zones' table has columns: Zone → Forwardings, Input, Output, Forward, Masquerading. It contains three entries:


Zone → Forwardings	Input	Output	Forward	Masquerading
lan ⇒ wan	accept	accept	accept	checkbox (unchecked)
wan ⇒ REJECT	drop	accept	reject	checkbox (checked)
guest ⇒ wan	reject	accept	reject	checkbox (unchecked)

Buttons for 'Add', 'Save & Apply', 'Save', and 'Reset' are at the bottom.

- WAN → REJECT — **EDIT** click it


# SunPower PVS Local Monitoring

By u/thedmpd

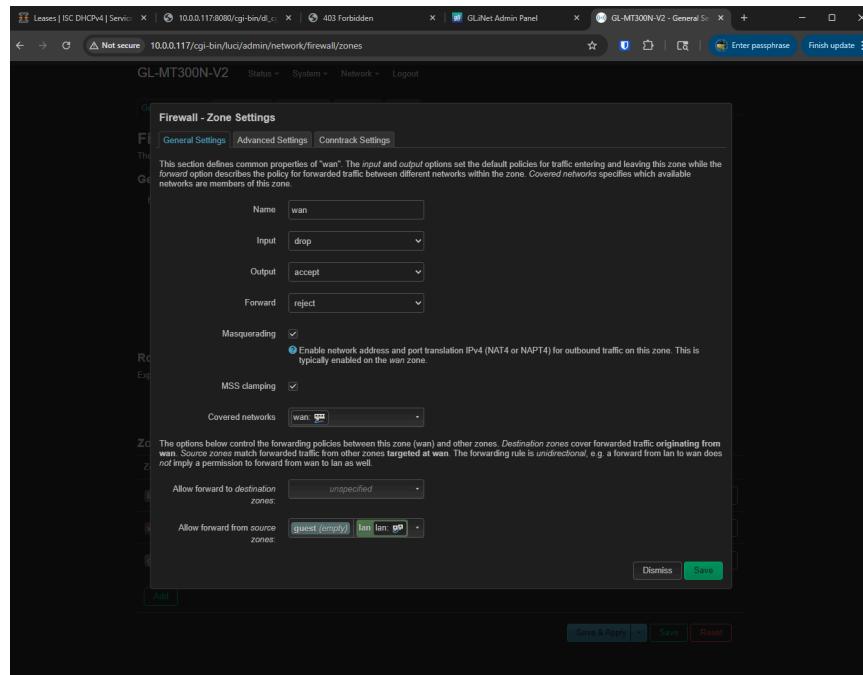

- 

- **Covered networks** click it

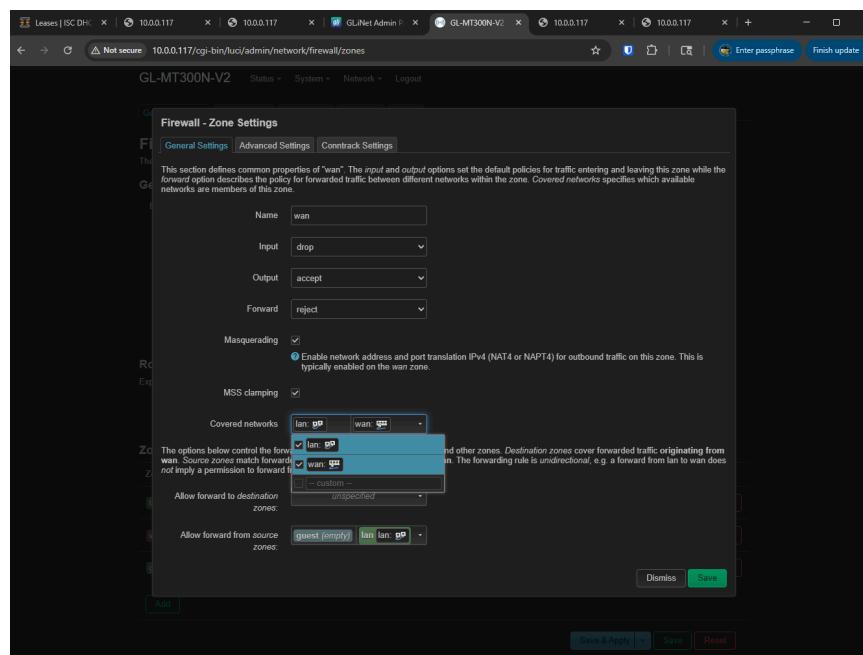

- 

- Add the **LAN** to the Covered Networks


- The WHY? \*shrug\* I am reaching out to more advanced networking users than me. Shit don't work without it; it should work in a different way but I don't know the way yet...
- Something about this rubs me the wrong way but technically not worried about it because it sits inside my firewalled garden. I will update as I learn and get taught more.

- **SAVE** click it

# SunPower PVS Local Monitoring

By u/thedmpd


- To the right of General Settings -> **Port Forwards** click it

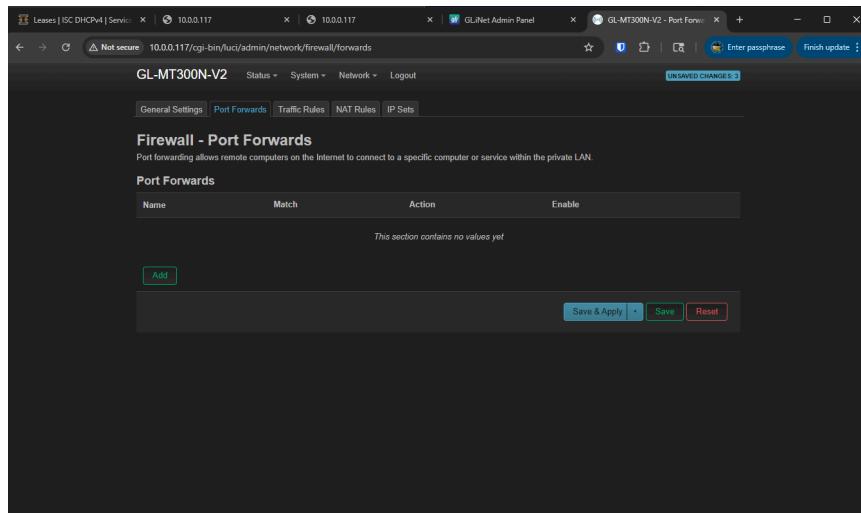

- Add click it
- Fill it out:
  - Name: Whatever your heart desires [SunPower PVS perhaps?]
  - Restrict to address family: IPv4 only
  - Protocol: TCP | UDP
  - Source Zone: WAN
  - External Port: 8080 [Hey, remember that!?!]
  - Destination zone: LAN
  - Internal IP address:
    - Sanity check; if you have done everything right then the PVS should be showing up on this list **AS 172.27.153.1**
    - If it's not, then you done goofed
    - Trace back your steps and see where the misfire happened
    - Can't figure it out?
      - Reset the Mango and start over
    - Still having issues. Ping me, I'll do what I can. But you'll owe me your best local beer and it better not be a Bud!
  - Internal Port: 80


# SunPower PVS Local Monitoring

By u/thedmpd

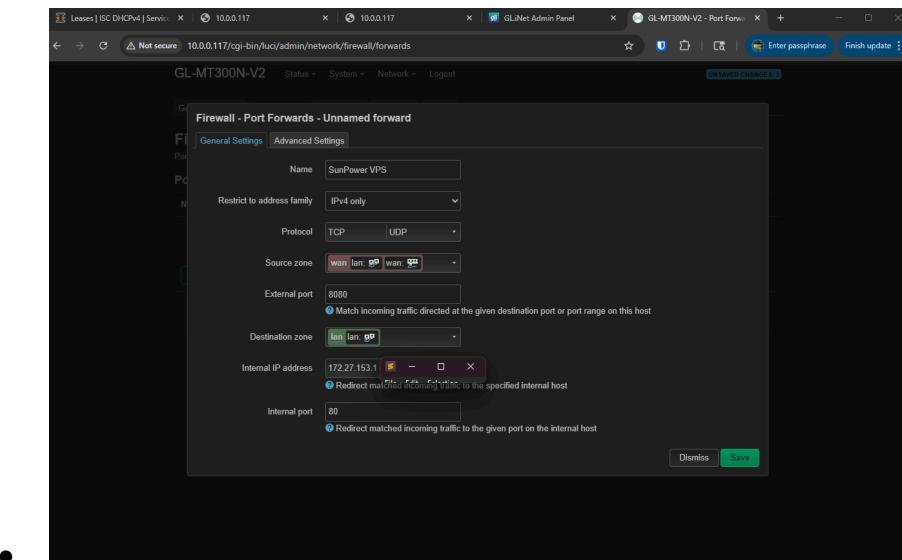

- 

- **SAVE click it**

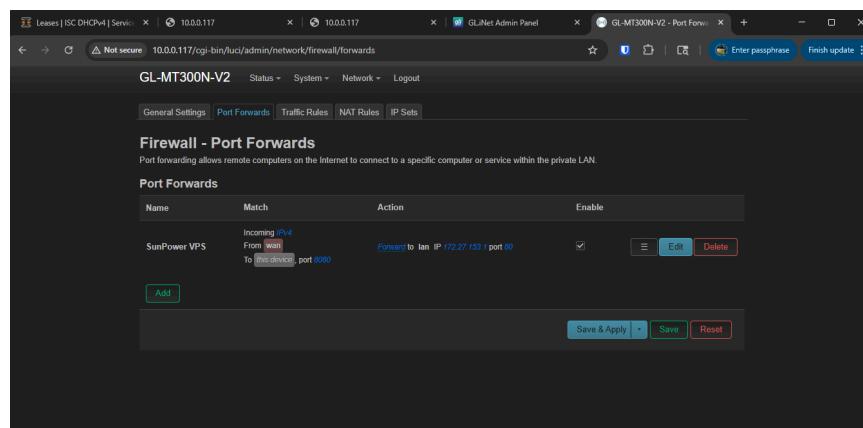

- 

- Switch tabs to the following:

- **IP\_OF\_YOUR\_MANGO\_HERE:8080**
- **IP\_OF\_YOUR\_MANGO\_HERE:8080/cgi-bin/dl.cgi?Command=DeviceList**
- **REFRESH**


# SunPower PVS Local Monitoring

By u/thedmpd



**EVERYBODY GETS A REFRESH!!!**

- You should now see 403 Forbidden on:
  - **IP\_OF\_YOUR\_MANGO\_HERE:8080**




403 Forbidden

○

○ **AMAZING!**

- You should now see device details on your browser

○ **IP\_OF\_YOUR\_MANGO\_HERE:8080/cgi-bin/dl\_cgi?Command=DeviceList**

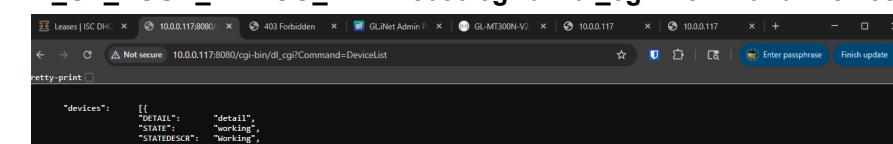

○ **AMAZEBALLS!! 2?!!**

- Feed IP\_OF\_YOUR\_MANGO\_HERE:8080 to Home Assistant!
- Now you can use the IP of your Mango with port 8080 as the address to feed Home Assistant. This guide is 30 pages long so I will end it here. Great job on getting local access to the equipment you own! Seriously, I'm proud of you! Well done!