RADIO TEST REPORT

Applicant:	ZHEJIANG QIDI TECHNOLOGY CO.,LTD
Address:	No.709 Huaguang Road, Tingtian Street, Wenzhou City, Zhejiang Province
Manufacturer:	ZHEJIANG QIDI TECHNOLOGY CO.,LTD
Address:	No.709 Huaguang Road, Tingtian Street, Wenzhou City, Zhejiang Province
Product Name:	3D printer
Trade Mark:	N/A
Model Number:	Max4, Plus5
Date of Receipt:	Nov. 19, 2025
Test Date:	Nov. 19, 2025 - Dec. 04, 2025
Date of Report:	Dec. 04, 2025
Prepared By:	Shenzhen DL Testing Technology Co., Ltd.
Address:	101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China
Applicable Standards:	ETSI EN 300 328 V2.2.2 (2019-07)
Test Result:	Pass
Report Number:	DLE-251119040-3R

Prepared (Engineer):	Ken Tan
Reviewer (Supervisor):	Jack Bu
Approved (Manager):	Jade Yang

This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.

TABLE OF CONTENT

Test Report Declaration Page

1. VERSION 3
2. TEST SUMMARY 3
3. GENERAL INFORMATION 4
4. TEST INSTRUMENT USED 12
5. RF OUTPUT POWER 13
6. POWER SPECTRAL DENSITY 15
7. ADAPTIVITY 16
8. OCCUPIED CHANNEL BANDWIDTH 35
9. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN 36
10. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN 48
11. RECEIVER SPURIOUS EMISSIONS 52
12. RECEIVER BLOCKING 56
13. SETUP PHOTOGRAPHS 58
14. EUT PHOTOGRAPHS 58

1. VERSION

Version No.	Date	Description
00	Dec. 04, 2025	Original

2. TEST SUMMARY

No	Test Item	Clause No	Result
Transmitter Parameters			
1	RF output power	4.3.2.2	PASS
2	Power Spectral Density	4.3.2.3	PASS
3	Duty Cycle, Tx-sequence, Tx-gap	4.3.2.4	N/A
4	Medium Utilisation (MU) factor	4.3.2.5	N/A
5	Adaptive non-FHSS using DAA	4.3.2.6	PASS
6	Occupied Channel Bandwidth	4.3.2.7	PASS
7	Transmitter unwanted emissions in the out-of-band domain	4.3.2.8	PASS
8	Transmitter unwanted emissions in the spurious domain	4.3.2.9	PASS
Receiver Parameters			
9	Receiver spurious emissions	4.3.2.10	PASS
10	Receiver Blocking	4.3.2.11	PASS

Note: (1)" N/A" denotes test is not applicable in this Test Report
(2) Test Facility: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

3. GENERAL INFORMATION

3.1 Description of Device (EUT)

Product Name:	3D printer
Trade Mark:	N/A
Model Number:	Max4, Plus5
Test Model:	Max4
Model difference:	All models are same as the samples except model name and appearance color, they have the same structure and circuit.
Power Supply:	100-240V～ 50/60Hz 3.4A Max
Operation Frequency:	802.11b/g/n20:2412~2472 MHz 802.11n40:2422~2462 MHz
Modulation Type:	CCK/OFDM/DBPSK/DAPSK
Number of Channel:	802.11b/g/n20:13CH 802.11n40:11 CH
Data Rate:	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps
Antenna Type:	Internal Antenna
Antenna Gain:	2.38dBi
Receiver Category:	1
Hardware Version:	1.0
Software Version:	1.0
Firmware:	---

Note1: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Note2: The EUT's all information provided by client.

Channel List for 802.11b/g/n HT20							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452	13	2472
02	2417	06	2437	10	2457	/	/
03	2422	07	2442	11	2462	/	/
04	2427	08	2447	12	2467	/	/

Channel List for 802.11n HT40							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452	/	/
04	2427	07	2442	10	2457	/	/
05	2432	08	2447	11	2462	/	/

ANNEX E.2

a) The type of wideband data transmission equipment:

☐ FHSS

■ non-FHSS

b) In case of FHSS:

•In case of non-Adaptive FHSS equipment:

The number of Hopping Frequencies:

•In case of Adaptive FHSS equipment:

The maximum number of Hopping Frequencies:

The minimum number of Hopping Frequencies:

•The (average) dwell time:

c) Adaptive / non-adaptive equipment:

☐ non-adaptive Equipment

■ adaptive Equipment without the possibility to switch to a non-adaptive mode

☐ adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

The Channel Occupancy Time implemented by the equipment: ms

☐ The equipment has implemented an LBT mechanism

- In case of non-FHSS equipment:

☐ The equipment is Frame Based equipment

☐ The equipment is Load Based equipment

☐ The equipment can switch dynamically between Frame Based and Load Based equipment

The CCA time implemented by the equipment: ..... µs

■ The equipment has implemented a DAA mechanism

☐ The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

The maximum RF Output Power (e.i.r.p.): 15.21 dBm

The maximum (corresponding) Duty Cycle: ……. %

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

- RF Output Power

802.11b

- Power Spectral Density

802.11b

- Duty cycle, Tx-Sequence, Tx-gap

802.11b

- Accumulated Transmit time, Frequency Occupation & Hopping Sequence (only for FHSS equipment)

.....

- Hopping Frequency Separation (only for FHSS equipment)

.....

- Medium Utilisation

.....

- Adaptivity & Receiver Blocking

.....

- Nominal Channel Bandwidth

20/40MHz

- Transmitter unwanted emissions in the OOB domain

802.11b

- Transmitter unwanted emissions in the spurious domain

802.11b

- Receiver spurious emissions

802.11b

g) The different transmit operating modes (tick all that apply):

■ Operating mode 1: Single Antenna Equipment

■ Equipment with only one antenna

☐ Equipment with two diversity antennas but only one antenna active at any moment in time

☐ Smart Antenna Systems with two or more antennas, but operating in a (legacy) mode where only one antenna is used (e.g. IEEE 802.11™ legacy mode in smart antenna systems)

☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming

☐ Single spatial stream/Standard throughput/(e.g. IEEE 802.11™ legacy mode)

☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1

☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2

NOTE1: Add more lines if more channel bandwidths are supported.

☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming

☐ Single spatial stream/Standard throughput (e.g. IEEE 802.11™ legacy mode)

☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 1

☐ High Throughput (> 1 spatial stream) using Nominal Channel Bandwidth 2

NOTE2: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains: .....
- The number of Transmit chains: .....

☐ symmetrical power distribution

☐ asymmetrical power distribution

In case of beam forming, the maximum (additional) beam forming gain: ..... dB

NOTE: The additional beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2412 MHz to 2472 MHz
- Operating Frequency Range 2: 2422 MHz to 2462 MHz

NOTE: Add more lines if more Frequency Ranges are supported.

j) Occupied Channel Bandwidth(s):

- Nominal Channel Bandwidth 1: 11.701MHz
- Nominal Channel Bandwidth 2: 35.874MHz

NOTE: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

■ Stand-alone
☐ Combined Equipment
☐ Plug-in radio device
☐ Other .....

l) The normal and the extreme operating conditions that apply to the equipment:

Normal operating conditions (if applicable):

Operating temperature:25° C

Other (please specify if applicable): ……

Extreme operating conditions:

Operating temperature range: Minimum: -20 °C Maximum 50°C

Other (please specify if applicable): Minimum: …… Maximum ……

Details provided are for the: ■ stand-alone equipment
☐ combined (or host) equipment
☐ test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p. levels:

- Antenna Type

■Internal Antenna (information to be provided in case of conducted measurements)
Antenna Gain: 2.38dBi
If applicable, additional beamforming gain (excluding basic antenna gain): ..... dB
☐ Temporary RF connector provided
☐ No temporary RF connector provided
☐ Dedicated Antennas (equipment with antenna connector)
☐ Single power level with corresponding antenna(s)
☐ Multiple power settings and corresponding antenna(s)
Number of different Power Levels: .....
Power Level 1: ..... dBm
Power Level 2: ..... dBm
Power Level 3: ..... dBm
NOTE 1: Add more lines in case the equipment has more power levels.
NOTE 2: These power levels are conducted power levels (at antenna connector).

- For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable

Power Level 1: 15.21dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1	2.38	15.21	
2			
3			
4			

NOTE 3: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 2: ..... dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

NOTE 4: Add more rows in case more antenna assemblies are supported for this power level.

Power Level 3: ..... dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

NOTE 5: Add more rows in case more antenna assemblies are supported for this power level.

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined equipment or test jig in case of plug-in devices:

Details provided are for the: ■ stand-alone equipment
☐ combined equipment
☐ test jig

Supply Voltage ■ AC mains State AC voltage: 230V
☐ DC State DC voltage : V

In case of DC, indicate the type of power source
■ Internal Power Supply
☐ External Power Supply or AC/DC adapter
☐ Battery: V
☐ Other: .....

o) Describe the test modes available which can facilitate testing:

The EUT can be into the Engineer mode for testing.

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™, IEEE 802.15.4™, proprietary, etc.):

IEEE 802.11™

q) If applicable, the statistical analysis referred to in clause 5.4.1 q)

(to be provided as separate attachment)

r) If applicable, the statistical analysis referred to in clause 5.4.1 r)

(to be provided as separate attachment)

s) Geo-location capability supported by the equipment:

□ Yes

□ The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user

■ No

ANNEX E.3

From all combinations of conducted power settings and intended antenna assembly(ies) specified in clause 5.4.1 m), specify the combination resulting in the highest e.i.r.p. for the radio equipment.

Unless otherwise specified in ETSI EN 300 328, this power setting is to be used for testing against the requirements of ETSI EN 300 328. In case there is more than one such conducted power setting resulting in the same (highest) e.i.r.p. level, the highest power setting is to be used for testing. See also ETSI EN 300 328, clause 5.3.2.3.

Highest overall e.i.r.p. value: ..... dBm	
Corresponding Antenna assembly gain: ..... dBi	Antenna Assembly #: .....
Corresponding conducted power setting: ..... dBm (also the power level to be used for testing)	Listed as Power Setting #: .....

ANNEX E.4.1

ITU Class(es) of emission: .....

Can the transmitter operate unmodulated? □ yes □ no

ANNEX E.4.2

The transmitter is intended for: □ Continuous duty

□ Intermittent duty

□ Continuous operation possible for testing purposes

ANNEX E.4.3

□ The equipment submitted are representative production models

□ If not, the equipment submitted are pre-production models?

□ If pre-production equipment are submitted, the final production equipment will be identical in all respects with the equipment tested

□ If not, supply full details

ANNEX E.4.4

□ Spare batteries (e.g. for portable equipment)
□ Battery charging device
□ External Power Supply or AC/DC adapter
□ Test jig or interface box
□ RF test fixture (for equipment with integrated antennas)
□ Combined equipment Manufacturer: .....
Model #: .....
Model name: .....
□ User Manual
□ Technical documentation (Handbook and circuit diagrams)

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up

EUT

3.4 Test Mode Description

Mode	data rate (Mbps)	Channel	Frequency (MHz)
802.11b	11	Low: CH1	2412
	11	Middle: CH7	2442
	11	High: CH13	2472
802.11g	54	Low: CH1	2412
	54	Middle: CH7	2442
	54	High: CH13	2472
802.11n HT20	MCS1	Low: CH1	2412
	MCS1	Middle: CH7	2442
	MCS1	High: CH13	2472
802.11n HT40	MCS1	Low: CH3	2422
	MCS1	Middle: CH7	2442
	MCS1	High: CH11	2462

3.5 Test Conditions

	Normal Conditions	Extreme Conditions	
Temperature range	25℃	HTHV	AC 253V, 50℃
		HTLV	AC 207V, 50℃
Power supply	AC 230V	LTLV	AC 207V, -20℃
		LTHV	AC 253V, -20℃
Note 1: The test procedure described in clause 5.1of EN300 328 was used for extreme test procedure. 2: The Extreme Temperature and Extreme Voltages declared by the manufacturer.			

3.6 Test Uncertainty

Item	MU	Remark
Uncertainty for Conducted Emission Test	2.50dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.04dB	Polarize: V
	3.02dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (Above 1GHz)	3.56dB	Polarize: H
	3.84dB	Polarize: V
Uncertainty for radio frequency	1×10^{-9}	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.6℃	
Uncertainty for humidity	1%	

4. TEST INSTRUMENT USED

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
Comprehensive Tester	ROHDE&SCHWARZ	CMW500	106504	Oct. 25, 2025	Oct. 24, 2026
Spectrum Analyzer	KEYSIGHT	N9020A	MY55370280	Oct. 25, 2025	Oct. 24, 2026
Signal Source	Agilent	N5182A	MY46240766	Oct. 25, 2025	Oct. 24, 2026
Signal Source	Agilent	83752A	3610A01631	Oct. 25, 2025	Oct. 24, 2026
Probe	KEYSIGHT	U2021XA	MY55210018	Oct. 25, 2025	Oct. 24, 2026
Attenuator	MAIWEI	MANASR0206S2	DLE-160	Oct. 25, 2025	Oct. 24, 2026
RF Control Box	MAIWEI	MW100-RFCB	DLE-179	Oct. 25, 2025	Oct. 24, 2026
RF Control Box	MAIWEI	MW200-RFCB	DLE-180	Oct. 25, 2025	Oct. 24, 2026
RF Cable	MAIWEI	Z302S	18054391	Oct. 25, 2025	Oct. 24, 2026
RF Cable	MAIWEI	Z302S	19051973	Nov. 06, 2023	Nov. 05, 2026
RF Cable	MAIWEI	Z302S	19051987	Oct. 25, 2025	Oct. 24, 2026
RF Cable	MAIWEI	Z302S	19051988	Oct. 25, 2025	Oct. 24, 2026
RF Cable	MAIWEI	Z302S	19063251	Oct. 25, 2025	Oct. 24, 2026
RF Cable	MAIWEI	Z302S	19063254	Oct. 25, 2025	Oct. 24, 2026
RF Cable	MAIWEI	Z302S	19063257	Oct. 27, 2025	Oct. 26, 2026
RF Cable	MAIWEI	Z302S	19063259	Oct. 27, 2025	Oct. 26, 2026
DC power	LODESTAR	LP532DE	LP1908158	Oct. 27, 2025	Oct. 26, 2026
966 chamber	YIHENG	966 Room	966	Oct. 25, 2025	Oct. 24, 2026
Spectrum Analyzer	Agilent	E4408B	MY50140780	Oct. 25, 2025	Oct. 24, 2026
EMI Receiver	R&S	ESRP7	101393	Oct. 25, 2025	Oct. 24, 2026
Amplifier	Schwarzbeck	BBV9743B	00153	Oct. 25, 2025	Oct. 24, 2026
Amplifier	EMEC	EM01G8GA	00270	Oct. 25, 2025	Oct. 24, 2026
Active Loop Antenna	Daze	ZN30900A	SEL0097	Oct. 25, 2025	Oct. 24, 2026
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Oct. 25, 2025	Oct. 24, 2026
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Oct. 25, 2025	Oct. 24, 2026
966 Cable 1#	ChengYu	966	004	Oct. 25, 2025	Oct. 24, 2026
966 Cable 2#	ChengYu	966	003	Oct. 25, 2025	Oct. 24, 2026
Temperature Controller	Terchy	MHQ	120	Oct. 25, 2025	Oct. 24, 2026

Other

1	RF test system	MAIWEI	MTS8310	2.0.0.0
2	RF communication test system	MAIWEI	MTS8200	2.0.0.0
3	EMC radiation test system	FALA	EZ_EMC	FA-03A2

5. RF OUTPUT POWER

5.1 Block Diagram of Test Setup

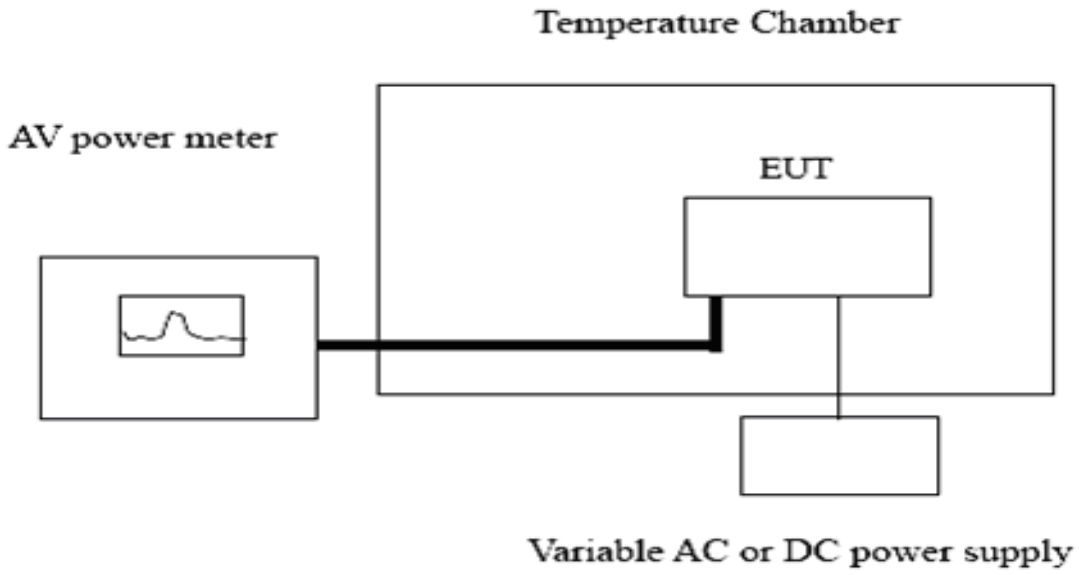

5.2 Limit

The RF output power for non-FHSS equipment shall be equal to or less than 20 dBm.

Notes: For Non-adaptive FHSS equipment, the manufacturer may have declared a reduced RF Output Power (seeclause 5.4.1 m)) and associated Duty Cycle (see clause 5.4.1 e)) that will ensure that the equipment meets the requirement for the Medium Utilization (MU) factor further described in clause 4.3.2.5. This is verified by the conformance test referred to in clause 4.3.2.5.4.

For non-adaptive non-FHSS equipment, where the manufacturer has declared an RF output power of less than 20 dBm e.i.r.p., the RF output power shall be equal to or less than that declared value.

5.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 Clause 5.4.2.2.1.1

5.4 Test Result

Total e.i.r.p（dBm） Result								
Mode	Test CH	Condition					Limit (dBm)	Result
		Normal	HTLV	LTLV	LTHV	HTHV		
802.11b	Low	15.09	15.13	15.06	15.20	15.02	20.00	Pass
	Middle	15.18	15.11	15.04	15.21	15.01	20.00	Pass
	High	15.10	14.94	14.76	14.96	15.05	20.00	Pass
802.11g	Low	14.16	14.32	14.04	13.92	14.11	20.00	Pass
	Middle	14.02	14.18	13.90	14.02	13.86	20.00	Pass
	High	14.71	14.53	14.31	14.45	14.63	20.00	Pass
802.11n HT20	Low	12.90	13.04	12.64	12.89	12.83	20.00	Pass
	Middle	13.13	13.17	12.58	13.09	13.12	20.00	Pass
	High	13.16	13.26	12.67	13.16	13.08	20.00	Pass
802.11n HT40	Low	11.56	10.62	11.25	11.56	11.51	20.00	Pass
	Middle	11.60	10.65	11.29	11.23	11.42	20.00	Pass
	High	10.83	10.94	10.78	10.87	10.82	20.00	Pass

6. POWER SPECTRAL DENSITY

6.1 Block Diagram of Test Setup

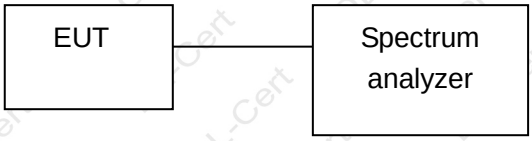

6.2 Test Standard and Limit

The maximum Power Spectral Density for non-FHSS equipment is 10 dBm per MHz.

6.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 Clause 5.4.3

Connect the UUT to the spectrum analyzer and use the following settings:

Start Frequency	2400 MHz
Stop Frequency	2483.5 MHz
RBW	10KHz
VBW	30KHz
Detector	RMS
Sweep points	>8350
Trace	Max Hold
Trigger	Free Run

6.4 Test Result

Mode	Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Conclusion
802.11b	Low	6.933	10.00	PASS
	Middle	6.509	10.00	PASS
	High	5.693	10.00	PASS
802.11g	Low	3.981	10.00	PASS
	Middle	3.083	10.00	PASS
	High	2.906	10.00	PASS
802.11n HT20	Low	1.477	10.00	PASS
	Middle	1.437	10.00	PASS
	High	1.025	10.00	PASS
802.11n HT40	Low	0.634	10.00	PASS
	Middle	0.571	10.00	PASS
	High	0.480	10.00	PASS

7. ADAPTIVITY

7.1 Block Diagram of Test Setup

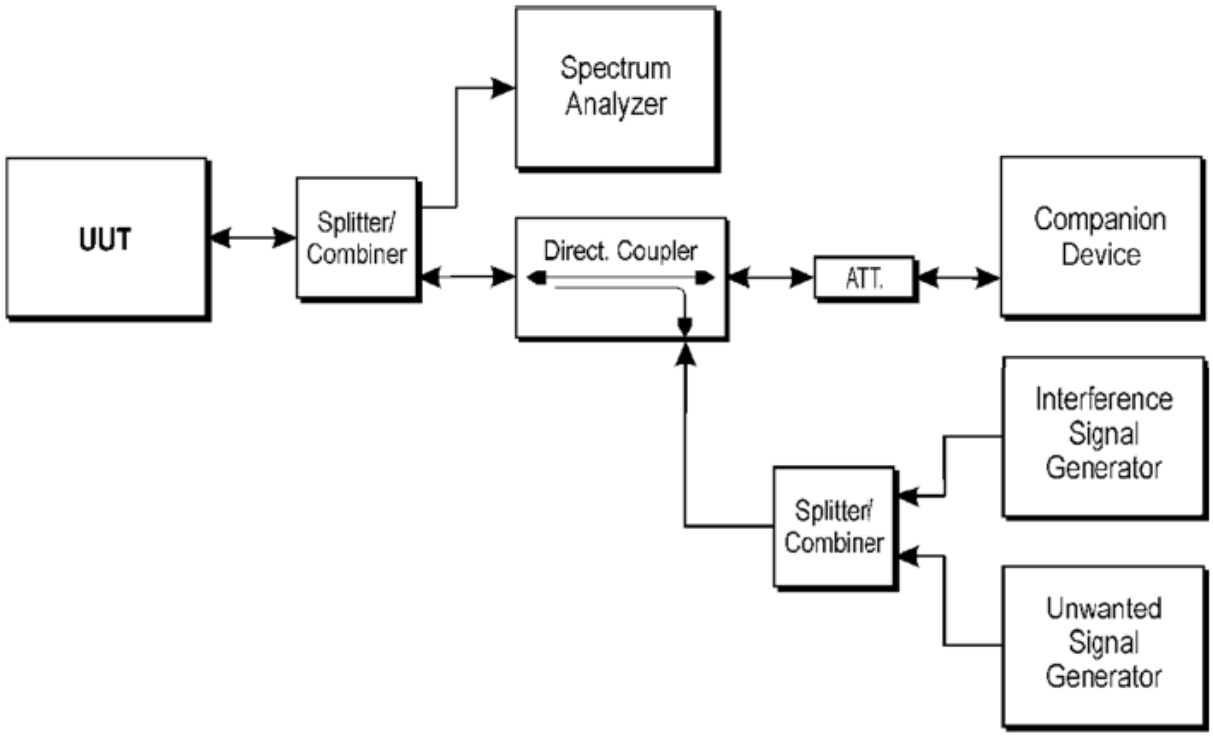

Figure 5: Test set-up for verifying the adaptivity of an equipment

7.2 Test Standard and Limit

Adaptive non-FHSS equipment using DAA shall comply with the following minimum set of requirements:

1) During normal operation, the equipment shall evaluate the presence of a signal on its current operating channel(s). If it is determined that a signal is present with a level above the detection threshold defined in step 5 that channel shall be marked as 'unavailable'.
2) The channel(s) shall remain unavailable for a minimum time equal to 1 s after which the channel may be considered again as an 'available' channel
3) The total time during which an equipment has transmissions on a given channel without re-evaluating the availability of that channel, is defined as the Channel Occupancy Time. The Channel Occupancy Time shall be less than 40 ms. Each such transmission sequence shall be followed by an Idle Period (no transmissions) of minimum 5 % of the Channel Occupancy Time with a minimum of 100 µs. After this, the procedure as in step 1 needs to be repeated.
4) The detection threshold shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the detection threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G); however, beamforming gain (Y) shall not be taken into account. For power levels less than 20 dBm e.i.r.p., the detection threshold level may be relaxed to:

$$TL = -70\ \text{dBm/MHz} + 10 \times \log10\ (100\ \text{mW} / P_{out})\ (P_{out}\ \text{in mW e.i.r.p.})$$

5) The equipment shall comply with the requirements defined in step 1 to step 4 of the present clause in the presence of an unwanted CW signal as defined in table 9.

Table 9: Unwanted Signal parameters

Wanted signal mean power from companion device (dBm)	Unwanted signal frequency (MHz)	Unwanted CW signal power (dBm)
-30 (see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 2)

NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.

NOTE 2: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density in front of the UUT antenna.

7.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 Clause 5.4.6

7.4 Test Result

PASS

Please refer to the following page.

Condition	Mode	Frequency (MHz)	Antenna	AWGN Level (dBm)	CW Level (dBm)	Short Control Width (ms)	Short Control Ratio(%)	Limit (%)	Verdict
NVNT	b	2412	Ant1	-60	-35	0	0	<=12	Pass
NVNT	b	2442	Ant1	-60	-35	0	0	<=12	Pass
NVNT	b	2472	Ant1	-60	-35	0	0	<=10	Pass
NVNT	g	2412	Ant1	-60	-35	0	0	<=10	Pass
NVNT	g	2442	Ant1	-60	-35	0	0	<=10	Pass
NVNT	g	2472	Ant1	-60	-35	0	0	<=10	Pass
NVNT	n20	2412	Ant1	-60	-35	0	0	<=10	Pass
NVNT	n20	2442	Ant1	-60	-35	0	0	<=10	Pass
NVNT	n20	2472	Ant1	-60	-35	0	0	<=10	Pass
NVNT	n40	2422	Ant1	-60	-35	0	0	<=10	Pass
NVNT	n40	2442	Ant1	-60	-35	0	0	<=10	Pass
NVNT	n40	2462	Ant1	-60	-35	0	0	<=10	Pass

Condition	Mode	Frequency (MHz)	Antenna	Max COT (ms)	Limit COT (ms)	Min Idle Time (ms)	Limit Idle Time (ms)	Verdict
NVNT	b	2412	Ant1	5.105	<=13	0.044	>0.018	Pass
NVNT	b	2442	Ant1	0.721	<=13	0.057	>0.018	Pass
NVNT	b	2472	Ant1	0.213	<=13	0.57	>0.018	Pass
NVNT	g	2412	Ant1	0.213	<=13	1.36	>0.018	Pass
NVNT	g	2442	Ant1	0.304	<=13	1.362	>0.018	Pass
NVNT	g	2472	Ant1	0.704	<=10	0.101	>0.018	Pass
NVNT	n20	2412	Ant1	0.448	<=13	0.114	>0.018	Pass
NVNT	n20	2442	Ant1	0.968	<=13	0.054	>0.018	Pass
NVNT	n20	2472	Ant1	1.023	<=13	0.046	>0.018	Pass
NVNT	n40	2422	Ant1	1.032	<=13	0.035	>0.018	Pass
NVNT	n40	2442	Ant1	1.023	<=13	0.035	>0.018	Pass
NVNT	n40	2462	Ant1	1.16	<=13	0.037	>0.018	Pass

Adaptivity NVNT b 2412MHz

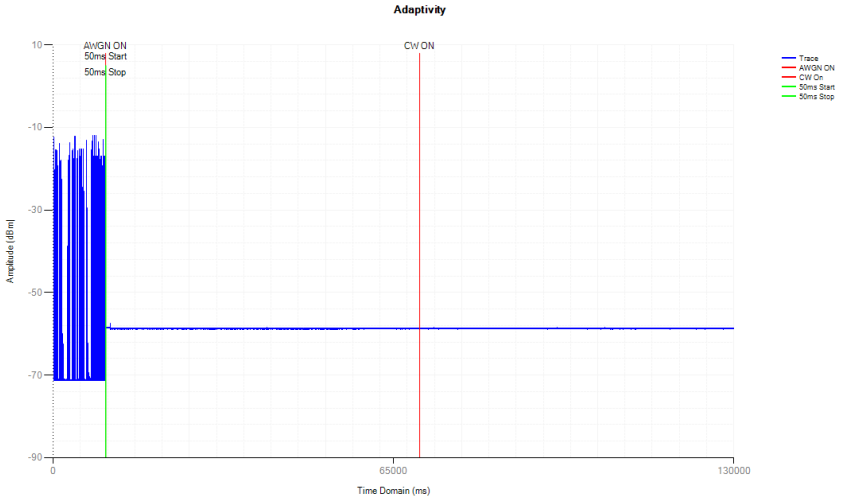

Control Signal NVNT b 2412MHz

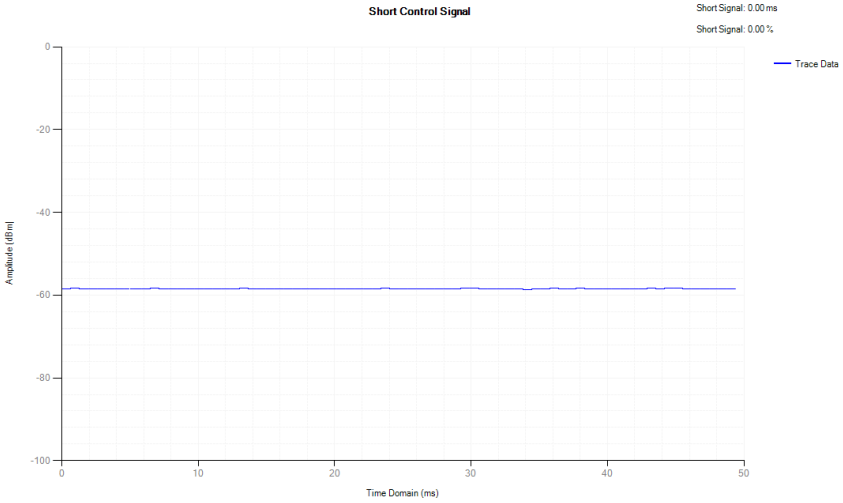

Adaptivity NVNT b 2442MHz

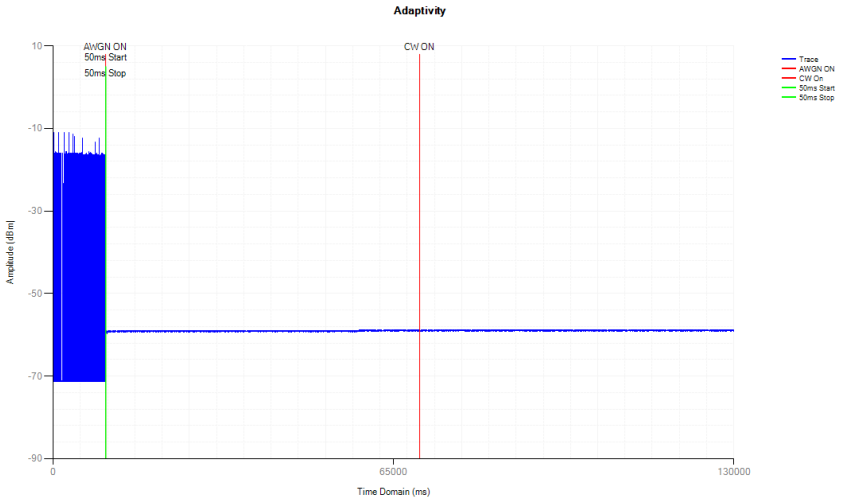

Control Signal NVNT b 2442MHz

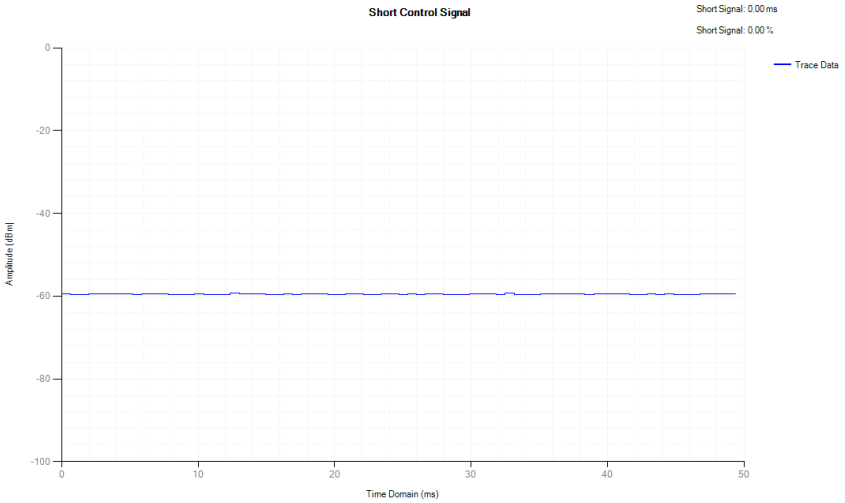

Adaptivity NVNT b 2472MHz

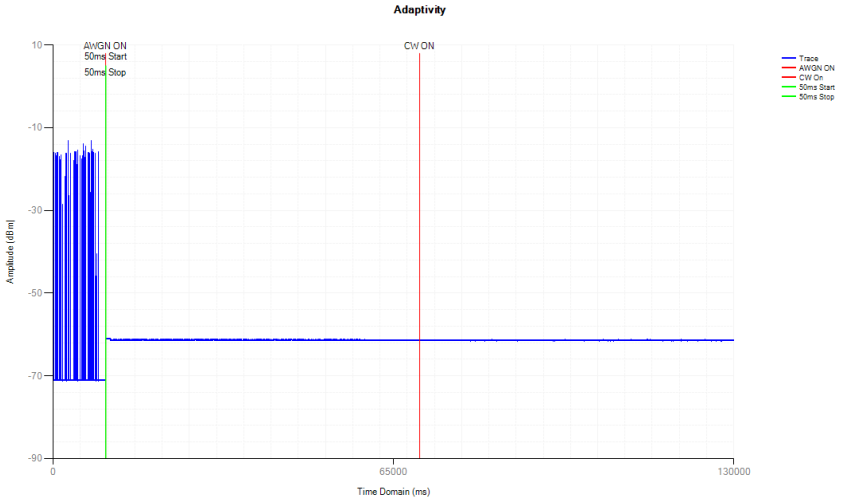

Control Signal NVNT b 2472MHz

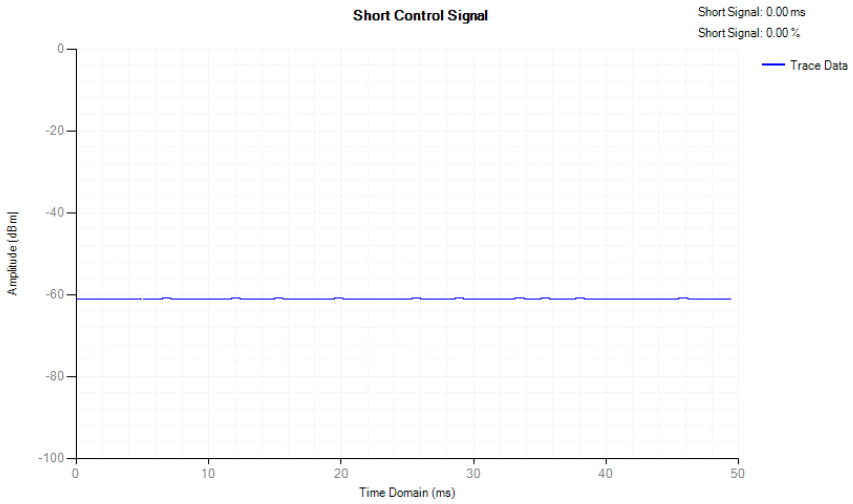

Adaptivity NVNT g 2412MHz

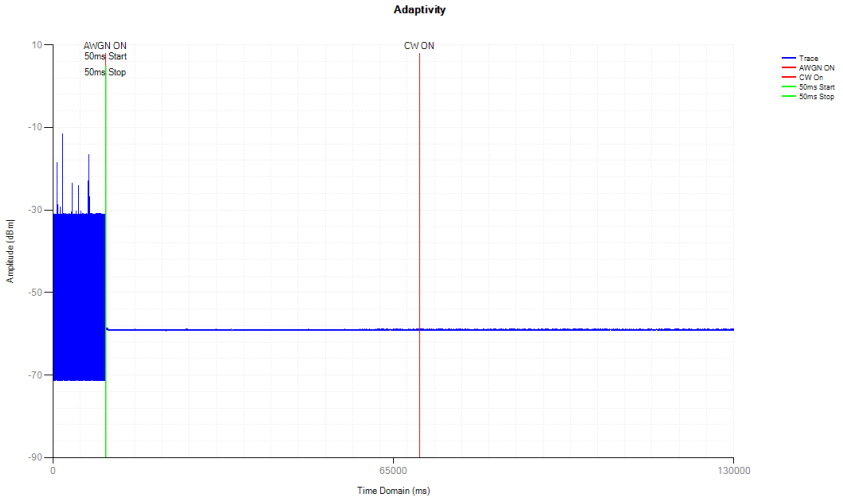

Control Signal NVNT g 2412MHz

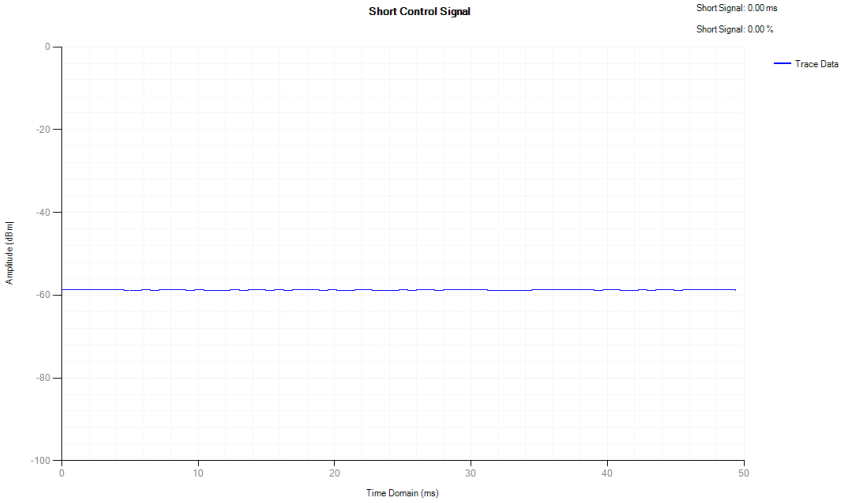

Adaptivity NVNT g 2442MHz

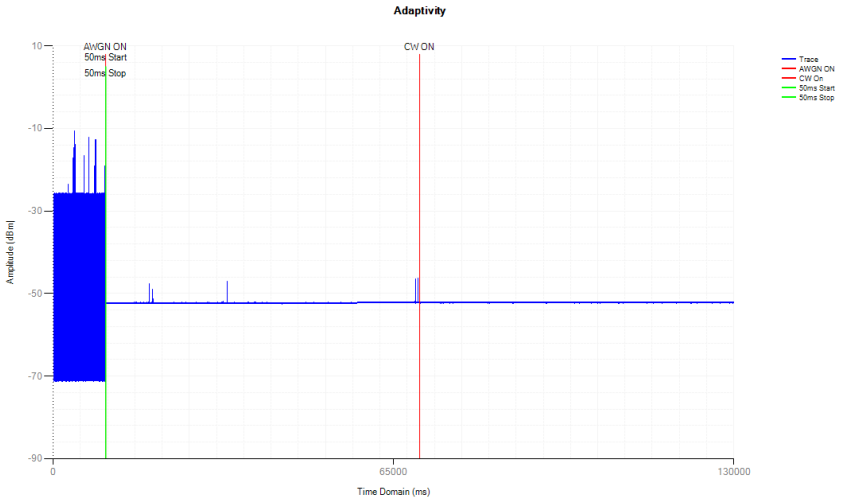

Control Signal NVNT g 2442MHz

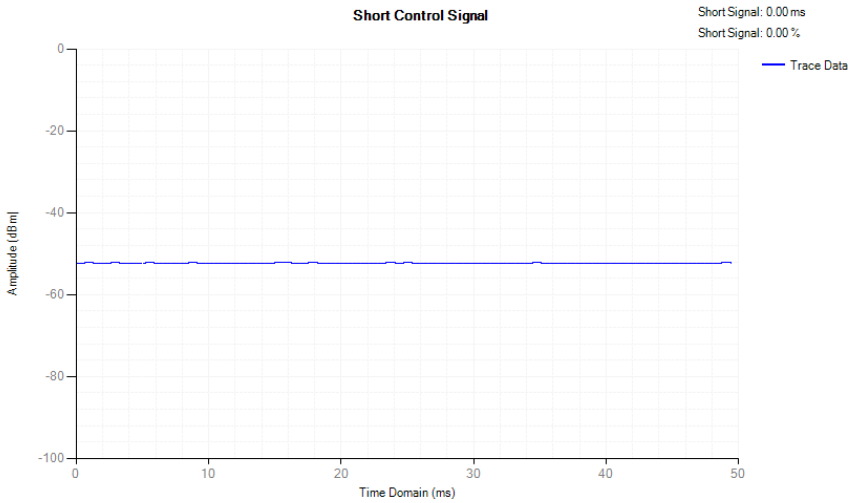

Adaptivity NVNT g 2472MHz

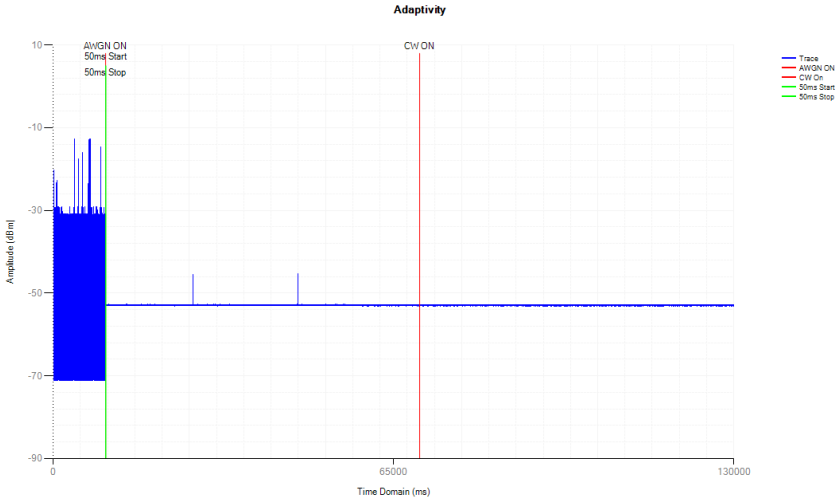

Control Signal NVNT g 2472MHz

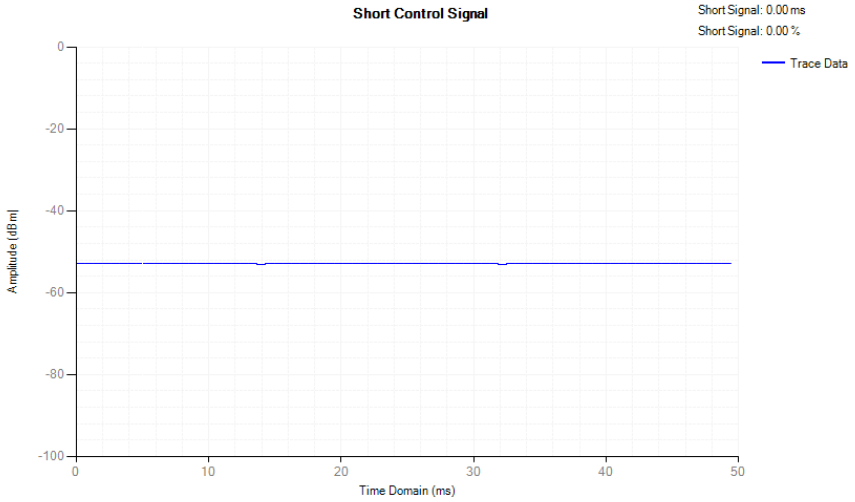

Adaptivity NVNT n20 2412MHz

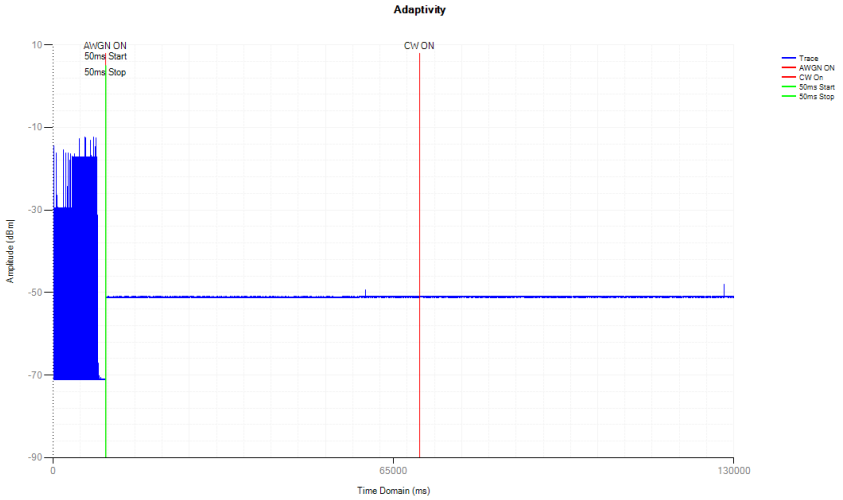

Control Signal NVNT n20 2412MHz

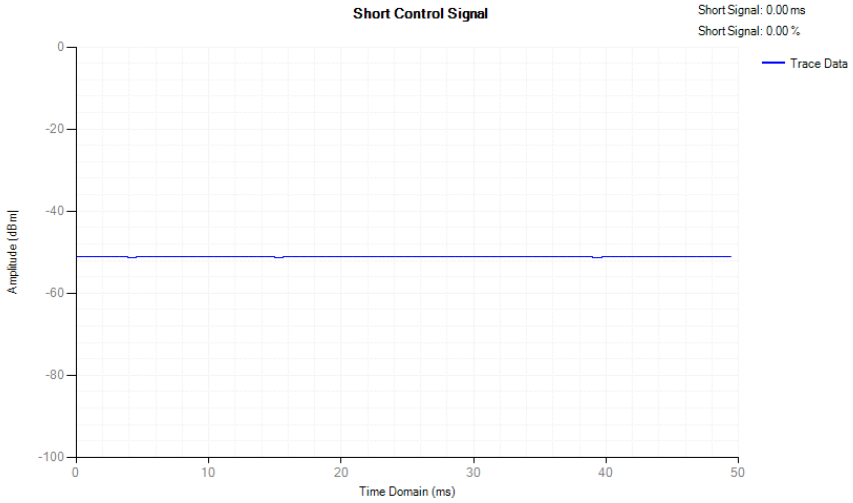

Adaptivity NVNT n20 2442MHz

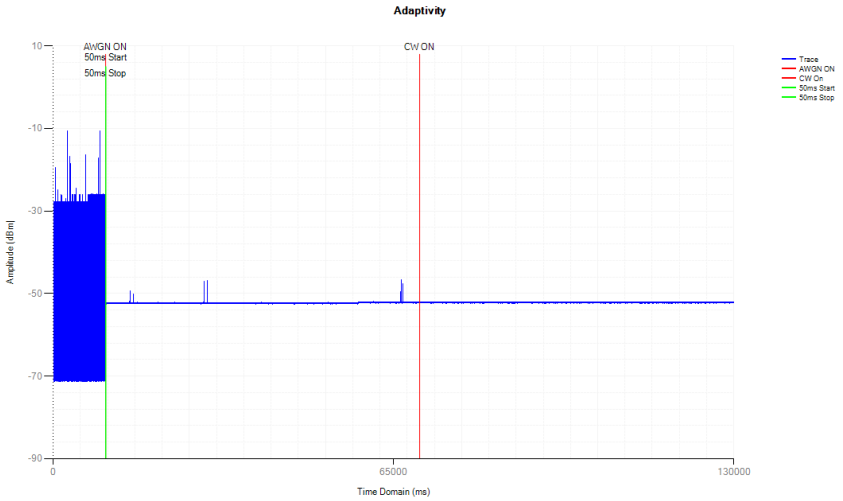

Control Signal NVNT n20 2442MHz

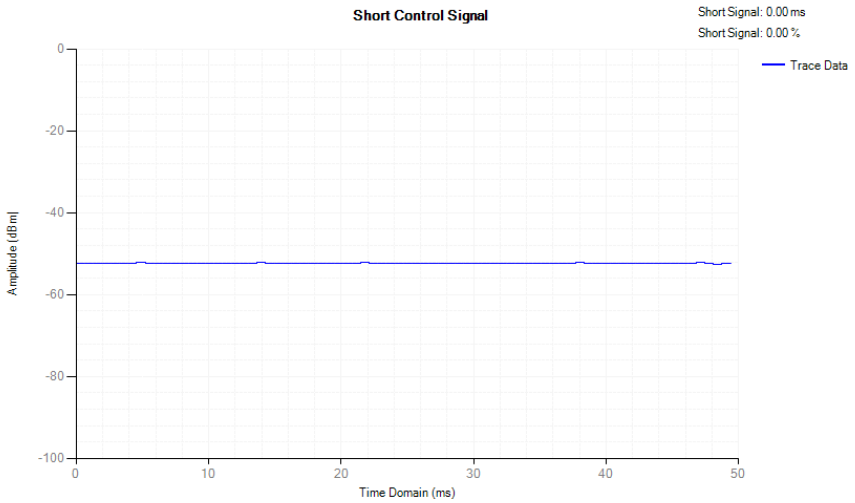

Adaptivity NVNT n20 2472MHz

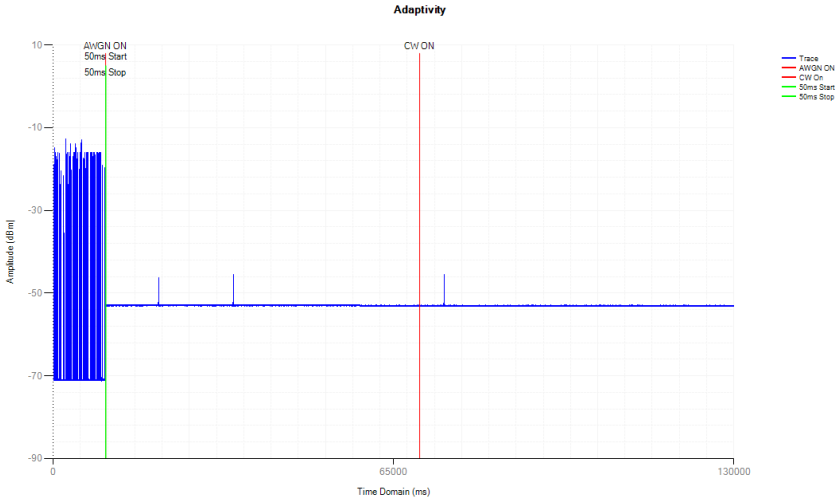

Control Signal NVNT n20 2472MHz

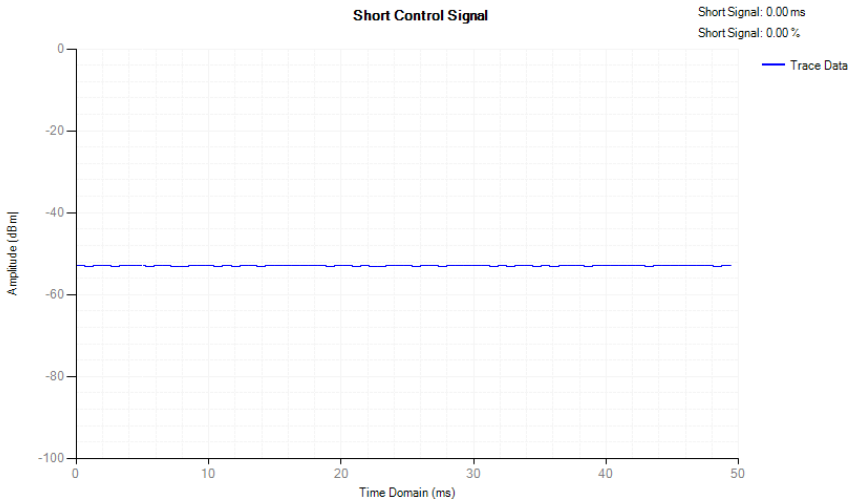

Adaptivity NVNT n40 2422MHz

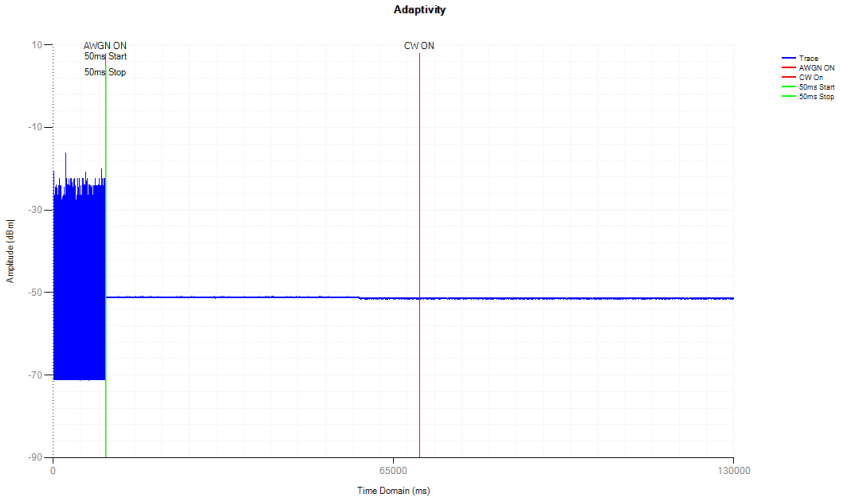

Control Signal NVNT n40 2422MHz

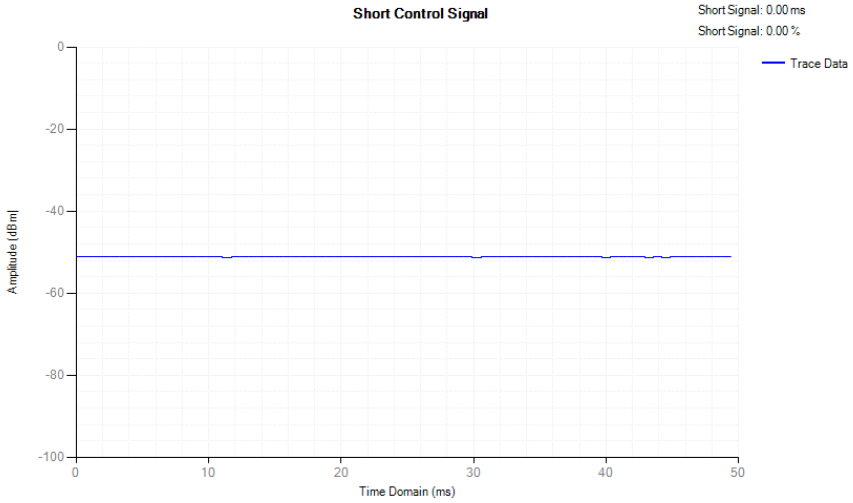

Adaptivity NVNT n40 2442MHz

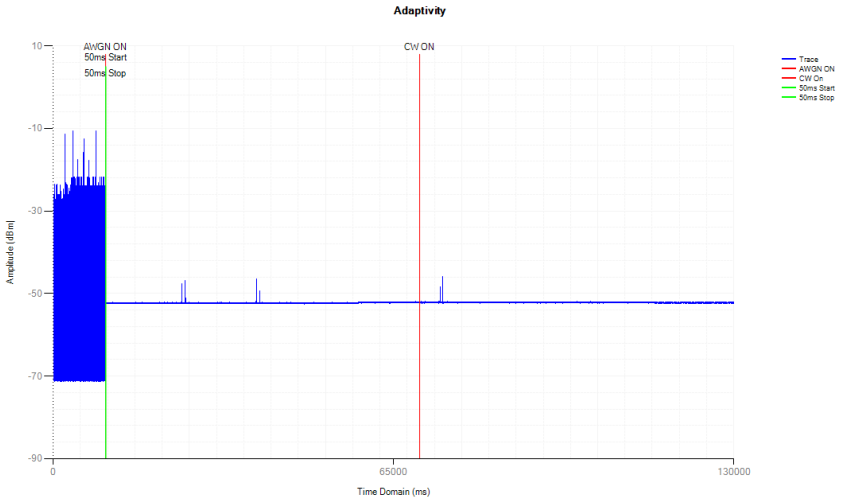

Control Signal NVNT n40 2442MHz

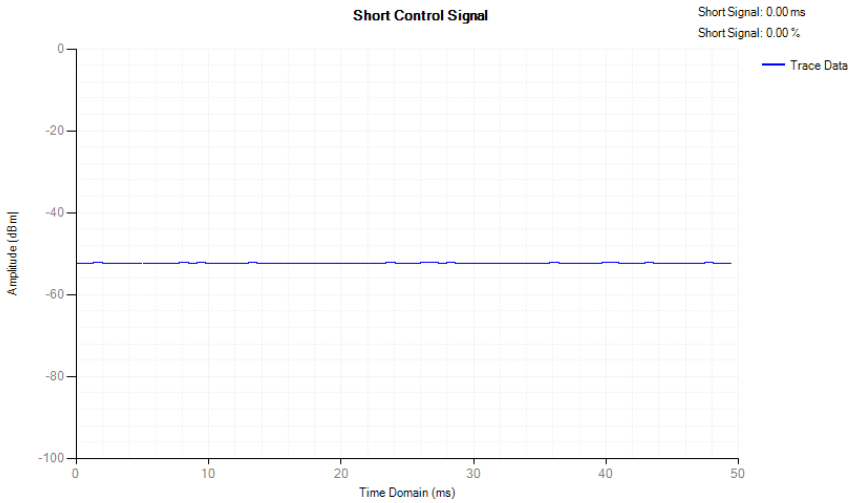

Adaptivity NVNT n40 2462MHz

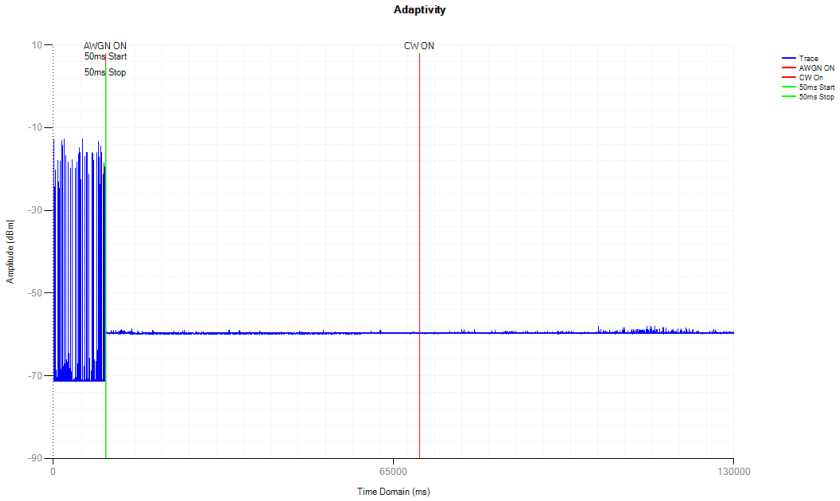

Control Signal NVNT n40 2462MHz

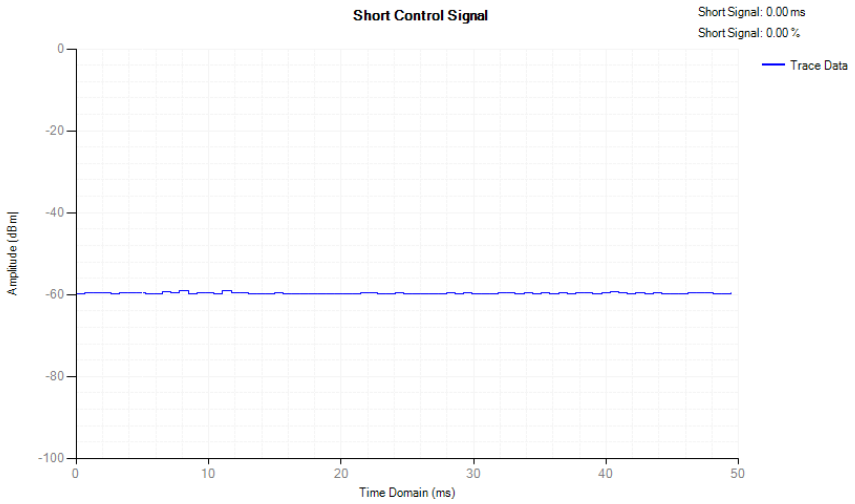

COT NVNT b 2412MHz

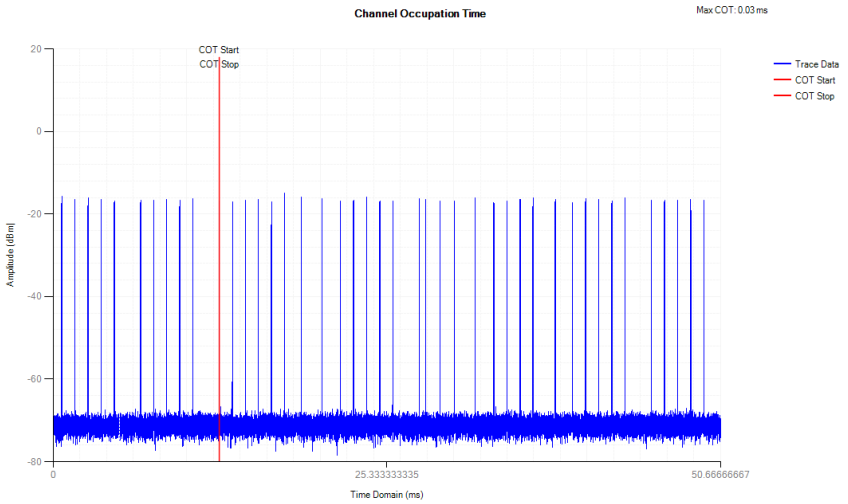

Idle NVNT b 2412MHz

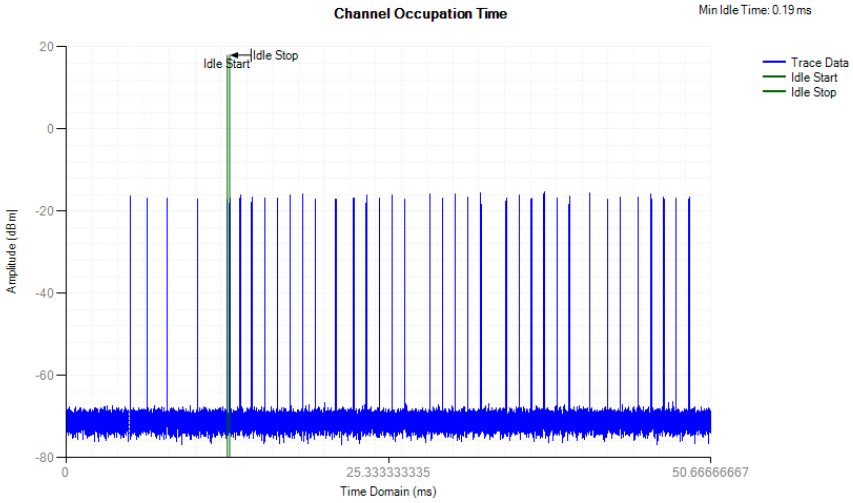

COT NVNT b 2442MHz

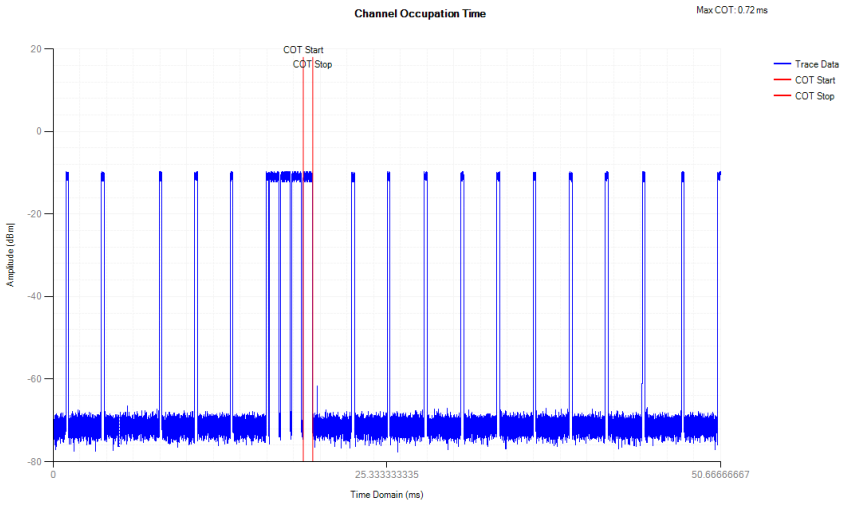

Idle NVNT b 2442MHz

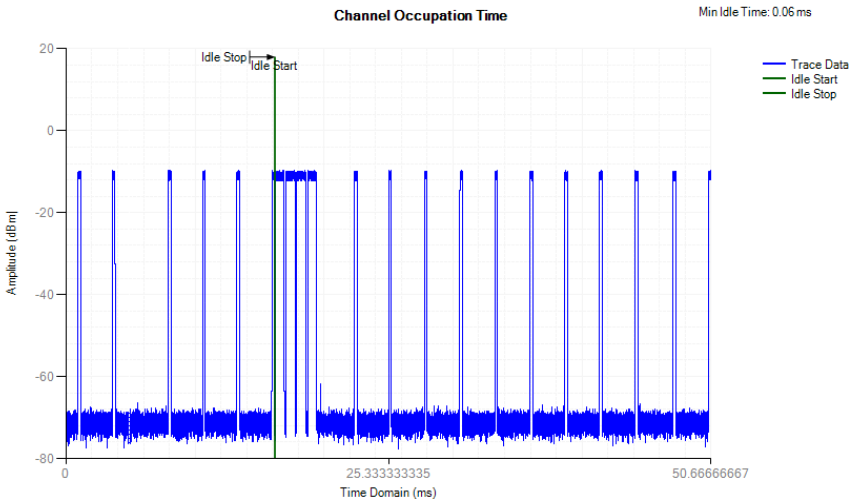

COT NVNT b 2472MHz

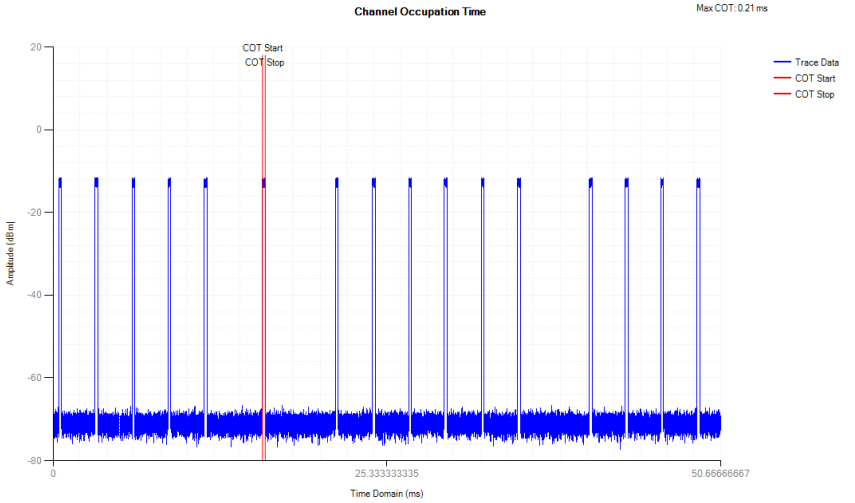

Idle NVNT b 2472MHz

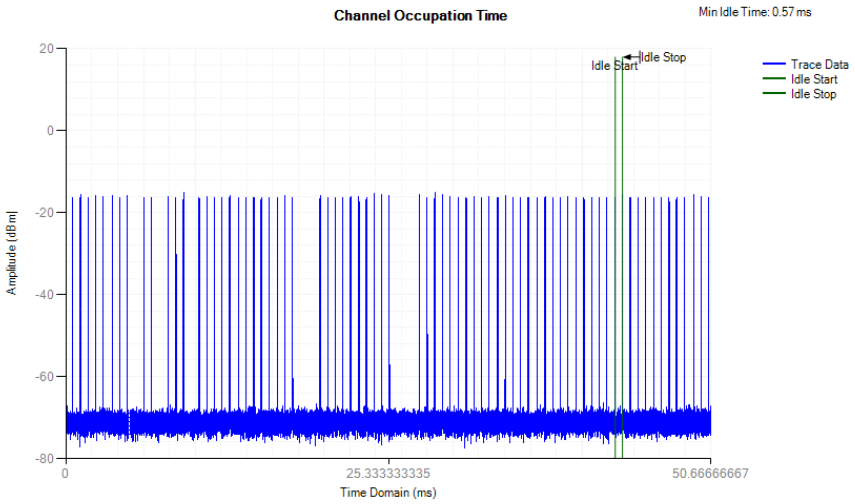

COT NVNT g 2412MHz

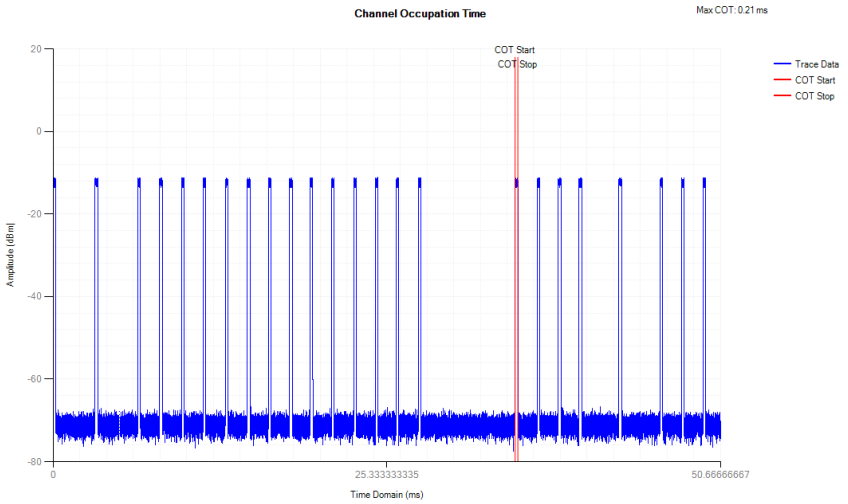

Idle NVNT g 2412MHz

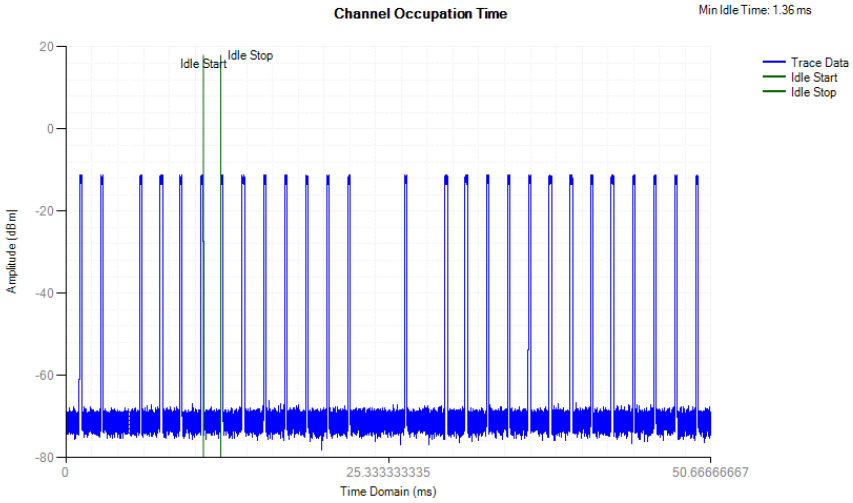

COT NVNT g 2442MHz

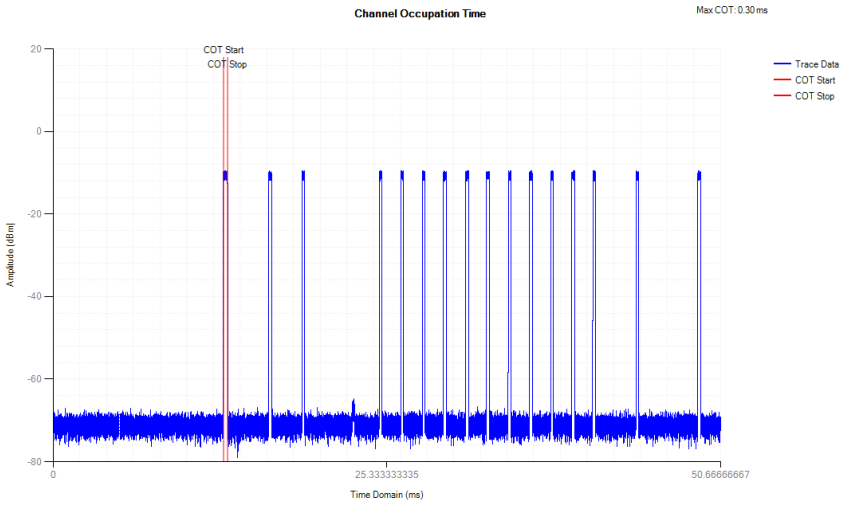

Idle NVNT g 2442MHz

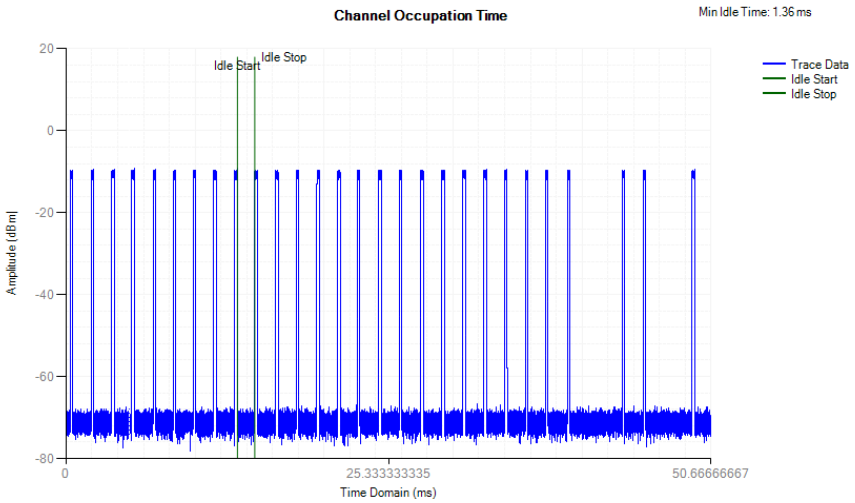

COT NVNT g 2472MHz

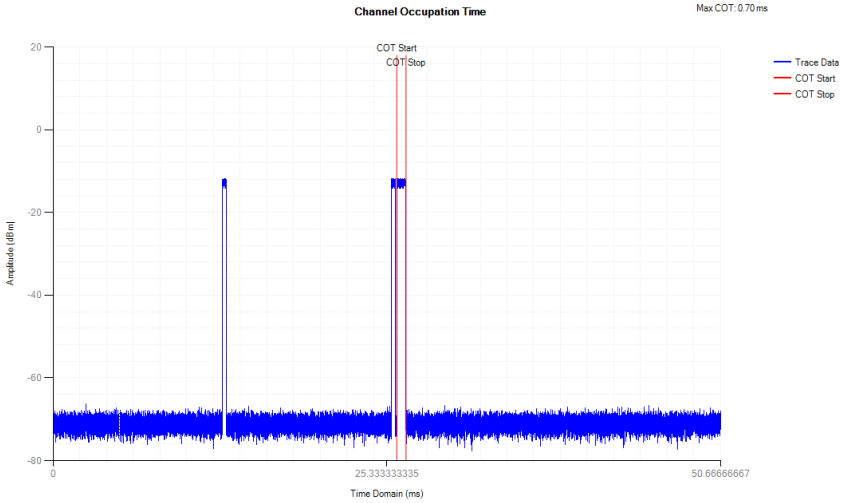

Idle NVNT g 2472MHz

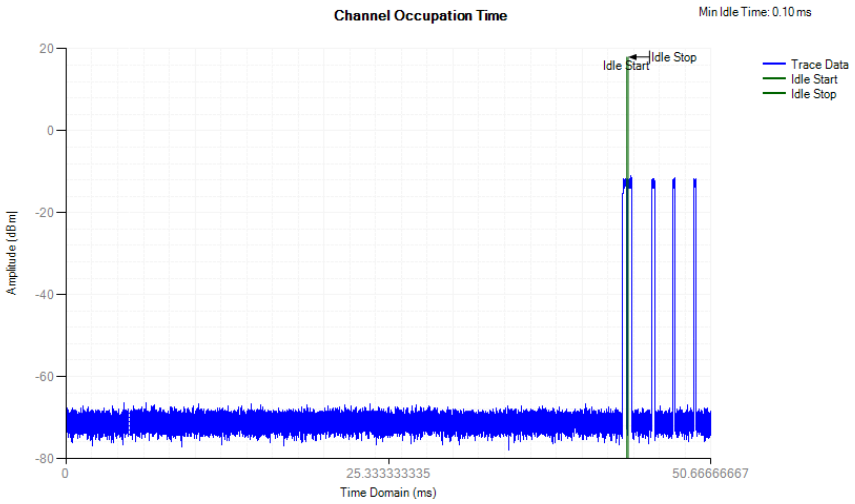

COT NVNT n20 2412MHz

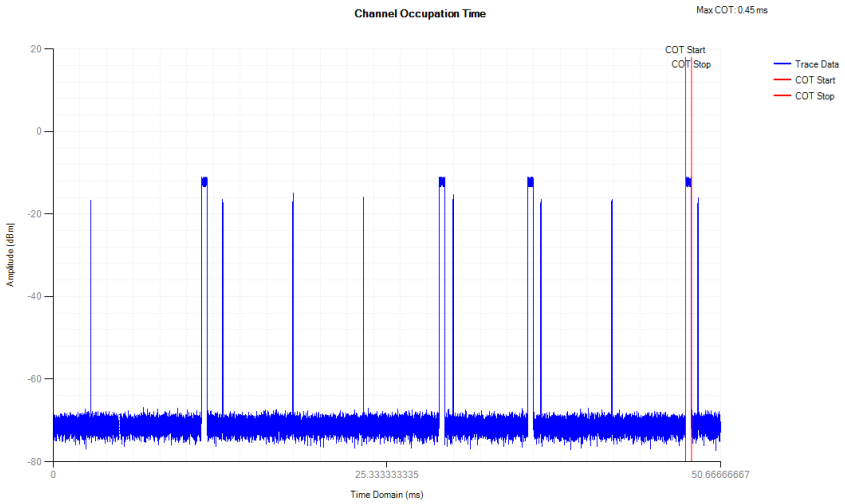

Idle NVNT n20 2412MHz

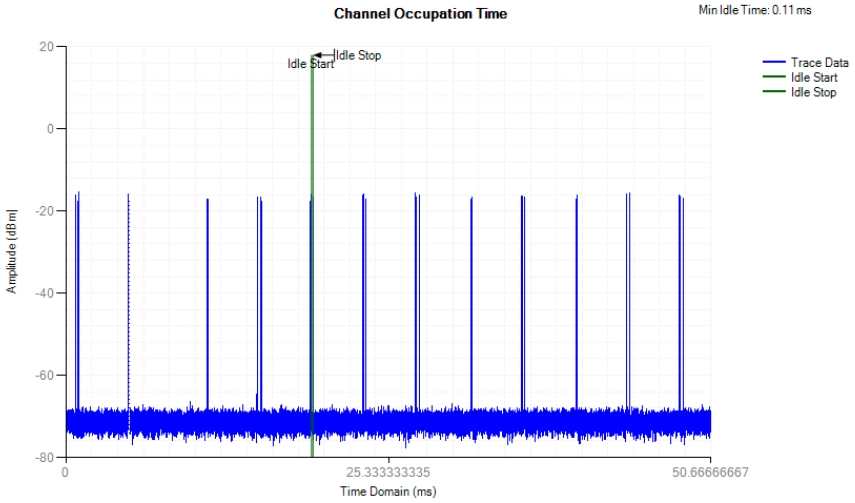

COT NVNT n20 2442MHz

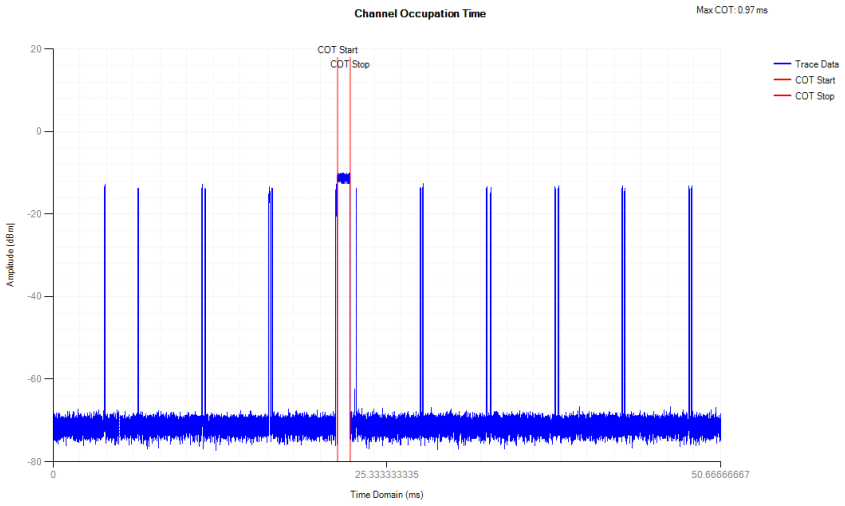

Idle NVNT n20 2442MHz

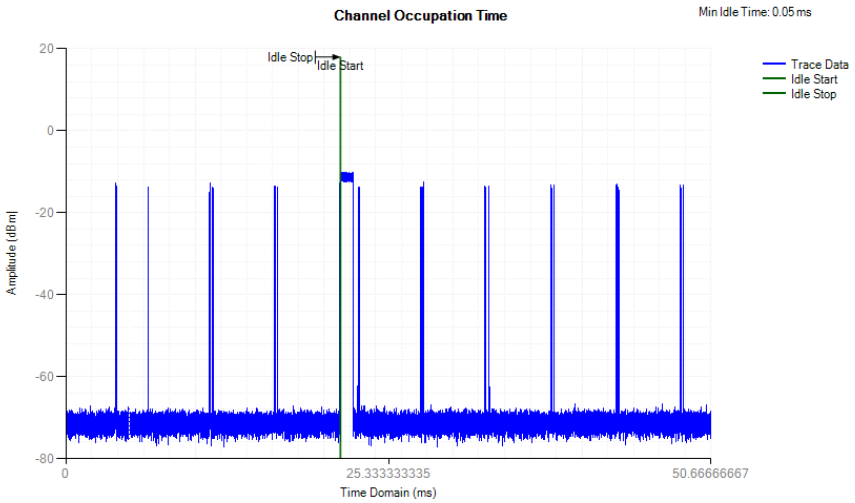

COT NVNT n20 2472MHz

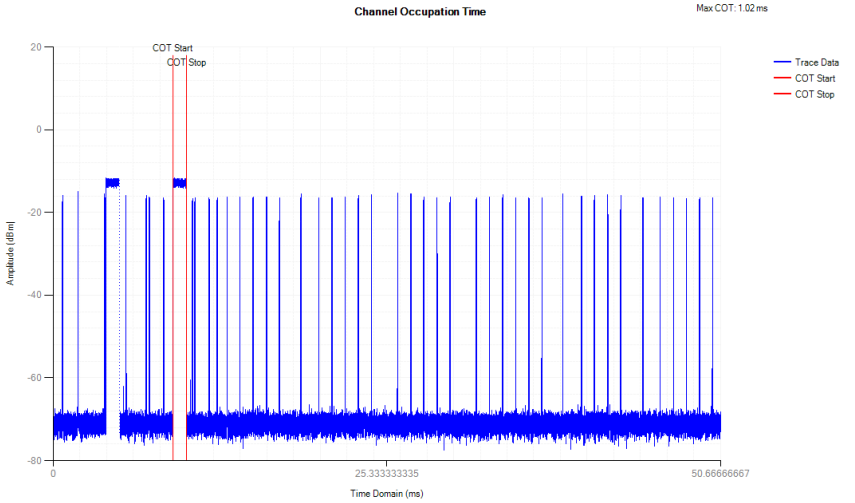

Idle NVNT n20 2472MHz

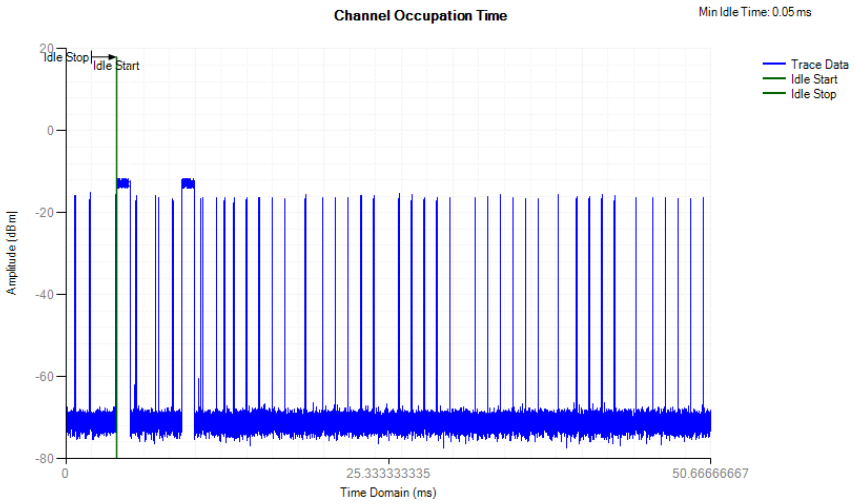

COT NVNT n40 2422MHz

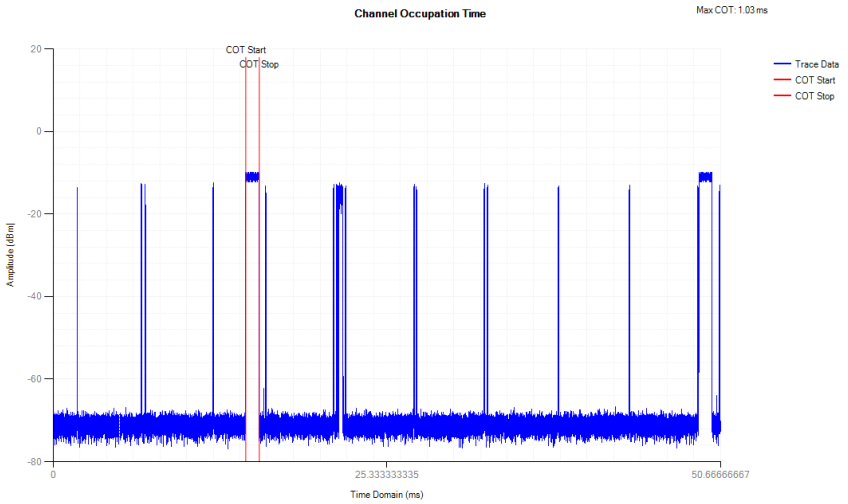

Idle NVNT n40 2422MHz

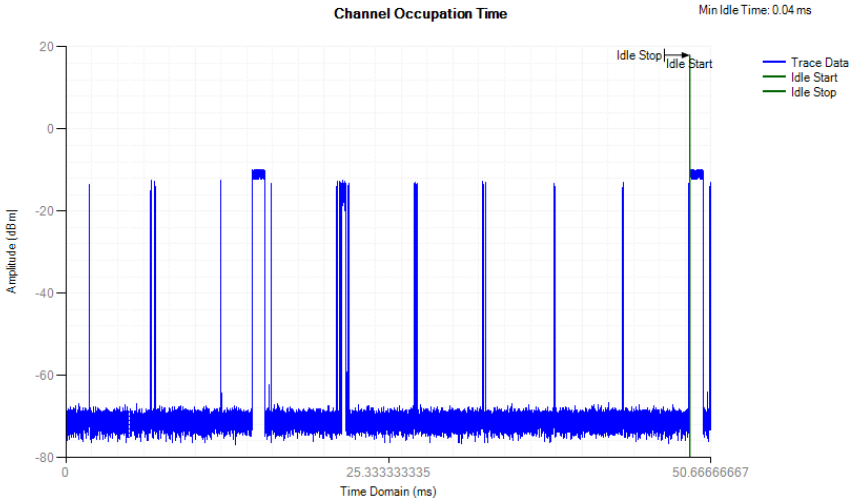

COT NVNT n40 2442MHz

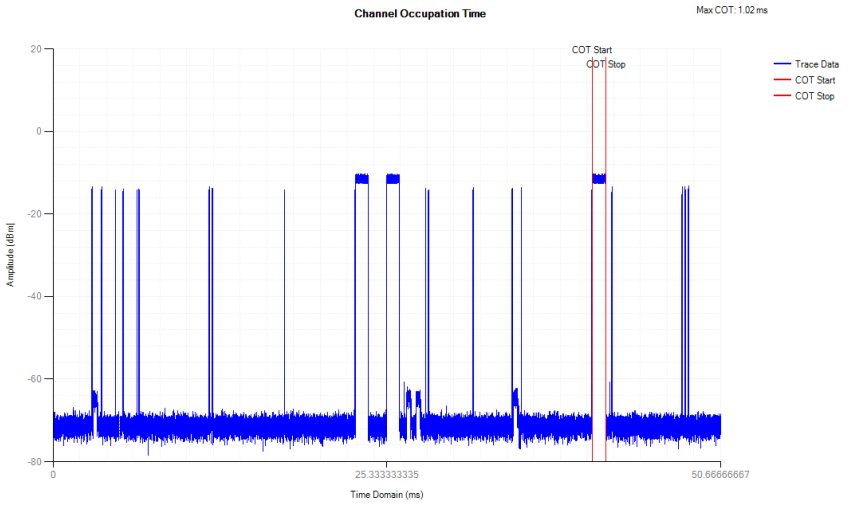

Idle NVNT n40 2442MHz

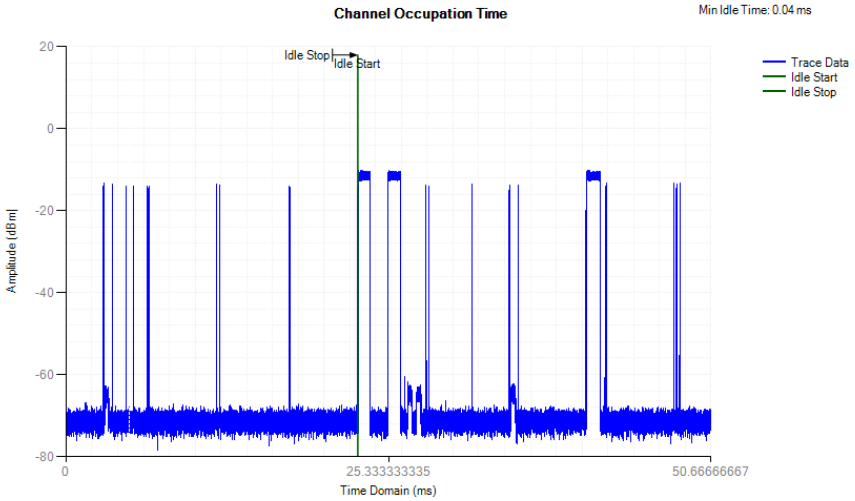

COT NVNT n40 2462MHz

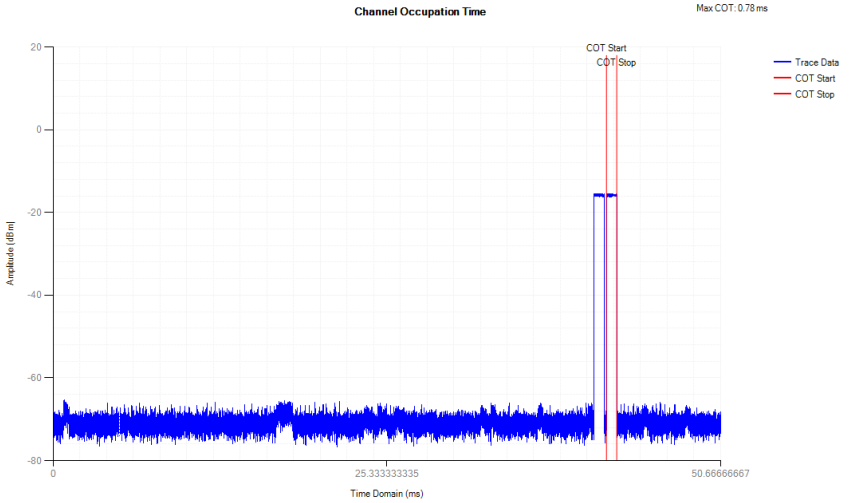

Idle NVNT n40 2462MHz

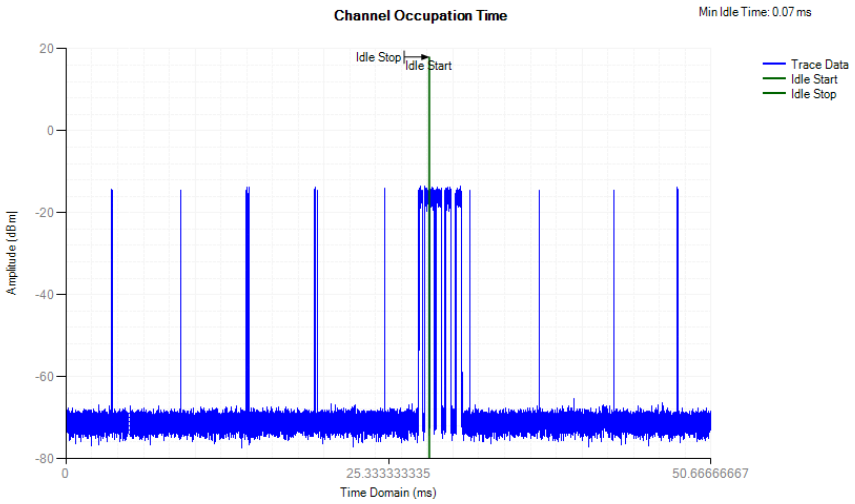

8. OCCUPIED CHANNEL BANDWIDTH

8.1 Block Diagram of Test Setup

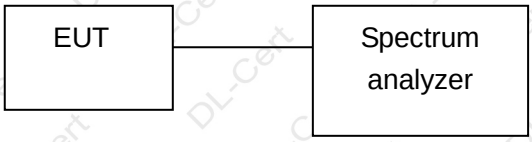

8.2 Test Standard and Limit

The Occupied Channel Bandwidth shall be within the band given in 2.4GHz to 2.4835GHz..

In addition, for non-adaptive non-FHSS equipment with e.i.r.p. greater than 10 dBm, the Occupied Channel Bandwidth shall be equal to or less than 20MHz.

8.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 Clause 5.4.7

Connect the UUT to the spectrum analyzer and use the following settings:

Centre Frequency:	The centre frequency of the channel under test
RBW	~ 1 % of the span without going below 1 %
VBW	3 × RBW
Frequency Span:	2 × Nominal Channel Bandwidth
Detector Mode:	RMS
Trace Mode:	Max Hold
Sweep time:	1s

8.4 Test Result

Test Mode	Test Channel	Occupied Bandwidth	Measured Frequency		Limit	Result
			F_L(MHz)	F_H(MHz)		
802.11b	Low	12.745	2405.877	/	>2400MHz And <2483.5MHz	Pass
	High	11.701	/	2477.004		Pass
802.11g	Low	16.451	2403.826	/		Pass
	High	15.640	/	2479.27		Pass
802.11n HT20	Low	17.649	2403.227	/		Pass
	High	16.120	/	2479.114		Pass
802.11n HT40	Low	35.874	2404.179	/		Pass
	High	33.908	/	2477.854		Pass

9. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

9.1 Block Diagram of Test Setup

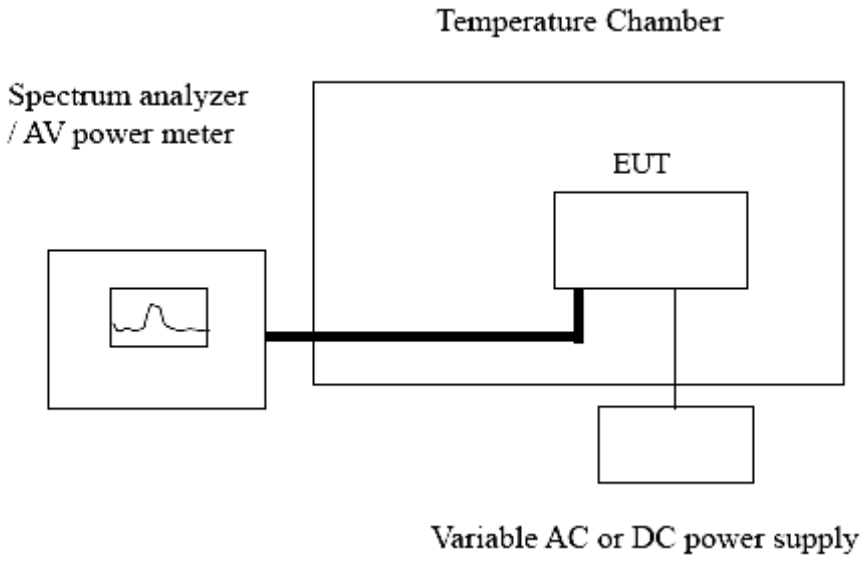

9.2 Test Standard and Limit

The transmitter unwanted emissions in the out-of-band domain shall not exceed the values provided by the mask in figure 3.

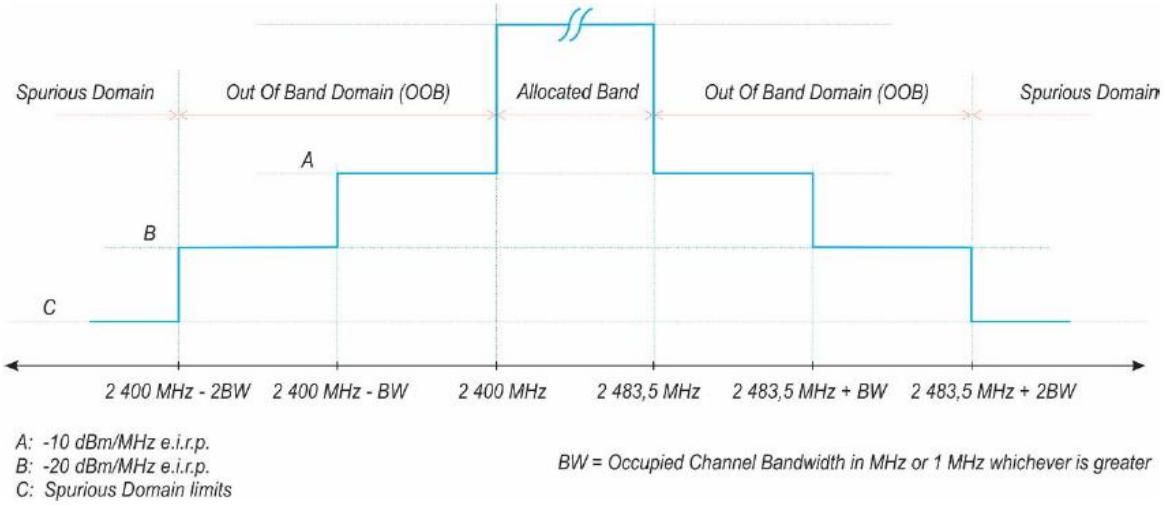

Figure 3: Transmit mask

9.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.0 Clause 5.4.8.

Connect the UUT to the spectrum analyzer and use the following settings:

RBW/VBW	1MHz/3MHz
Span	0Hz
Filter mode	Channel filter
Sweep mode	Continuous
Sweep Points	5000
Detector	RMS
Trace mode	Clear/Write
Trigger Mode	Video trigger

9.4 Test Result

Condition	Mode	Frequency (MHz)	Antenna	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	b	2412	Ant1	2399.5	-44.14	-10	Pass
NVNT	b	2412	Ant1	2398.5	-45.93	-10	Pass
NVNT	b	2412	Ant1	2397.5	-47.54	-10	Pass
NVNT	b	2412	Ant1	2396.5	-49.83	-10	Pass
NVNT	b	2412	Ant1	2395.5	-51.36	-10	Pass
NVNT	b	2412	Ant1	2394.5	-52.01	-10	Pass
NVNT	b	2412	Ant1	2393.5	-53.76	-10	Pass
NVNT	b	2412	Ant1	2392.5	-55.06	-10	Pass
NVNT	b	2412	Ant1	2391.5	-57.2	-10	Pass
NVNT	b	2412	Ant1	2390.5	-58.71	-10	Pass
NVNT	b	2412	Ant1	2389.5	-59.54	-10	Pass
NVNT	b	2412	Ant1	2388.5	-59.31	-10	Pass
NVNT	b	2412	Ant1	2387.755	-58.88	-10	Pass
NVNT	b	2412	Ant1	2386.755	-58.8	-20	Pass
NVNT	b	2412	Ant1	2385.755	-59.38	-20	Pass
NVNT	b	2412	Ant1	2384.755	-59.73	-20	Pass
NVNT	b	2412	Ant1	2383.755	-59.98	-20	Pass
NVNT	b	2412	Ant1	2382.755	-60.55	-20	Pass
NVNT	b	2412	Ant1	2381.755	-60.96	-20	Pass
NVNT	b	2412	Ant1	2380.755	-61.36	-20	Pass
NVNT	b	2412	Ant1	2379.755	-61.23	-20	Pass
NVNT	b	2412	Ant1	2378.755	-61.32	-20	Pass
NVNT	b	2412	Ant1	2377.755	-61.69	-20	Pass
NVNT	b	2412	Ant1	2376.755	-61.7	-20	Pass
NVNT	b	2412	Ant1	2375.755	-61.73	-20	Pass
NVNT	b	2412	Ant1	2375.01	-61.56	-20	Pass

NVNT	b	2472	Ant1	2484	-48.53	-10	Pass
NVNT	b	2472	Ant1	2485	-47.79	-10	Pass
NVNT	b	2472	Ant1	2486	-48.15	-10	Pass
NVNT	b	2472	Ant1	2487	-50.07	-10	Pass
NVNT	b	2472	Ant1	2488	-52.08	-10	Pass
NVNT	b	2472	Ant1	2489	-53.94	-10	Pass
NVNT	b	2472	Ant1	2490	-55.76	-10	Pass
NVNT	b	2472	Ant1	2491	-57.57	-10	Pass
NVNT	b	2472	Ant1	2492	-59.33	-10	Pass
NVNT	b	2472	Ant1	2493	-60.37	-10	Pass
NVNT	b	2472	Ant1	2494	-61.5	-10	Pass
NVNT	b	2472	Ant1	2494.701	-61.44	-10	Pass
NVNT	b	2472	Ant1	2495.701	-61.41	-20	Pass
NVNT	b	2472	Ant1	2496.701	-61.43	-20	Pass
NVNT	b	2472	Ant1	2497.701	-61.53	-20	Pass
NVNT	b	2472	Ant1	2498.701	-61.76	-20	Pass
NVNT	b	2472	Ant1	2499.701	-61.75	-20	Pass
NVNT	b	2472	Ant1	2500.701	-61.86	-20	Pass
NVNT	b	2472	Ant1	2501.701	-62.03	-20	Pass
NVNT	b	2472	Ant1	2502.701	-61.98	-20	Pass
NVNT	b	2472	Ant1	2503.701	-61.85	-20	Pass
NVNT	b	2472	Ant1	2504.701	-61.7	-20	Pass
NVNT	b	2472	Ant1	2505.701	-61.82	-20	Pass
NVNT	b	2472	Ant1	2506.402	-61.84	-20	Pass
NVNT	g	2412	Ant1	2399.5	-37.44	-10	Pass
NVNT	g	2412	Ant1	2398.5	-40.01	-10	Pass
NVNT	g	2412	Ant1	2397.5	-41.32	-10	Pass
NVNT	g	2412	Ant1	2396.5	-43.73	-10	Pass
NVNT	g	2412	Ant1	2395.5	-45.63	-10	Pass
NVNT	g	2412	Ant1	2394.5	-47.91	-10	Pass
NVNT	g	2412	Ant1	2393.5	-49.57	-10	Pass
NVNT	g	2412	Ant1	2392.5	-51.68	-10	Pass
NVNT	g	2412	Ant1	2391.5	-52.77	-10	Pass
NVNT	g	2412	Ant1	2390.5	-54.23	-10	Pass
NVNT	g	2412	Ant1	2389.5	-54.35	-10	Pass
NVNT	g	2412	Ant1	2388.5	-53.91	-10	Pass
NVNT	g	2412	Ant1	2387.5	-55.84	-10	Pass
NVNT	g	2412	Ant1	2386.5	-56.06	-10	Pass
NVNT	g	2412	Ant1	2385.5	-56.63	-10	Pass
NVNT	g	2412	Ant1	2384.5	-58.26	-10	Pass
NVNT	g	2412	Ant1	2384.049	-59.72	-10	Pass
NVNT	g	2412	Ant1	2383.049	-60.15	-20	Pass
NVNT	g	2412	Ant1	2382.049	-60.58	-20	Pass

NVNT	g	2412	Ant1	2381.049	-60.85	-20	Pass
NVNT	g	2412	Ant1	2380.049	-61.08	-20	Pass
NVNT	g	2412	Ant1	2379.049	-61.44	-20	Pass
NVNT	g	2412	Ant1	2378.049	-61.31	-20	Pass
NVNT	g	2412	Ant1	2377.049	-61.64	-20	Pass
NVNT	g	2412	Ant1	2376.049	-61.39	-20	Pass
NVNT	g	2412	Ant1	2375.049	-61.42	-20	Pass
NVNT	g	2412	Ant1	2374.049	-61.58	-20	Pass
NVNT	g	2412	Ant1	2373.049	-61.89	-20	Pass
NVNT	g	2412	Ant1	2372.049	-61.29	-20	Pass
NVNT	g	2412	Ant1	2371.049	-61.71	-20	Pass
NVNT	g	2412	Ant1	2370.049	-61.92	-20	Pass
NVNT	g	2412	Ant1	2369.049	-62	-20	Pass
NVNT	g	2412	Ant1	2368.049	-62.04	-20	Pass
NVNT	g	2412	Ant1	2367.598	-61.76	-20	Pass
NVNT	g	2472	Ant1	2484	-41.26	-10	Pass
NVNT	g	2472	Ant1	2485	-43.35	-10	Pass
NVNT	g	2472	Ant1	2486	-44.9	-10	Pass
NVNT	g	2472	Ant1	2487	-47.16	-10	Pass
NVNT	g	2472	Ant1	2488	-48.73	-10	Pass
NVNT	g	2472	Ant1	2489	-50.72	-10	Pass
NVNT	g	2472	Ant1	2490	-52.61	-10	Pass
NVNT	g	2472	Ant1	2491	-54.31	-10	Pass
NVNT	g	2472	Ant1	2492	-55.49	-10	Pass
NVNT	g	2472	Ant1	2493	-57.56	-10	Pass
NVNT	g	2472	Ant1	2494	-58.51	-10	Pass
NVNT	g	2472	Ant1	2495	-59.42	-10	Pass
NVNT	g	2472	Ant1	2496	-59.77	-10	Pass
NVNT	g	2472	Ant1	2497	-61.23	-10	Pass
NVNT	g	2472	Ant1	2498	-61.59	-10	Pass
NVNT	g	2472	Ant1	2498.64	-61.51	-10	Pass
NVNT	g	2472	Ant1	2499.64	-61.74	-20	Pass
NVNT	g	2472	Ant1	2500.64	-61.43	-20	Pass
NVNT	g	2472	Ant1	2501.64	-61.52	-20	Pass
NVNT	g	2472	Ant1	2502.64	-61.49	-20	Pass
NVNT	g	2472	Ant1	2503.64	-61.91	-20	Pass
NVNT	g	2472	Ant1	2504.64	-61.76	-20	Pass
NVNT	g	2472	Ant1	2505.64	-61.63	-20	Pass
NVNT	g	2472	Ant1	2506.64	-61.87	-20	Pass
NVNT	g	2472	Ant1	2507.64	-61.96	-20	Pass
NVNT	g	2472	Ant1	2508.64	-61.63	-20	Pass
NVNT	g	2472	Ant1	2509.64	-62.23	-20	Pass
NVNT	g	2472	Ant1	2510.64	-61.85	-20	Pass

NVNT	g	2472	Ant1	2511.64	-61.68	-20	Pass
NVNT	g	2472	Ant1	2512.64	-62.08	-20	Pass
NVNT	g	2472	Ant1	2513.64	-61.3	-20	Pass
NVNT	g	2472	Ant1	2514.28	-61.39	-20	Pass
NVNT	n20	2412	Ant1	2399.5	-31.31	-10	Pass
NVNT	n20	2412	Ant1	2398.5	-32.94	-10	Pass
NVNT	n20	2412	Ant1	2397.5	-34.92	-10	Pass
NVNT	n20	2412	Ant1	2396.5	-36.83	-10	Pass
NVNT	n20	2412	Ant1	2395.5	-39.37	-10	Pass
NVNT	n20	2412	Ant1	2394.5	-41.8	-10	Pass
NVNT	n20	2412	Ant1	2393.5	-44.26	-10	Pass
NVNT	n20	2412	Ant1	2392.5	-46.93	-10	Pass
NVNT	n20	2412	Ant1	2391.5	-48.96	-10	Pass
NVNT	n20	2412	Ant1	2390.5	-50.92	-10	Pass
NVNT	n20	2412	Ant1	2389.5	-52.32	-10	Pass
NVNT	n20	2412	Ant1	2388.5	-53.06	-10	Pass
NVNT	n20	2412	Ant1	2387.5	-53.98	-10	Pass
NVNT	n20	2412	Ant1	2386.5	-55.36	-10	Pass
NVNT	n20	2412	Ant1	2385.5	-56.66	-10	Pass
NVNT	n20	2412	Ant1	2384.5	-58.02	-10	Pass
NVNT	n20	2412	Ant1	2383.5	-59.25	-10	Pass
NVNT	n20	2412	Ant1	2382.851	-59.6	-10	Pass
NVNT	n20	2412	Ant1	2381.851	-60.33	-20	Pass
NVNT	n20	2412	Ant1	2380.851	-60.76	-20	Pass
NVNT	n20	2412	Ant1	2379.851	-60.96	-20	Pass
NVNT	n20	2412	Ant1	2378.851	-61.12	-20	Pass
NVNT	n20	2412	Ant1	2377.851	-61.32	-20	Pass
NVNT	n20	2412	Ant1	2376.851	-61.27	-20	Pass
NVNT	n20	2412	Ant1	2375.851	-61.44	-20	Pass
NVNT	n20	2412	Ant1	2374.851	-61.55	-20	Pass
NVNT	n20	2412	Ant1	2373.851	-61.56	-20	Pass
NVNT	n20	2412	Ant1	2372.851	-61.75	-20	Pass
NVNT	n20	2412	Ant1	2371.851	-61.61	-20	Pass
NVNT	n20	2412	Ant1	2370.851	-61.55	-20	Pass
NVNT	n20	2412	Ant1	2369.851	-61.71	-20	Pass
NVNT	n20	2412	Ant1	2368.851	-61.73	-20	Pass
NVNT	n20	2412	Ant1	2367.851	-61.63	-20	Pass
NVNT	n20	2412	Ant1	2366.851	-61.86	-20	Pass
NVNT	n20	2412	Ant1	2365.851	-61.78	-20	Pass
NVNT	n20	2412	Ant1	2365.202	-61.76	-20	Pass
NVNT	n20	2472	Ant1	2484	-41.25	-10	Pass
NVNT	n20	2472	Ant1	2485	-43.29	-10	Pass
NVNT	n20	2472	Ant1	2486	-45.09	-10	Pass

NVNT	n20	2472	Ant1	2487	-47.03	-10	Pass
NVNT	n20	2472	Ant1	2488	-49	-10	Pass
NVNT	n20	2472	Ant1	2489	-50.87	-10	Pass
NVNT	n20	2472	Ant1	2490	-52.71	-10	Pass
NVNT	n20	2472	Ant1	2491	-54.56	-10	Pass
NVNT	n20	2472	Ant1	2492	-56.05	-10	Pass
NVNT	n20	2472	Ant1	2493	-57.07	-10	Pass
NVNT	n20	2472	Ant1	2494	-58.5	-10	Pass
NVNT	n20	2472	Ant1	2495	-59.48	-10	Pass
NVNT	n20	2472	Ant1	2496	-60.39	-10	Pass
NVNT	n20	2472	Ant1	2497	-60.9	-10	Pass
NVNT	n20	2472	Ant1	2498	-61.23	-10	Pass
NVNT	n20	2472	Ant1	2499	-61.65	-10	Pass
NVNT	n20	2472	Ant1	2499.12	-61.61	-10	Pass
NVNT	n20	2472	Ant1	2500.12	-61.84	-20	Pass
NVNT	n20	2472	Ant1	2501.12	-61.73	-20	Pass
NVNT	n20	2472	Ant1	2502.12	-62.08	-20	Pass
NVNT	n20	2472	Ant1	2503.12	-61.9	-20	Pass
NVNT	n20	2472	Ant1	2504.12	-61.88	-20	Pass
NVNT	n20	2472	Ant1	2505.12	-62.05	-20	Pass
NVNT	n20	2472	Ant1	2506.12	-61.79	-20	Pass
NVNT	n20	2472	Ant1	2507.12	-61.89	-20	Pass
NVNT	n20	2472	Ant1	2508.12	-61.94	-20	Pass
NVNT	n20	2472	Ant1	2509.12	-61.79	-20	Pass
NVNT	n20	2472	Ant1	2510.12	-61.85	-20	Pass
NVNT	n20	2472	Ant1	2511.12	-61.98	-20	Pass
NVNT	n20	2472	Ant1	2512.12	-61.83	-20	Pass
NVNT	n20	2472	Ant1	2513.12	-61.8	-20	Pass
NVNT	n20	2472	Ant1	2514.12	-62.08	-20	Pass
NVNT	n20	2472	Ant1	2515.12	-61.93	-20	Pass
NVNT	n20	2472	Ant1	2515.24	-61.94	-20	Pass
NVNT	n40	2422	Ant1	2399.5	-35.07	-10	Pass
NVNT	n40	2422	Ant1	2398.5	-36.26	-10	Pass
NVNT	n40	2422	Ant1	2397.5	-37.54	-10	Pass
NVNT	n40	2422	Ant1	2396.5	-39.42	-10	Pass
NVNT	n40	2422	Ant1	2395.5	-40.92	-10	Pass
NVNT	n40	2422	Ant1	2394.5	-42.11	-10	Pass
NVNT	n40	2422	Ant1	2393.5	-44.05	-10	Pass
NVNT	n40	2422	Ant1	2392.5	-45.26	-10	Pass
NVNT	n40	2422	Ant1	2391.5	-46.45	-10	Pass
NVNT	n40	2422	Ant1	2390.5	-47.67	-10	Pass
NVNT	n40	2422	Ant1	2389.5	-47.77	-10	Pass
NVNT	n40	2422	Ant1	2388.5	-47.77	-10	Pass

NVNT	n40	2422	Ant1	2387.5	-47.89	-10	Pass
NVNT	n40	2422	Ant1	2386.5	-48.56	-10	Pass
NVNT	n40	2422	Ant1	2385.5	-49.9	-10	Pass
NVNT	n40	2422	Ant1	2384.5	-51.22	-10	Pass
NVNT	n40	2422	Ant1	2383.5	-53.37	-10	Pass
NVNT	n40	2422	Ant1	2382.5	-55.37	-10	Pass
NVNT	n40	2422	Ant1	2381.5	-56.79	-10	Pass
NVNT	n40	2422	Ant1	2380.5	-57.87	-10	Pass
NVNT	n40	2422	Ant1	2379.5	-58.69	-10	Pass
NVNT	n40	2422	Ant1	2378.5	-59.46	-10	Pass
NVNT	n40	2422	Ant1	2377.5	-59.8	-10	Pass
NVNT	n40	2422	Ant1	2376.5	-60.49	-10	Pass
NVNT	n40	2422	Ant1	2375.5	-60.79	-10	Pass
NVNT	n40	2422	Ant1	2374.5	-60.92	-10	Pass
NVNT	n40	2422	Ant1	2373.5	-61.39	-10	Pass
NVNT	n40	2422	Ant1	2372.5	-61.34	-10	Pass
NVNT	n40	2422	Ant1	2371.5	-61.37	-10	Pass
NVNT	n40	2422	Ant1	2370.5	-61.58	-10	Pass
NVNT	n40	2422	Ant1	2369.5	-61.65	-10	Pass
NVNT	n40	2422	Ant1	2368.5	-61.68	-10	Pass
NVNT	n40	2422	Ant1	2367.5	-61.56	-10	Pass
NVNT	n40	2422	Ant1	2366.5	-61.49	-10	Pass
NVNT	n40	2422	Ant1	2365.5	-61.77	-10	Pass
NVNT	n40	2422	Ant1	2364.626	-61.89	-10	Pass
NVNT	n40	2422	Ant1	2363.626	-61.62	-20	Pass
NVNT	n40	2422	Ant1	2362.626	-61.9	-20	Pass
NVNT	n40	2422	Ant1	2361.626	-61.75	-20	Pass
NVNT	n40	2422	Ant1	2360.626	-61.68	-20	Pass
NVNT	n40	2422	Ant1	2359.626	-61.86	-20	Pass
NVNT	n40	2422	Ant1	2358.626	-61.81	-20	Pass
NVNT	n40	2422	Ant1	2357.626	-61.63	-20	Pass
NVNT	n40	2422	Ant1	2356.626	-61.76	-20	Pass
NVNT	n40	2422	Ant1	2355.626	-61.93	-20	Pass
NVNT	n40	2422	Ant1	2354.626	-62.09	-20	Pass
NVNT	n40	2422	Ant1	2353.626	-61.86	-20	Pass
NVNT	n40	2422	Ant1	2352.626	-61.92	-20	Pass
NVNT	n40	2422	Ant1	2351.626	-62.09	-20	Pass
NVNT	n40	2422	Ant1	2350.626	-62.08	-20	Pass
NVNT	n40	2422	Ant1	2349.626	-61.99	-20	Pass
NVNT	n40	2422	Ant1	2348.626	-61.93	-20	Pass
NVNT	n40	2422	Ant1	2347.626	-62.01	-20	Pass
NVNT	n40	2422	Ant1	2346.626	-61.93	-20	Pass
NVNT	n40	2422	Ant1	2345.626	-61.98	-20	Pass

NVNT	n40	2422	Ant1	2344.626	-62.2	-20	Pass
NVNT	n40	2422	Ant1	2343.626	-61.98	-20	Pass
NVNT	n40	2422	Ant1	2342.626	-61.92	-20	Pass
NVNT	n40	2422	Ant1	2341.626	-61.89	-20	Pass
NVNT	n40	2422	Ant1	2340.626	-61.94	-20	Pass
NVNT	n40	2422	Ant1	2339.626	-61.98	-20	Pass
NVNT	n40	2422	Ant1	2338.626	-61.89	-20	Pass
NVNT	n40	2422	Ant1	2337.626	-62.05	-20	Pass
NVNT	n40	2422	Ant1	2336.626	-62.03	-20	Pass
NVNT	n40	2422	Ant1	2335.626	-62.09	-20	Pass
NVNT	n40	2422	Ant1	2334.626	-62.13	-20	Pass
NVNT	n40	2422	Ant1	2333.626	-61.96	-20	Pass
NVNT	n40	2422	Ant1	2332.626	-62.01	-20	Pass
NVNT	n40	2422	Ant1	2331.626	-61.96	-20	Pass
NVNT	n40	2422	Ant1	2330.626	-61.99	-20	Pass
NVNT	n40	2422	Ant1	2329.626	-62.2	-20	Pass
NVNT	n40	2422	Ant1	2328.752	-61.99	-20	Pass
NVNT	n40	2462	Ant1	2484	-43.51	-10	Pass
NVNT	n40	2462	Ant1	2485	-44.93	-10	Pass
NVNT	n40	2462	Ant1	2486	-46.52	-10	Pass
NVNT	n40	2462	Ant1	2487	-47.26	-10	Pass
NVNT	n40	2462	Ant1	2488	-48.38	-10	Pass
NVNT	n40	2462	Ant1	2489	-50.03	-10	Pass
NVNT	n40	2462	Ant1	2490	-50.83	-10	Pass
NVNT	n40	2462	Ant1	2491	-51.91	-10	Pass
NVNT	n40	2462	Ant1	2492	-53.22	-10	Pass
NVNT	n40	2462	Ant1	2493	-54.04	-10	Pass
NVNT	n40	2462	Ant1	2494	-55.68	-10	Pass
NVNT	n40	2462	Ant1	2495	-56.87	-10	Pass
NVNT	n40	2462	Ant1	2496	-57.54	-10	Pass
NVNT	n40	2462	Ant1	2497	-58.31	-10	Pass
NVNT	n40	2462	Ant1	2498	-59.29	-10	Pass
NVNT	n40	2462	Ant1	2499	-59.68	-10	Pass
NVNT	n40	2462	Ant1	2500	-60.21	-10	Pass
NVNT	n40	2462	Ant1	2501	-60.58	-10	Pass
NVNT	n40	2462	Ant1	2502	-60.97	-10	Pass
NVNT	n40	2462	Ant1	2503	-60.97	-10	Pass
NVNT	n40	2462	Ant1	2504	-61.27	-10	Pass
NVNT	n40	2462	Ant1	2505	-61.63	-10	Pass
NVNT	n40	2462	Ant1	2506	-61.6	-10	Pass
NVNT	n40	2462	Ant1	2507	-61.88	-10	Pass
NVNT	n40	2462	Ant1	2508	-61.72	-10	Pass
NVNT	n40	2462	Ant1	2509	-61.85	-10	Pass

NVNT	n40	2462	Ant1	2510	-61.89	-10	Pass
NVNT	n40	2462	Ant1	2511	-61.61	-10	Pass
NVNT	n40	2462	Ant1	2512	-61.85	-10	Pass
NVNT	n40	2462	Ant1	2513	-61.81	-10	Pass
NVNT	n40	2462	Ant1	2514	-61.92	-10	Pass
NVNT	n40	2462	Ant1	2515	-61.69	-10	Pass
NVNT	n40	2462	Ant1	2516	-61.94	-10	Pass
NVNT	n40	2462	Ant1	2516.908	-61.88	-10	Pass
NVNT	n40	2462	Ant1	2517.908	-61.82	-20	Pass
NVNT	n40	2462	Ant1	2518.908	-61.71	-20	Pass
NVNT	n40	2462	Ant1	2519.908	-61.56	-20	Pass
NVNT	n40	2462	Ant1	2520.908	-61.64	-20	Pass
NVNT	n40	2462	Ant1	2521.908	-61.63	-20	Pass
NVNT	n40	2462	Ant1	2522.908	-61.61	-20	Pass
NVNT	n40	2462	Ant1	2523.908	-61.53	-20	Pass
NVNT	n40	2462	Ant1	2524.908	-61.54	-20	Pass
NVNT	n40	2462	Ant1	2525.908	-61.77	-20	Pass
NVNT	n40	2462	Ant1	2526.908	-61.85	-20	Pass
NVNT	n40	2462	Ant1	2527.908	-61.68	-20	Pass
NVNT	n40	2462	Ant1	2528.908	-61.75	-20	Pass
NVNT	n40	2462	Ant1	2529.908	-61.97	-20	Pass
NVNT	n40	2462	Ant1	2530.908	-61.74	-20	Pass
NVNT	n40	2462	Ant1	2531.908	-62.01	-20	Pass
NVNT	n40	2462	Ant1	2532.908	-61.66	-20	Pass
NVNT	n40	2462	Ant1	2533.908	-61.69	-20	Pass
NVNT	n40	2462	Ant1	2534.908	-61.75	-20	Pass
NVNT	n40	2462	Ant1	2535.908	-61.78	-20	Pass
NVNT	n40	2462	Ant1	2536.908	-62.12	-20	Pass
NVNT	n40	2462	Ant1	2537.908	-61.95	-20	Pass
NVNT	n40	2462	Ant1	2538.908	-61.84	-20	Pass
NVNT	n40	2462	Ant1	2539.908	-62.05	-20	Pass
NVNT	n40	2462	Ant1	2540.908	-61.78	-20	Pass
NVNT	n40	2462	Ant1	2541.908	-61.68	-20	Pass
NVNT	n40	2462	Ant1	2542.908	-61.69	-20	Pass
NVNT	n40	2462	Ant1	2543.908	-61.72	-20	Pass
NVNT	n40	2462	Ant1	2544.908	-61.75	-20	Pass
NVNT	n40	2462	Ant1	2545.908	-61.72	-20	Pass
NVNT	n40	2462	Ant1	2546.908	-61.79	-20	Pass
NVNT	n40	2462	Ant1	2547.908	-61.9	-20	Pass
NVNT	n40	2462	Ant1	2548.908	-61.9	-20	Pass
NVNT	n40	2462	Ant1	2549.908	-61.88	-20	Pass
NVNT	n40	2462	Ant1	2550.816	-61.84	-20	Pass

Tx. Emissions OOB NVNT b 2412MHz Ant1

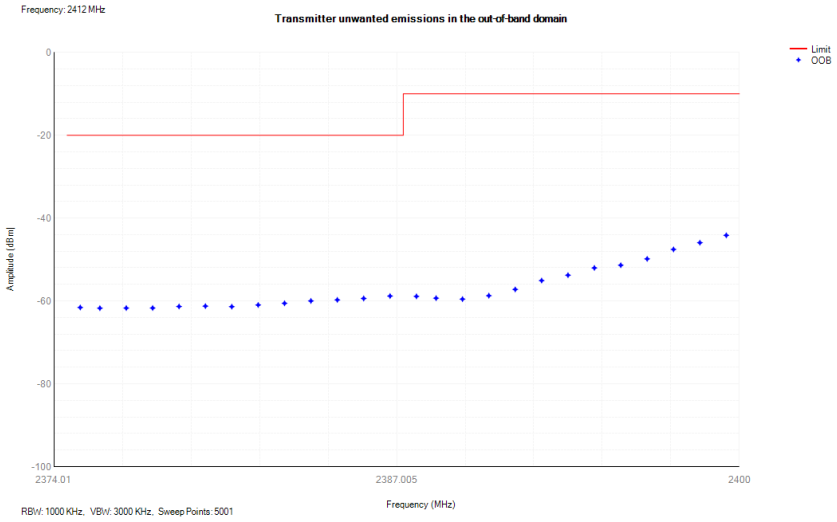

Tx. Emissions OOB NVNT b 2472MHz Ant1

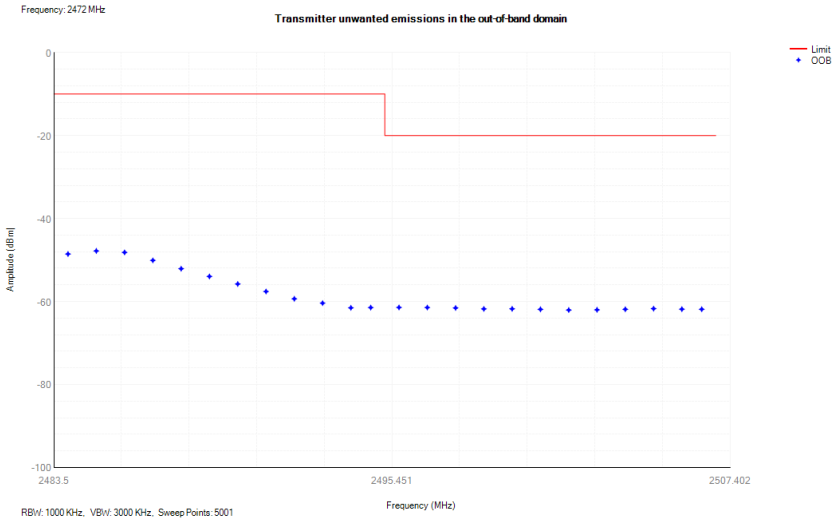

Tx. Emissions OOB NVNT g 2412MHz Ant1

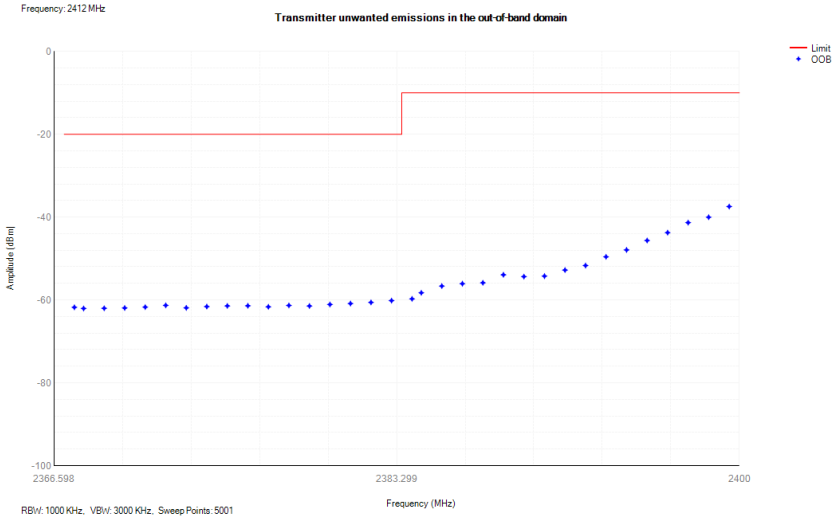

Tx. Emissions OOB NVNT g 2472MHz Ant1

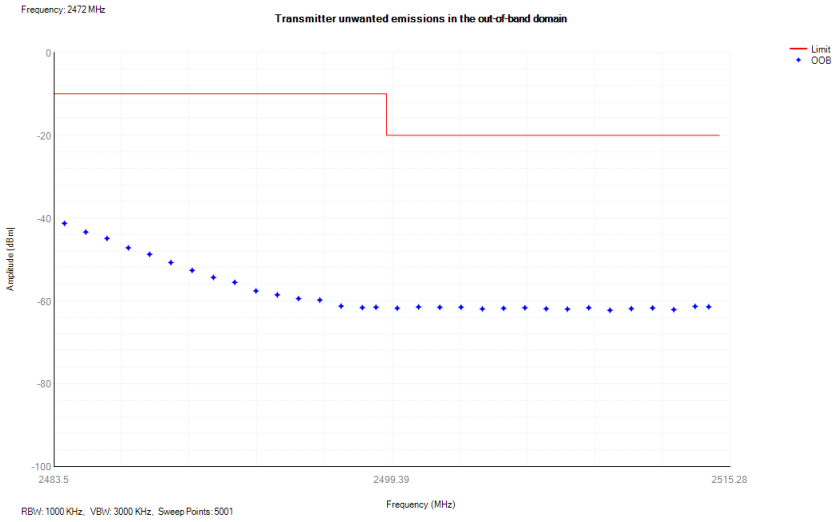

Tx. Emissions OOB NVNT n20 2412MHz Ant1

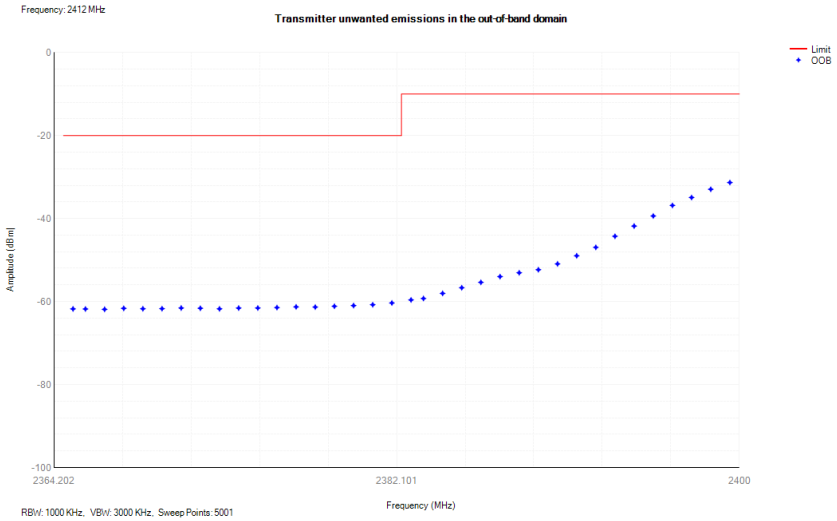

Tx. Emissions OOB NVNT n20 2472MHz Ant1

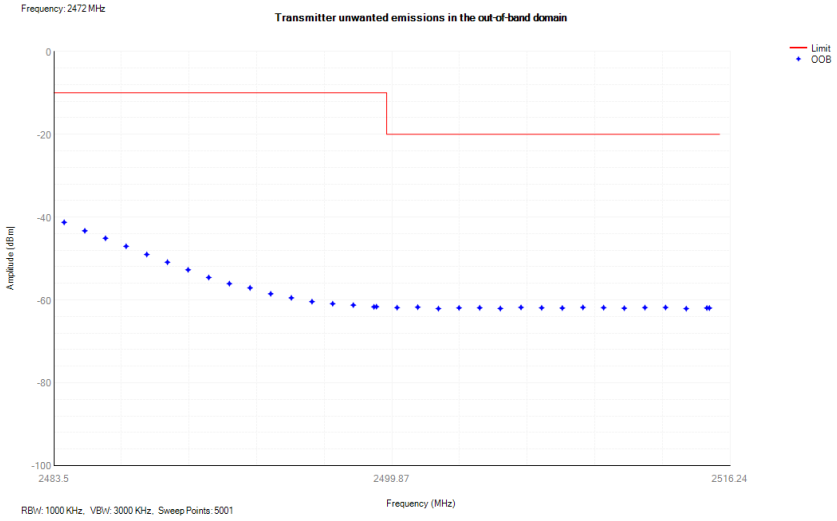

Tx. Emissions OOB NVNT n40 2422MHz Ant1

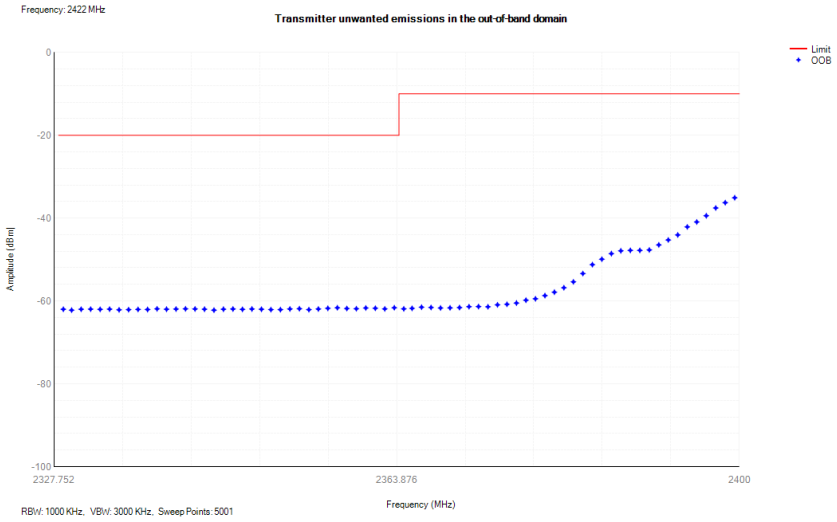

Tx. Emissions OOB NVNT n40 2462MHz Ant1

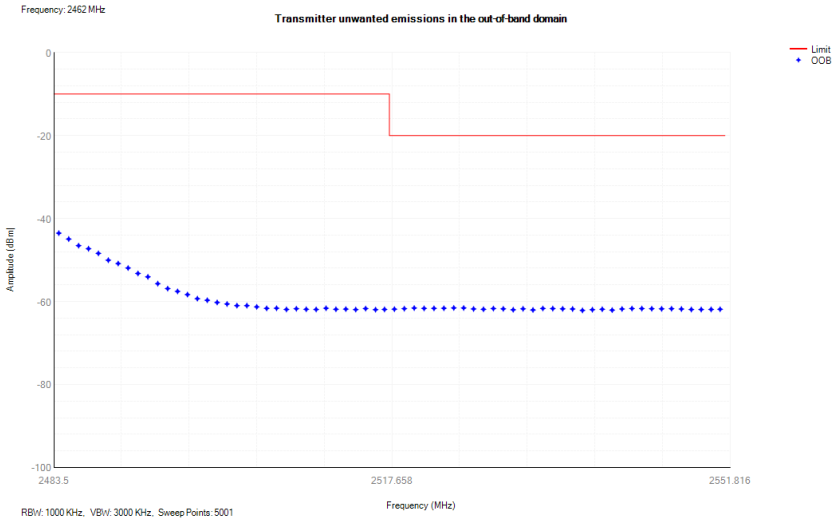

10. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

10.1 Block Diagram of Test Setup

Below 1GHz

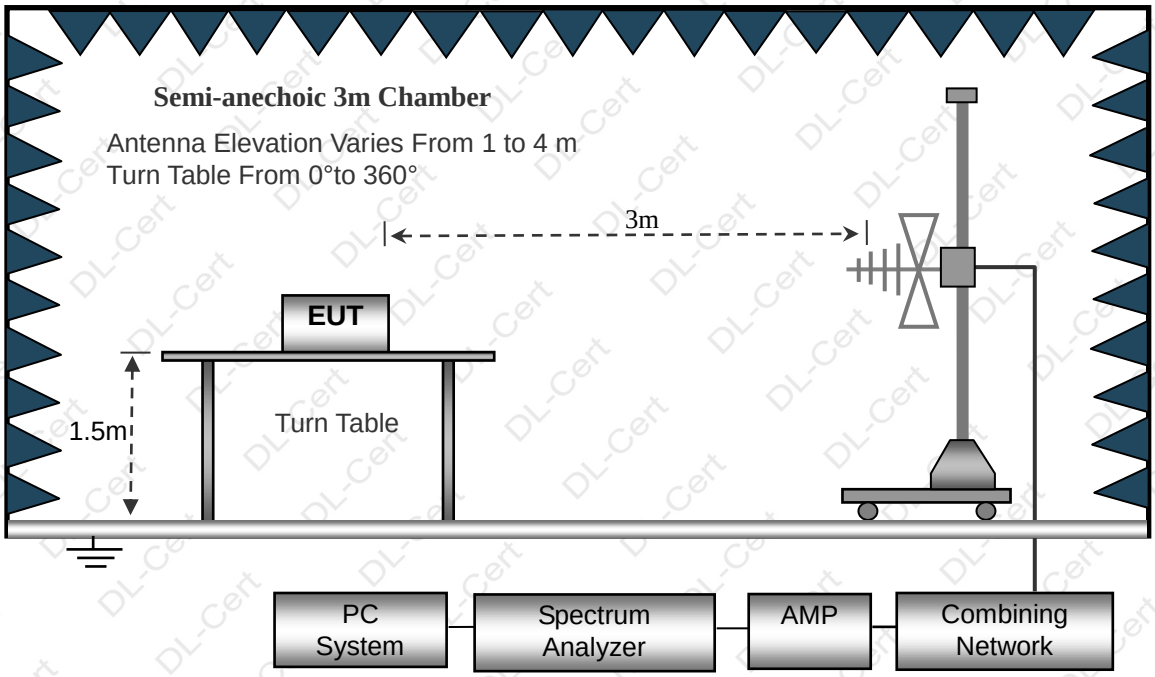

Above 1GHz

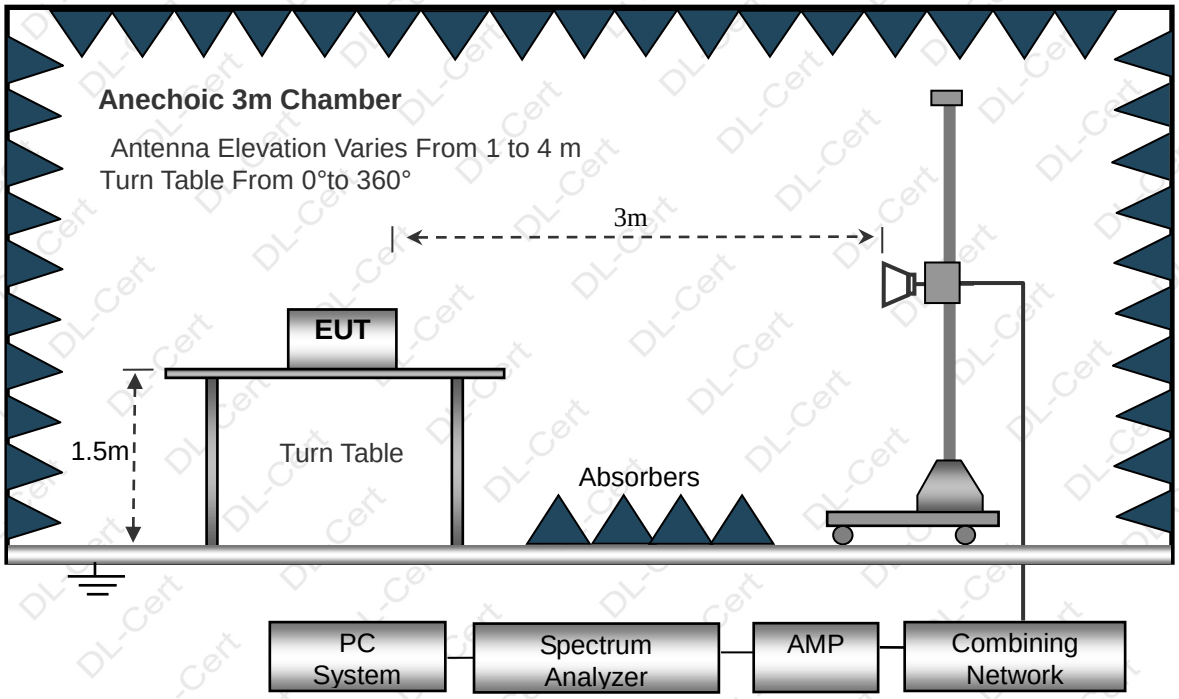

10.2 Limit

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in table 12.

Table 12: Transmitter limits for spurious emissions

Frequency range	Maximum power	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

10.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.0 Clause 5.4.9.

10.4 Test Result

Below 1GHz

Spurious Emission Test Data					
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)	Marging (dB)	Result
33.70	Vertical	-61.38	-36	-25.38	Pass
101.92	Vertical	-64.59	-54	-10.59	Pass
277.24	Vertical	-60.49	-36	-24.49	Pass
482.14	Vertical	-64.42	-54	-10.42	Pass
514.59	Vertical	-65.10	-54	-11.10	Pass
742.51	Vertical	-59.07	-36	-23.07	Pass
31.61	Horizontal	-60.89	-36	-24.89	Pass
99.35	Horizontal	-67.01	-54	-13.01	Pass
139.12	Horizontal	-60.16	-36	-24.16	Pass
261.67	Horizontal	-59.58	-36	-23.58	Pass
534.51	Horizontal	-64.57	-54	-10.57	Pass
784.64	Horizontal	-60.54	-36	-24.54	Pass

Above 1GHz

Spurious Emission Test Data						
Mode	**Frequency (MHz)**	**Polarization**	**Level (dBm)**	**Limit (dBm)**	**Margin (dB)**	**Result**
802.11b Low Channel	4824	Vertical	-41.28	-30.00	-11.28	Pass
	7236	Vertical	-41.88	-30.00	-11.88	Pass
	9648	Vertical	-41.13	-30.00	-11.13	Pass
	4824	Horizontal	-42.55	-30.00	-12.55	Pass
	7236	Horizontal	-42.87	-30.00	-12.87	Pass
	9648	Horizontal	-42.58	-30.00	-12.58	Pass
802.11b Middle Channel	4884	Vertical	-40.87	-30.00	-10.87	Pass
	7326	Vertical	-40.97	-30.00	-10.97	Pass
	9768	Vertical	-40.53	-30.00	-10.53	Pass
	4884	Horizontal	-42.63	-30.00	-12.63	Pass
	7326	Horizontal	-42.54	-30.00	-12.54	Pass
	9768	Horizontal	-40.98	-30.00	-10.98	Pass
802.11b High Channel	4944	Vertical	-40.82	-30.00	-10.82	Pass
	7416	Vertical	-41.18	-30.00	-11.18	Pass
	9888	Vertical	-41.89	-30.00	-11.89	Pass
	4944	Horizontal	-41.28	-30.00	-11.28	Pass
	7416	Horizontal	-44.64	-30.00	-14.64	Pass
	9888	Horizontal	-41.16	-30.00	-11.16	Pass
802.11g Low Channel	4824	Vertical	-40.95	-30.00	-10.95	Pass
	7236	Vertical	-43.84	-30.00	-13.84	Pass
	9648	Vertical	-40.06	-30.00	-10.06	Pass
	4824	Horizontal	-41.88	-30.00	-11.88	Pass
	7236	Horizontal	-42.66	-30.00	-12.66	Pass
	9648	Horizontal	-40.22	-30.00	-10.22	Pass
802.11g Middle Channel	4884	Vertical	-42.73	-30.00	-12.73	Pass
	7326	Vertical	-42.60	-30.00	-12.60	Pass
	9768	Vertical	-40.42	-30.00	-10.42	Pass
	4884	Horizontal	-41.98	-30.00	-11.98	Pass
	7326	Horizontal	-42.58	-30.00	-12.58	Pass
	9768	Horizontal	-40.09	-30.00	-10.09	Pass
802.11g High Channel	4944	Vertical	-41.85	-30.00	-11.85	Pass
	7416	Vertical	-40.78	-30.00	-10.78	Pass
	9888	Vertical	-40.27	-30.00	-10.27	Pass
	4944	Horizontal	-42.74	-30.00	-12.74	Pass
	7416	Horizontal	-40.52	-30.00	-10.52	Pass
	9888	Horizontal	-40.06	-30.00	-10.06	Pass

Spurious Emission Test Data						
Mode	**Frequency (MHz)**	**Polarization**	**Level (dBm)**	**Limit (dBm)**	**Margin (dB)**	**Result**
802.11n HT20 Low Channel	4824	Vertical	-41.69	-30.00	-11.69	Pass
	7236	Vertical	-43.07	-30.00	-13.07	Pass
	9648	Vertical	-40.49	-30.00	-10.49	Pass
	4824	Horizontal	-40.05	-30.00	-10.05	Pass
	7236	Horizontal	-41.73	-30.00	-11.73	Pass
	9648	Horizontal	-41.61	-30.00	-11.61	Pass
802.11n HT20 Middle Channel	4884	Vertical	-42.24	-30.00	-12.24	Pass
	7326	Vertical	-41.35	-30.00	-11.35	Pass
	9768	Vertical	-41.97	-30.00	-11.97	Pass
	4884	Horizontal	-40.26	-30.00	-10.26	Pass
	7326	Horizontal	-43.53	-30.00	-13.53	Pass
	9768	Horizontal	-40.42	-30.00	-10.42	Pass
802.11n HT20 High Channel	4944	Vertical	-41.42	-30.00	-11.42	Pass
	7416	Vertical	-42.84	-30.00	-12.84	Pass
	9888	Vertical	-40.12	-30.00	-10.12	Pass
	4944	Horizontal	-40.02	-30.00	-10.02	Pass
	7416	Horizontal	-40.60	-30.00	-10.60	Pass
	9888	Horizontal	-40.83	-30.00	-10.83	Pass
802.11n HT40 Low Channel	4844	Vertical	-40.79	-30.00	-10.79	Pass
	7266	Vertical	-42.36	-30.00	-12.36	Pass
	9688	Vertical	-40.61	-30.00	-10.61	Pass
	4844	Horizontal	-40.34	-30.00	-10.34	Pass
	7266	Horizontal	-42.91	-30.00	-12.91	Pass
	9688	Horizontal	-40.09	-30.00	-10.09	Pass
802.11n HT40 Middle Channel	4884	Vertical	-41.88	-30.00	-11.88	Pass
	7326	Vertical	-41.76	-30.00	-11.76	Pass
	9768	Vertical	-40.16	-30.00	-10.16	Pass
	4884	Horizontal	-41.34	-30.00	-11.34	Pass
	7326	Horizontal	-42.50	-30.00	-12.50	Pass
	9768	Horizontal	-40.73	-30.00	-10.73	Pass
802.11n HT40 High Channel	4924	Vertical	-43.44	-30.00	-13.44	Pass
	7386	Vertical	-41.54	-30.00	-11.54	Pass
	9848	Vertical	-42.96	-30.00	-12.96	Pass
	4924	Horizontal	-40.46	-30.00	-10.46	Pass
	7386	Horizontal	-43.99	-30.00	-13.99	Pass
	9848	Horizontal	-43.52	-30.00	-13.52	Pass

11. RECEIVER SPURIOUS EMISSIONS

11.1 Block Diagram of Test Setup

Below 1GHz

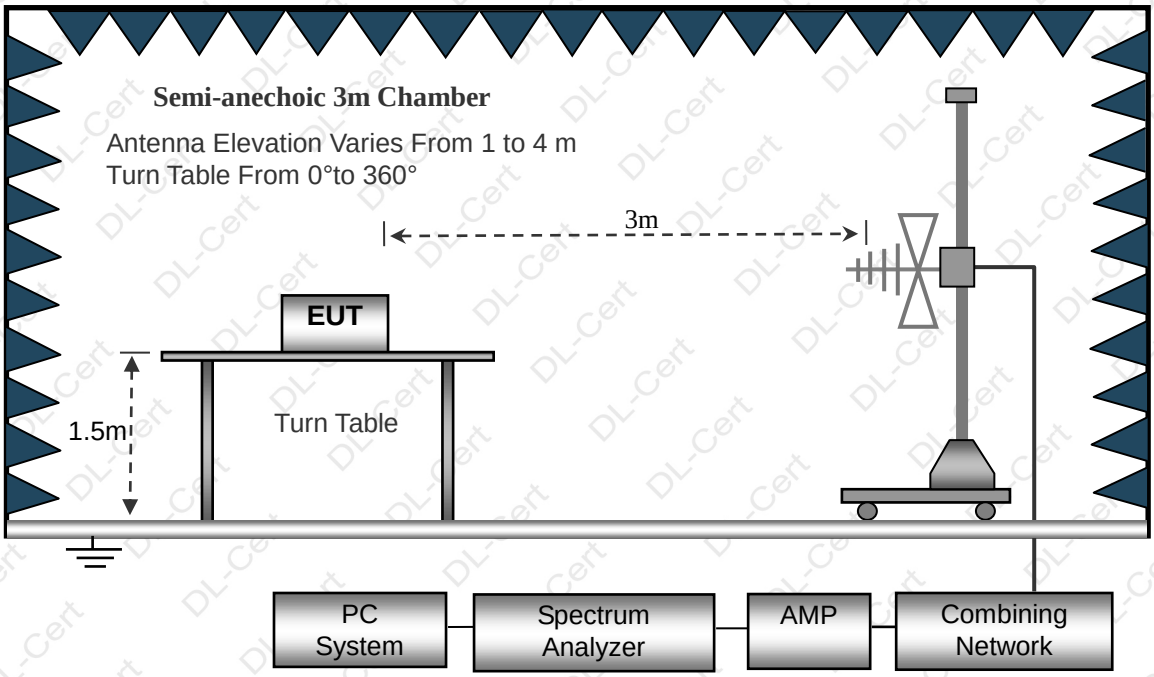

Above 1GHz

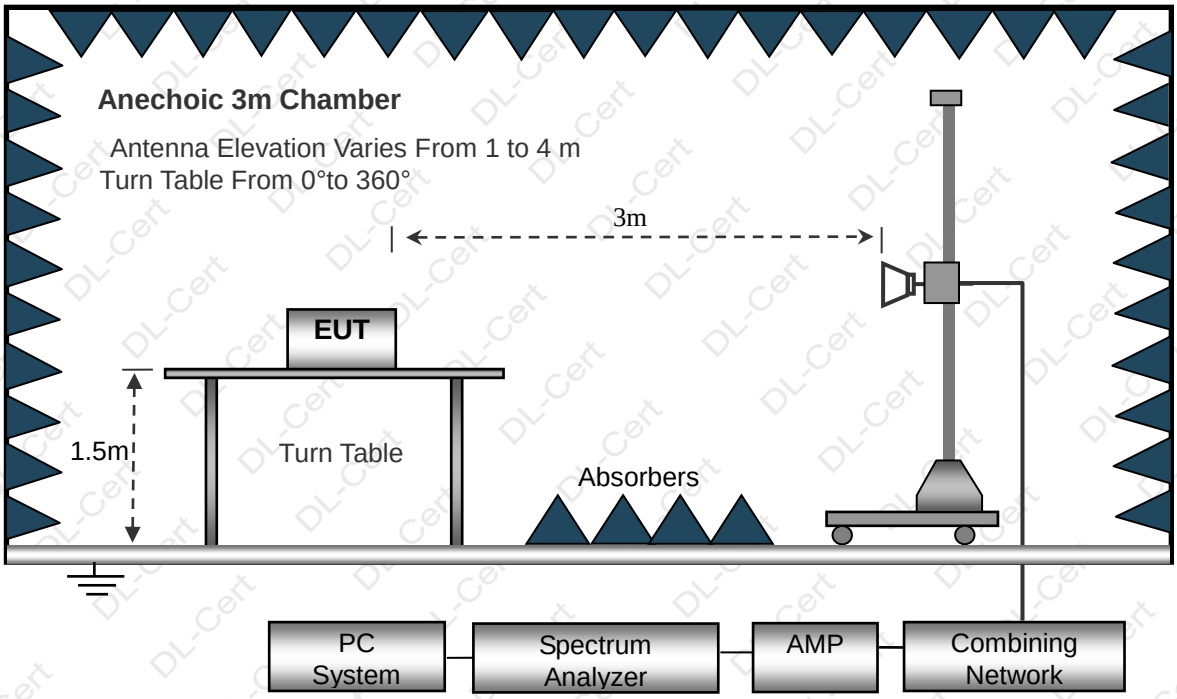

11.2 Limit

The spurious emissions of the receiver shall not exceed the values given in table 13.

Table 13: Spurious emission limits for receivers

Frequency range	Maximum power	Bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12,75 GHz	-47 dBm	1 MHz

11.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.0 Clause 5.4.9.

11.4 Test Result

Below 1GHz

Receiver spurious emissions Test Data					
Frequency (MHz)	Polarization	Level (dBm)	Limit (dBm)	Marging (dB)	Result
32.86	Vertical	-68.03	-57	-11.03	Pass
108.92	Vertical	-68.91	-57	-11.91	Pass
248.04	Vertical	-68.82	-57	-11.82	Pass
470.28	Vertical	-68.79	-57	-11.79	Pass
578.04	Vertical	-68.82	-57	-11.82	Pass
780.18	Vertical	-69.75	-57	-12.75	Pass
32.83	Horizontal	-68.12	-57	-11.12	Pass
164.19	Horizontal	-68.41	-57	-11.41	Pass
209.63	Horizontal	-68.86	-57	-11.86	Pass
366.92	Horizontal	-68.39	-57	-11.39	Pass
555.64	Horizontal	-69.38	-57	-12.38	Pass
779.89	Horizontal	-69.22	-57	-12.22	Pass

Above 1GHz

Receiver spurious emissions Test Data						
Mode	**Frequency (MHz)**	**Polarization**	**Level (dBm)**	**Limit (dBm)**	**Margin (dB)**	**Result**
802.11b Low Channel	4824	Vertical	-59.06	-47.00	-12.06	Pass
	7236	Vertical	-58.88	-47.00	-11.88	Pass
	9648	Vertical	-58.67	-47.00	-11.67	Pass
	4824	Horizontal	-59.88	-47.00	-12.88	Pass
	7236	Horizontal	-57.49	-47.00	-10.49	Pass
	9648	Horizontal	-59.78	-47.00	-12.78	Pass
802.11b Middle Channel	4884	Vertical	-59.93	-47.00	-12.93	Pass
	7326	Vertical	-58.68	-47.00	-11.68	Pass
	9768	Vertical	-57.58	-47.00	-10.58	Pass
	4884	Horizontal	-58.52	-47.00	-11.52	Pass
	7326	Horizontal	-61.27	-47.00	-14.27	Pass
	9768	Horizontal	-58.42	-47.00	-11.42	Pass
802.11b High Channel	4944	Vertical	-58.31	-47.00	-11.31	Pass
	7416	Vertical	-60.85	-47.00	-13.85	Pass
	9888	Vertical	-58.22	-47.00	-11.22	Pass
	4944	Horizontal	-57.58	-47.00	-10.58	Pass
	7416	Horizontal	-57.51	-47.00	-10.51	Pass
	9888	Horizontal	-59.93	-47.00	-12.93	Pass
802.11g Low Channel	4824	Vertical	-57.57	-47.00	-10.57	Pass
	7236	Vertical	-59.00	-47.00	-12.00	Pass
	9648	Vertical	-59.26	-47.00	-12.26	Pass
	4824	Horizontal	-58.92	-47.00	-11.92	Pass
	7236	Horizontal	-58.74	-47.00	-11.74	Pass
	9648	Horizontal	-57.91	-47.00	-10.91	Pass
802.11g Middle Channel	4884	Vertical	-59.07	-47.00	-12.07	Pass
	7326	Vertical	-57.86	-47.00	-10.86	Pass
	9768	Vertical	-60.16	-47.00	-13.16	Pass
	4884	Horizontal	-60.33	-47.00	-13.33	Pass
	7326	Horizontal	-59.06	-47.00	-12.06	Pass
	9768	Horizontal	-58.76	-47.00	-11.76	Pass
802.11g High Channel	4944	Vertical	-59.05	-47.00	-12.05	Pass
	7416	Vertical	-58.86	-47.00	-11.86	Pass
	9888	Vertical	-59.26	-47.00	-12.26	Pass
	4944	Horizontal	-59.38	-47.00	-12.38	Pass
	7416	Horizontal	-58.79	-47.00	-11.79	Pass
	9888	Horizontal	-59.80	-47.00	-12.80	Pass

Receiver spurious emissions Test Data						
Mode	**Frequency (MHz)**	**Polarization**	**Level (dBm)**	**Limit (dBm)**	**Margin (dB)**	**Result**
802.11n HT20 Low Channel	4824	Vertical	-57.74	-47.00	-10.74	Pass
	7236	Vertical	-58.23	-47.00	-11.23	Pass
	9648	Vertical	-59.97	-47.00	-12.97	Pass
	4824	Horizontal	-57.97	-47.00	-10.97	Pass
	7236	Horizontal	-59.06	-47.00	-12.06	Pass
	9648	Horizontal	-59.43	-47.00	-12.43	Pass
802.11n HT20 Middle Channel	4884	Vertical	-58.16	-47.00	-11.16	Pass
	7326	Vertical	-57.67	-47.00	-10.67	Pass
	9768	Vertical	-57.28	-47.00	-10.28	Pass
	4884	Horizontal	-57.34	-47.00	-10.34	Pass
	7326	Horizontal	-58.50	-47.00	-11.50	Pass
	9768	Horizontal	-59.05	-47.00	-12.05	Pass
802.11n HT20 High Channel	4944	Vertical	-58.92	-47.00	-11.92	Pass
	7416	Vertical	-58.30	-47.00	-11.30	Pass
	9888	Vertical	-59.43	-47.00	-12.43	Pass
	4944	Horizontal	-58.59	-47.00	-11.59	Pass
	7416	Horizontal	-58.36	-47.00	-11.36	Pass
	9888	Horizontal	-58.79	-47.00	-11.79	Pass
802.11n HT40 Low Channel	4844	Vertical	-57.63	-47.00	-10.63	Pass
	7266	Vertical	-58.52	-47.00	-11.52	Pass
	9688	Vertical	-59.78	-47.00	-12.78	Pass
	4844	Horizontal	-58.79	-47.00	-11.79	Pass
	7266	Horizontal	-58.23	-47.00	-11.23	Pass
	9688	Horizontal	-58.47	-47.00	-11.47	Pass
802.11n HT40 Middle Channel	4884	Vertical	-57.60	-47.00	-10.60	Pass
	7326	Vertical	-58.11	-47.00	-11.11	Pass
	9768	Vertical	-59.39	-47.00	-12.39	Pass
	4884	Horizontal	-58.12	-47.00	-11.12	Pass
	7326	Horizontal	-58.33	-47.00	-11.33	Pass
	9768	Horizontal	-59.39	-47.00	-12.39	Pass
802.11n HT40 High Channel	4924	Vertical	-59.08	-47.00	-12.08	Pass
	7386	Vertical	-59.21	-47.00	-12.21	Pass
	9848	Vertical	-58.14	-47.00	-11.14	Pass
	4924	Horizontal	-57.40	-47.00	-10.40	Pass
	7386	Horizontal	-58.61	-47.00	-11.61	Pass
	9848	Horizontal	-57.67	-47.00	-10.67	Pass

12. RECEIVER BLOCKING

12.1 Block Diagram of Test Setup

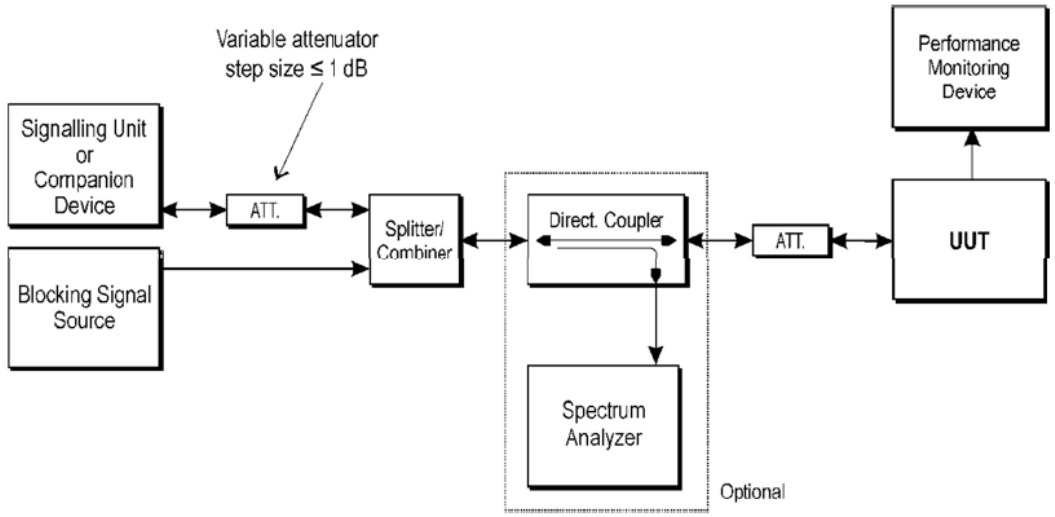

12.2 Limit

Table 14 contains the Receiver Blocking parameters for Receiver Category 1 equipment.

Table 14: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × $\log_{10}$(OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
(-139 dBm + 10 × $\log_{10}$(OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 20 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

Table 15 contains the Receiver Blocking parameters for Receiver Category 2 equipment.

Table 15: Receiver Blocking parameters receiver Category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + 10 × $\log_{10}$(OCBW) + 10 dB) or (-74 dBm + 10 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Table 16 contains the Receiver Blocking parameters for Receiver Category 3 equipment.

Table 16: Receiver Blocking parameters receiver Category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + 10 × $\log_{10}$(OCBW) + 20 dB) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 30 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

12.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.0 Clause 5.4.11.

12.4 Test Results

PASS

Observation Result: Refer to 5 that blocking signal is injected while interference signal is present. With the presence of the blocking signal, channel of the observation does not resume the link.

13. SETUP PHOTOGRAPHS

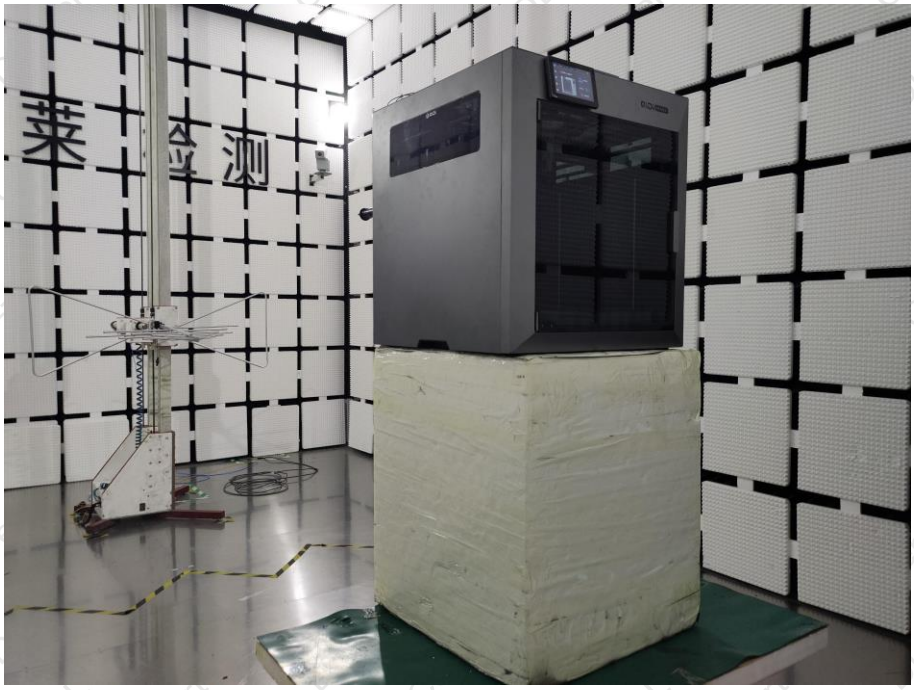

14. EUT PHOTOGRAPHS

Please see EMC test report(DLE-251119040-2R).

※※※※※ **END OF REPORT** ※※※※※