

# Non-Maintained LED Emergency Pack

## 2W (230 - 240V)



Product Code: FLEMLD2  
Barcode: 6002844063689




- Unit requires an unswitched 230 - 240V mains to charge the battery.
- The unit will only energize in the event of an electrical mains supply failure.
- Batteries must be charged for 24 hours to ensure full emergency duration before testing.
- 3 year warranty.

### Non-Maintained LED Emergency Pack

This FLEMLD2 2W constant current non-maintained LED emergency light system is capable of providing 3 hours of emergency lighting when fully charged.

### Diagram

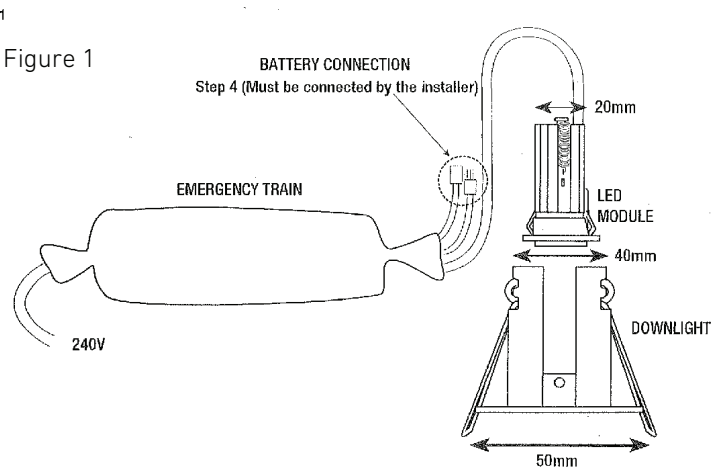

### Installation Instructions

1. Select the required position for the luminaire. Beware of joints, water pipes and electric cables.
2. Drill the cutout in the position required (cutout is 40mm  $\phi$ ).
3. Connect the pack to the main supply, Brown to the Live supply (Red or Brown) and Blue to the Neutral (Black or Blue) using a suitable junction box.
4. Connect the battery as shown in Figure 1.
5. Push the emergency train through the cutout in the ceiling.
6. Slide the legs of the mounting spring clips into the ceiling cutout and push the fitting up into the aperture.

### TECHNICAL INFORMATION

#### Specifications:

Wattage	2W
Lifetime when fully charged	3 hours
Input	230 - 240V
Battery discharge rate current	0.55A

### PACKAGE CONTENTS



- 1 x Non-Maintained LED Emergency Pack
- 1 x Instruction Manual



Blister Pack Dimensions

Height (mm)	Depth (mm)	Width (mm)	Weight (kg)
64	65	290	0,38