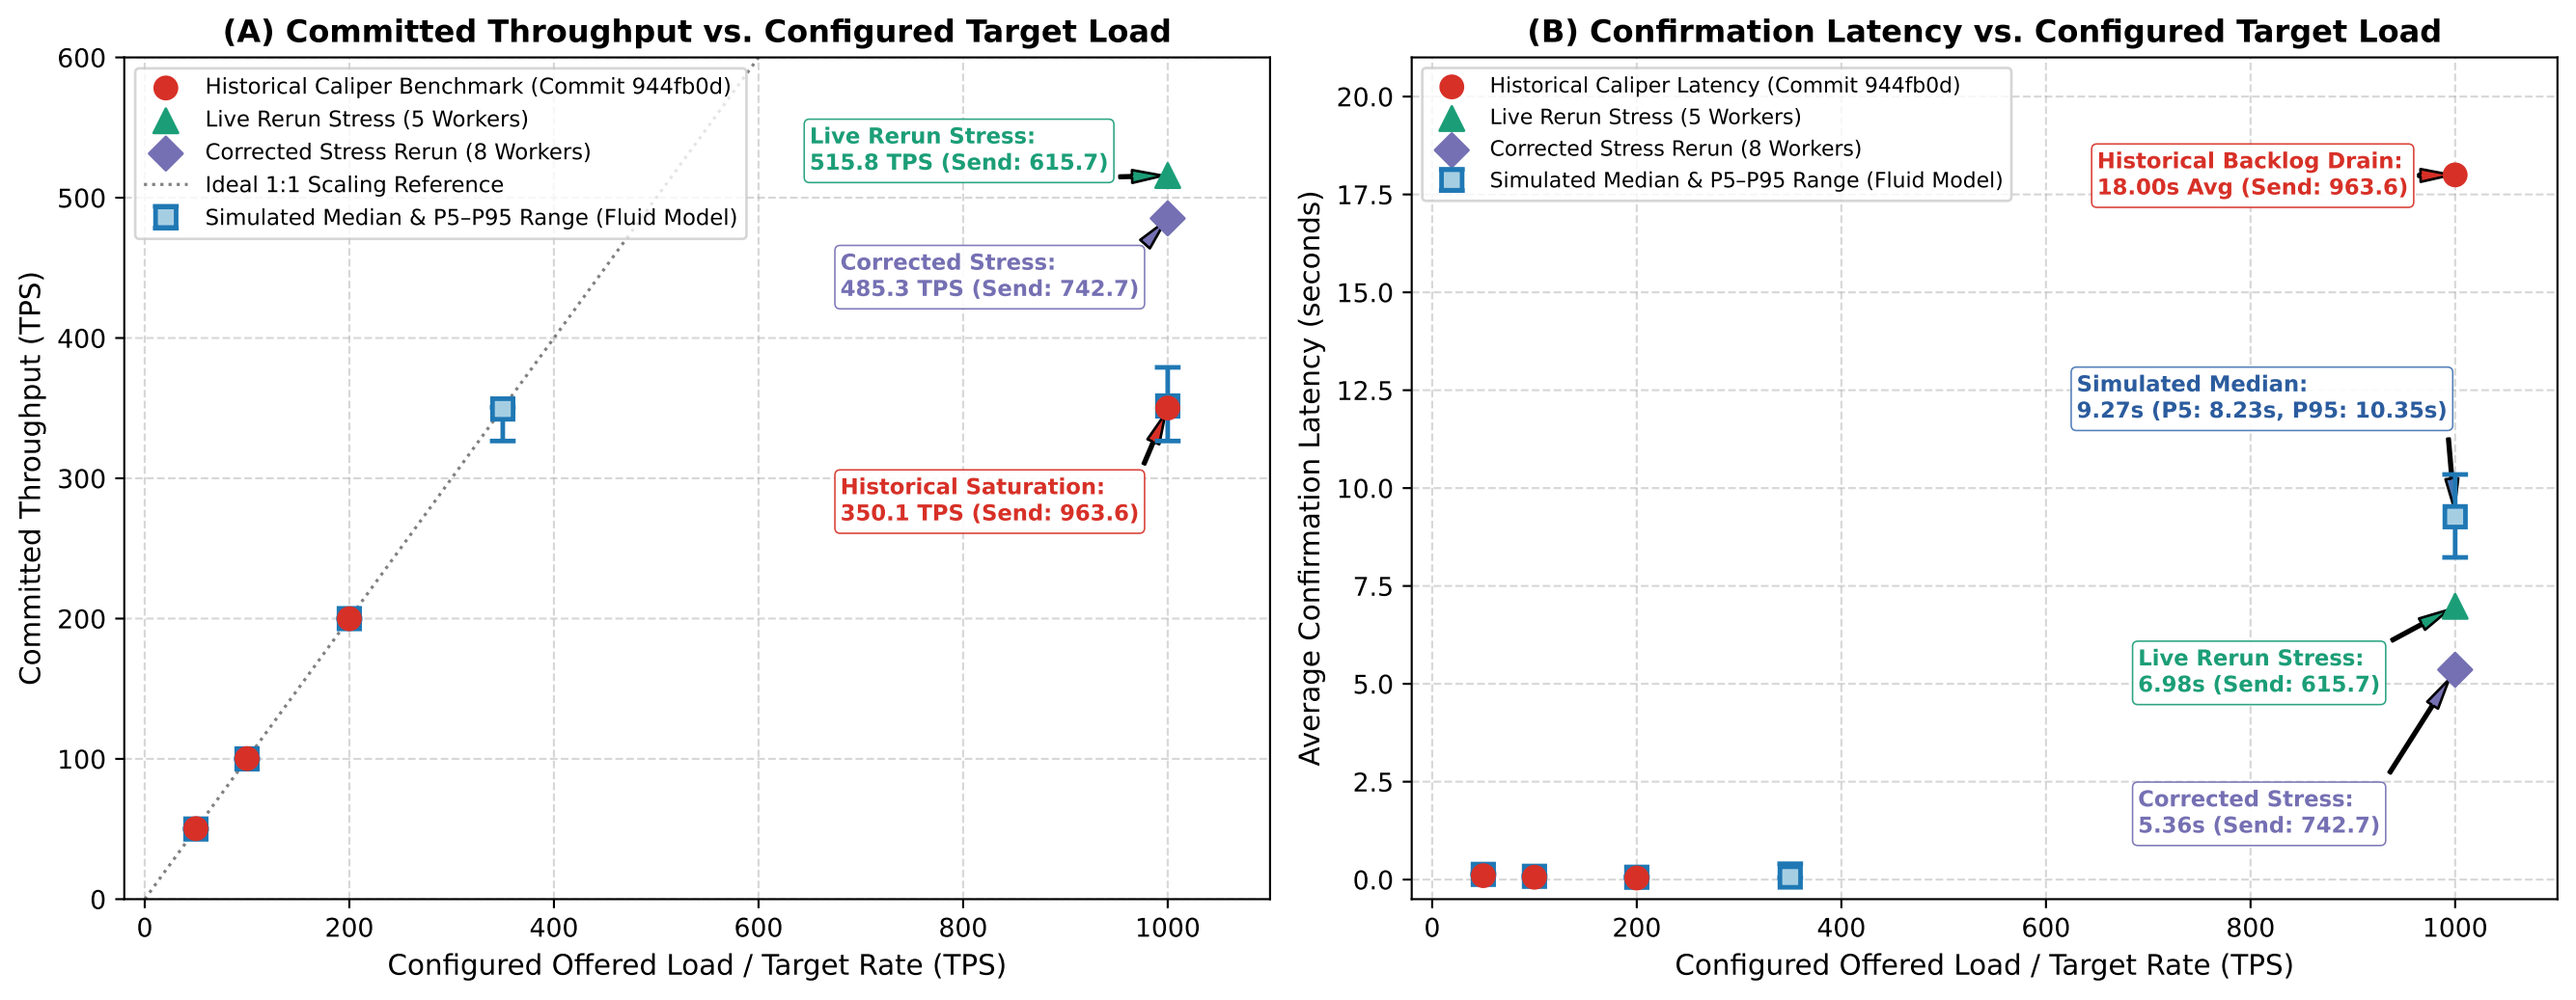
(A) Committed Throughput vs. Configured Target Load
Historical Caliper Benchmark (Commit 944fb0d)
Live Rerun Stress (5 Workers)
Corrected Stress Rerun (8 Workers)
Ideal 1:1 Scaling Reference
Simulated Median & P5–P95 Range (Fluid Model)
Live Rerun Stress:
515.8 TPS (Send: 615.7)
Corrected Stress:
485.3 TPS (Send: 742.7)
Historical Saturation:
350.1 TPS (Send: 963.6)
Committed Throughput (TPS)
Configured Offered Load / Target Rate (TPS)
0
100
200
300
400
500
600
0
200
400
600
800
1000
(B) Confirmation Latency vs. Configured Target Load
Historical Caliper Latency (Commit 944fb0d)
Live Rerun Stress (5 Workers)
Corrected Stress Rerun (8 Workers)
Simulated Median & P5–P95 Range (Fluid Model)
Historical Backlog Drain:
18.00s Avg (Send: 963.6)
Simulated Median:
9.27s (P5: 8.23s, P95: 10.35s)
Live Rerun Stress:
6.98s (Send: 615.7)
Corrected Stress:
5.36s (Send: 742.7)
Average Confirmation Latency (seconds)
Configured Offered Load / Target Rate (TPS)
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
20.0
0
200
400
600
800
1000