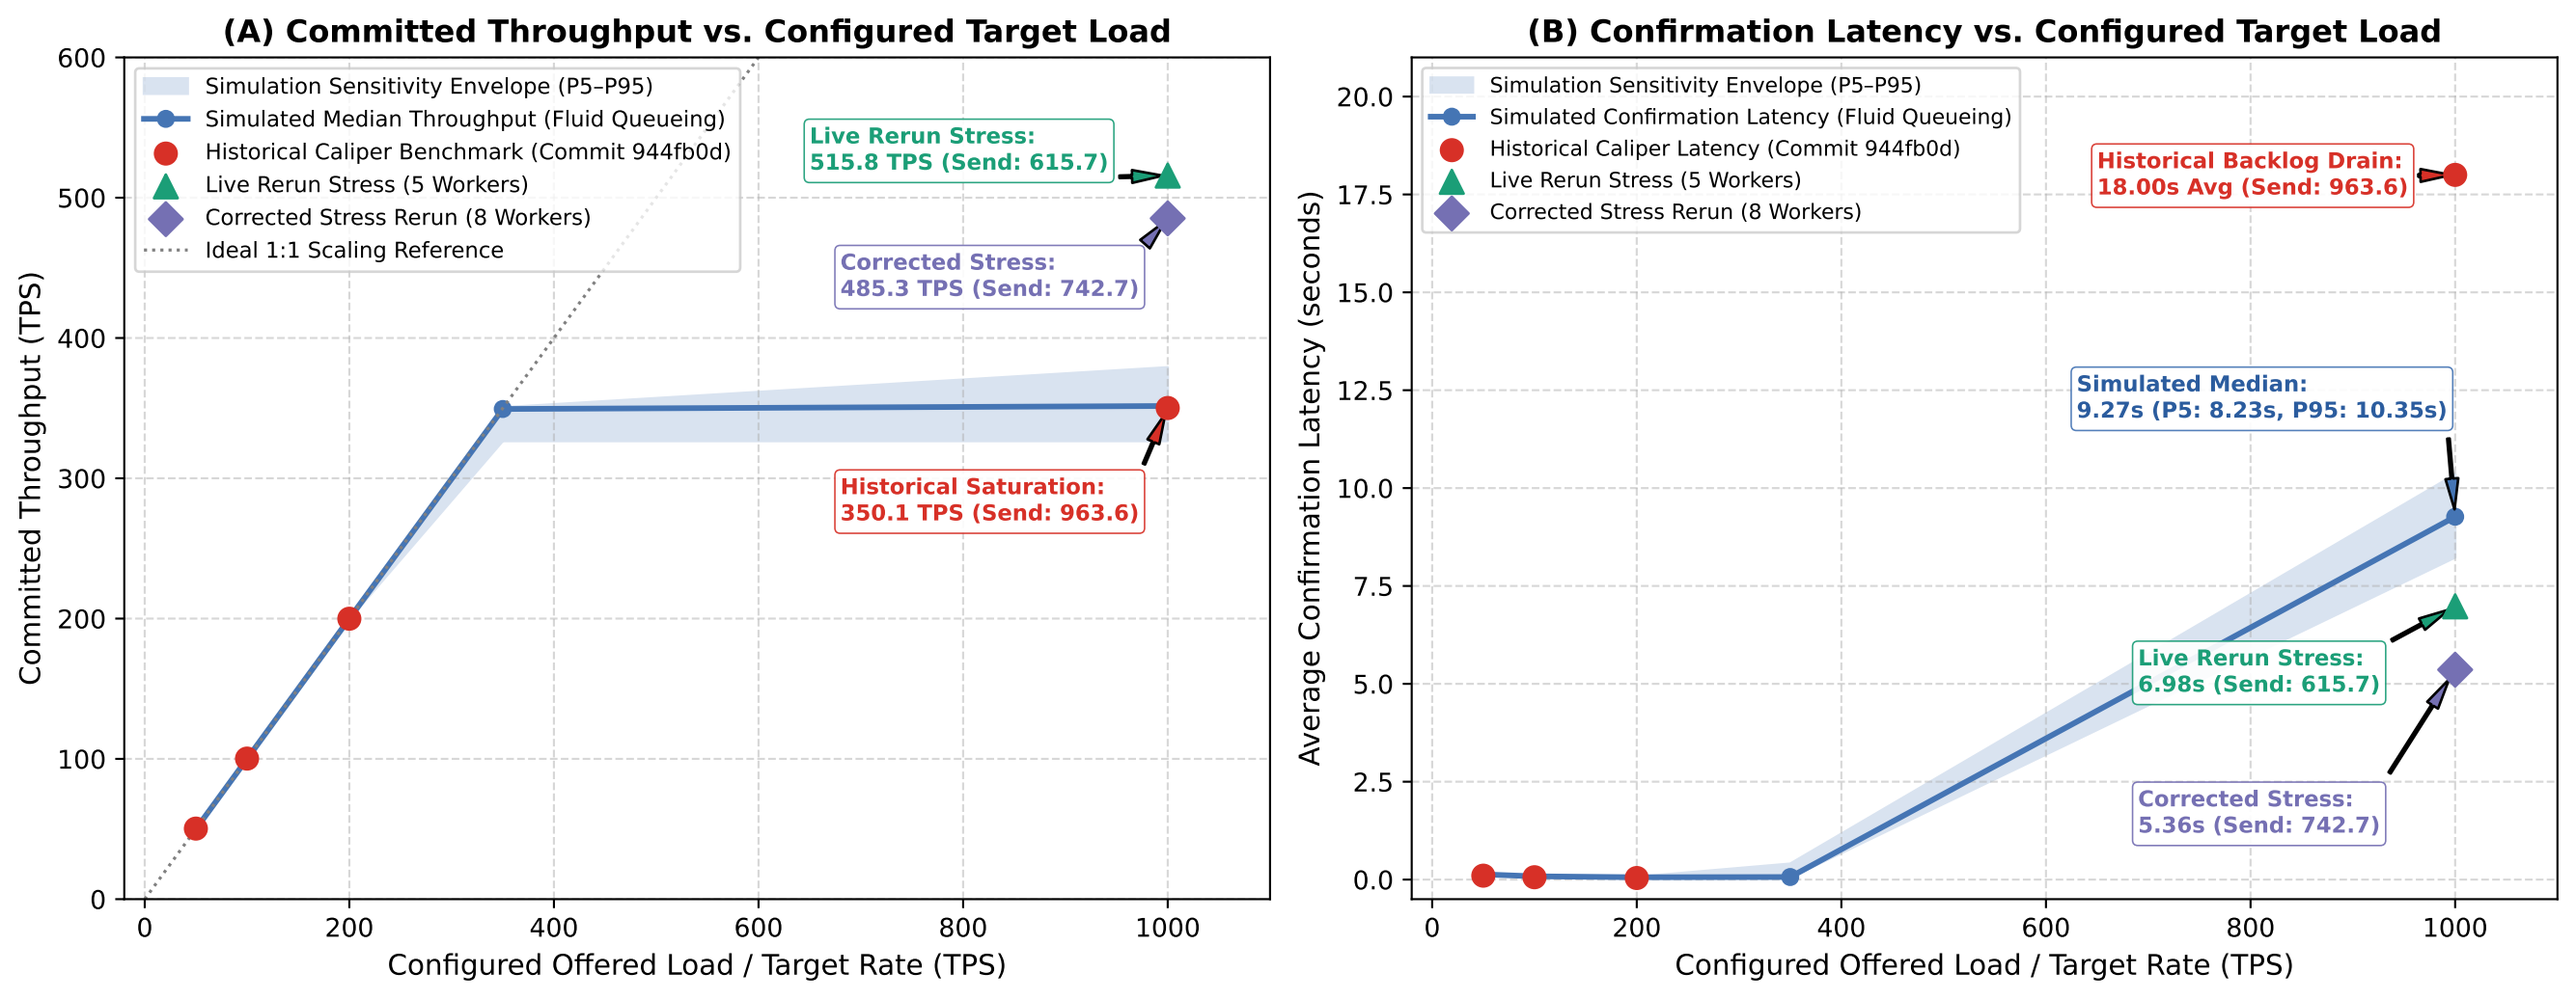
(A) Committed Throughput vs. Configured Target Load
Simulation Sensitivity Envelope (P5–P95)
Simulated Median Throughput (Fluid Queueing)
Historical Caliper Benchmark (Commit 944fb0d)
Live Rerun Stress (5 Workers)
Corrected Stress Rerun (8 Workers)
Ideal 1:1 Scaling Reference
Live Rerun Stress:
515.8 TPS (Send: 615.7)
Corrected Stress:
485.3 TPS (Send: 742.7)
Historical Saturation:
350.1 TPS (Send: 963.6)
Committed Throughput (TPS)
Configured Offered Load / Target Rate (TPS)
0
100
200
300
400
500
600
0
200
400
600
800
1000
(B) Confirmation Latency vs. Configured Target Load
Simulation Sensitivity Envelope (P5–P95)
Simulated Confirmation Latency (Fluid Queueing)
Historical Caliper Latency (Commit 944fb0d)
Live Rerun Stress (5 Workers)
Corrected Stress Rerun (8 Workers)
Historical Backlog Drain:
18.00s Avg (Send: 963.6)
Simulated Median:
9.27s (P5: 8.23s, P95: 10.35s)
Live Rerun Stress:
6.98s (Send: 615.7)
Corrected Stress:
5.36s (Send: 742.7)
Average Confirmation Latency (seconds)
Configured Offered Load / Target Rate (TPS)
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
20.0
0
200
400
600
800
1000