



BETOPPER Mini Moving Head LM70S - 7x8W RGBW Mini Stage Lights Moving Head Manual


[Manuals](#) / [Brands](#) / [BETOPPER Manuals](#) / [Lighting Equipment](#) / [Mini Moving Head](#) / [User manual](#) / PDF

Contents

1. Control Panel Instruction
2. Operation Instruction
 - 2.1. Controller Settings
 - 2.2. Mode Setting
 - 2.3. Motor Rotating Setting
 - 2.4. LED Display Direction Setting
 - 2.5. Channel Mode Setting
 - 2.6. Reset Setting
 - 2.7. Initialization Setting
3. 9 Channels Mode
4. 14 Channels Mode
5. Technical parameters
6. Documents / Resources
 - 6.1. In Other Languages
 - 6.2. Other ManualsLib Projects



Control Panel Instruction

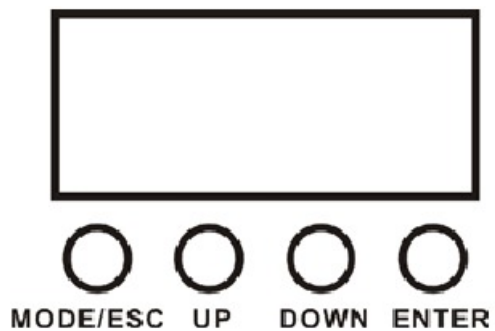

[**MODE/ESC**] Used to initially access the control panel system, and also navigate to the previous higher-level menu item


- [**UP**] Scrolls through menu items and numbers in ascending order.
- [**DOWN**] Scrolls through menu items and numbers in descending order.
- [**ENTER**] Used to select and confirm/store the current selection.

Operation Instruction


Controller Settings




Mode Setting

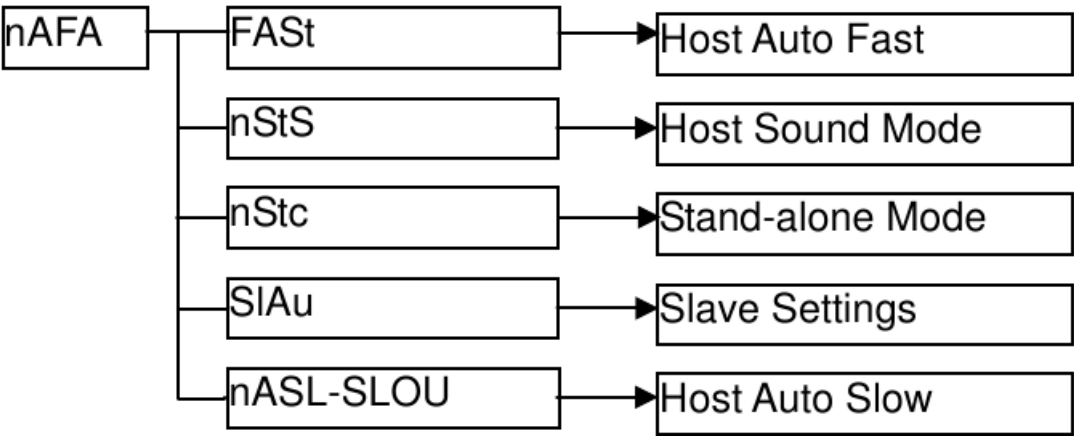


Motor Rotating Setting

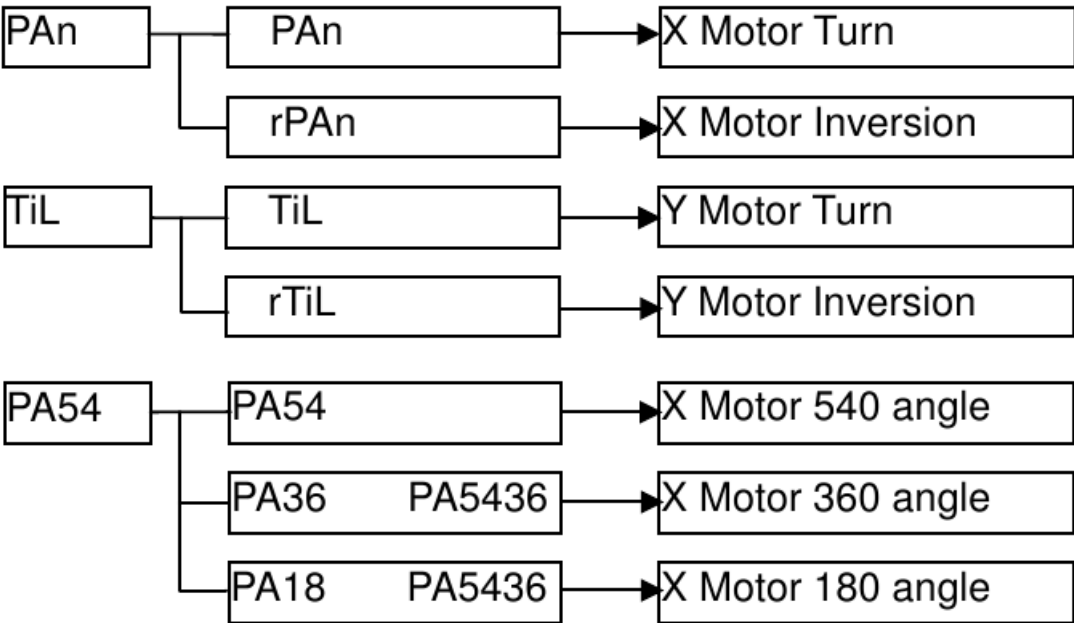


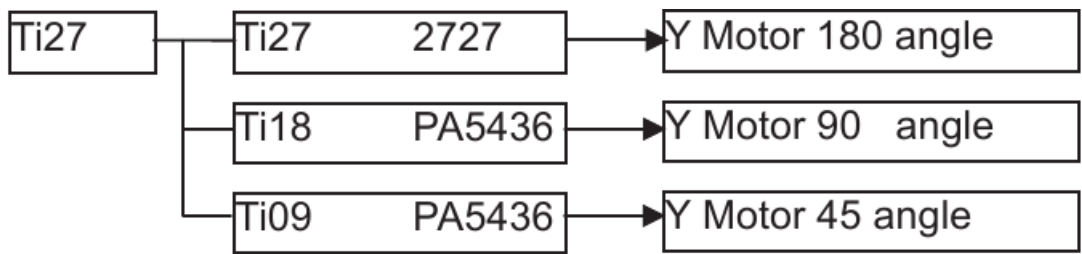

LED Display Direction Setting

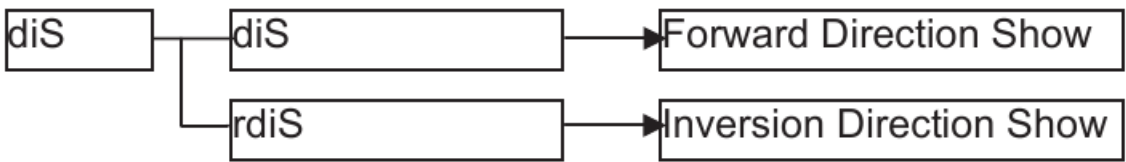

Channel Mode Setting

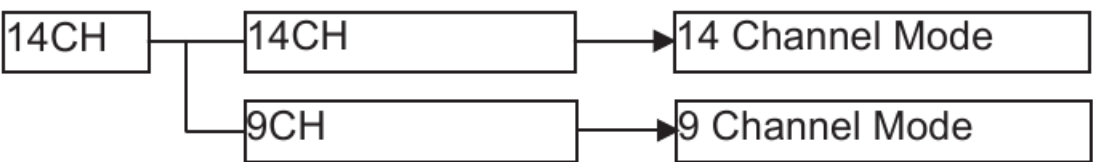

Reset Setting



Initialization Setting



Remark: When the operation mode is chosen, press the Enter button to run.

9 Channels Mode

Channel			Function
1	X Axis	0-255	
2	Y Axis	0-255	
3		0-8	Light off
		8-135	Dimming

	Master Control	136-240	Strobe
		241-255	Power ON/OFF
4	R LED Dimming	0-255	Dimming from dark to bright
5	G LED Dimming	0-255	Dimming from dark to bright
6	B LED Dimming	0-255	Dimming from dark to bright
7	W LED Dimming	0-255	Dimming from dark to bright
8	Speed	0-255	XY Motor Speed
9	Reset	150-200	

14 Channels Mode

Channel		Function
1	0-255	Pan
2	0-255	Pan fine
3	0-255	Tilt
4	0-255	Tilt fine
5	0-255	Speed
6	0-7	No Effect
	8-134	Dimming
	135-239	Strobe from slow to fast
	240-255	Light on
7	0-255	RED Dimming
8	0-255	Green Dimming
9	0-255	Blue Dimming
10	0-255	White Dimming
		Color Choose
	0-7	Color Assortment1
	8-21	Color Assortment2
	22-34	Color Assortment3
	35-49	Color Assortment4
	50-63	Color Assortment5
	64-77	Color Assortment6
	78-91	Color Assortment7

11	92-105	Color Assortment8
	106-119	Color Assortment9
	120-134	Color Assortment10
	135-147	Color Assortment11
	148-161	Color Assortment12
	162-175	Color Assortment13
	176-189	Color Assortment14
	190-203	Color Assortment15
	204-217	Color Assortment16
	218-231	Color Assortment17
	232-255	Color Saltus
12	0-255	Color Speed
13		Auto
	0-7	MOVEMENT(AUTO & SOUND EFFECT)
	8-22	Auto 1
	23-37	Auto 2
	38-53	Auto 3
	54-67	Auto 4
	68-82	Auto 5
	83-97	Auto 6
	98-112	Auto 7
	113-127	Auto 8
	128-142	Sound 1
	143-157	Sound 2
	158-172	Sound 3
	173-187	Sound 4
	188-202	Sound 5
	203-217	Sound 6
	218-232	Sound 7
	233-255	Sound 8
14	150-255	Reset

Technical parameters

Parameters	TLM70SK/TLM70SP
Light Source	7*8W 4-in-1 Led (RGBW)
Power Supply	100-240V/50-60HZ
Rated Power	100W
Control Mode	Auto/Sound/DMX/Master-slave
DMX Channel	9/14
Product Size	175*175*235mm
N.W./G.W.	2.7/3.5kg
In the box	Power cable x1; Handle x1; Screw x2; User Manual x1

BETOPPER®

Documents / Resources

Available languages

 [Deutsch](#)
 [Français](#)
 [Español](#)
 [Mexicano](#)
 [Dutch](#)
 [Italiano](#)
 [Dansk](#)
 [Norsk](#)

 [Polski](#)
 [Suomi](#)
 [Português](#)
[Español \(Latinoamérica\)](#)
 [Русский](#)
 [Български](#)

 [Čeština](#)
 [ελληνικά](#)
[English \(UK\)](#)
 [Eesti](#)
 [Hrvatski](#)
 [Magyar](#)

 [Bahasa indonesia](#)
 [Қазақша](#)
 [Lietuvių](#)
[Português \(Brasil\)](#)
 [Română](#)

[Română \(Moldova\)](#)
 [Slovenčina](#)
 [Slovenščina](#)
 [Shqip](#)
[Kiswahili](#)
 [Türkçe](#)

 [O'zbekcha](#)

Other ManualsLib Projects

 www.manualslib.com
 www.manualslib.de
 www.manualslib.es
 www.manualslib.fr
 www.manualslib.nl

 www.manualslib.mx

 www.manualslib.tech 30+ languages