
HD-AE5000 installation guide

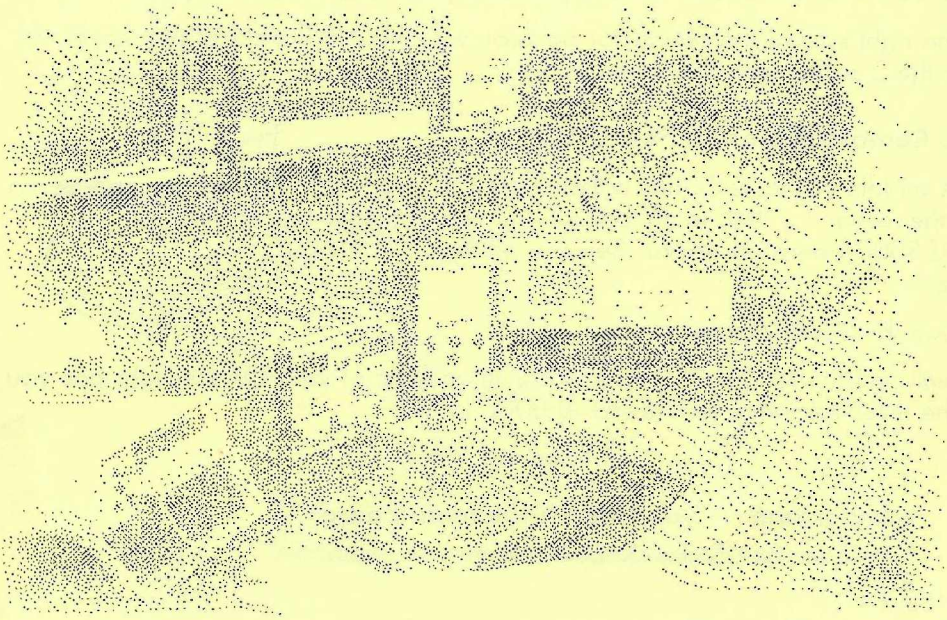

If you follow this instruction guide, the HD-AE5000 installation is very easy an no problem for you. There is no need for a special knowledge to install the HD-AE5000 extension.

Important! ***Please be informed, that only an installation trough the Technics dealer will keep the 12 month product warranty.***


1. Preparations

You only need a cross screw driver for the HD-AE5000 installation.

Prepare a soft pad and turn the keyboard lower side up and the input/outputs to your side.

2. Remove the cover for the parallel port and audio output

On the right side of the connector part you will find a 5 x 2 cm plastic cover. Remove the 2 screws and the cover.

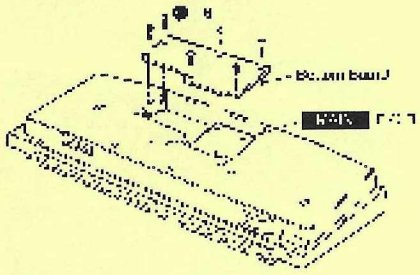

3. Remove the main board cover

In the middle of the keyboard bottom you will find the cover for the main board and the HD-AE5000 extension board. Remove all the 6 screws.

Remove the wooden cover.

You will find the KN5000 main board (left) in front of you. On the right side you see the reserved space for the HD-AE5000 board.

Important! Don't touch the main board!


4. Remove the earth wire

On the right front corner, remove the earth wire.

5. Install the HD-AE5000 board

Open the HD-AE5000 carton box and take out of the antistatic plastic bag the HD-AE board.

Bend the metal foil on the metal output board down to the HDD about 90° angle (marking).

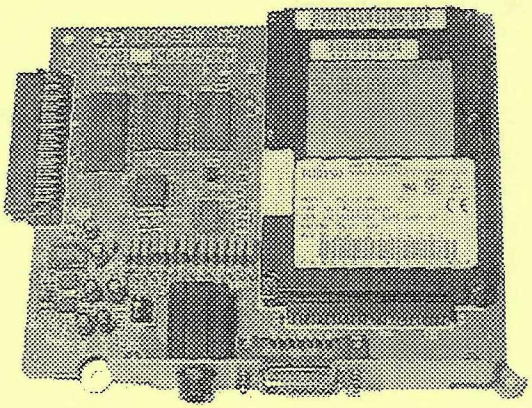

Important! ***Hold the HD-AE board only on the crusts or on the metal parts.***

Hold the HD-AE5000 board so in your hand, that the 56-pin connector point to the left side. On the right side oft the main board you will find the counterpart of the connector.

Lead the HD-AE5000 board with a 30° angle to the connector and connect it.

Important! ***Please pay attention that the earth wire will not be jammed below the HD-AE5000 board.***

The space conditions are not on a large scale. Anyway, when the HD-AE board is connected with the main board you can screw on the HD-AE board with the delivered 3 screws.

The earth wire has to be screwed on the same place (Metal piece on the right corner of the HD-AE board) where you removed.

Important! ***Before you put on the wooden cover, please check all working steps and look that nothing is on the main/HD-AE board box.***

But on now the cover and screw it with the same 6 screws.

Turn the keyboard in play position, connect the keyboard with the power cable and switch it ON.

The KN5000 will now start up with the new HD-AE5000 initial page. On the DISK MENU you will find the new HD-AE5000 button.

We recommend to store a song to the HD-AE5000 hard disk. On the back side you will find all steps in details.

Save a song to HDD

Because of security reasons, the hard disk drive is always write protected.

> ☞ Press the HD-AE5000 button on the DISK MENU followed by the SETUP & TOOLS button.



Change the WRITE PROTECT to OFF.

Now all SAVE, EDIT and DEL buttons will be visible.

> ☞ Press the EXIT button to get back to the HD-AE5000 page.

Data save will be made normally with the SELECT BY NAME function.
Exception: If you would like to save KN5000 songs from a disk direct to the HDD. We will use this function now. (Please refer the owners manual page 19)

> ☞ Insert an original KN5000 disk into the Floppy disk drive and press the COPY FD TO HARD DISK button.

The disk directory will be read and shown on the COPY TECH TO HD page.

> ☞ Mark the song(s) with the SELECT button and press the * TO button.
> On the HD DIR SELECT page choose a directory and name it by pressing EDIT. Press COPY to write the song(s) to the hard disk.

To check your storage, please initialise the KN5000 and load the song from hard disk.
With this example your customer got a special training how to use the HD-AE.