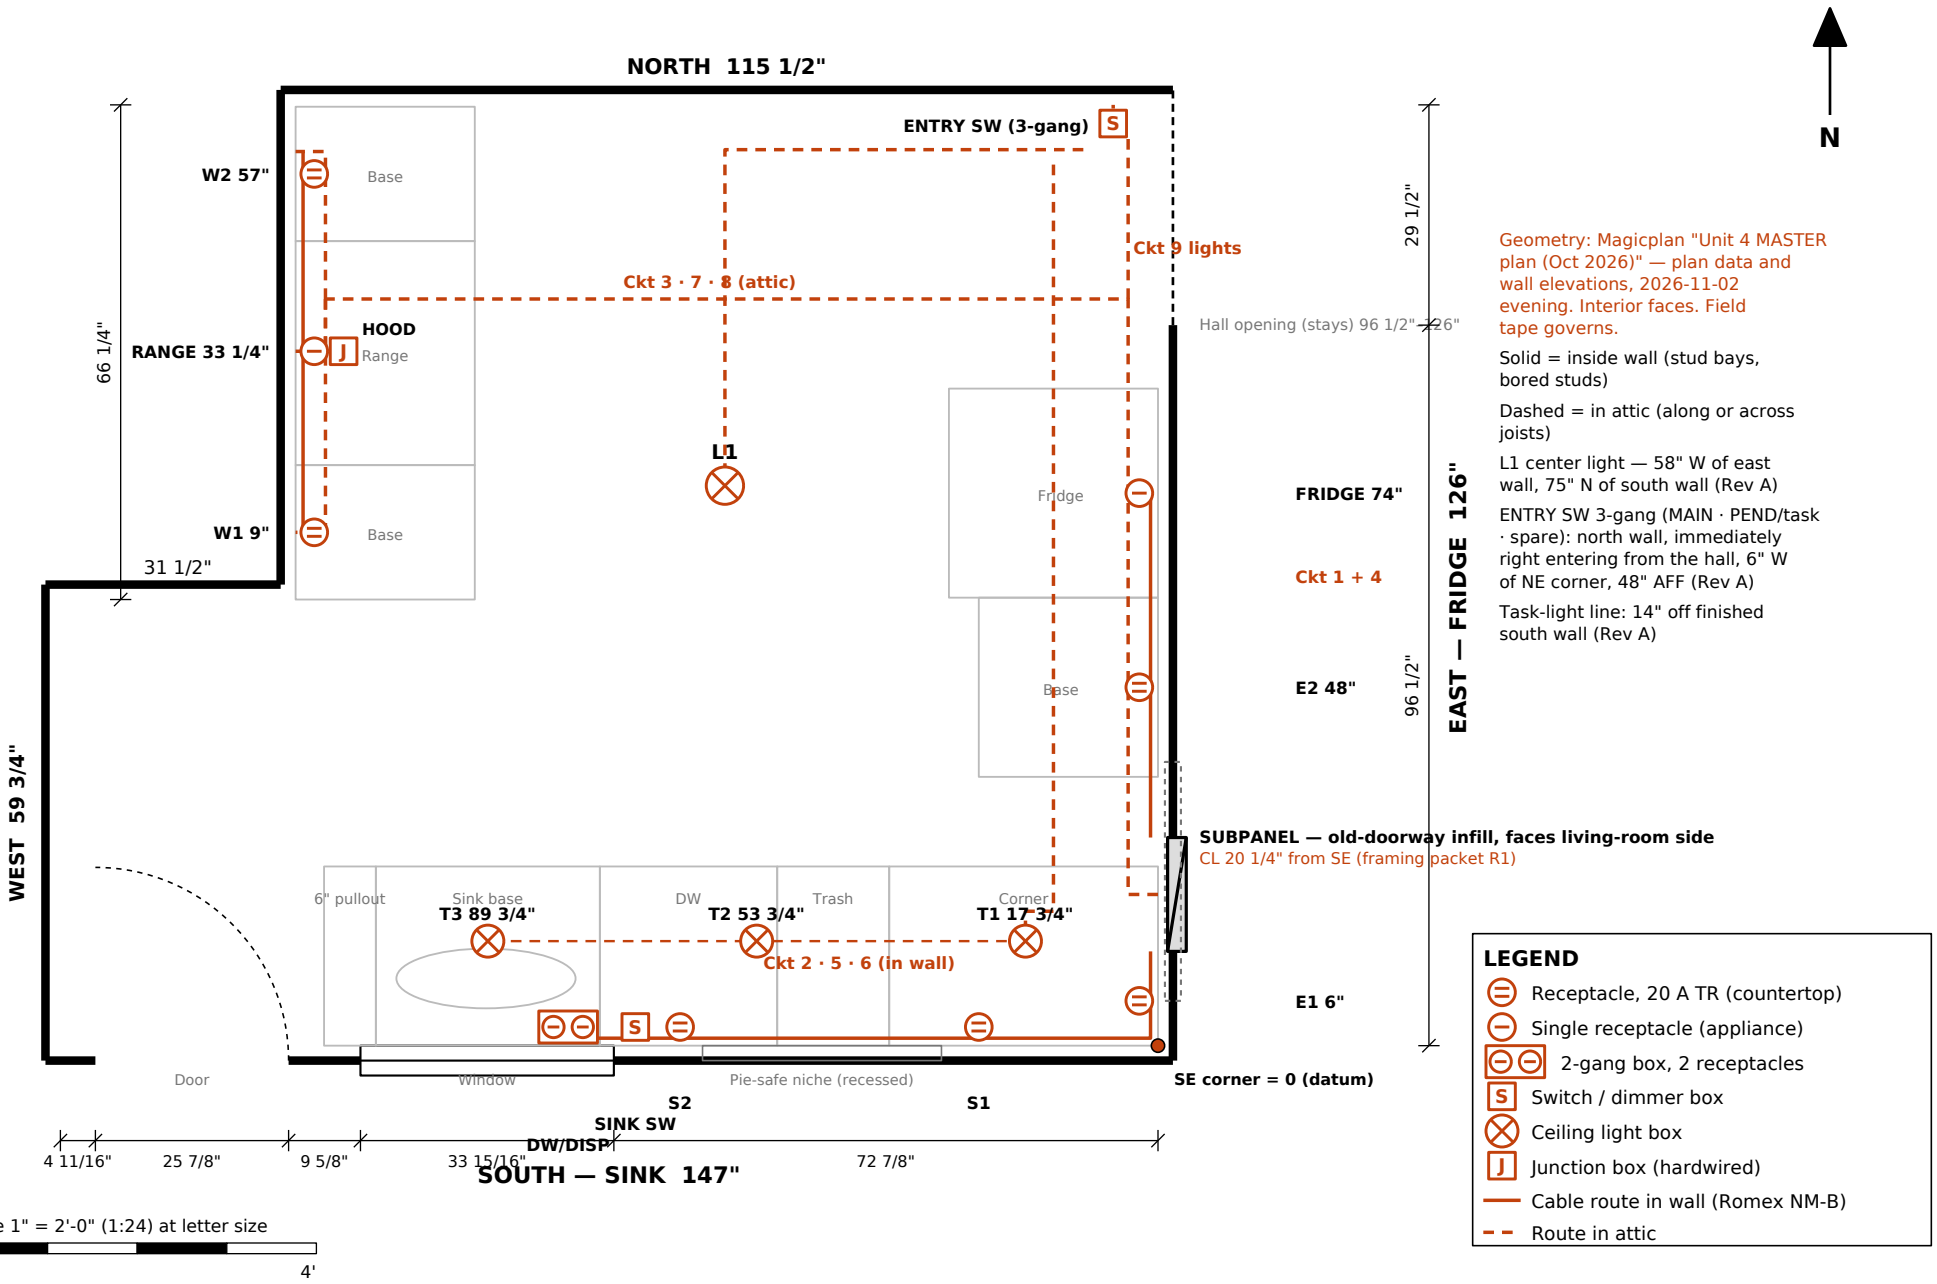


KE-01 Kitchen plan — devices and cable routes

English edition.


DRAFT — WORKING PLAN. VERIFY IN FIELD. Not a permit set or rough-in release.

1231 11th Ave, Unit 4 — San Francisco CA 94122 · Kitchen electrical working drawings · Rev I · 2026-11-02 · supersedes Rev H (same date)

Rev I: circuits labeled with Rev A numbers 1–10; devices named in plain words; key added (KE-05). Locations unchanged from Rev H.

Looking SOUTH. SE corner at LEFT. Distances from SE corner (finished face).

Subfloor mark = AFF + t (t = finished floor build-up, NOT YET KNOWN)

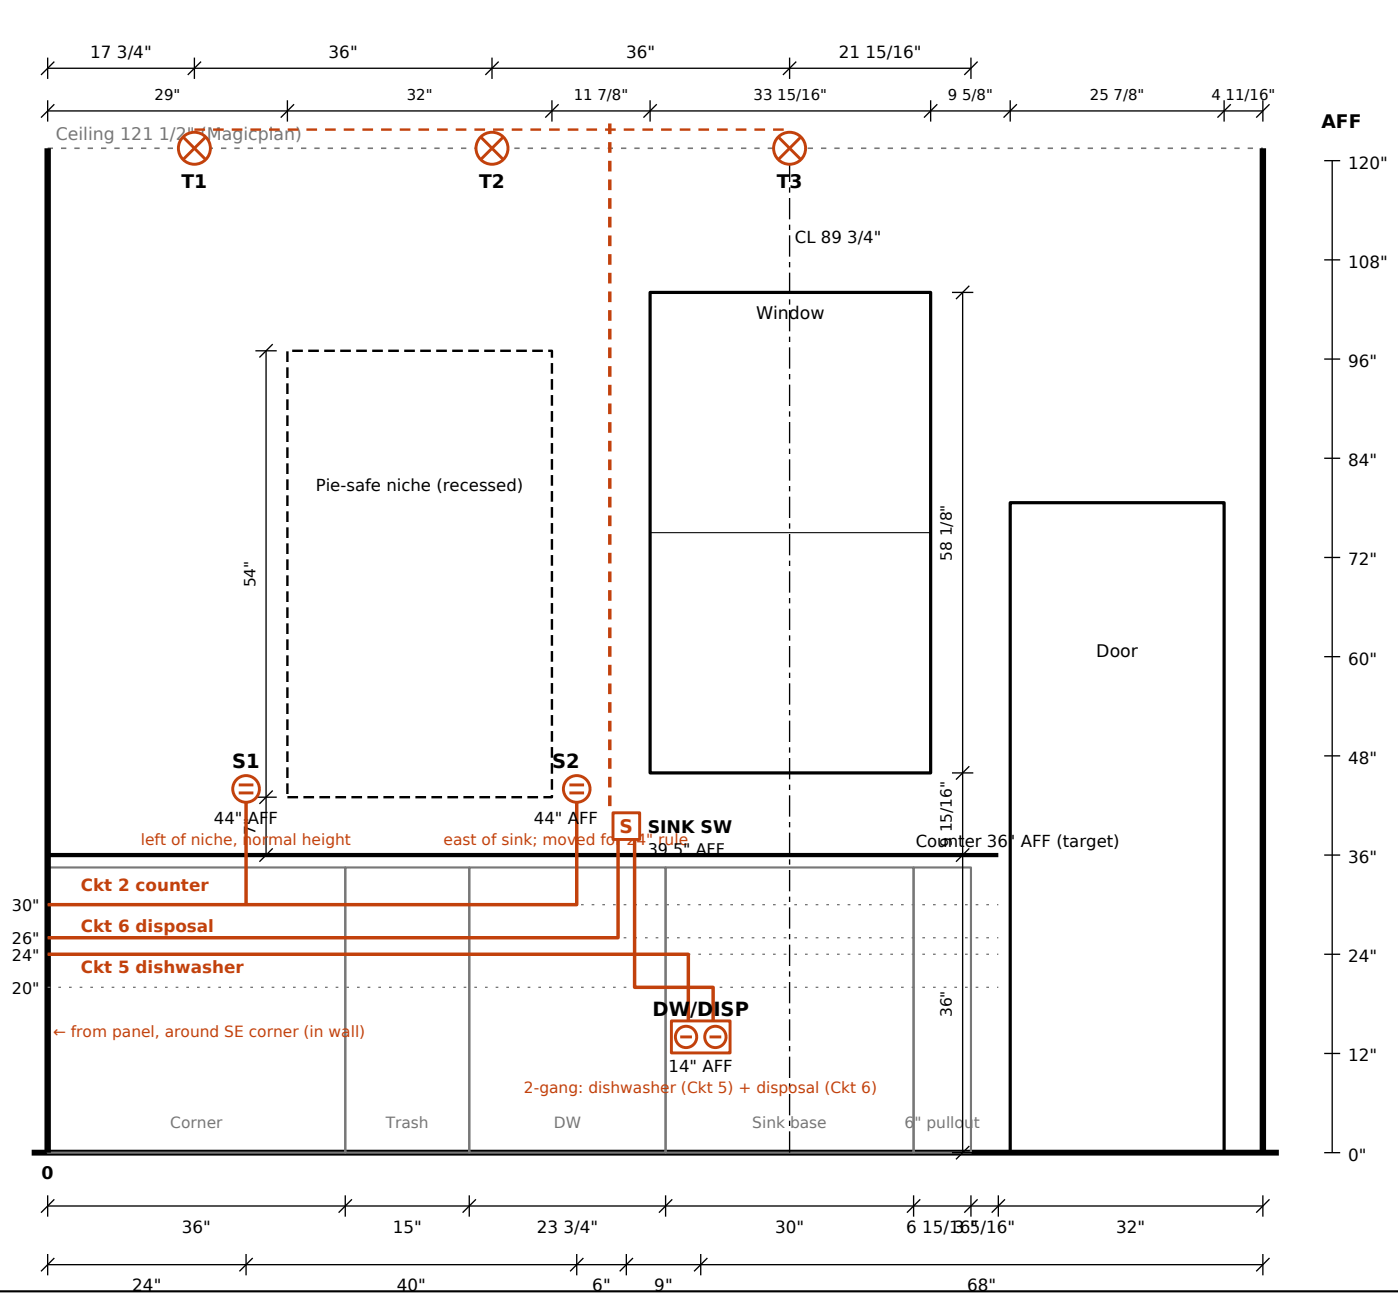

Scale 1/4" = 1'-0" (approx. 1:48) at letter size

0 2'

TASK LIGHTS — 3 fixtures, equal 36" spacing, T3 on sink CL (89 3/4")

T1 17 3/4" · T2 53 3/4" · T3 89 3/4" (sink CL)

Task-light line: 14" off finished south wall (Rev A)

Pendant or flush. If pendant: 10" dia. max, bottom 30–32" above counter. Owner decides 3 vs. the earlier 2.

SINK SW 2-gang east of the sink (Rev A): disposal switch (Ckt 6) + task-light switch (Ckt 9), 39 1/2" AFF.

LEGEND

- Receptacle, 20 A TR (countertop)
- Single receptacle (appliance)
- 2-gang box, 2 receptacles
- S — Switch / dimmer box
- Ceiling light box
- J — Junction box (hardwired)
- Cable route in wall (Romex NM-B)
- Route in attic

KE-02 South (sink) wall — devices, routes, task lights

English edition.


DRAFT — WORKING PLAN. VERIFY IN FIELD. Not a permit set or rough-in release.

1231 11th Ave, Unit 4 — San Francisco CA 94122 · Kitchen electrical working drawings · Rev I · 2026-11-02 · supersedes Rev H (same date)

Rev I: circuits labeled with Rev A numbers 1–10; devices named in plain words; key added (KE-05). Locations unchanged from Rev H.

Looking EAST. SE corner at RIGHT. Distances from SE corner, going north.

Subfloor mark = AFF + t (t = finished floor build-up, NOT YET KNOWN)

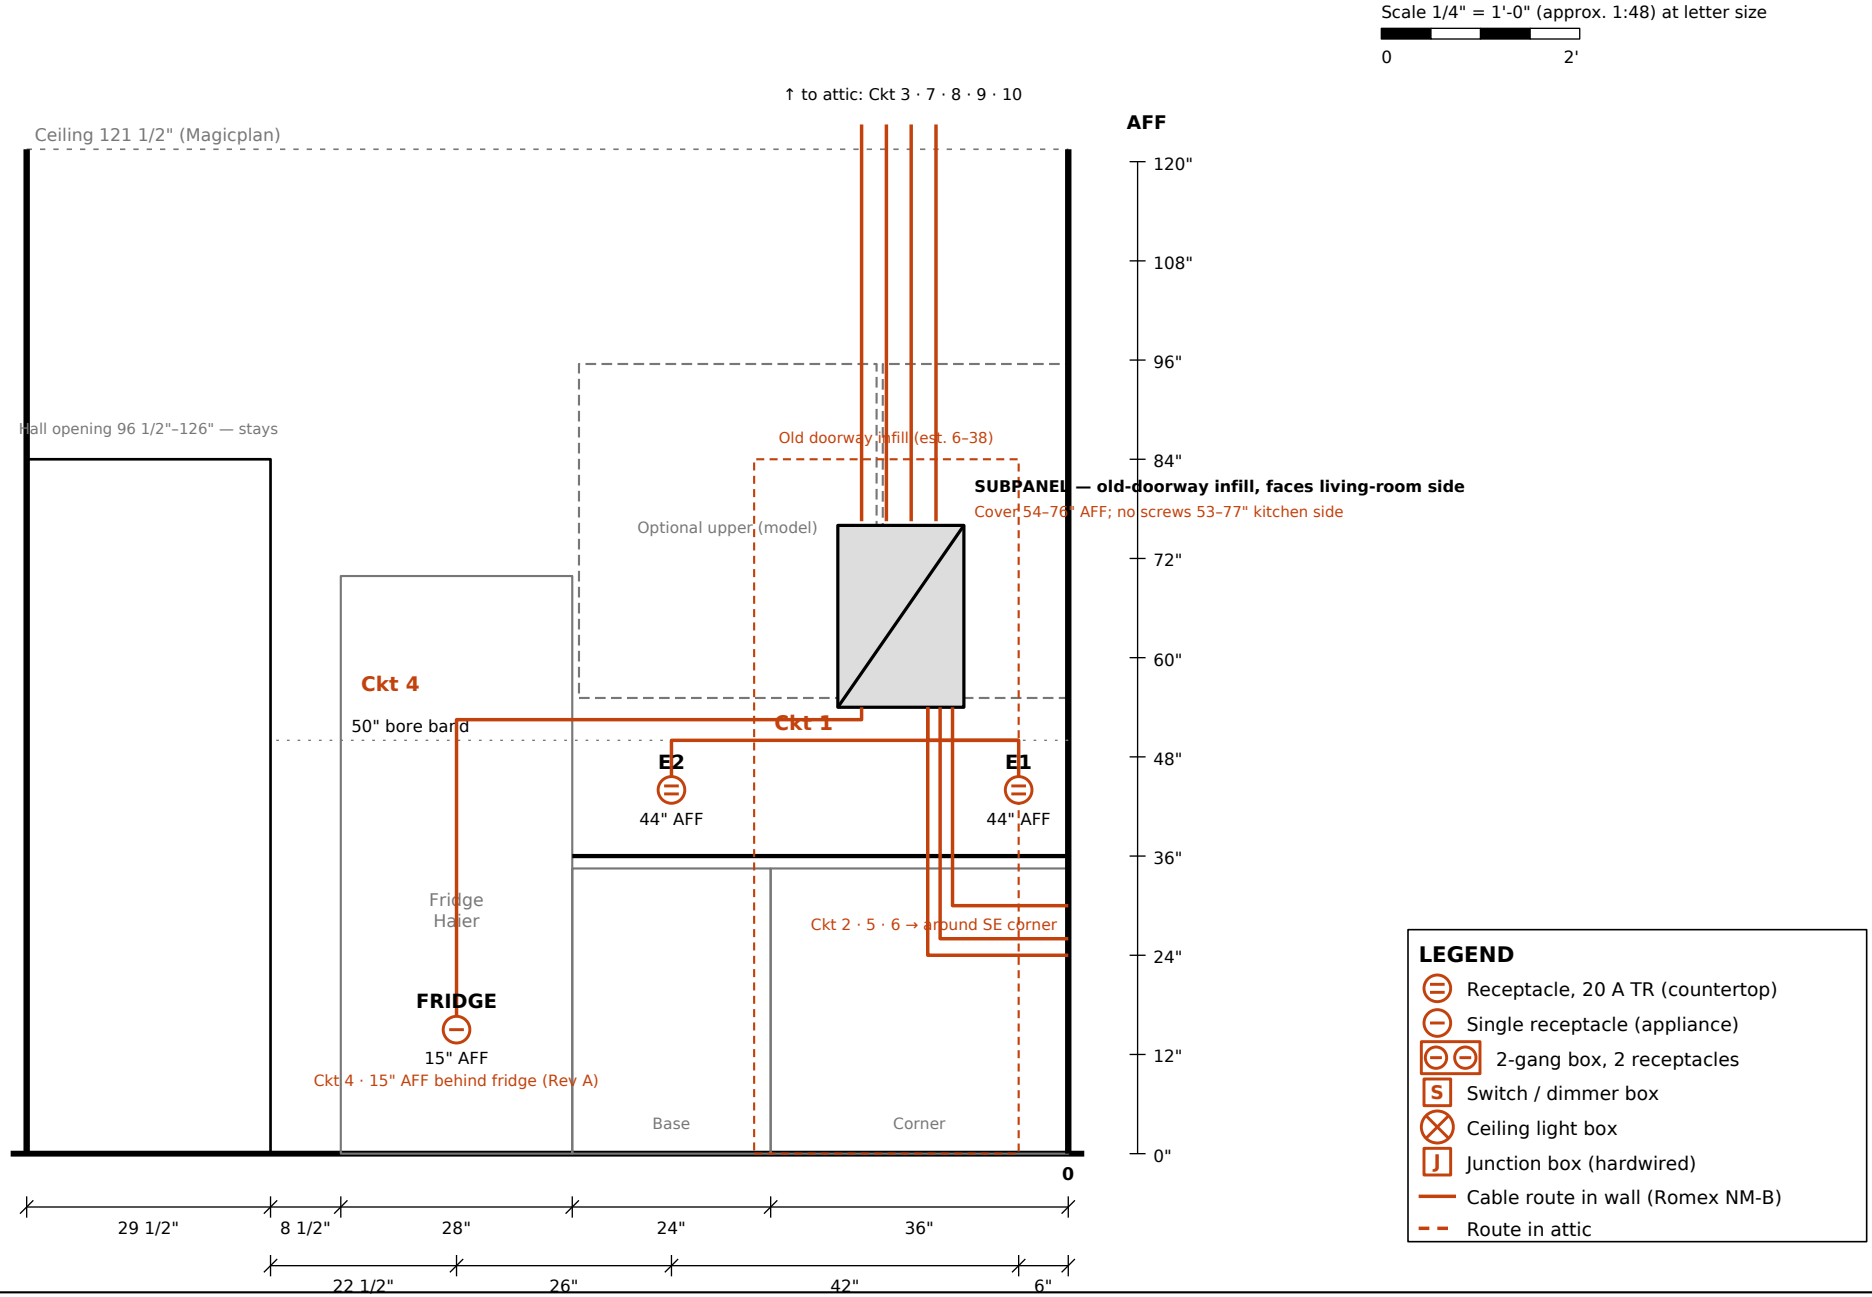

KE-03 East (refrigerator) wall — devices and routes

English edition.

DRAFT — WORKING PLAN. VERIFY IN FIELD. Not a permit set or rough-in release.

1231 11th Ave, Unit 4 — San Francisco CA 94122 · Kitchen electrical working drawings · Rev I · 2026-11-02 · supersedes Rev H (same date)


Rev I: circuits labeled with Rev A numbers 1–10; devices named in plain words; key added (KE-05). Locations unchanged from Rev H.

Looking WEST at range wall. South end of run (outside corner) at LEFT. Distances from that corner, going north.

Subfloor mark = AFF + t (t = finished floor build-up, NOT YET KNOWN)

Scale 1/4" = 1'-0" (approx. 1:48) at letter size

0 2'

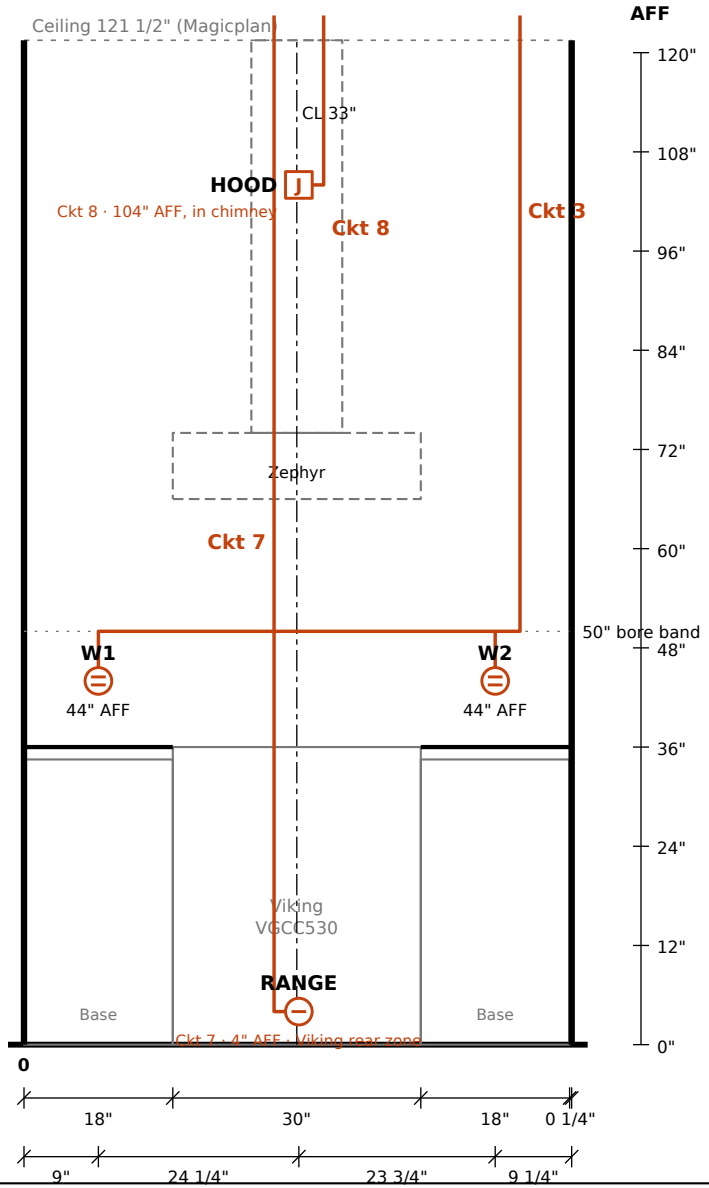

LEGEND

- Receptacle, 20 A TR (countertop)
- Single receptacle (appliance)
- 2-gang box, 2 receptacles
- S — Switch / dimmer box
- Ceiling light box
- J — Junction box (hardwired)
- Cable route in wall (Romex NM-B)
- Route in attic

KE-04 West (range) wall — devices and routes

English edition.

DRAFT — WORKING PLAN. VERIFY IN FIELD. Not a permit set or rough-in release.

1231 11th Ave, Unit 4 — San Francisco CA 94122 · Kitchen electrical working drawings · Rev I · 2026-11-02 · supersedes Rev H (same date)

Rev I: circuits labeled with Rev A numbers 1–10; devices named in plain words; key added (KE-05). Locations unchanged from Rev H.

HOW CABLE IS RUN — no diagonals

1. Inside walls: vertical runs stay in one stud bay; horizontal runs go straight through bored holes at a set band height.
2. Bore holes centered in the stud. If the hole edge is less than 1-1/4" from the stud face, add a steel nail plate (300.4(A)).
3. Through top and bottom plates: bore, then seal the hole with fire-rated caulk or foam (fire-blocking).
4. Attic: run along the side of joists, or through bored holes. Across the TOP of joists within 6 ft of the attic hatch: guard strips required.
5. Staple within 12" of every box and at least every 4-1/2 ft. No more than 2 cables per bored hole unless the electrician derates.
6. Bands stay clear of cabinet screws: east and range walls 50" AFF (uppers start 55"); south wall 30" (Ckt 2), 26" (Ckt 6 feed), 24" (Ckt 5), 20" (Ckt 6 switched leg) behind the bases.
7. DW/DISP 2-gang box: two circuits (5 and 6) in one box. Keep each circuit's neutral with its own hot (no shared neutral); label both receptacles and both breakers.
8. Per Rev A: circuits 1, 2, 4, 5 and 6 run inside the open east wall and around the SE corner along the south wall (no attic). Circuits 3, 7, 8, 9 and 10 go up from the panel through the attic.
9. Leave every cable loop and box open until rough inspection passes (licensed contractor, SF permit).

OPEN ITEMS BEFORE MARKING

Locations follow the owner's Rev A contractor packet (E-5, E-6, E-11). Only change: John's DW/sink swap and 6" pullout (Magicplan 11/2).

S2: Rev A put it at the west edge of the old sink. After the swap that leaves counter 58–75" more than 24" from a receptacle, so S2 moves east of the sink (64", 44" AFF).

Sink switch box and DW/DISP box moved with the sink (east of sink 70"; sink base 79").

S1 moved from 34" (39 1/2" AFF, squeezed under the niche) to 24", left of the niche, at the normal 44" AFF.

Subpanel: framing packet R1 location (CL 20 1/4" from SE, cover 54–76" AFF), faces living-room side; can + cover in hand before framing. Hall opening stays.

K-E03 Range GFCI method (DF breaker vs. dead-front GFCI) — electrician.

K-E07 Floor build-up t unknown — all subfloor marks = AFF + t.

Stud positions are not surveyed; electrician uses the nearest bay to each mark.

MARK TABLE — box centers

Mark	Wall	From datum	AFF	Ckt #	Note
E1	East	6"	44"	1	
E2	East	48"	44"	1	
FRIDGE	East	74"	15"	4	low behind fridge (Rev A)
S1	South	24"	44"	2	left of niche, 44" AFF
SINK SW	South	70"	39.5"	6 + 9	GD switch + task switch (Rev A)
DW/DISP	South	79"	14"	5 + 6	2-gang, 2 circuits, VERIFY drain
S2	South	64"	44"	2	moved east of sink (24" rule)
W1	Range	9"	44"	3	
RANGE	Range	33.25"	4"	7	Viking rear zone (Rev A)
HOOD	Range	33.25"	104"	8	in chimney (Rev A)
W2	Range	57"	44"	3	
ENTRY SW	North	6"	48"	9	N wall, 6" W of NE corner (Rev A)
T1	Ceiling	17.75"	—	9	14" off south wall
T2	Ceiling	53.75"	—	9	14" off south wall
T3	Ceiling	89.75"	—	9	14" off south wall
L1	Ceiling	(58", 75")	—	9	58" W, 75" N (Rev A)

Subfloor mark = AFF + t (t = finished floor build-up, NOT YET KNOWN)

CIRCUITS — D04 Eaton BRP20L125G

Ckt #	Serves	Breaker	Romex
1	Counter east (E1, E2)	20 A DF	12/2
2	Counter south (S1, S2)	20 A DF	12/2
3	Counter west (W1, W2)	20 A DF	12/2
4	Refrigerator	20 A DF	12/2
5	Dishwasher	15 A DF	14/2
6	Disposal (switched)	15 A DF	14/2
7	Gas range (ignition/light)	15 A DF*	14/2
8	Range hood (hardwired)	15 A AFCI	14/2
9	Kitchen lights	15 A AFCI	14/2 (+14/3 if 3-way)
10	Attic furnace (not drawn here)	15 A	14/2

Numbers = Rev A contractor packet circuit numbers. *Ckt 7 GFCI method open (K-E03).

LEGEND

- Receptacle, 20 A TR (countertop)
- Single receptacle (appliance)
- 2-gang box, 2 receptacles
- S — Switch / dimmer box
- Ceiling light box
- J — Junction box (hardwired)
- Cable route in wall (Romex NM-B)
- Route in attic

KEY — words on the drawings

Ckt # = circuit number (breaker) — same as Rev A
AFF = height above finished floor
CL = centerline SE = southeast corner (datum)
DF = breaker with AFCI + GFCI in one
GFCI = ground-fault (shock) protection
AFCI = arc-fault protection
TR = tamper-resistant receptacle
J-box = junction box (hardwired)
DW/DISP = dishwasher + disposal box
SW = switch box E/S/W = east/south/west counter

KE-05 Routing rules, circuit list, mark table, key

English edition.

DRAFT — WORKING PLAN. VERIFY IN FIELD. Not a permit set or rough-in release.