# STRATA LAMP - general arrangement

Five 180 x 92 x 12 boards laminated W-P-W-P-W (W walnut, P yellow pine), bendable aluminium LED channel, RF remote dock.

## SIDE ELEVATION 1:4

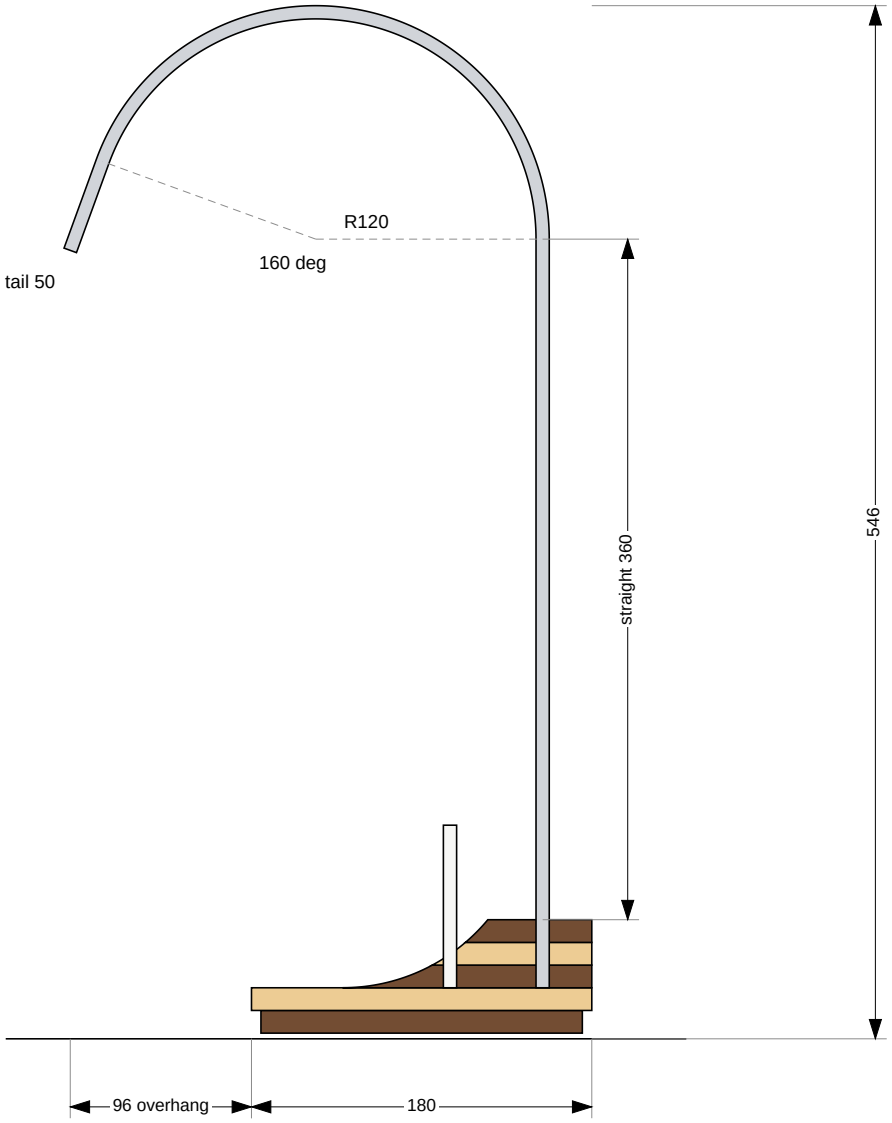


## PLAN OF BASE 1:2 (front on the left)

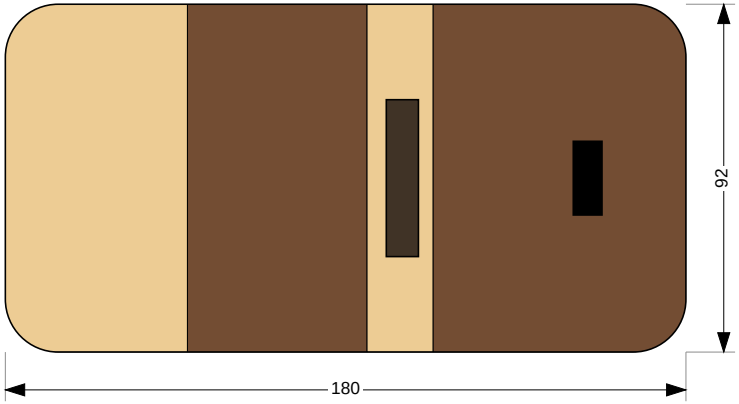


## CUT LIST / OPERATIONS

| Layer | Timber | Before glue-up |
|---|---|---|
| L1 | Walnut | trim 5 all round; controller pocket + cable notch |
| L2 | Yellow Pine | drill 12 hole under the arm |
| L3 | Walnut | arm + remote windows |
| L4 | Yellow Pine | arm + remote windows |
| L5 | Walnut | arm + remote windows (remote one is waste; it guides the glue-up stick) |

Channel: 781 mm total (36 in the base, 745 lit). Bend 396-731 mm from the lead end on the R112.5 former (sheet 5).

Slots: arm 7.6 x 19.5 x 36 deep; remote 8.5 x 41.5.

Mass approx.: base 350 g, arm 156 g, total 532 g. Centre of mass 94 mm behind the front feet's front edge.

Stability: tips forward only past 36.4 deg, backward past 27.3 deg.

Glue: PVA, clamp 1 h, cure overnight. Finish: sand 120-180-240, hardwax/Danish oil.

**PRINT AT 100% / ACTUAL SIZE - this bar must measure exactly 100 mm**

# STRATA LAMP - 1:1 layer templates

Cut out along the dotted board outline, stick on with glue stick, front edge left.

## L1 - WALNUT - 12 mm - layer 1 of 5 (counting up from the desk)

Stick on the TOP face. Cut windows BEFORE gluing (drill inside the corners, coping/scroll saw, file to the line).

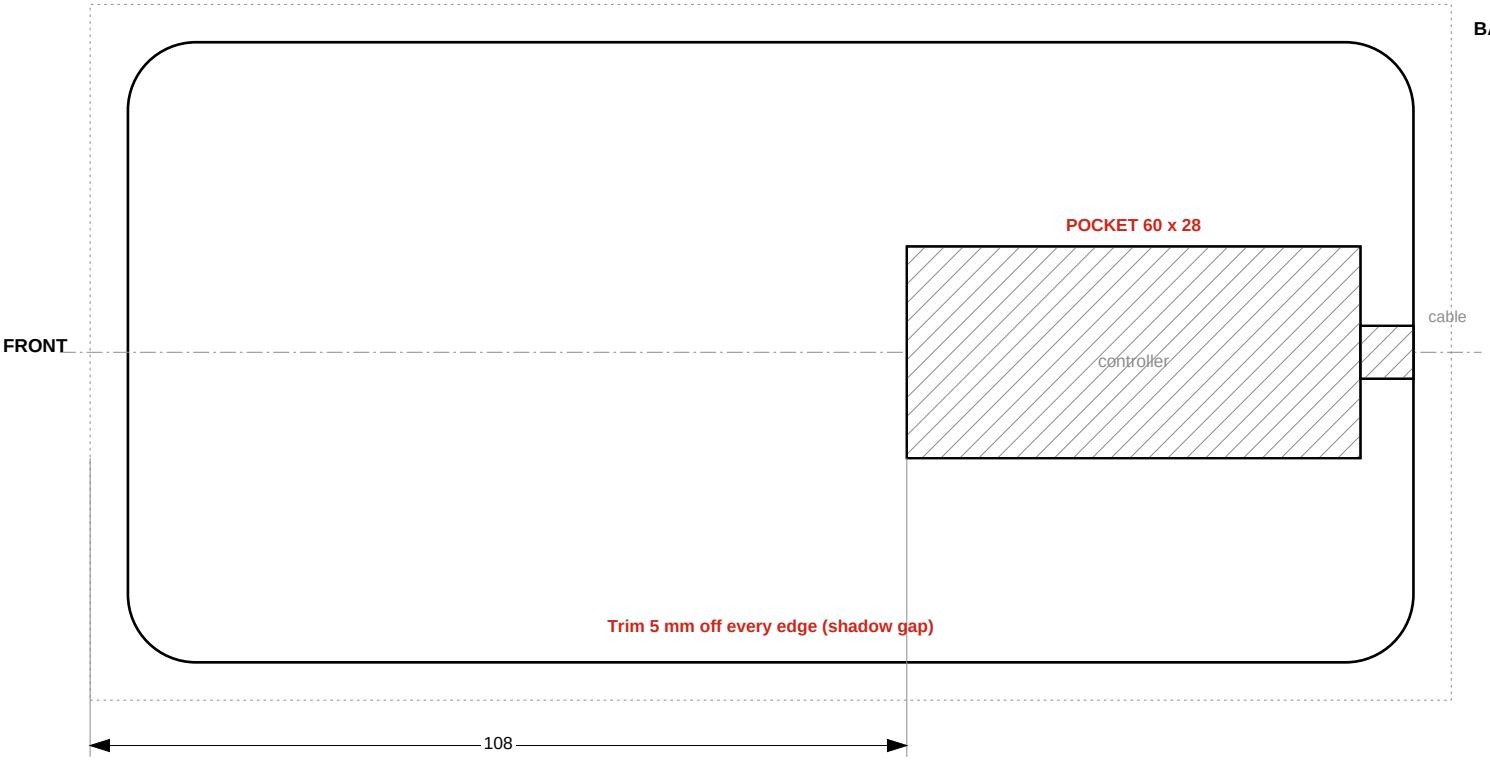


## L2 - YELLOW PINE - 12 mm - layer 2 of 5 (counting up from the desk)

Stick on the TOP face. Cut windows BEFORE gluing (drill inside the corners, coping/scroll saw, file to the line).

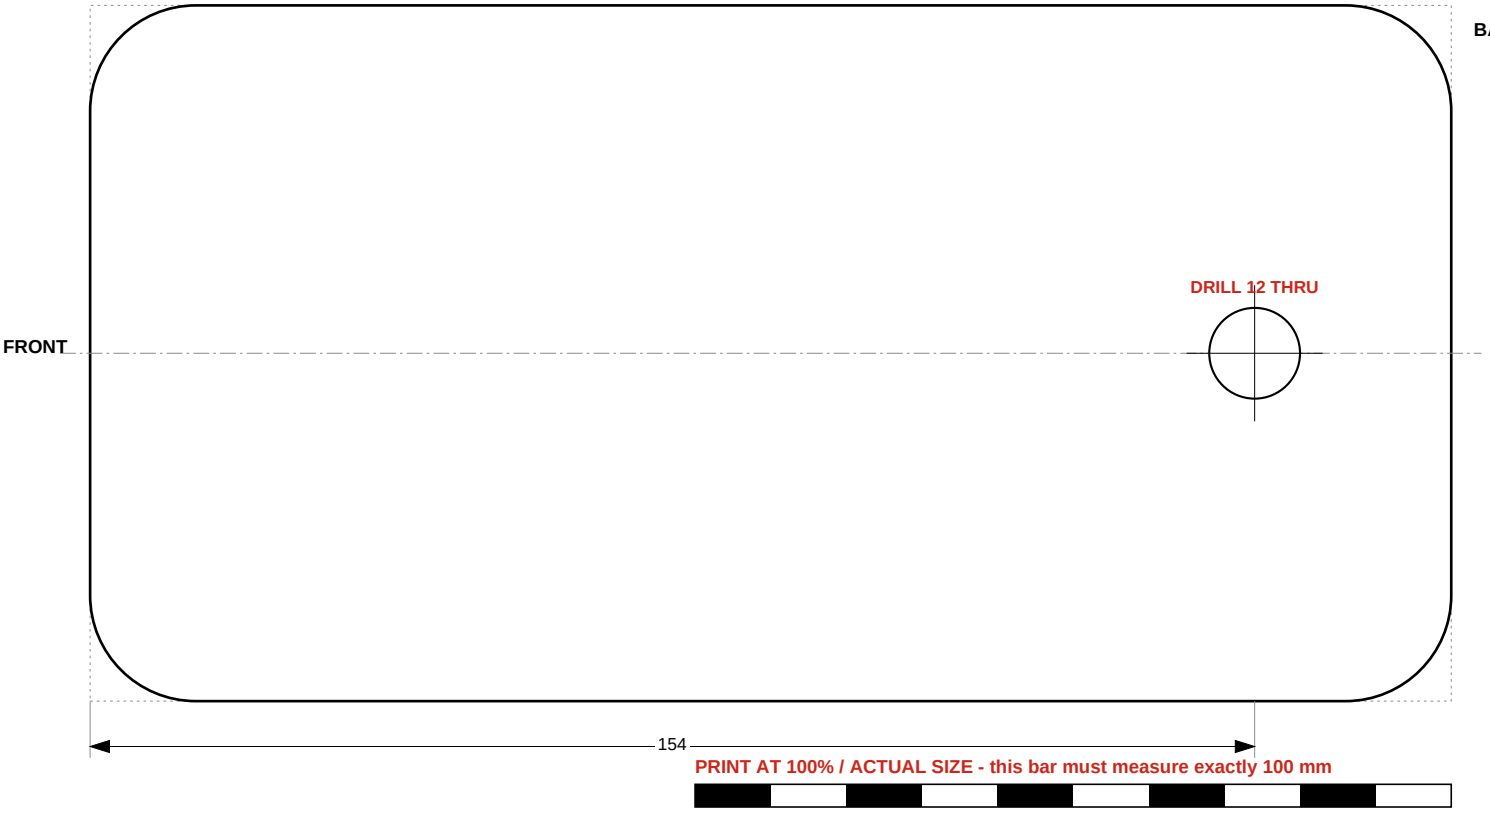

# STRATA LAMP - 1:1 layer templates

Cut out along the dotted board outline, stick on with glue stick, front edge left.

## L3 - WALNUT - 12 mm - layer 3 of 5 (counting up from the desk)

Stick on the TOP face. Cut windows BEFORE gluing (drill inside the corners, coping/scroll saw, file to the line).

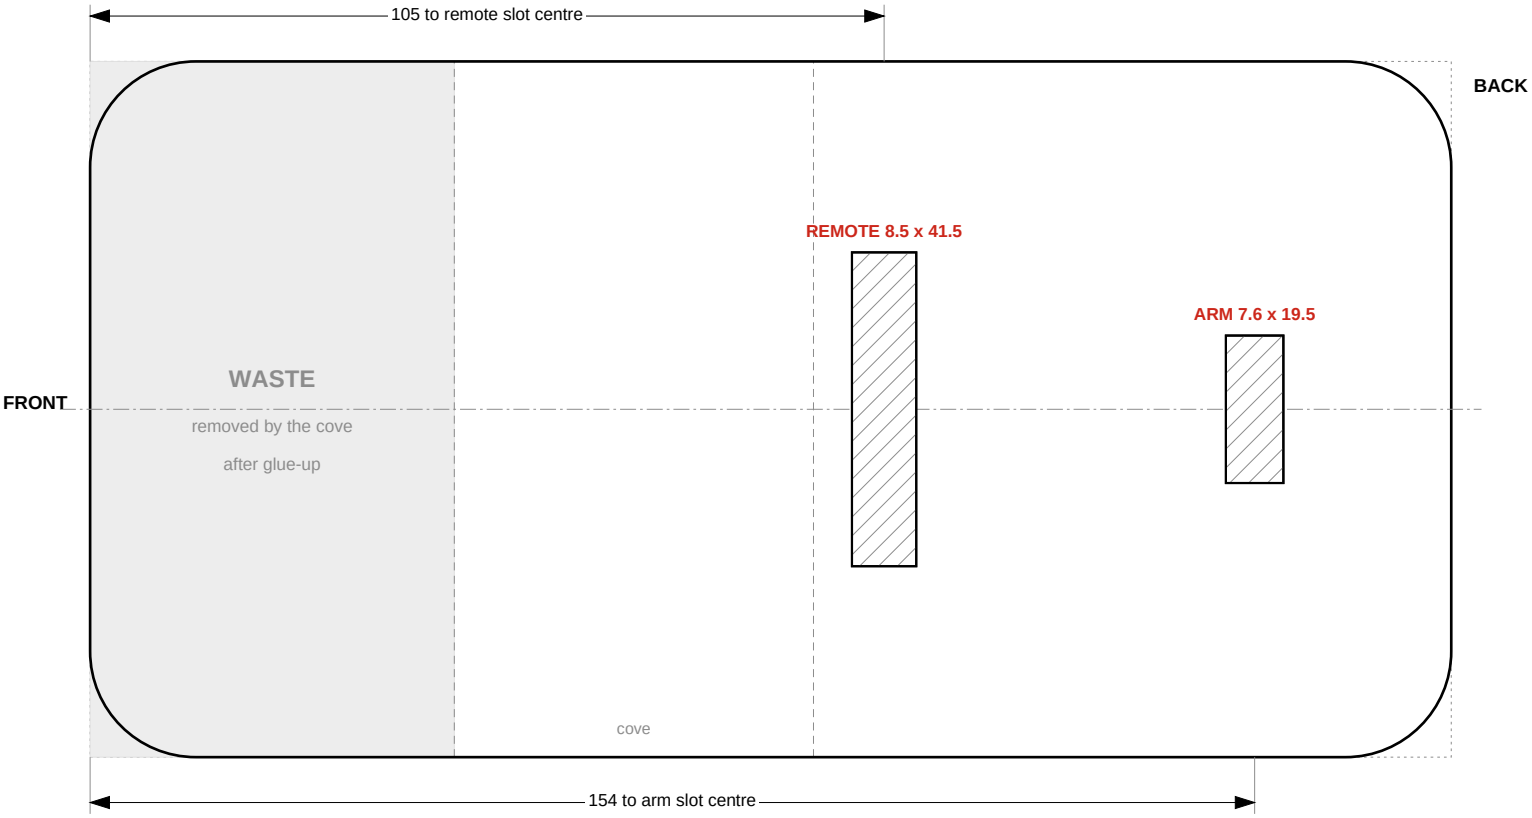


## L4 - YELLOW PINE - 12 mm - layer 4 of 5 (counting up from the desk)

Stick on the TOP face. Cut windows BEFORE gluing (drill inside the corners, coping/scroll saw, file to the line).

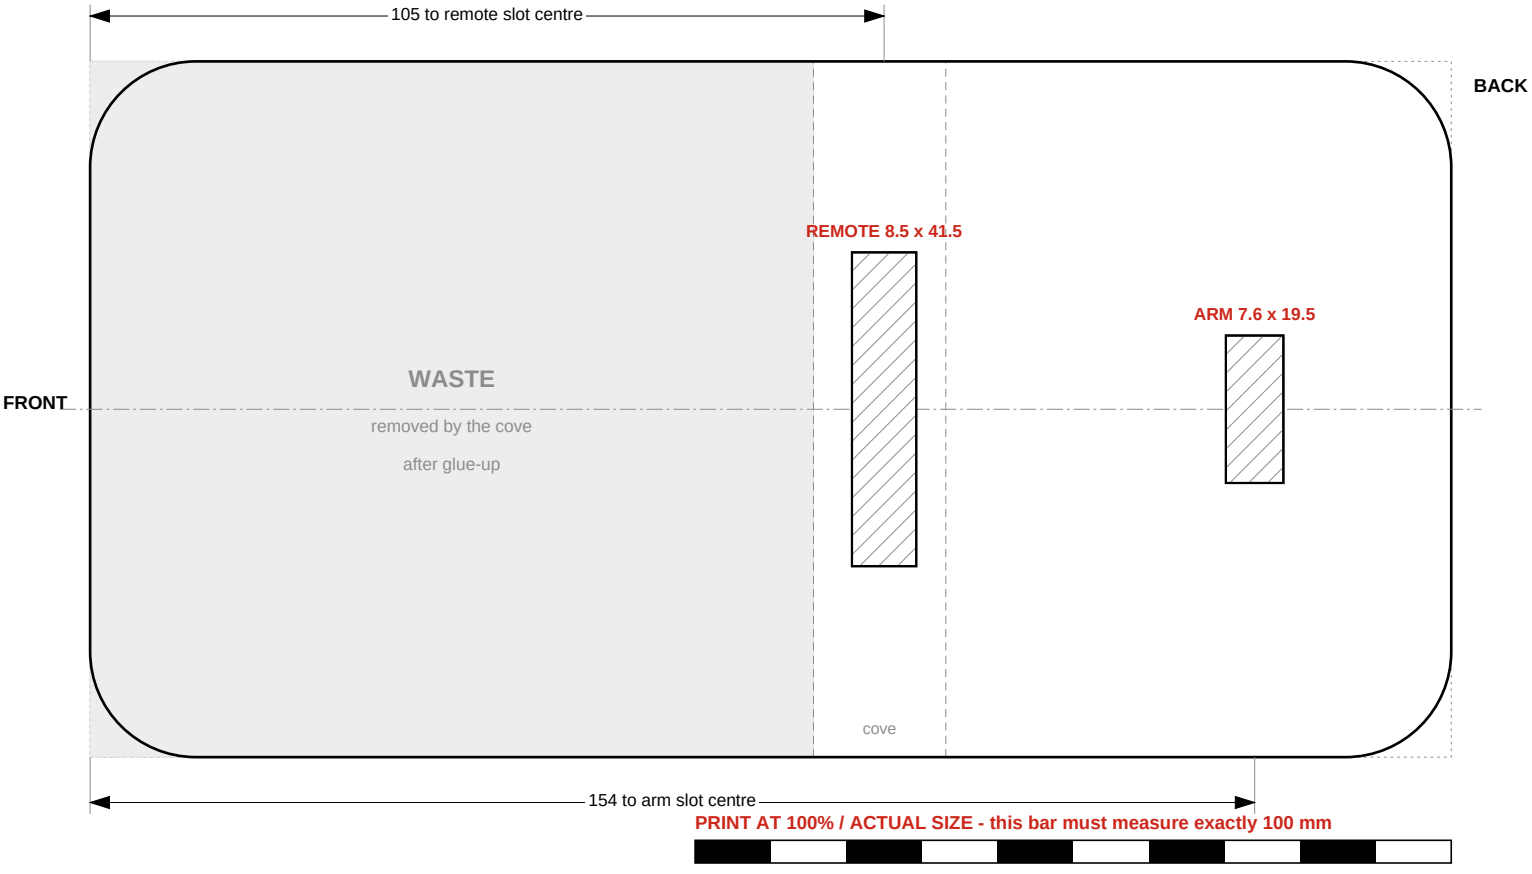

# STRATA LAMP - 1:1 top layer + side profile

Side profile goes on after glue-up; it is the bandsaw line for the cove.

## L5 - WALNUT - 12 mm - layer 5 of 5 (counting up from the desk)

Stick on the TOP face. Cut windows BEFORE gluing (drill inside the corners, coping/scroll saw, file to the line).

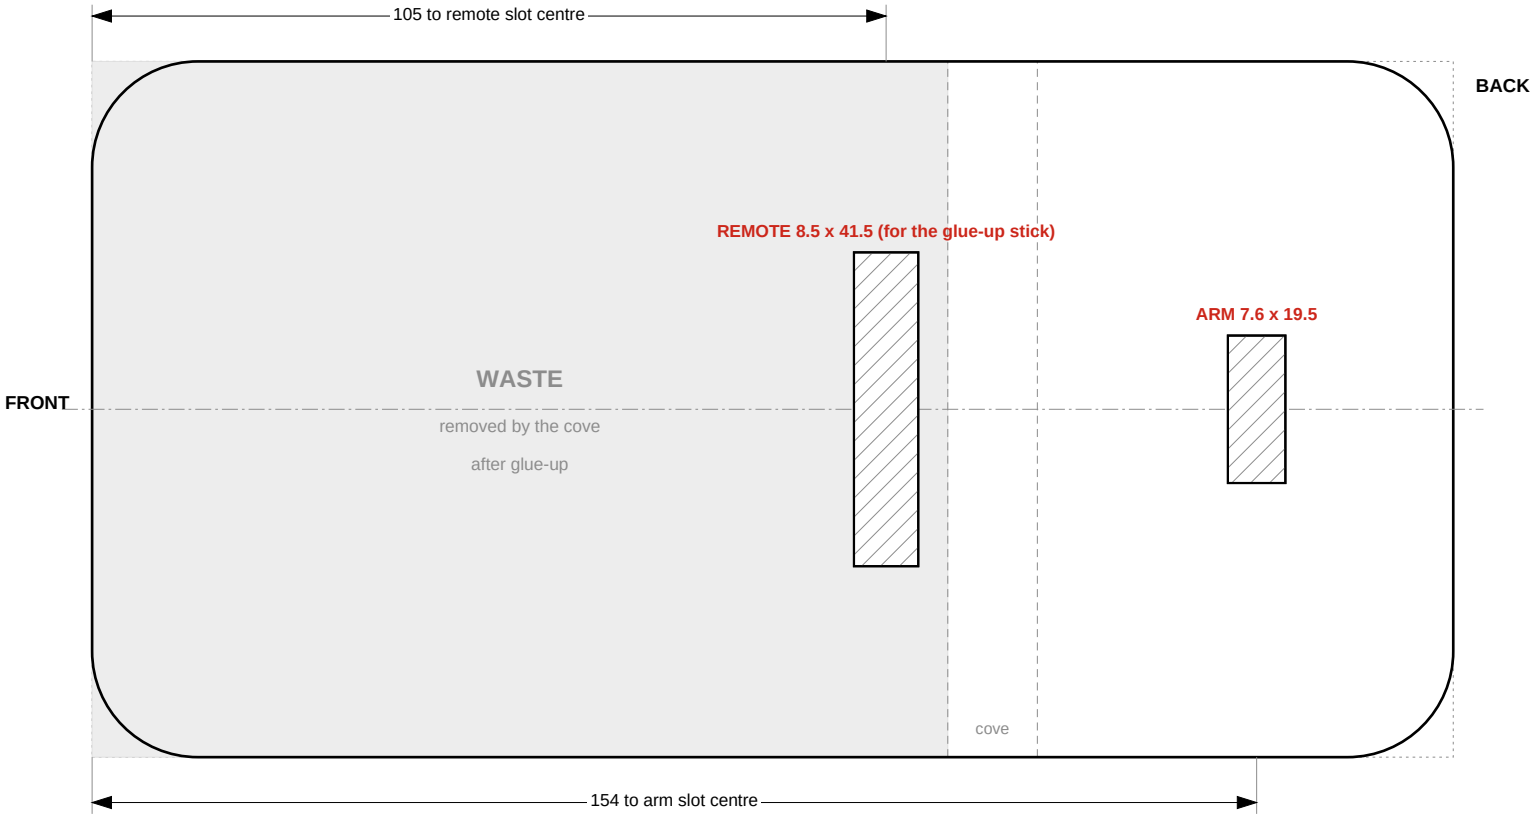


## SIDE PROFILE - stick on either side of the glued block, bottom edge flush with the desk face

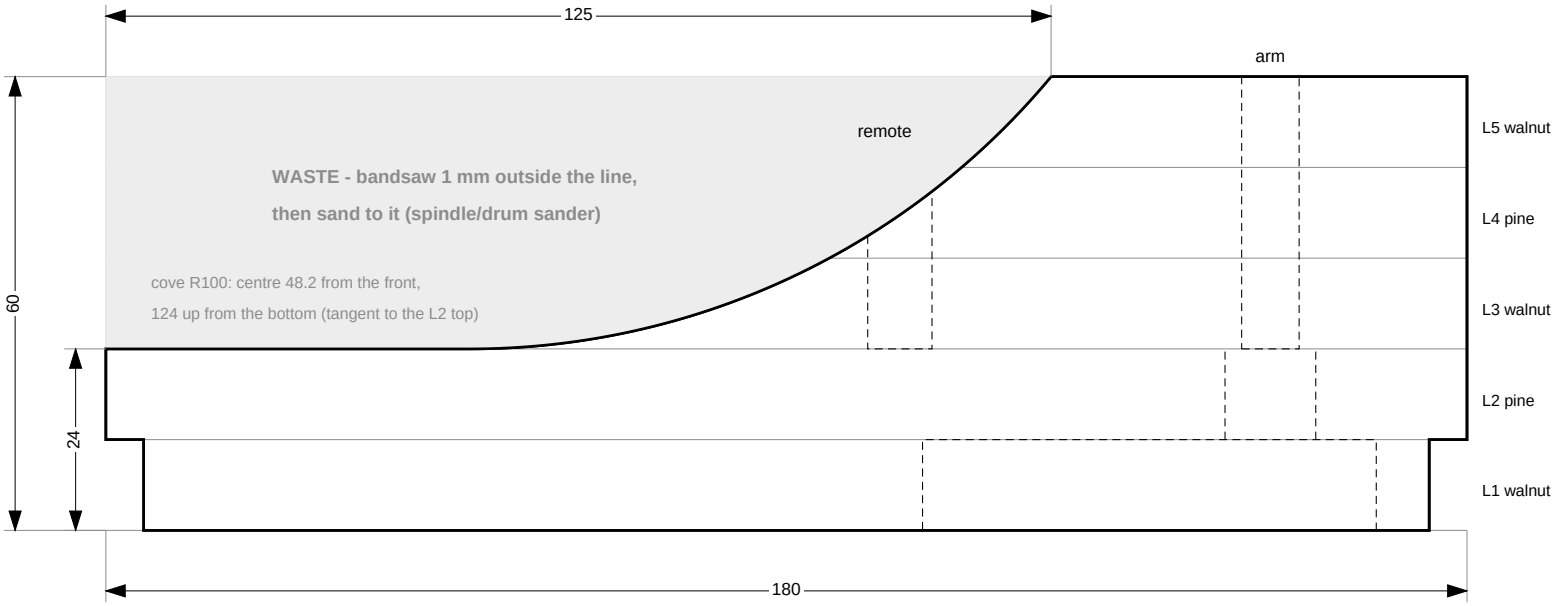


< FRONT

PRINT AT 100% / ACTUAL SIZE - this bar must measure exactly 100 mm

# STRATA LAMP - 1:1 bending former

Cut from 18 mm MDF/ply on the SOLID line (R112.5), screw to a scrap board, bend the channel round it with the LED (open) side against the former.

**PRINT AT 100% / ACTUAL SIZE - this bar must measure exactly 100 mm**