


Engineering Calculation Report: Problem 2-1


2025-12-08

1 Vector Diagrams

Problem Setup

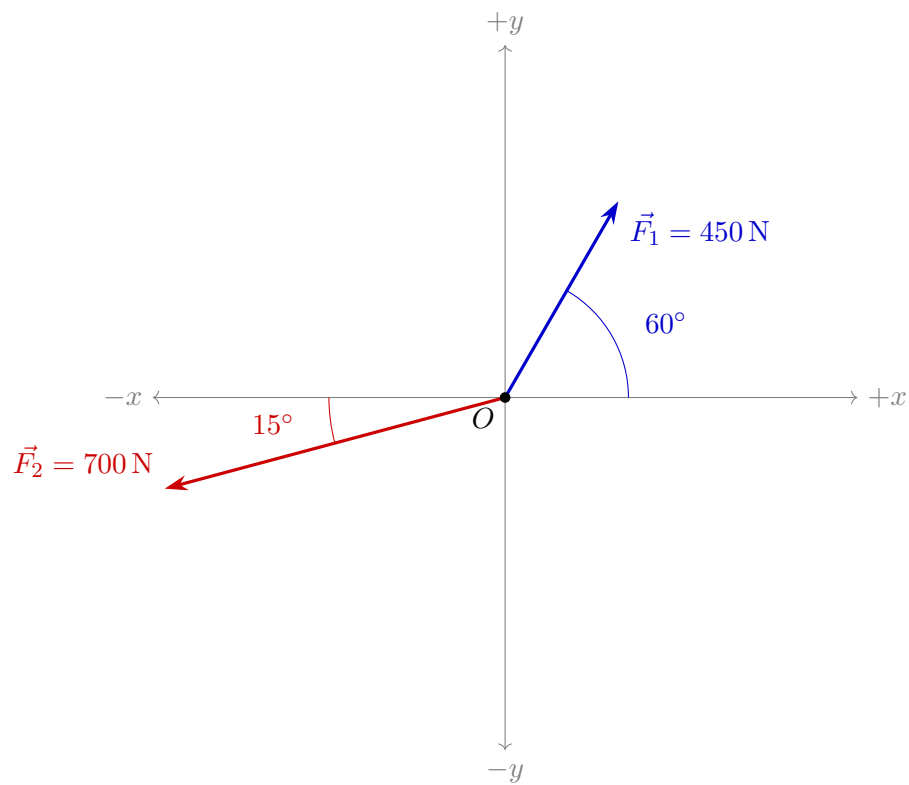

Force Triangle (Parallelogram Law)

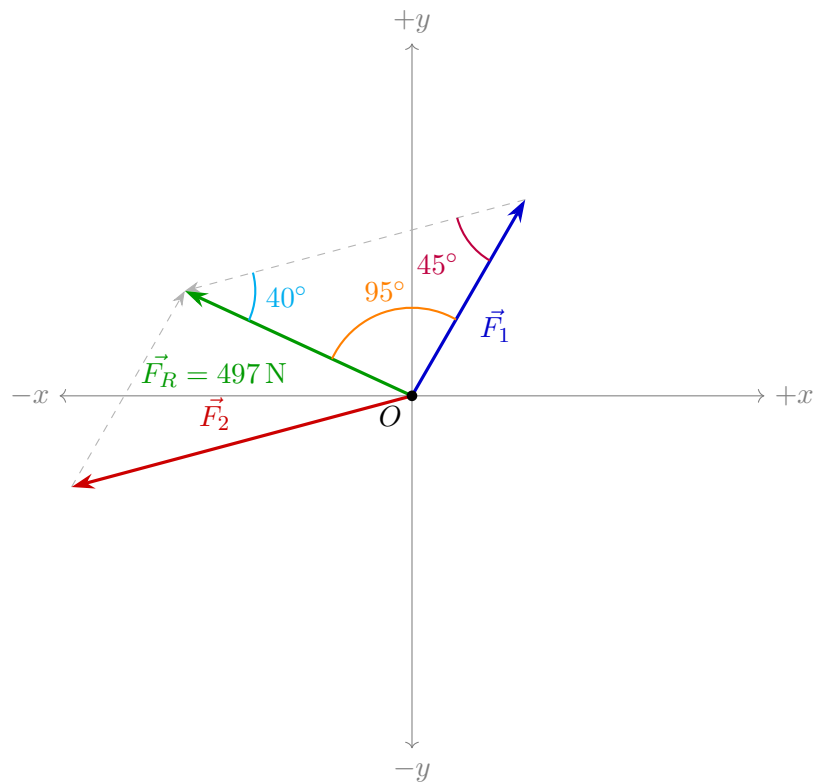

2 Known Variables

Vector	$ \vec{F} $ (N)	θ (deg)	Reference
\vec{F}_1	450.0	60.0	$+x$
\vec{F}_2	700.0	15.0	$-x$

3 Unknown Variables

Vector	$ \vec{F} $ (N)	θ (deg)	Reference
\vec{F}_R	?	?	$+x$

4 Equations Used

- $|\vec{F}_R|^2 = |\vec{F}_1|^2 + |\vec{F}_2|^2 - 2 \cdot |\vec{F}_1| \cdot |\vec{F}_2| \cdot \cos(\angle(\vec{F}_1, \vec{F}_2))$
- $\frac{\sin(\angle(\vec{F}_1, \vec{F}_R))}{|\vec{F}_2|} = \frac{\sin(\angle(\vec{F}_1, \vec{F}_2))}{|\vec{F}_R|}$

5 Step-by-Step Solution

Step 1: Solve for $\angle(\vec{F}_1, \vec{F}_2)$

$$\begin{aligned}\angle(\vec{F}_1, \vec{F}_2) &= |\angle(\vec{x}, \vec{F}_1) - \angle(-\vec{x}, \vec{F}_2)| \\ &= |60^\circ - 15^\circ| \\ &= 45^\circ\end{aligned}$$

Step 2: Solve for $|\vec{F}_R|$ using Eq 1

$$\begin{aligned}|\vec{F}_R| &= \sqrt{(450.0 \text{ N})^2 + (700.0 \text{ N})^2 - 2(450.0 \text{ N})(700.0 \text{ N})\cos(45.0^\circ)} \\ &= 497.0 \text{ N}\end{aligned}$$

Step 3: Solve for $\angle(\vec{F}_1, \vec{F}_R)$ using Eq 2

$$\begin{aligned}\angle(\vec{F}_1, \vec{F}_R) &= \sin^{-1}(700.0 \text{ N} \cdot \frac{\sin(45.0^\circ)}{497.0 \text{ N}}) \\ &= 95.2^\circ\end{aligned}$$

Step 4: Solve for $\angle(\vec{x}, \vec{F}_R)$ with respect to $+x$

$$\begin{aligned}\angle(\vec{x}, \vec{F}_R) &= \angle(\vec{x}, \vec{F}_1) + \angle(\vec{F}_1, \vec{F}_R) \\ &= 60.0^\circ + 95.2^\circ \\ &= 155.2^\circ\end{aligned}$$

6 Summary of Results

Vector	$ \vec{F} $ (N)	θ (deg)	Reference
\vec{F}_R	497.0	155.2	$+x$

Disclaimer

While every effort has been made to ensure the accuracy and reliability of the calculations provided, we do not guarantee that the information is complete, up-to-date, or suitable for any specific purpose. Users must independently verify the results and assume full responsibility for any decisions or actions taken based on its output. Use of this calculator is entirely at your own risk, and we expressly disclaim any liability for errors or omissions in the information provided.

Report Details:

- **Generated Date:** 2025-12-08
- **Generated Using:** Qnty Library
- **Version:** Beta (Independent verification required for production use)

Signatures:

Role	Name	Signature	Date
------	------	-----------	------

Calculated By	_____	_____	_____
Reviewed By	_____	_____	_____
Approved By	_____	_____	_____

Report generated using qnty library