SE(3)-WAM: Role-Aware 4D World–Action Modeling for Dynamic Manipulation

Anonymous CVPR submission

Figure placeholder: Fig. 1 teaser — a role-aware 4D view of a moving scene (real robot)

Layout: full width, two parts. **(a) Left, ∼62%:** one real-robot frame of the *linear-motion grasp* at the instant a chunk is issued. Overlays in the paper's semantic colors: blue = the target's past SE(3) poses from the causal tracker (small triads at $-350 \ldots 0$ ms, fading with age); orange = the target's SE(3) forecast at the execution times of the chunk, taken from the training-time heads evaluated offline; light orange arrows = sparse 3D flow on the context on the 14×14 grid only; purple = the commanded gripper path meeting the target at τ^{a}. A gray ghost marks the pose observed at capture, with a dashed red arrow showing where a reactive policy would close. A thin timeline strip under the image: capture $\tau_t \rightarrow$ latency $\ell_t \rightarrow$ execution τ^{a}. **(b) Right, ∼38%:** top: "Image-space WAM: future frames or latents at uniform fidelity" (filmstrip icon); middle: "SE(3)-WAM: SE(3) for the target, sparse 3D flow for the context, training only" (triads + sparse arrows); bottom **(required)**: SR vs. added latency (0–200 ms) for SE(3)-WAM and the strongest baseline (data: the latency sweep of Appendix E.2). **Rules:** real photo kept unretouched; overlays drawn from logged tracker/forecast/command data of that trial; caption states the trial's outcome.

Figure 1. **A role-aware 4D view of a moving scene.** Between image capture and the first command, a part on the conveyor moves farther than the grasp tolerates. SE(3)-WAM encodes the target's metric motion (blue) and is trained to forecast the target's SE(3) pose precisely and the surrounding scene as a sparse 3D flow (orange), a forecast it skips at deployment, so that its commands meet the target when they execute (purple). Image-space world–action models forecast appearance at uniform fidelity instead. Right: success against added latency on Dynamic-14.

Abstract

Manipulating moving objects requires actions that fit the scene at the moment they execute, not when the image was captured. A policy must therefore infer how the scene moves and anticipate where it will be, yet every millisecond spent on this inference lets the target move further. Existing methods resolve this tension poorly: world–action models forecast future images or latents at uniform fidelity, spending capacity and time on appearance while leaving the target's metric pose implicit, and target-centric predictors ignore the surroundings that constrain the motion. We observe that the parts of a dynamic scene differ in the precision they require: the target's pose determines contact to within millimeters, whereas the rest of the scene matters only through the clearance it leaves. We present SE(3)-WAM, a world–action model that learns this role-aware 4D structure. It encodes the target's motion as a metric SE(3) pose history and is trained to forecast the target's future SE(3) trajectory precisely and the surrounding scene coarsely as a sparse 3D flow. Its action stream reads the representation shaped by these forecasts and generates action chunks by conditional flow matching, replanning after every step; the forecasts themselves are never fed back to the actions and are skipped at deployment, so inference needs neither past frames nor a generated future and stays fast enough for real-time control. On Dynamic-14, a simulated benchmark in which the scene keeps moving during inference, SE(3)-WAM achieves [XX.X]% success, [XX.X] points above the strongest baseline, and it succeeds in [XX]% of trials across six real-robot tasks spanning linear, circular, free planar, post-impact, and gravity-accelerated target motion.

1. Introduction

Learning-based manipulation has advanced rapidly, from diffusion policies to vision–language–action (VLA) and world–action models (WAMs) [9, 16, 36, 53, 69, 78, 100], yet most of this progress assumes that objects stay still unless the robot moves them. In factories, kitchens, and human–robot handovers, objects keep moving while the robot perceives, computes, and acts. This poses two coupled difficulties. A single image does not reveal how the target is moving, and by the time an action executes, the target is no longer where it was seen: a part on a conveyor at 0.1 m/s travels 15 mm during a 150 ms delay, more than a parallel-jaw grasp typically tolerates (Fig. 1).

Recent work equips policies with a memory of past motion and a forecast of the future [19, 47, 62, 88]. Both are costly in the resource that dynamic manipulation lacks most: time. Richer histories and denser forecasts add computation, and computation adds latency, which enlarges the very error the forecast is meant to remove. Existing designs therefore

trade information against speed. Video-based WAMs sit at one end [47, 69, 78]: they forecast whole future frames or latents at uniform fidelity, pay for it in latency, and spend most of their capacity on appearance, while the quantity that decides contact, the target's metric pose when the action executes, remains implicit. Methods that forecast only dynamic regions or salient tokens [62, 88] reduce where they predict but still predict in image space, where that pose remains implicit as well. Target-centric predictors sit at the other end [19, 27, 48]: they are fast but blind to surroundings that can block or redirect the motion. What none of them provides is knowledge of the moving scene that is precise where contact depends on it, coarse elsewhere, and cheap to use at execution time.

Our key observation is that a dynamic policy needs to know very little precisely. Contact depends on the target's pose at the moment the action executes, to within millimeters, whereas the rest of the scene matters only through the clearance it leaves. Nor does the forecast have to be computed at test time: a forecast that supervises training shapes what the policy represents and can be dropped at deployment. Following this observation, we present SE(3)-WAM, a role-aware world–action model for dynamic manipulation (Fig. 2). Its input keeps only what motion requires: the current image, encoded by a frozen encoder, and short histories of the target's metric SE(3) pose and of the robot state, which convey motion directly instead of a stack of past frames. A world stream condenses these inputs into a small set of summary tokens and is trained to forecast, in one metric 4D space, the target's future SE(3) trajectory precisely and the rest of the scene as a sparse 3D flow. An action stream reads the summary tokens at every layer through shared attention, generates action chunks by conditional flow matching, and replans as often as its latency permits, so its actions follow the target as it moves. The forecasts act only as supervision: they shape the summary tokens during training, are never fed back to the actions, and their heads are skipped at deployment. SE(3)-WAM thus gains the precision of a metric forecast at a latency close to that of a reactive policy.

We evaluate SE(3)-WAM on Dynamic-14, a simulated benchmark of fourteen tasks in which observation, scene motion, and action execution share one physical clock, so the scene keeps moving while a policy computes. SE(3)-WAM achieves state-of-the-art success of [XX.X]%, [XX.X] points above the strongest baseline, at a p95 latency of [XX] ms, and succeeds in [XX]% of trials across six real-robot tasks spanning linear, circular, free planar, post-impact, and gravity-accelerated target motion, against [XX]% for the strongest baseline. Four final-scale controls test the contributions of target-motion history, future supervision, and its two geometric components. Broader history, representation, and coupling choices are supported by separate small-scale screening studies.

Our contributions are threefold:

- We identify that in dynamic manipulation, inference latency turns directly into contact error, and propose role-aware 4D modeling, which represents the target precisely by its metric SE(3) pose history and future trajectory and the rest of the scene coarsely by a sparse 3D flow.
- We present SE(3)-WAM, a world–action model whose action stream reads a representation shaped by these role-aware forecasts, while the forecasts themselves are never fed back and are skipped at deployment, obtaining the precision of prediction at a latency close to that of a reactive policy.
- We build Dynamic-14, a benchmark in which perception, scene motion, and execution share one physical clock. SE(3)-WAM achieves state-of-the-art results on it and on six real-robot tasks, and four core ablations test its history and future supervision.

2. Related Work

Dynamic manipulation. Acting on a moving target requires compensating for the time between sensing and acting, a problem as old as feedback control with dead time [59] and predictive tracking [4]. Classical catching and grasping systems estimate the target's trajectory with Kalman-type filters [5], servo on visual features [31], and plan an interception [2, 6, 26], later combined with grasp and reachability planning [1, 50]. These pipelines are precise but engineered for each object and task. Learned visuomotor policies [16, 92] and vision–language–action models (VLAs) [9, 11, 36, 52, 53, 100] generalize across objects and instructions, but they are trained and evaluated in quasi-static scenes, where the world waits while the model computes. Recent work brings learned policies to moving scenes. DOMINO provides a dynamic benchmark together with PUMA, which reads historical optical flow and is supervised with future object features [19]. DynamicManip synthesizes dynamic demonstrations from a single static one [40], DynamicWAM conditions a WAM on flow and kinematic descriptors of the past [47], and DynaWM refines a base VLA's action chunk for moving objects [14]. Other methods forecast salient visual tokens [62], a future image [89], a compact future code with the time to the next gripper event [48], or a 3D Gaussian velocity field that is optimized online [84], and feed the forecast to the policy at test time. Execution schemes reduce or hide the latency instead. DynamicVLA and StreamingVLA overlap inference with execution [56, 75], real-time chunking and bidirectional decoding keep consecutive chunks consistent [10, 44], asynchronous inference decouples prediction from control [58], VLASH rolls the robot state forward to the execution time [63], and Chronos Policy encodes observation and execution timestamps [67]. These schemes change when actions are

computed and executed, whereas SE(3)-WAM changes what the policy represents, so the two are orthogonal. Closest to ours, PUMA also uses future prediction only as a training signal. It forecasts mask-pooled image features of the target from 2D flow, whereas SE(3)-WAM forecasts the target's metric SE(3) trajectory and a sparse 3D flow of its surroundings.

World models and world–action models. World models learn how observations evolve, and they have been used for planning with visual foresight [20], for reinforcement learning in a learned latent space [23, 24], and for planning on pretrained visual features [3, 96]. In manipulation, predicted frames or subgoal images have been converted into actions [8, 17, 90], and video prediction has served as pretraining [73], as a predictive objective for inverse dynamics [65], and as a source of predictive features [28]. World–action models (WAMs) generate future video and actions jointly in one network [39, 69, 78, 97]. Recent studies compare how the two streams should exchange information [69, 80] and how long and how compressed their context should be [30, 45]. Because video is expensive and dominated by appearance, a growing body of work changes what is forecast: dynamic regions, depth, and semantic features [88], flow, geometry, and semantics alongside RGB [82], motion-weighted video [32], object masks [79] or object slots [46], optical flow [15] or motion vectors [41], compact future latents [37, 38], and targets in the policy's own condition or token space [61, 91]. A second question is whether the forecast is needed at test time. Fast-WAM finds that most of the benefit of video modeling remains when test-time imagination is skipped [83], and other methods drop their predictors [19, 61, 91] or auxiliary structure branches [82] after training. SE(3)-WAM follows this training-only use of the forecast but changes its target. Instead of pixels or latents at a uniform resolution, it forecasts a metric 4D state whose precision follows each entity's role: a full SE(3) trajectory for the target and a sparse 3D flow for the rest of the scene. Its action stream reads observation-derived summary tokens shaped by these forecasts, never the forecasts themselves, so the forecast heads are skipped at deployment.

Structured 3D and 4D representations. Metric 3D structure makes manipulation policies more precise and sample-efficient. Voxel, multi-view, and point-cloud policies act on scene geometry [21, 34, 57, 85], object-centric point clouds improve generalization [99], and 3D and 4D VLAs bring 3D and spatiotemporal inputs to large models [87, 93]. Motion has been exposed to policies through 2D point tracks [7, 71, 76, 94], dense pixel motion [51, 54, 55], and 3D flow [22, 81, 95], either as inputs or as intermediate predictions that are then turned into actions. Object-level representations include keypoints [49], object SE(3) trajectories [27, 60, 72], and separate encodings of the robot, the task object, and obstacles [18]. Rigid-body structure has long been used to learn scene dynamics, from SE(3) decompositions of point clouds [12, 13] and 3D dynamic scene memories [77] to scene flow estimation [43, 64], and PointWorld scales action-conditioned 3D point flow to in-the-wild robot data [29]. Point trackers, pose estimators, and feed-forward reconstruction models [33, 68, 70, 74, 86] now make such labels cheap to extract from video. These representations usually apply one granularity to the whole scene, either dense geometry and flow everywhere or poses for every object. SE(3)-WAM assigns granularity by role. The target, where contact depends on millimeters, is described by its SE(3) pose history and forecast, and the rest of the scene, which matters through the clearance it leaves, by a sparse 3D flow. For real robots, we pretrain on DROID with the 3D point tracks that PointWorld extracted from it [29].

3. SE(3)-WAM

SE(3)-WAM (Fig. 2) is a transformer with a world stream and an action stream that share attention. The world stream encodes the current observation and the recent motion and is trained to forecast a role-aware 4D scene. The action stream generates action chunks by conditional flow matching [42] and reads the world only through a few summary tokens. We first state the setting that motivates this design.

3.1. Acting on a Moving Target

Execution times. At query t, a policy receives an image, a depth map, and the robot state captured at time τ_t, together with histories of earlier states, and outputs a chunk $A_t = (\mathbf{a}_{t,0}, \dots, \mathbf{a}_{t,H-1})$ whose j-th command executes at

$$\tau^{\mathrm{a}}_{t,j} = \tau_t + \ell_t + j\Delta_a, \tag{1}$$

where ℓ_t is the latency from capture to the first execution (preprocessing, inference, and actuation) and Δ_a is the control period. A command must fit the scene at $\tau^{\mathrm{a}}_{t,j}$ rather than at τ_t (Fig. 3), and the lead $\Delta_{t,j} = \tau^{\mathrm{a}}_{t,j} - \tau_t$ grows with every millisecond of inference.

Target and context. Let $W_t(\mathbf{x}, \tau) \in \mathbb{R}^3$ be the displacement between τ_t and τ of the scene point at $\mathbf{x}$, in the robot base frame. The *target* $\mathcal{O}$ is the rigid body whose pose error enters a contact or containment tolerance ε, e.g., an object to grasp or a receptacle to place into. The *context* $\mathcal{C}$ contains the bodies that only need to be avoided, such as a belt or an occluder, with clearance m. On the target, the motion field is set by its pose $T(\tau) = (R(\tau), \mathbf{p}(\tau)) \in \mathrm{SE}(3)$:

$$W_t(\mathbf{x}, \tau) = T(\tau)\, T(\tau_t)^{-1}\mathbf{x} - \mathbf{x}, \qquad \mathbf{x} \in \mathcal{O}. \tag{2}$$

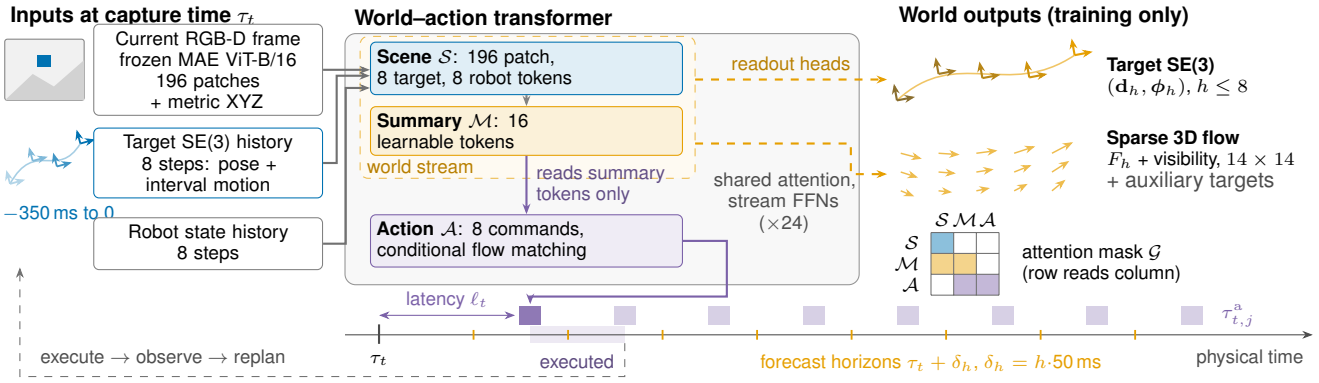


Figure 2. **SE(3)-WAM.** The world stream holds 212 scene tokens, the current image patches from a frozen encoder together with short histories of the target's metric SE(3) pose and of the robot state, and 16 summary tokens. During training, light heads read the world stream out into a role-aware 4D forecast at physical horizons $\tau_t + \delta_h$: the target's SE(3) trajectory and a sparse 3D flow with visibility on a 14×14 grid (dashed: training only). The action stream generates a chunk of 8 commands by flow matching. The attention mask $\mathcal{G}$ lets scene tokens read the scene, summary tokens read the scene and summaries, and actions read summaries and actions, so the forecasts never reach the actions. The policy observes and replans at the first control boundary at or after each query ends.




Figure 3. **Acting on a moving target** (schematic). (a) Two histories reach the same pose at capture time τ_t but imply different motions. (b) At the execution time τ^{a}, they lead to different target poses. (c) A contact requires the end-effector frame E to match the target O within ε, whereas the context matters only through the gap it leaves, $m \gg \varepsilon$.

Where the error comes from. Let a policy act, explicitly or implicitly, on an estimate $\hat{T}$ of the target pose at τ^{a}. For a contact point at lever arm r and a rotation error θ, the contact error is at most $\|\hat{\mathbf{p}}(\tau^{\mathrm{a}}) - \mathbf{p}(\tau^{\mathrm{a}})\| + 2r\sin(\theta/2)$. Writing the motion over the lead Δ as constant velocity $\mathbf{v}$ plus a residual $\boldsymbol{\rho}$ (acceleration, rolling, impacts) gives

$$\|\hat{\mathbf{p}}(\tau^{\mathrm{a}}) - \mathbf{p}(\tau^{\mathrm{a}})\| \le e_{\mathrm{loc}} + \Delta\, e_v + \|\mathbf{v}\|\, e_\tau + e_{\mathrm{dyn}}, \quad (3)$$

the errors of the current position, of the velocity times the lead, of the timing times the speed, and of the residual motion (Appendix G). For the context, a collision requires a prediction error of at least m somewhere along the commanded path. Two conclusions follow. First, the precision that matters is concentrated on the target: a millimeter-level estimate of its pose and motion, including rotation through the lever arm r, whereas the context can be predicted far more coarsely. Second, latency enters the budget twice, through the lead Δ that multiplies every velocity error and through the motion that the residual accumulates, so information that costs inference time pays for itself only if it removes more error than the extra latency adds. These conclusions shape the three parts of SE(3)-WAM: what it remembers (Sec. 3.2), what it learns to forecast (Sec. 3.3), and how its actions use this forecast without paying for it at deployment (Sec. 3.4).

3.2. Inputs: The Current Frame and Motion Histories

SE(3)-WAM sees only one image. A frozen MAE ViT-B/16 [25] encodes the current RGB frame into 196 patch tokens, and the depth map gives each patch the metric 3D position of its center point in the base frame. The motion comes from two short histories over the last 8 control steps (350 ms at 20 Hz). The target history is the current target pose in the base frame together with the seven interval motions between consecutive samples: the translation, the relative rotation, the time interval, and the finite-difference velocity and acceleration, in physical units (Appendix A.1). It forms 8 target-state tokens. The robot history forms 8 end-effector state tokens. Together with the patch tokens, these are the 212 scene tokens. On the real robot, a marker-free causal tracker estimates the target state from the RGB-D stream; each estimate is emitted once with its capture time, and later frames do not revise it. The real-ball protocol retains translation and masks target angular features (Appendix A.2). In simulation, we read the target pose from the simulator, which separates the policy from tracking errors. We evaluate synthetic pose noise separately; actual tracker calibration and closed-loop tracking remain pending (Appendix F.2). The model receives no past images, so its visual encoding cost does not grow with the history.

3.3. Role-Aware 4D Forecast

The world stream is trained to forecast W_t at horizons $\tau_t + \delta_h$, with $\delta_h = h{\cdot}50\,\text{ms}$ and $h = 1, \ldots, 8$, which span the execution times of a whole chunk (400 ms). We parameterize the target through Eq. (2). For each horizon,

$$\mathbf{d}_h = \mathbf{p}(\tau_t{+}\delta_h) - \mathbf{p}(\tau_t), \quad \boldsymbol{\phi}_h = \mathrm{Log}\big(R(\tau_t{+}\delta_h)R(\tau_t)^\top\big)^\vee, \tag{4}$$

and a pose head regresses $(\mathbf{d}_h, \boldsymbol{\phi}_h)$ with a squared translation error plus λ_R times the squared geodesic rotation error ($\mathcal{L}_P$). The rest of the scene is a sparse 3D flow: for the center point of each of the 196 patches on the 14×14 grid, about [X] mm apart in the workspace, a flow head regresses its base-frame displacements $F_h \in \mathbb{R}^3$ and its visibility at every horizon ($\mathcal{L}_F$). The grid is deliberately coarse, since the context is tolerated up to its clearance, and the target's precision comes from its pose rather than from its points. We also use auxiliary appearance targets ($\mathcal{L}_{\text{aux}}$) only during training, skipping their heads at deployment (Appendix A.3). All heads are light readouts of the final hidden states of the world stream; motion labels are cumulative from the current state, and the losses use valid labels only.

3.4. Actions and the Shared Backbone

The world stream holds the 212 scene tokens and 16 learnable summary tokens. The action stream holds 8 tokens, one per command, each embedding a noisy command and the flow time. A chunk spans 8 control periods of $\Delta_a = 50\,\text{ms}$, and each command is an end-effector translation and rotation plus a gripper command. The attention mask $\mathcal{G}$ lets scene tokens attend only to the scene, summary tokens to the scene and summaries, and action tokens to summaries and actions. The actions therefore read the world only through the summary tokens, whose content the forecast losses shape during training, while the forecasts themselves never enter the action stream. Both streams share the attention projections of each layer and have separate feed-forward networks, so they exchange information in attention but keep stream-specific capacity. For a normalized chunk $\mathbf{a}_1$, noise $\mathbf{a}_0 \sim \mathcal{N}(0, I)$, and $u \sim \mathcal{U}[0, 1]$, the action loss is

$$\mathcal{L}_A = \mathbb{E}\ \mathrm{MSE}_{\text{valid}}\big(v_\psi(\mathbf{a}_u, u \mid \mathcal{S}_t, \mathcal{G}), \mathbf{a}_1 - \mathbf{a}_0\big), \tag{5}$$

with $\mathbf{a}_u = (1{-}u)\mathbf{a}_0{+}u\mathbf{a}_1$ and the scene tokens $\mathcal{S}_t$ of query t. The total loss is $\mathcal{L} = \mathcal{L}_A + \lambda_F\mathcal{L}_F + \lambda_P\mathcal{L}_P + \lambda_{\text{aux}}\mathcal{L}_{\text{aux}}$. The 4-layer screening study (Appendix F.4) compares alternative couplings: R0 disables the forecast losses; R2 adds world queries whose hidden states the actions read at every layer; R3 lets these queries read the actions, and R4 opens both directions; and R5 encodes the decoded forecast as geometric tokens for the actions (Appendix A.5).

Deployment. At test time, the forecast heads are skipped. Because world tokens never attend to actions, the world stream runs once per query, and the action stream integrates 5 Euler steps on its cached keys and values. The new chunk starts at the next control-period boundary, where the policy observes again and starts the next query, so a query that fits in one control period yields a fresh command for every period (Appendix A.7). The p95 time-to-action is [XX] ms on an RTX 5090.

Implementation. The transformer has 24 layers of width 1024 with 16 heads and feed-forward width 4096, with 504.0M backbone parameters and 523.8M trainable parameters in total. The MAE ViT-B/16 encoder (85.8M) and the DINOv3 teacher (303M) stay frozen. The Dynamic-14 recipe uses all windows of 800 demonstrations per task for 20 epochs (51,740 updates at a global batch size of 512) with AdamW and a cosine schedule, with $\lambda_F = \lambda_P = 1$, $\lambda_R = \lambda_{\text{aux}} = 0.1$. Final training hardware and duration remain [N] RTX PRO 6000 GPUs and [X] hours per seed (Appendix A.6).

3.5. Pretraining for Real Robots

Real robot data do not provide object poses, so the real-robot base learns the parts of the forecast that DROID [35] supports. It has the same architecture with 48 layers (1.02B trainable parameters) and the same inputs except the target history. Its targets are the actions, the sparse 3D flow, and the future DINOv3 features. The flow labels come from the 3D point tracks and the optimized camera calibrations that PointWorld released for DROID [29], resampled to one track per image patch and to DROID's native timing. We configure training on 538,740 windows from 37,874 training episodes for 21,060 updates on 64 GPUs; pretraining is ongoing (Appendix B). The real-robot recipe initializes from this base, adds the target-state tokens and the pose head, and fine-tunes on task demonstrations with tracked poses. The simulation model is trained from the generic initialization, a frozen MAE encoder with a randomly initialized transformer.

4. Experiments

We compare SE(3)-WAM with reactive, dynamic, and world–action policies in simulation and on a real robot (Secs. 4.2 and 4.3) and then ablate its target history and its future supervision (Sec. 4.4).

4.1. Setup

Dynamic-14. We built fourteen tasks in MuJoCo/robosuite [66, 98] in five families: grasping a moving target (harmonic, conveyor, translating, rotating, and occluded motion), placing into a moving receptacle, passing a wand along a rotating wire, capturing rolling or sliding objects, and grasping after an impact (Appendix C, Fig. S3). We vary the added latency (0–200 ms) within the original task motion ranges.

Experts with privileged simulator state provide 800 demonstrations per task. We select configurations on development scenes and report the main Dynamic-14 comparisons and final-model ablations on 1,400 held-out scenes (100 per task, new seeds). The final-model ablations average three training seeds; the screening studies state their own seeds and splits in Appendix F. Each baseline is trained once. We give paired 95% intervals from a bootstrap over held-out scenes.

Protocol. Observation, scene motion, and execution share one physical clock with a control period of 50 ms. All methods run under the same executor, and physics advances while a method computes, by its measured latency on one RTX 5090. A policy is queried again once a command has executed and its previous inference has finished, and until a new chunk arrives, the executor continues with the previous one. The +150 ms setting adds 150 ms of delay for every method, and the paused setting stops physics during inference (Appendix C.3). We report the task-balanced success rate (SR), the contact-time error e_t, the position error at first contact e_p, and the p95 time-to-action.

Baselines. We compare with reactive policies (ACT [92], Diffusion Policy [16], and $\pi_{0.5}$ [53]), dynamic VLAs (DynamicVLA [75] and PUMA [19]), image- or latent-space WAMs (DreamVLA [88] and OpenWAM-α [69]), and a dynamic WAM (DynamicWAM [47]). Each baseline uses its official code, inputs, and recipe, is trained on the same demonstrations, and receives a rendered wrist camera if its recipe uses one (Appendix D). SE(3)-WAM uses only the agent view, but it also uses depth and the target pose. To control access to target-motion information, $\pi_{0.5}$ and DynamicWAM also receive our SE(3) history tokens (+SE(3)); their depth inputs still differ from ours. The *CV input* variant is SE(3)-WAM without forecast losses that receives the constant-velocity extrapolation of the target pose as input tokens.

4.2. Main Results

SE(3)-WAM reaches [XX.X]% SR on held-out Dynamic-14 scenes (Table 1), [X.X] points above the strongest baseline, [name of the strongest baseline], and [X.X] points above the strongest baseline that receives the same SE(3) history, [name]. The margin is largest on [rotating targets and on fast conveyor and translating targets], where the target moves farthest during the lead. Its p95 time-to-action of [XX] ms is [X]× lower than that of the image-space WAMs, whose latency adds to the lead they must bridge. With 150 ms of added delay, SE(3)-WAM keeps [XX.X]%, whereas reactive policies drop to [XX.X]% and image-space WAMs to [XX.X]%. With physics paused during inference, the difference to [name of the strongest paused baseline] is [±X.X] points, which separates the contribution of speed from that of the representation. The CV-input variant trails SE(3)-WAM by [X.X] points. We interpret this difference together with the no-future control, which has neither forecast losses nor extrapolated input tokens. Results on DOMINO [19] are in Appendix D.2.

Figure placeholder: Fig. 4 — real-robot trials

Rows: a success of SE(3)-WAM; the strongest baseline on the same trial key; a failure of SE(3)-WAM. **Columns:** the query frame, the first execution time τ^{a}, and contact. **Overlays:** blue tracked past poses; purple commanded gripper path. Real photos, unretouched; overlays from logged data of each trial.

Figure 4. **Real-robot trials** of SE(3)-WAM and [the strongest baseline] on the same trial key (top two rows) and a failure of SE(3)-WAM (bottom). [One-sentence description of the selected trials.]

4.3. Real-Robot Experiments

We evaluate six tasks on a Franka arm ([model]) with [gripper model] and a fixed RealSense D435 RGB-D camera (Fig. S4, Table S9), comparing SE(3)-WAM with $\pi_{0.5}$, DynamicWAM, and Diffusion Policy [16]: conveyor grasping (T1), placement into a receptacle on the conveyor (T2), turntable grasping (T3), grasping a moving toy car (T4), intercepting a ball after a collision (T5), and intercepting an object that rolls or slides down a ramp (T6). Together they cover linear, circular, free planar, post-impact, and gravity-accelerated target motion. Each method is trained or fine-tuned per task on the same 100 teleoperated demonstrations, with 20 separate validation demonstrations, and runs 20 trials per task with shared trial keys. SE(3)-WAM tracks the target with [tracker] and runs on one RTX 5090 with a p95 time-to-action of [XX] ms. It succeeds in [XX.X]% of all trials, against [XX.X]% for [the strongest baseline] (Table 2). [Where its advantage is largest, and its dominant failure mode] (Fig. 4).

4.4. Ablations: What Does a Dynamic Policy Need?

Four core controls use the final 24-layer model and recipe, with three training seeds per control and the same data and training budget (Table 3). They test target history, future supervision, scene-flow supervision, and dedicated target-pose supervision. Each is evaluated under the real-time protocol at 0 and 150 ms of added delay, reusing the full-model reference from Sec. 4.2. Broader design choices were screened with 4-layer models under the group-specific recipes in Appendix F.

Table 1. **Main results.** Held-out SR (%) on Dynamic-14 (1,400 new scenes, task-balanced, real time, three training seeds for our variants and one for baselines) by family, with 150 ms of added delay, and with physics paused during inference, together with the contact-time error e_t (ms), the position error at first contact e_p (mm), and the p95 time-to-action on one RTX 5090. Inputs: R, RGB and robot state. D, depth. P, target SE(3) history. Best in bold. Intervals in Appendix E.

		Dynamic-14 SR, real time unless noted										
Method	Inputs	All	Grasp	Place	Pass	Capture	Impact	+150 ms	Paused	e_t	e_p	p95 (ms)
ACT [92]	R	—	—	—	—	—	—	—	—	—	—	—
Diffusion Policy [16]	R	—	—	—	—	—	—	—	—	—	—	—
$\pi_{0.5}$ [53]	R	—	—	—	—	—	—	—	—	—	—	—
$\pi_{0.5}$ + SE(3)	R+P	—	—	—	—	—	—	—	—	—	—	—
DynamicVLA [75]	R	—	—	—	—	—	—	—	—	—	—	—
PUMA [19]	R	—	—	—	—	—	—	—	—	—	—	—
DreamVLA [88]	R	—	—	—	—	—	—	—	—	—	—	—
OpenWAM-α [69]	R	—	—	—	—	—	—	—	—	—	—	—
DynamicWAM [47]	R	—	—	—	—	—	—	—	—	—	—	—
DynamicWAM + SE(3)	R+P	—	—	—	—	—	—	—	—	—	—	—
SE(3)-WAM, CV input	RD+P	—	—	—	—	—	—	—	—	—	—	—
SE(3)-WAM	RD+P	—	—	—	—	—	—	—	—	—	—	—

Figure placeholder: Fig. 5 — ablations (four panels)

(a) History. SR difference between the full model and no target-motion history at 0 and 150 ms added delay. **(b) Future supervision.** Full model vs. all future losses off, grouped by task family. **(c) Geometry supervision.** Full model vs. no scene flow and no dedicated SE(3), grouped by task family. **(d) Success and latency.** p95 time-to-action vs. SR for the full model and these four controls, at 0 and 150 ms added delay. All panels reuse the same held-out trajectories and three training seeds; show paired 95% bootstrap intervals.

Figure 5. **Core ablations at the final model scale.** (a) Target-motion history. (b) Future supervision. (c) The two geometric supervision components. (d) Their success–latency tradeoff under the real-time protocol. [Summarize the measured effects after the four controls are complete.]

Table 2. **Real-robot results.** Success rate (%) on six tasks: T1 conveyor grasping, T2 moving-receptacle placement, T3 turntable grasping, T4 moving-car grasping, T5 post-collision interception, and T6 ramp interception (20 trials per task and method). All pools the trials; intervals in Appendix D.3.

Method	T1	T2	T3	T4	T5	T6	All
$\pi_{0.5}$	—	—	—	—	—	—	—
DynamicWAM	—	—	—	—	—	—	—
Diffusion Policy	—	—	—	—	—	—	—
SE(3)-WAM	—	—	—	—	—	—	—

Table 3. **Core ablations** of the final 24-layer model on held-out Dynamic-14 scenes (three training seeds). Each row changes one component of SE(3)-WAM (*). SR, SR_{150}: success (%) without and with 150 ms of added delay. e_t: contact-time error (ms). e_p: position error at first contact (mm). p95: time-to-action (ms).

Variant	SR	SR_{150}	e_t	e_p	p95
SE(3)-WAM *	—	—	—	—	—
No target history	—	—	—	—	—
No future supervision	—	—	—	—	—
No scene-flow supervision	—	—	—	—	—
No dedicated SE(3)	—	—	—	—	—

What to remember. The no-history control keeps the current image, current target pose, and eight robot states, and removes past target poses and their velocity and acceleration features. Its SR difference from the full model is [signed X.X] points at 0 ms and [signed X.X] points at 150 ms added delay (Fig. 5a). Visual-history alternatives remain part of the 4-layer screening study; they are not final-scale controls. Pose-noise robustness is evaluated separately with frozen

Figure placeholder: Fig. 6 — forecasts at the execution time

Rows: a rolling capture (median forecast error) and a post-impact grasp that fails. **Columns:** the query frame at τ_t, the frame at τ^a, and a 3D inset in the base frame. **Overlays:** blue past poses, orange forecast triads and coarse flow arrows from the training-time heads, gray ground truth at the same times, purple commanded path. Full set in Fig. S5.

Figure 6. **Forecasts at the execution time** on held-out Dynamic-14 episodes, read from the training-time heads. Top: the SE(3) forecast follows a rolling target that extrapolation overshoots. Bottom: before an impact, the regressed forecast averages the possible outcomes, and the grasp misses.

weights (Appendix F.2).

What to predict. The no-future control disables SE(3), scene-flow and visibility, and future depth, DINO, and dynamic-RGB losses, while retaining current-target RGB reconstruction. It measures the effect of future supervision as a whole (Fig. 5b). The other two controls keep all appearance targets: one removes only scene-flow and visibility supervision, and the other removes only dedicated SE(3) supervision. The latter retains the same 14×14 flow across the target, robot, and surroundings, giving every part of the scene the same coarse representation. The former measures scene-flow supervision, not environment information alone. Their signed SR differences are [X.X] and [X.X] points at 0 ms and [X.X] and [X.X] at 150 ms; Fig. 5c breaks these effects down by task family.

How to use the forecast. The final model uses the forecast only as training supervision. The 4-layer coupling study found no consistent gain from feeding predictions to actions across its three seeds (Appendix F.4); it does not establish equivalence at the final scale. On the final model, enabling unused forecast heads checks action equality for fixed inputs and noise and measures their extra cost. Under the real-time protocol, this extra latency can change the closed-loop trajectory. Figure 5d reports measured success and latency for the four trained controls, without a final-scale R5 comparison.

5. Conclusion

We presented SE(3)-WAM, a world–action model for manipulating moving objects that spends precision where contact depends on it and time only where it pays off. It remembers the target's metric SE(3) motion instead of past frames, learns to forecast the target's SE(3) trajectory precisely and the rest of the scene as a sparse 3D flow, and lets its actions read a representation shaped by these forecasts without generating them at test time. On Dynamic-14, where the scene keeps moving while a policy computes, and on six real-robot tasks, it improves on reactive, dynamic, and world–action policies. Four final-scale controls examine the metric motion history, future supervision, and its two geometric components. [State the supported component-level conclusions after the core ablations.] The design uses forecasts to train the representation while keeping their heads outside the deployed action path.

Limitations. SE(3)-WAM assumes a rigid target that moves on its own until contact, so deformable or articulated targets and post-contact dynamics are outside its scope. It depends on a pose estimate of the target, and tracker failures propagate to the policy; in simulation we read the pose from the simulator. The regressed target forecast cannot represent multimodal futures, e.g., before an impact. Our real-robot base learns from DROID without target poses, so its pose-related parts are learned only during fine-tuning. Finally, our tasks have a single target and slow context motion.

LLM Usage Statement

[To be completed before submission: actual tools used, affected parts of the research and manuscript, and extent of use.]

References

[1] Iretiayo Akinola, Jingxi Xu, Shuran Song, and Peter K. Allen. Dynamic grasping with reachability and motion awareness. In *IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 9422–9429, 2021. 2

[2] Peter K. Allen, Aleksandar Timcenko, Billibon Yoshimi, and Paul Michelman. Automated tracking and grasping of a moving object with a robotic hand-eye system. *IEEE Transactions on Robotics and Automation*, 9(2):152–165, 1993. 2

[3] Mido Assran, Adrien Bardes, David Fan, Quentin Garrido, Russell Howes, Mojtaba Komeili, et al. V-JEPA 2: Self-supervised video models enable understanding, prediction and planning. *arXiv preprint arXiv:2506.09985*, 2025. 3

[4] Ronald Azuma and Gary Bishop. Improving static and dynamic registration in an optical see-through HMD. In *Proceedings of SIGGRAPH*, pages 197–204, 1994. 2

[5] Yaakov Bar-Shalom, X. Rong Li, and Thiagalingam Kirubarajan. *Estimation with Applications to Tracking and Navigation*. Wiley, 2001. 2

[6] Berthold Bäuml, Thomas Wimböck, and Gerd Hirzinger. Kinematically optimal catching a flying ball with a hand-arm-system. In *IEEE/RSJ International Conference on Intelligent Robots and Systems*, 2010. 2

[7] Homanga Bharadhwaj, Roozbeh Mottaghi, Abhinav Gupta, and Shubham Tulsiani. Track2Act: Predicting point tracks from internet videos enables generalizable robot manipulation. In *European Conference on Computer Vision*, 2024. 3

[8] Kevin Black, Mitsuhiko Nakamoto, Pranav Atreya, Homer Walke, Chelsea Finn, Aviral Kumar, and Sergey Levine. Zero-shot robotic manipulation with pre-trained image-editing diffusion models. In *International Conference on Learning Representations*, 2024. 3

[9] Kevin Black, Noah Brown, Danny Driess, et al. π_0: A vision-language-action flow model for general robot control. In *Proceedings of Robotics: Science and Systems*, 2025. 1, 2

[10] Kevin Black, Manuel Y. Galliker, and Sergey Levine. Real-time execution of action chunking flow policies. In *Advances in Neural Information Processing Systems*, 2025. 2

[11] Anthony Brohan, Noah Brown, Justice Carbajal, et al. RT-1: Robotics transformer for real-world control at scale. In *Proceedings of Robotics: Science and Systems*, 2023. 2

[12] Arunkumar Byravan and Dieter Fox. SE3-Nets: Learning rigid body motion using deep neural networks. In *IEEE International Conference on Robotics and Automation*, 2017. 3

[13] Arunkumar Byravan, Felix Leeb, Franziska Meier, and Dieter Fox. SE3-Pose-Nets: Structured deep dynamics models for visuomotor control. In *IEEE International Conference on Robotics and Automation*, 2018. 3

[14] Chongkei Chang and Zhidong Deng. DynaWM: A base-VLA-guided world foundation model for moving-object manipulation. *arXiv preprint arXiv:2607.02604*, 2026. 2

[15] Yixiang Chen, Peiyan Li, Yuan Xu, Qisen Ma, Jiabing Yang, Kai Wang, Jianhua Yang, Dong An, He Guan, Gaoteng Liu, Jianlou Si, Jun Huang, Jing Liu, Nianfeng Liu, Yan Huang, and Liang Wang. FlowWAM: Optical flow as a unified action representation for world action models. *arXiv preprint arXiv:2607.13017*, 2026. 3

[16] Cheng Chi, Siyuan Feng, Yilun Du, Zhenjia Xu, Eric Cousineau, Benjamin C. M. Burchfiel, and Shuran Song. Diffusion policy: Visuomotor policy learning via action diffusion. In *Proceedings of Robotics: Science and Systems*, 2023. 1, 2, 6, 7

[17] Yilun Du et al. Learning universal policies via text-guided video generation. In *Advances in Neural Information Processing Systems*, 2023. 3

[18] David Emukpere, Romain Deffayet, Bingbing Wu, Romain Brégier, Michael Niemaz, Jean-Luc Meunier, Denys Proux, Jean-Michel Renders, and Seungsu Kim. Disentangled object-centric image representation for robotic manipulation. *arXiv preprint arXiv:2503.11565*, 2025. 3

[19] Heng Fang, Shangru Li, Shuhan Wang, Xuanyang Xi, Dingkang Liang, and Xiang Bai. Towards generalizable robotic manipulation in dynamic environments. *arXiv preprint arXiv:2603.15620*, 2026. 1, 2, 3, 6, 7

[20] Chelsea Finn and Sergey Levine. Deep visual foresight for planning robot motion. In *IEEE International Conference on Robotics and Automation*, 2017. 3

[21] Ankit Goyal, Jie Xu, Yijie Guo, Valts Blukis, Yu-Wei Chao, and Dieter Fox. RVT: Robotic view transformer for 3D object manipulation. In *Conference on Robot Learning*, pages 694–710, 2023. 3

[22] Jun Guo, Xiaojian Ma, Yikai Wang, Min Yang, Huaping Liu, and Qing Li. FlowDreamer: A RGB-D world model with flow-based motion representations for robot manipulation. *arXiv preprint arXiv:2505.10075*, 2025. 3

[23] Danijar Hafner, Jurgis Pasukonis, Jimmy Ba, and Timothy Lillicrap. Mastering diverse control tasks through world models. *Nature*, 640(8059), 2025. 3

[24] Nicklas Hansen, Hao Su, and Xiaolong Wang. TD-MPC2: Scalable, robust world models for continuous control. In *International Conference on Learning Representations*, 2024. 3

[25] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16000–16009, 2022. 4

[26] B. Hove and Jean-Jacques E. Slotine. Experiments in robotic catching. In *American Control Conference*, 1991. 2

[27] Cheng-Chun Hsu, Bowen Wen, Jie Xu, Yashraj Narang, Xiaolong Wang, Yuke Zhu, Joydeep Biswas, and Stan Birchfield. SPOT: SE(3) pose trajectory diffusion for object-centric manipulation. In *IEEE International Conference on Robotics and Automation*, 2025. 2, 3

[28] Yucheng Hu, Yanjiang Guo, Pengchao Wang, Xiaoyu Chen, Yen-Jen Wang, Jianke Zhang, Koushil Sreenath, Chaochao Lu, and Jianyu Chen. Video prediction policy: A generalist robot policy with predictive visual representations. In *International Conference on Machine Learning*, 2025. 3

[29] Wenlong Huang, Yu-Wei Chao, Arsalan Mousavian, Ming-Yu Liu, Dieter Fox, Kaichun Mo, and Li Fei-Fei. PointWorld: Scaling 3D world models for in-the-wild robotic manipulation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026. 3, 5

[30] Wei Huang, Bohan Zhang, Chenzhi Liu, Isabella Liu, Shuai Yang, Weian Mao, Luozhou Wang, Yicheng Xiao, Weifeng Lin, Qixin Hu, Bryan Chu, Sifei Liu, Linxi Fan, Xiaojuan Qi, Song Han, and Yukang Chen. Long-WAM: Scaling the context of world-action models. *arXiv preprint arXiv:2610.10528*, 2026. 3

[31] Seth Hutchinson, Gregory D. Hager, and Peter I. Corke. A tutorial on visual servo control. *IEEE Transactions on Robotics and Automation*, 12(5):651–670, 1996. 2

[32] Haoyuan Ji, Lingxiang Fan, Shang Su, Yinqiao Lu, Mengkai Shi, Jun Gao, and Shuo Feng. DC-WAM: Dynamic-centric visual supervision and reasoning for world-action models. *arXiv preprint arXiv:2607.25918*, 2026. 3

[33] Nikita Karaev, Ignacio Rocco, Benjamin Graham, Natalia Neverova, Andrea Vedaldi, and Christian Rupprecht. CoTracker: It is better to track together. In *European Conference on Computer Vision*, 2024. 3

[34] Tsung-Wei Ke, Nikolaos Gkanatsios, and Katerina Fragkiadaki. 3D diffuser actor: Policy diffusion with 3D scene representations. In *Conference on Robot Learning*, 2024. 3

[35] Alexander Khazatsky, Karl Pertsch, Suraj Nair, et al. DROID: A large-scale in-the-wild robot manipulation dataset. In *Proceedings of Robotics: Science and Systems*, 2024. 5

[36] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, et al. OpenVLA: An open-source vision-language-action model. In *Conference on Robot Learning*, 2024. 1, 2

[37] Fenghao Lei, Zhixiong Huang, Long Yang, Jiabao Chen, Peilin Huang, Han Fu, Zhuo Li, and Xiaoxue Ren. DELE-w0.5: Inferring action from future latent state for robotic manipulation. *arXiv preprint arXiv:2608.22067*, 2026. 3

[38] Jiajun Li, Tiecheng Guo, Yifan Ye, Rongyu Zhang, Xiaowei Chi, Qianpu Sun, Ying Li, Yunfan Lou, Jinqiao Wang, Zhihe Lu, Meng Guo, and Shanghang Zhang. Efficient-WAM: A 1B-parameter world-action model with low-cost future imagination. *arXiv preprint arXiv:2606.10040*, 2026. 3

[39] Shuang Li, Yihuai Gao, Dorsa Sadigh, and Shuran Song. Unified video action model. In *Proceedings of Robotics: Science and Systems*, 2025. 3

[40] Haoran Liao, Pengyue Wang, Shuoyu Chen, Kehan Cheng, Xuhang Chen, Yuhao Lin, Mu Lin, Zhizhao Liang, Xiaoyi Fan, Chengyi Xing, Dan Niu, Yi-Lin Wei, and Wei-Shi Zheng. DynamicManip: Enabling dynamic manipulation from a single static demonstration. *arXiv preprint arXiv:2608.01452*, 2026. 2

[41] Minghui Lin, Pengxiang Ding, Shu Wang, Zifeng Zhuang, Yang Liu, Xinyang Tong, Wenxuan Song, Shangke Lyu, Siteng Huang, and Donglin Wang. HiF-VLA: Hindsight, insight and foresight through motion representation for vision-language-action models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026. 3

[42] Yaron Lipman, Ricky T. Q. Chen, Heli Ben-Hamu, Maximilian Nickel, and Matthew Le. Flow matching for generative modeling. In *International Conference on Learning Representations*, 2023. 3

[43] Xingyu Liu, Charles R. Qi, and Leonidas J. Guibas. FlowNet3D: Learning scene flow in 3D point clouds. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2019. 3

[44] Yuejiang Liu, Jubayer Ibn Hamid, Annie Xie, Yoonho Lee, Maximilian Du, and Chelsea Finn. Bidirectional decoding: Improving action chunking via guided test-time sampling. In *International Conference on Learning Representations*, 2025. 2

[45] Yushan Liu, Jingjing Fan, Shoujie Li, Yifan Xie, Xiao-Ping Zhang, and Wenbo Ding. PACT-WAM: Predicting actions and visual foresight with compact temporal encoding for robot manipulation. *arXiv preprint arXiv:2602.15882*, 2026. 3

[46] Yushan Liu, Peibo Sun, Shoujie Li, Yifan Xie, Lingfeng Zhang, Xintao Chao, Shiyuan Dong, Fang Chen, Xiao-Ping Zhang, and Wenbo Ding. OA-WAM: Object-addressable world action model for robust robot manipulation. *arXiv preprint arXiv:2605.06481*, 2026. 3

[47] Yunfan Lou, Hewen Gao, Xiyu Zhu, Zhuoran Qiao, Xuan Han, Yifan Yang, Yifan Ye, Boxian Yao, and Zhibo Pang. DynamicWAM: Dual-path motion conditioning for world-action models in dynamic manipulation. *arXiv preprint arXiv:2608.00793*, 2026. 1, 2, 6, 7

[48] Siyuan Ma, Yutian Zhang, Boshi Zhang, Qinglian Wu, Jiaqi Zhai, Dong Wei, and Xiaojin Huang. ForeTime-VLA: Causal future-token distillation from a world action model for conveyor-belt manipulation. *arXiv preprint arXiv:2608.20735*, 2026. 2

[49] Lucas Manuelli, Wei Gao, Peter Florence, and Russ Tedrake. kPAM: Keypoint affordances for category-level robotic manipulation. In *International Symposium on Robotics Research*, 2019. 3

[50] Naresh Marturi, Marek Kopicki, Alireza Rastegarpanah, et al. Dynamic grasp and trajectory planning for moving objects. *Autonomous Robots*, 43(5):1241–1256, 2019. 2

[51] E-Ro Nguyen, Yichi Zhang, Kanchana Ranasinghe, Xiang Li, and Michael S. Ryoo. Pixel motion diffusion is what we need for robot control. *arXiv preprint arXiv:2509.22652*, 2025. 3

[52] Octo Model Team, Dibya Ghosh, Homer Walke, et al. Octo: An open-source generalist robot policy. In *Proceedings of Robotics: Science and Systems*, 2024. 2

[53] Physical Intelligence, Kevin Black, Noah Brown, James Darpinian, et al. $\pi_{0.5}$: a vision-language-action model with open-world generalization. *arXiv preprint arXiv:2504.16054*, 2025. 1, 2, 6, 7

[54] Kanchana Ranasinghe, Xiang Li, E-Ro Nguyen, Cristina Mata, Jongwoo Park, and Michael S. Ryoo. Pixel motion

as universal representation for robot control. *arXiv preprint arXiv:2505.07817*, 2025. 3

[55] Kanchana Ranasinghe, Honglu Zhou, Yu Fang, Luyu Yang, Le Xue, Ran Xu, Caiming Xiong, Silvio Savarese, Michael S. Ryoo, and Juan Carlos Niebles. Future optical flow prediction improves robot control & video generation. *arXiv preprint arXiv:2601.10781*, 2026. 3

[56] Yiran Shi, Dongqi Guo, Tianchen Zhao, Feng Gao, Liangzhi Shi, Chao Yu, ZhiJian Mo, Qihua Xiao, XiaoShuai Peng, Qingmin Liao, and Yu Wang. StreamingVLA: Streaming vision-language-action model with action flow matching and adaptive early observation. *arXiv preprint arXiv:2603.28565*, 2026. 2

[57] Mohit Shridhar, Lucas Manuelli, and Dieter Fox. Perceiver-actor: A multi-task transformer for robotic manipulation. In *Conference on Robot Learning*, 2022. 3

[58] Mustafa Shukor, Dana Aubakirova, Francesco Capuano, Pepijn Kooijmans, Steven Palma, et al. SmolVLA: A vision-language-action model for affordable and efficient robotics. *arXiv preprint arXiv:2506.01844*, 2025. 2

[59] Otto J. M. Smith. Closer control of loops with dead time. *Chemical Engineering Progress*, 53(5):217–219, 1957. 2

[60] Rustin Soraki, Homanga Bharadhwaj, Ali Farhadi, and Roozbeh Mottaghi. ObjectForesight: Predicting future 3D object trajectories from human videos. *arXiv preprint arXiv:2601.05237*, 2026. 3

[61] Yue Su, Sijin Chen, Haixin Shi, Mingyu Liu, Zhengshen Zhang, Ningyuan Huang, Weiheng Zhong, Zhengbang Zhu, Yuxiao Liu, and Xihui Liu. World guidance: World modeling in condition space for action generation. *arXiv preprint arXiv:2602.22010*, 2026. 3

[62] Shahram Najam Syed, Arthur Jakobsson, Haoran Hao, and Jeffrey Ichnowski. Intercepting the future: Latent-space predictive world model for dynamic VLA manipulation. *arXiv preprint arXiv:2606.02486*, 2026. 1, 2

[63] Jiaming Tang, Yufei Sun, Yilong Zhao, Shang Yang, Yujun Lin, Zhuoyang Zhang, James Hou, Yao Lu, Zhijian Liu, and Song Han. VLASH: Real-time VLAs via future-state-aware asynchronous inference. *arXiv preprint arXiv:2512.01031*, 2025. 2

[64] Zachary Teed and Jia Deng. RAFT-3D: Scene flow using rigid-motion embeddings. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021. 3

[65] Yang Tian, Sizhe Yang, Jia Zeng, Ping Wang, Dahua Lin, Hao Dong, and Jiangmiao Pang. Predictive inverse dynamics models are scalable learners for robotic manipulation. In *International Conference on Learning Representations*, 2025. 3

[66] Emanuel Todorov, Tom Erez, and Yuval Tassa. MuJoCo: A physics engine for model-based control. In *IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 5026–5033, 2012. 5

[67] Changhao Wang, Jaden Clark, and Shuran Song. Chronos policy: Learning robot policies on physical time. *arXiv preprint arXiv:2610.13929*, 2026. 2

[68] Jianyuan Wang, Minghao Chen, Nikita Karaev, Andrea Vedaldi, Christian Rupprecht, and David Novotny. VGGT: Visual geometry grounded transformer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025. 3

[69] Yuran Wang, Siqiao Huang, Mingleyang Li, Chenhao Zhang, Jiaqi Liang, Weiyang Jin, Yue Chen, Xuemin Chi, Donghao Zhou, Qize Yu, Yu-Kai Wang, Yuhan Rui, Shenzhe Yao, Zhen Yuan, Zhenhao Shen, Kefei Zhu, Zijie Zhu, Ning Gao, Xiaowei Chi, Guanqi He, Shanghang Zhang, Hao Dong, Lin Shao, and Hang Zhao. OpenWAM: An open, modular exploration towards systematic world-action model pretraining. *arXiv preprint arXiv:2609.07398*, 2026. 1, 2, 3, 6, 7

[70] Bowen Wen, Wei Yang, Jan Kautz, and Stan Birchfield. FoundationPose: Unified 6D pose estimation and tracking of novel objects. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 17868–17879, 2024. 3

[71] Chuan Wen, Xingyu Lin, John So, Kai Chen, Qi Dou, Yang Gao, and Pieter Abbeel. Any-point trajectory modeling for policy learning. In *Proceedings of Robotics: Science and Systems*, 2024. 3

[72] Gaoyuan Wu, Ziyu Shan, Haoyang Du, Yuyao Jiang, and Ziwei Wang. AffordTrajDP: Dynamic affordance-guided visuomotor policy learning for robotic manipulation. *arXiv preprint arXiv:2608.01603*, 2026. 3

[73] Hongtao Wu, Ya Jing, Chilam Cheang, Guangzeng Chen, Jiafeng Xu, Xinghang Li, Minghuan Liu, Hang Li, and Tao Kong. Unleashing large-scale video generative pre-training for visual robot manipulation. In *International Conference on Learning Representations*, 2024. 3

[74] Yuxi Xiao, Qianqian Wang, Shangzhan Zhang, Nan Xue, Sida Peng, Yujun Shen, and Xiaowei Zhou. SpatialTracker: Tracking any 2D pixels in 3D space. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024. 3

[75] Haozhe Xie, Beichen Wen, Jiarui Zheng, Zhaoxi Chen, Fangzhou Hong, Haiwen Diao, and Ziwei Liu. DynamicVLA: A vision-language-action model for dynamic object manipulation. *arXiv preprint arXiv:2601.22153*, 2026. 2, 6, 7

[76] Mengda Xu, Zhenjia Xu, Yinghao Xu, Cheng Chi, Gordon Wetzstein, Manuela Veloso, and Shuran Song. Flow as the cross-domain manipulation interface. In *Conference on Robot Learning*, 2024. 3

[77] Zhenjia Xu, Zhanpeng He, Jiajun Wu, and Shuran Song. Learning 3D dynamic scene representations for robot manipulation. In *Conference on Robot Learning*, 2020. 3

[78] Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyuan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, et al. World action models are zero-shot policies. *arXiv preprint arXiv:2602.15922*, 2026. 1, 2, 3

[79] Hanyang Yu, Haitao Lin, Jingbo Zhang, Wenyao Zhang, Chenghao Gu, Heng Li, and Ping Tan. MaskWAM: Unifying mask prompting and prediction for world-action models. *arXiv preprint arXiv:2606.13515*, 2026. 3

[80] Heng Yu, David D. Yuan, Juze Zhang, Changan Chen, Yao Feng, Michelle Baldonado, Steve Cousins, Li Fei-Fei, Jiajun Wu, and Ehsan Adeli. OpenWAM: An open frame-

work for composable world-action models. *arXiv preprint arXiv:2610.07922*, 2026. 3

[81] Chengbo Yuan, Chuan Wen, Tong Zhang, and Yang Gao. General flow as foundation affordance for scalable robot learning. In *Conference on Robot Learning*, pages 1541–1566, 2024. 3

[82] Shanglin Yuan, Weiheng Zhao, Xin Shi, Haoyi Jiang, Xianda Guo, Liu Liu, Wenyu Liu, Wei Sui, and Xinggang Wang. DreamWAM: Beyond RGB future prediction for world action models. *arXiv preprint arXiv:2608.04996*, 2026. 3

[83] Tianyuan Yuan, Zibin Dong, Yicheng Liu, and Hang Zhao. Fast-WAM: Do world action models need test-time future imagination? *arXiv preprint arXiv:2603.16666*, 2026. 3

[84] Peng Yun, Shouwang Huang, Hao Li, Jinxi Li, Jianan Wang, and Bo Yang. PhysMani: Physics-principled 3D world model for dynamic object manipulation. *arXiv preprint arXiv:2607.01938*, 2026. 2

[85] Yanjie Ze, Gu Zhang, Kangning Zhang, Chenyuan Hu, Muhan Wang, and Huazhe Xu. 3D diffusion policy: Generalizable visuomotor policy learning via simple 3D representations. In *Proceedings of Robotics: Science and Systems*, 2024. 3

[86] Chuhan Zhang, Guillaume Le Moing, Skanda Koppula, Ignacio Rocco, Liliane Momeni, Junyu Xie, Shuyang Sun, Rahul Sukthankar, Joëlle K. Barral, Raia Hadsell, Zoubin Ghahramani, Andrew Zisserman, Junlin Zhang, and Mehdi S. M. Sajjadi. Efficiently reconstructing dynamic scenes one D4RT at a time. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026. 3

[87] Jiahui Zhang, Yurui Chen, Yueming Xu, Ze Huang, Yanpeng Zhou, Yu-Jie Yuan, Xinyue Cai, Guowei Huang, Xingyue Quan, Hang Xu, and Li Zhang. 4D-VLA: Spatiotemporal vision-language-action pretraining with cross-scene calibration. In *Advances in Neural Information Processing Systems*, 2025. 3

[88] Wenyao Zhang, Hongsi Liu, Zekun Qi, Yunnan Wang, XinQiang Yu, Jiazhao Zhang, Runpei Dong, Jiawei He, He Wang, Zhizheng Zhang, Li Yi, Wenjun Zeng, and Xin Jin. DreamVLA: A vision-language-action model dreamed with comprehensive world knowledge. In *Advances in Neural Information Processing Systems*, pages 24195–24228, 2025. 1, 2, 3, 6, 7

[89] Yifan Zhang, Ruiping Wang, and Xilin Chen. Dynamic behavior cloning with temporal feature prediction: Enhancing robotic arm manipulation in moving object tasks. *IEEE Robotics and Automation Letters*, 10(6):5209–5216, 2025. 2

[90] Qingqing Zhao, Yao Lu, Moo Jin Kim, Zipeng Fu, Zhuoyang Zhang, Yecheng Wu, Zhaoshuo Li, Qianli Ma, Song Han, Chelsea Finn, Ankur Handa, Tsung-Yi Lin, Gordon Wetzstein, Ming-Yu Liu, and Donglai Xiang. CoT-VLA: Visual chain-of-thought reasoning for vision-language-action models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025. 3

[91] Ruiteng Zhao, Zhengshen Zhang, Yue Su, Wenshuo Wang, Jiahui Li, Zhiyuan Yang, Francis E. H. Tay, Marcelo H. Ang, and Haiyue Zhu. SG-WAM: Self-guided world modeling in geometry-aware policy space. *arXiv preprint arXiv:2608.01397*, 2026. 3

[92] Tony Z. Zhao, Vikash Kumar, Sergey Levine, and Chelsea Finn. Learning fine-grained bimanual manipulation with low-cost hardware. In *Proceedings of Robotics: Science and Systems*, 2023. 2, 6, 7

[93] Haoyu Zhen, Xiaowen Qiu, Peihao Chen, Jincheng Yang, Xin Yan, Yilun Du, Yining Hong, and Chuang Gan. 3D-VLA: A 3D vision-language-action generative world model. In *International Conference on Machine Learning*, 2024. 3

[94] Ruijie Zheng, Yongyuan Liang, Shuaiyi Huang, Jianfeng Gao, Hal Daumé III, Andrey Kolobov, Furong Huang, and Jianwei Yang. TraceVLA: Visual trace prompting enhances spatial-temporal awareness for generalist robotic policies. In *International Conference on Learning Representations*, 2025. 3

[95] Hongyan Zhi, Peihao Chen, Siyuan Zhou, Yubo Dong, Quanxi Wu, Lei Han, and Mingkui Tan. 3DFlowAction: Learning cross-embodiment manipulation from 3D flow world model. *arXiv preprint arXiv:2506.06199*, 2025. 3

[96] Gaoyue Zhou, Hengkai Pan, Yann LeCun, and Lerrel Pinto. DINO-WM: World models on pre-trained visual features enable zero-shot planning. In *International Conference on Machine Learning*, 2025. 3

[97] Chuning Zhu, Raymond Yu, Siyuan Feng, Benjamin Burchfiel, Paarth Shah, and Abhishek Gupta. Unified world models: Coupling video and action diffusion for pretraining on large robotic datasets. In *Proceedings of Robotics: Science and Systems*, 2025. 3

[98] Yuke Zhu, Josiah Wong, Ajay Mandlekar, Roberto Martín-Martín, Abhishek Joshi, Kevin Lin, Abhiram Maddukuri, Soroush Nasiriany, and Yifeng Zhu. robosuite: A modular simulation framework and benchmark for robot learning. *arXiv preprint arXiv:2009.12293*, 2020. 5

[99] Yifeng Zhu, Zhenyu Jiang, Peter Stone, and Yuke Zhu. Learning generalizable manipulation policies with object-centric 3D representations. In *Conference on Robot Learning*, 2023. 3

[100] Brianna Zitkovich, Tianhe Yu, Sichun Xu, et al. RT-2: Vision-language-action models transfer web knowledge to robotic control. In *Conference on Robot Learning*, 2023. 1, 2