




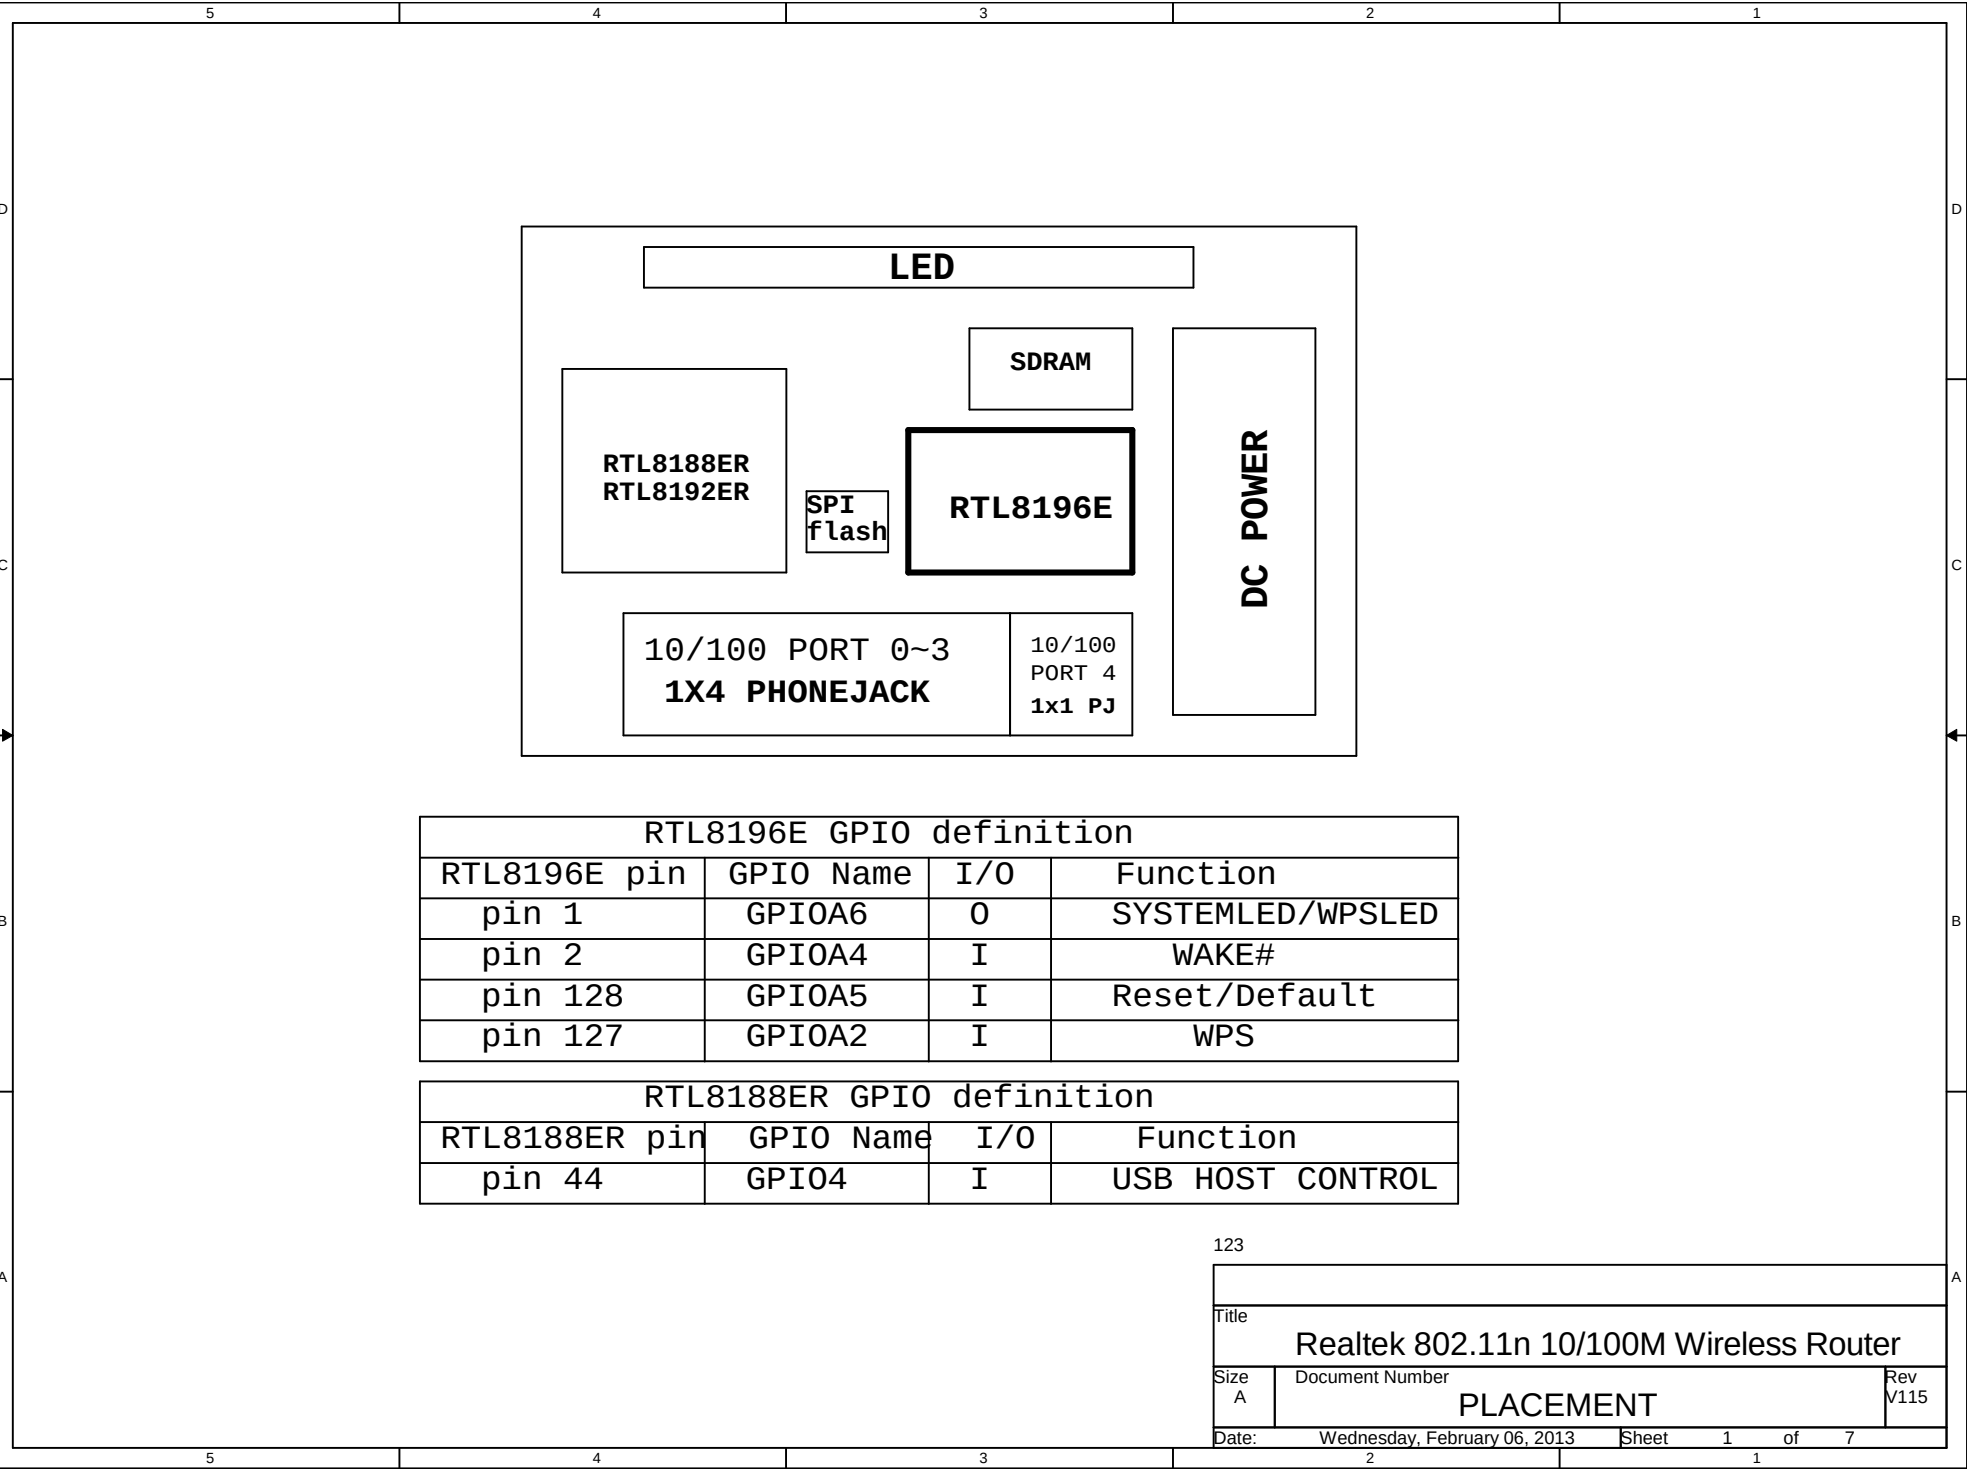

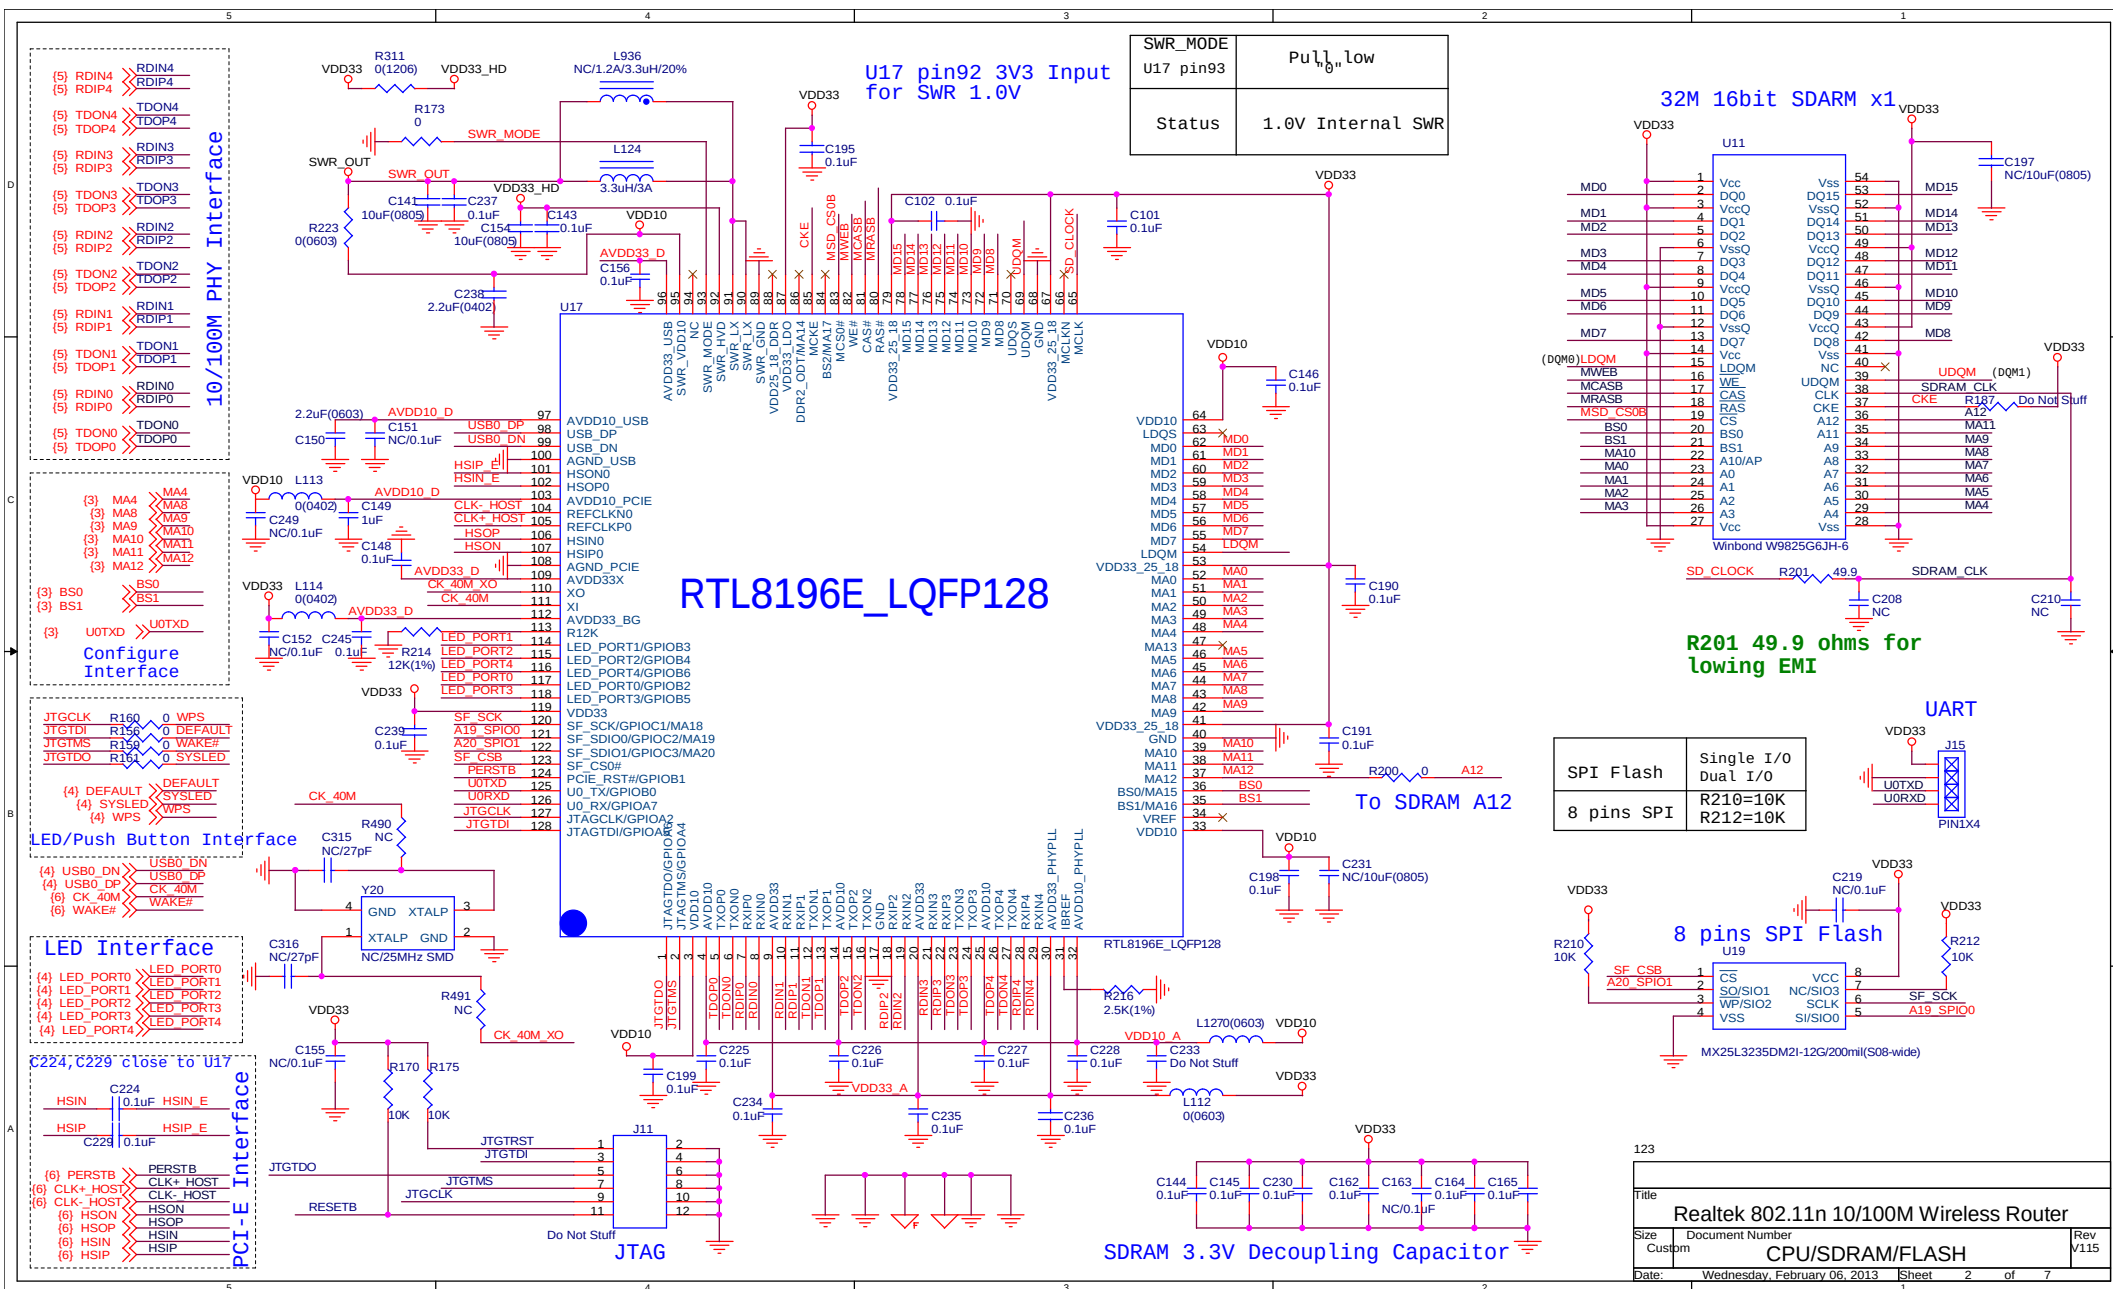


Strap Pin Definition

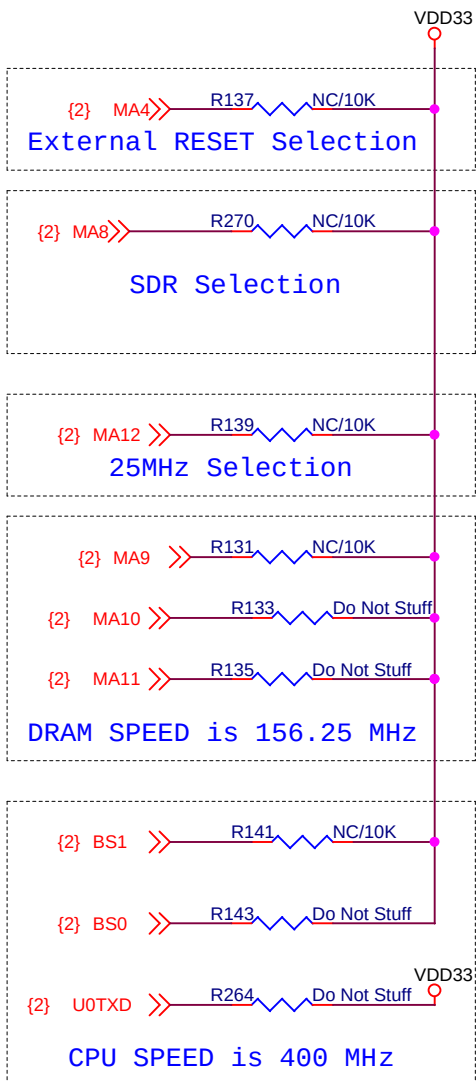

pin name	function name	function detail
PIN_M_A4	ENABLE_EXT_RSTN	ENABLE_EXT_RSTN 1=enable 0=disable
PIN_M_A8	DRAM_TYPE[1]	DRAM_TYPE[1] 1=DDR 0=SDR (Default)
PIN_M_A3	DRAM_TYPE[0]_INV	DRAM_TYPE[0]_INV 1=DDR1 0=DDR2 (Default)
PIN_M_A12	sel_40m	1=40MHZ 0=25MHZ(default)

	ck_m2x_freq_sel[2:0] (MHZ)	
PIN_M_A9	ck_m2x_freq_sel[0]	000: 156.25 100: Reserved
PIN_M_A10	ck_m2x_freq_sel[1]	001: Reserved 101: 125
PIN_M_A11	ck_m2x_freq_sel[2]	010: Reserved 110: Reserved
		011: Reserved 111: Reserved

	ck_cpu_freq_sel[3:1] (MHZ)	
DDR_BS1	ck_cpu_freq_sel[3]	000: 400MHZ 100: 320MHZ
DDR_BS0	ck_cpu_freq_sel[2]	001: 380MHZ 101: 300MHZ
U0TXD	ck_cpu_freq_sel[1]	010: 360MHZ 110: 280MHZ
		011: 340MHZ 111: 260MHZ



123




Title		
Realtek 802.11n 10/100M Wireless Router		
Size A	Document Number Configure Interface	Rev V115
Date:	Wednesday, February 06, 2013	Sheet 3 of 7

(2) WPS >>> DEFAULT
(2) DEFAULT >>> SYSLED
(2) SYSLED >>> SYSLED




LED/ Push Button Interface

Mark on board

USB#0

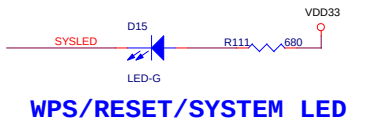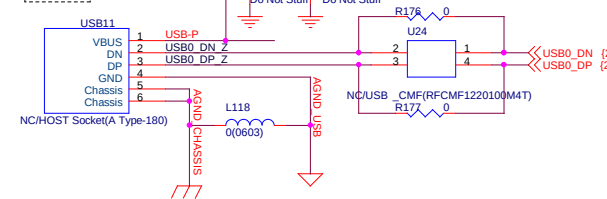



SCAN Mode

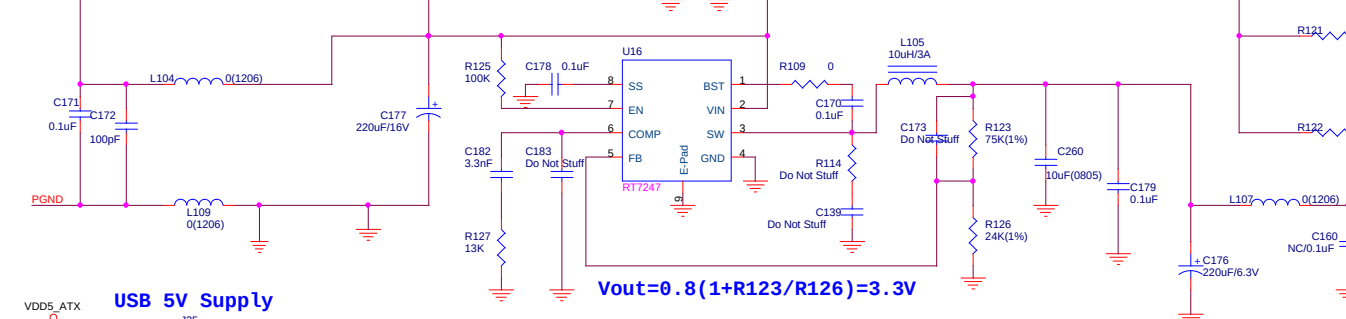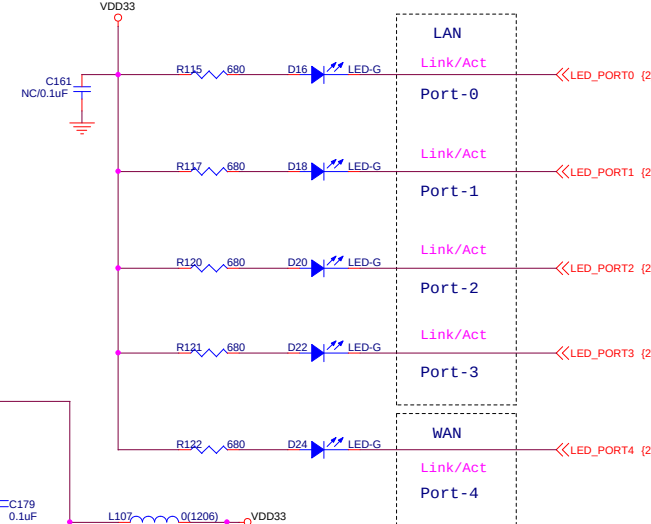

$$V_{out} = 0.8(1 + R123/R126) = 3.3V$$

USB 5V Supply

1 to 2 USB HOST
2 to 3 USB SLAVE


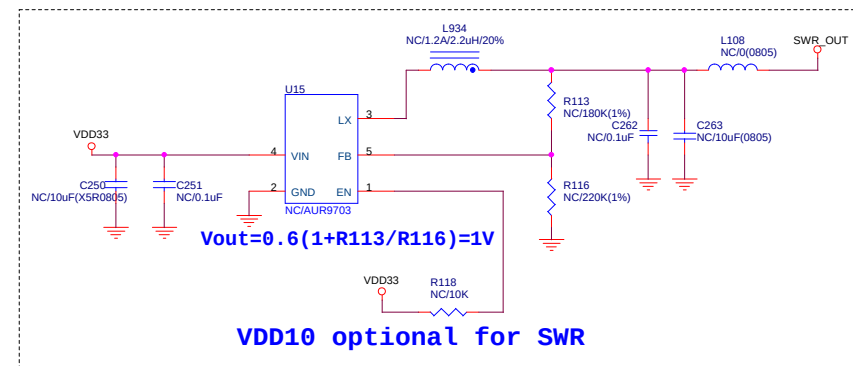
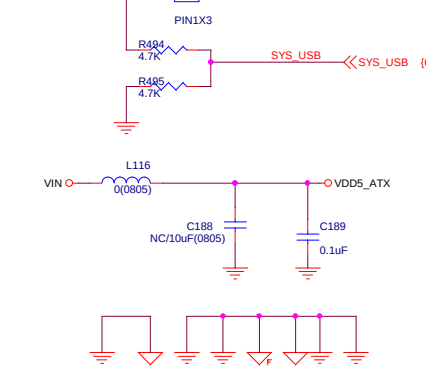


$$V_{out} = 0.6(1 + R113/R116) = 1V$$


VDD10 optional for SWR

123			
Title			
Realtek 802.11n 10/100M Wireless Router			
Size	Document Number	POWER/LEDs	
Custm		Rev V115	
Date:	Wednesday, February 06, 2013	Sheet	4 of 7

10/100M PHY Interface 10pF for lowering EMI

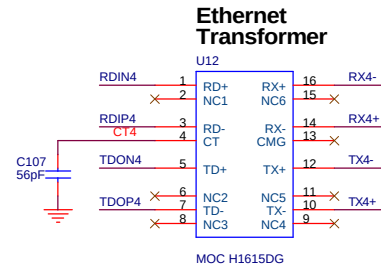
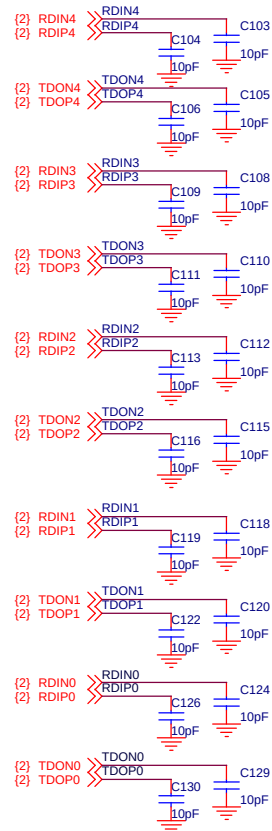


MOD H1615DG:
Common mode chock
must near CPU
side

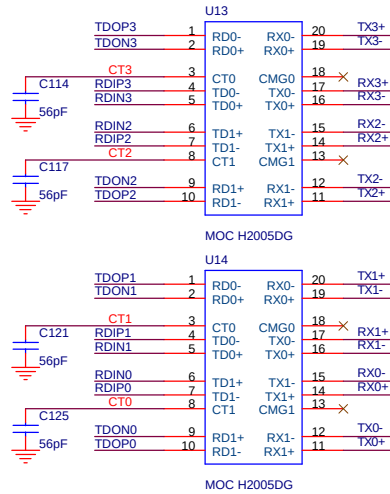


MOD H2005DG:
Common mode chock
must near CPU
side

20 mil Trace
replace
C127, C128

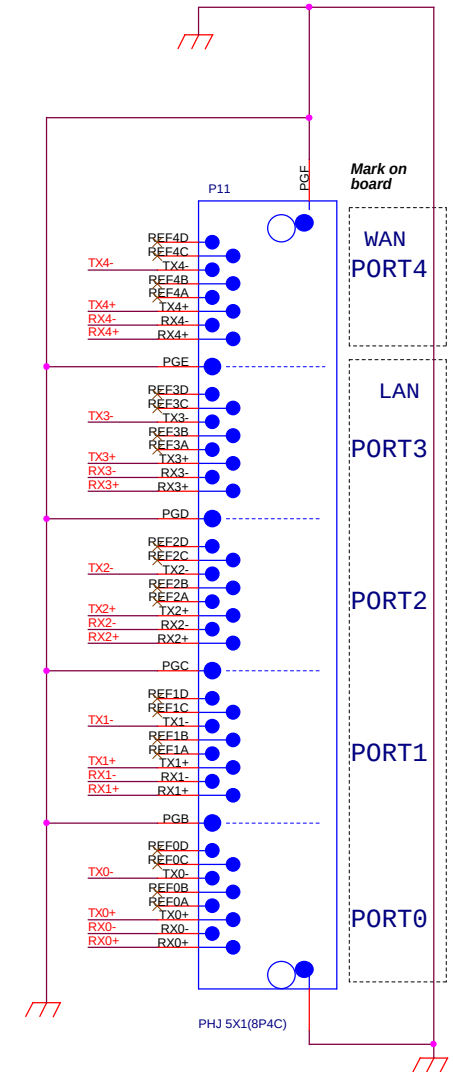

123			
Title			
Realtek 802.11n 10/100M Wireless Router			
Size	Document Number	Rev	
B	MDI 10/100M	V115	
Date:	Wednesday, February 06, 2013	Sheet	5 of 7

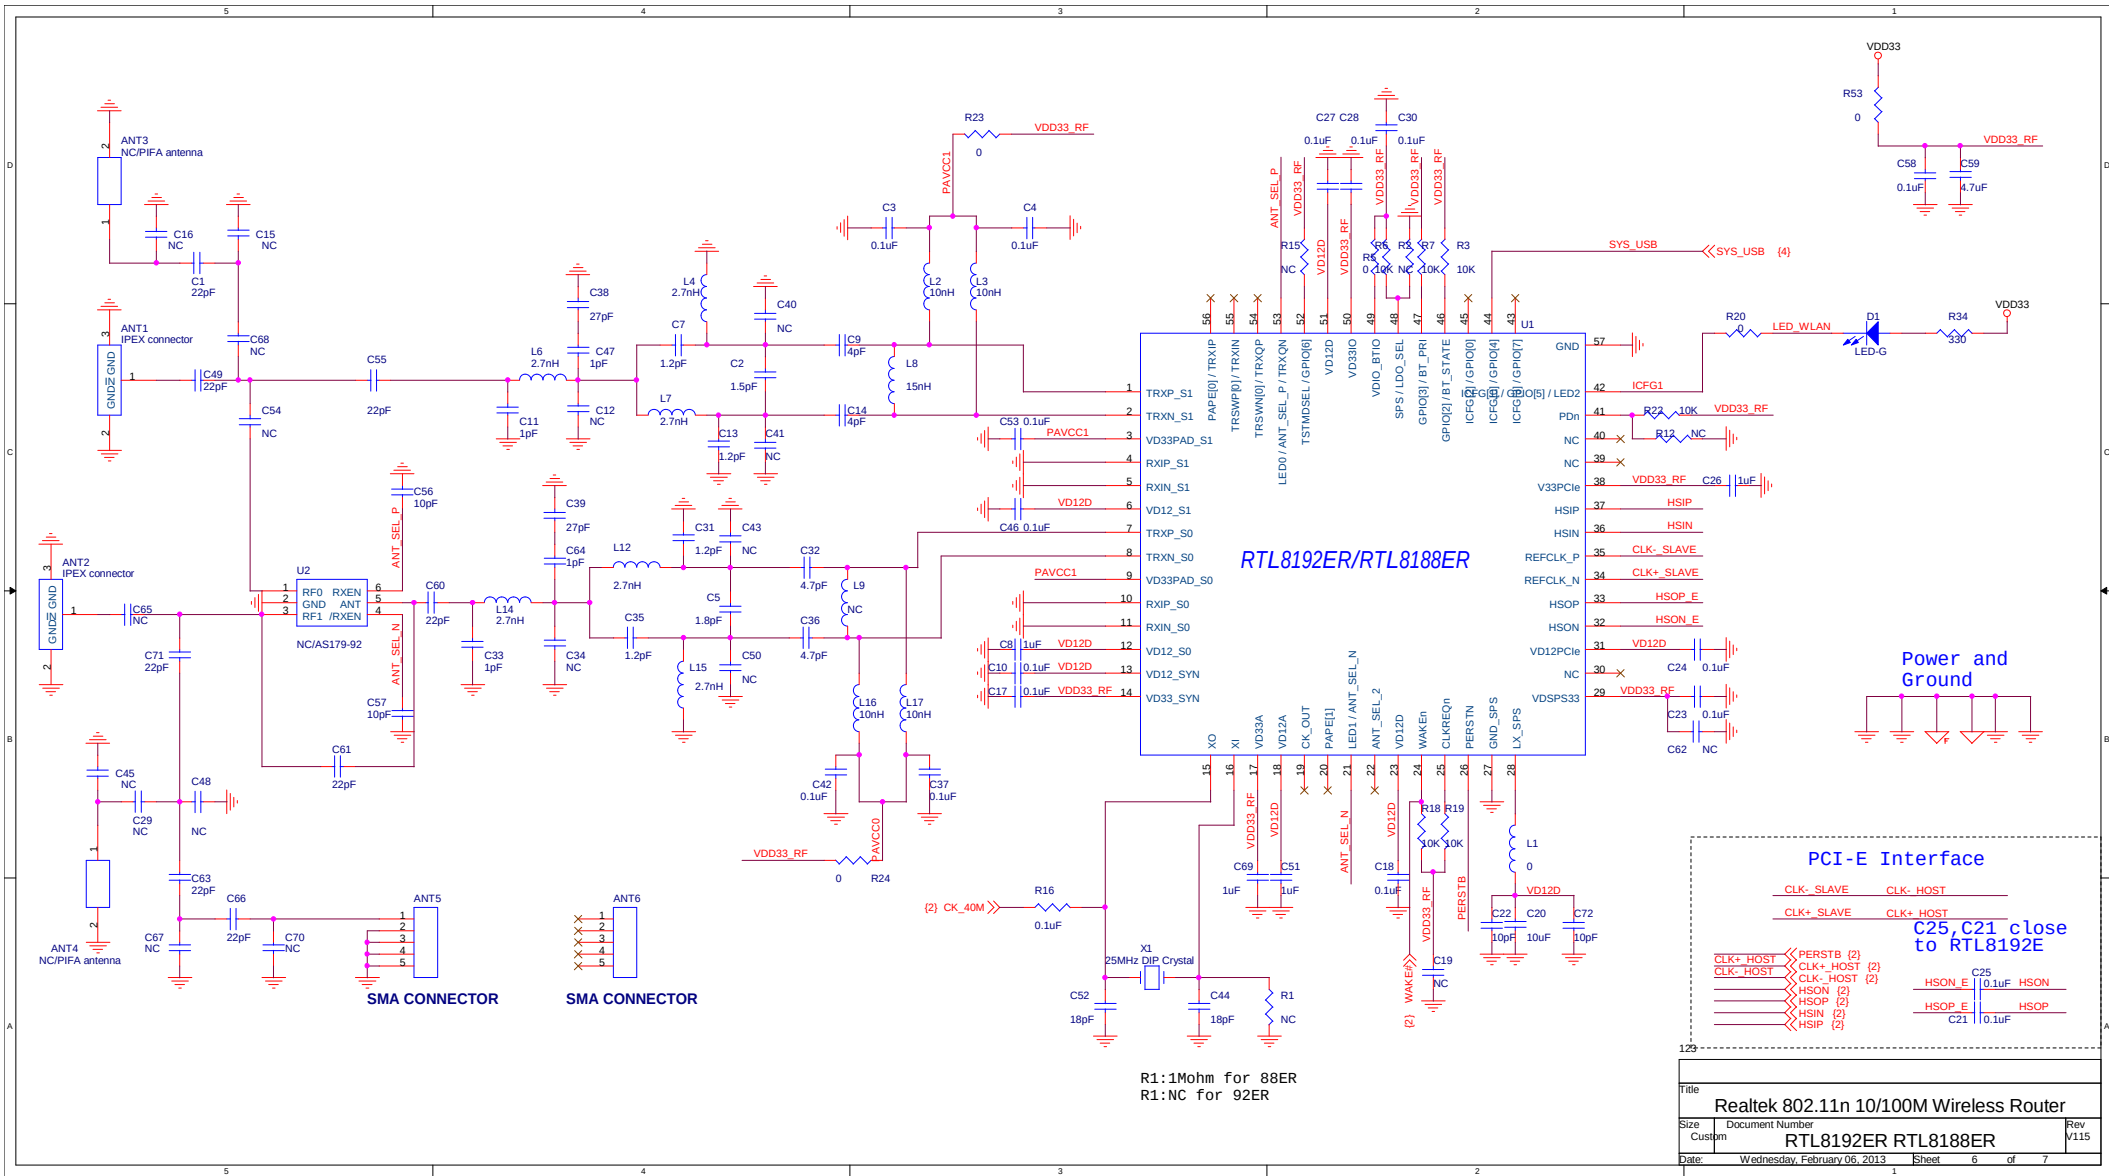

Version	Major change	Issue date
V110	First issue (Realtek Internal Usage)	12/13/2011
V111	Formal Release	1/20/2012
V112	40MHz Crystal changed to 25MHz Crystal	3/26/2012
V113	RTL8192ER Draft release(Internal usage)	11/26/2012
V114	RTL8192ER formal release	12/26/2012
V115	Add R16 0.1uF into 25MHz signal for DC block	2/6/2013
Note:	1.RTL8196E Internal 1.0V SWR only can be used on RTL8196E core power (1.0V), which can not use on any other application circuits	
	2.RTL8196E Internal 1.0V SWR output decoupling capacitors cannot be over 20uF for avoiding with SWR circuit oscillation.	

123

Title		
Realtek 802.11n 10/100M Wireless Router		
Size A	Document Number Version Changed History	Rev V115
Date:	Wednesday, February 06, 2013	Sheet 7 of 7