


FMUSER FUQ-200A 10G IP QAM Processor 64-128 DVB-C QAM Channels IP-to-QAM Conversion 3x SFP+-SFP Ports EN300 429 ITU-T J.83A-B-C Multiplexer Scrambler Modulator for Broadcast Systems Product Overview

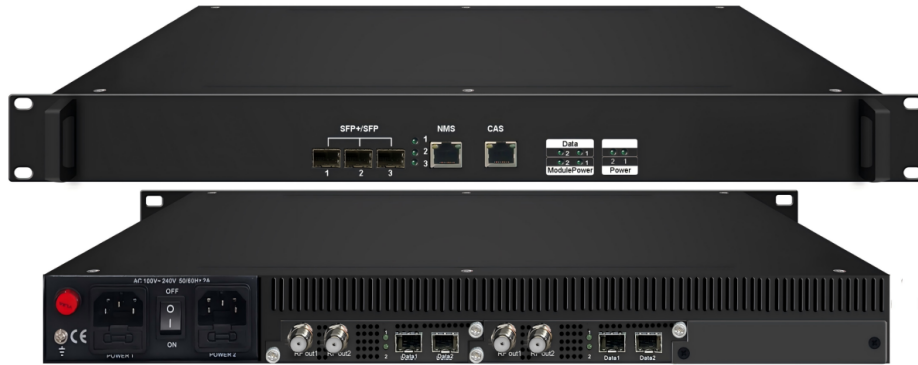

The FMUSER FUQ-200C integrates multiplexer, scrambler, and modulator functions, delivering up to 128 DVB-C QAM channels via RF ports. It processes input signals through SFP+ ports, supporting TS over UDP/RTP and multicast protocols. Housed in a 1U chassis, it features web-based management for easy control. Ideal for broadcast systems requiring high-density signal processing. The device is equipped with 1 (or 2) 64ch QAM card and characterized with dual RF output ports on each card to broaden the bandwidth for QAM carriers. Its high density helps operators to save cost to the most extent.

Key feature


High-Density Design: Features a 1U chassis with plug-in cards for up to 128 non-adjacent carrier outputs.

Advanced Processing: Supports multiplexing, scrambling with 6 CAS Simul-cryption, PCR adjusting, PID remapping, and PSI/SI editing.


Flexible Interfaces: Includes 3 SFP+ (10G)/SFP (1G) ports for TS over UDP/RTP and multicast.

Web-Based Management: Enables easy monitoring and configuration via a network interface.

Inner Principle Chart (two cards)

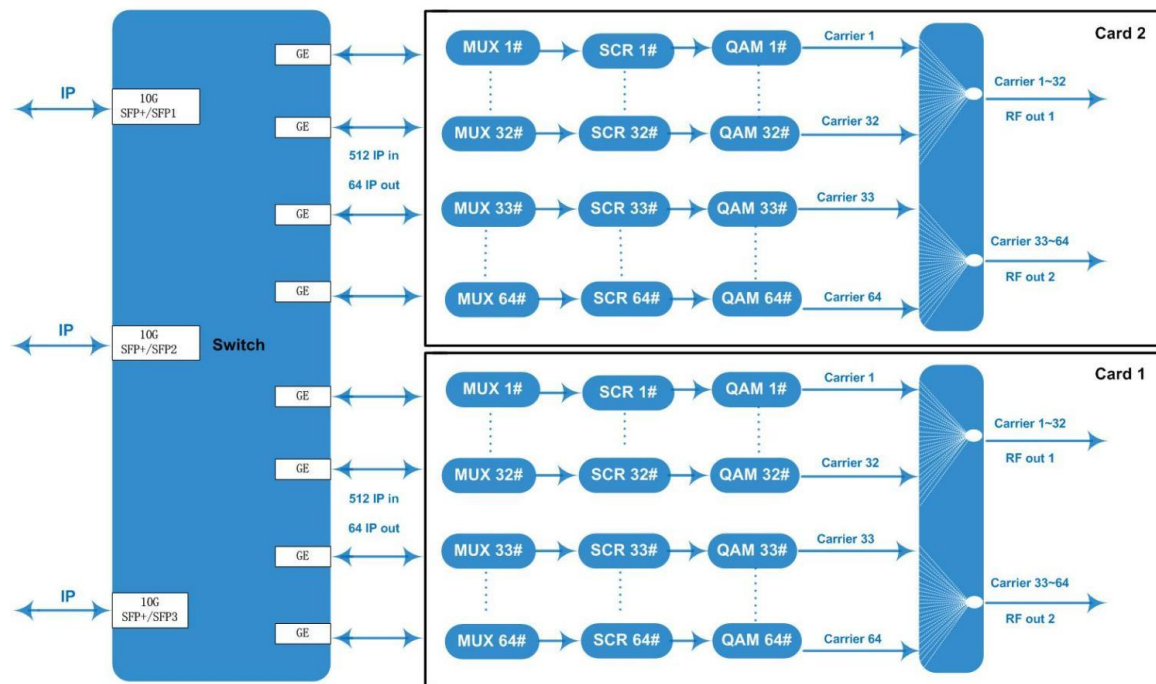

Carrier Setting Illustration (per card)

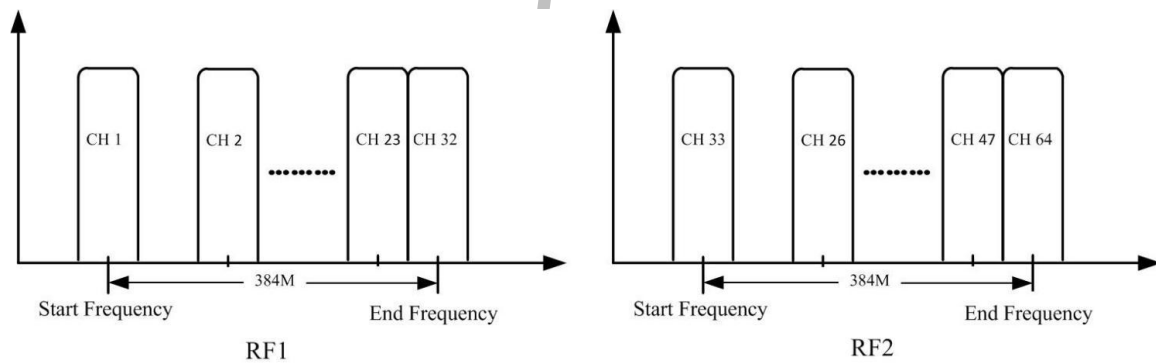

Specifications

Input	Input	Max 512 IP in per card through SFP+/SFP ports 1-3	Max 512 IP in per card through SFP+/SFP ports 1-3
Input	Transmission Rate	Max 9600Mbps for each 10G SFP+/SFP input	Max 9600Mbps for each 10G SFP+/SFP input
Input	Transport Protocol	TS over UDP/RTP, unicast and multicast, IGMP V2/V3	TS over UDP/RTP, unicast and multicast, IGMP V2/V3
Mux	Max PIDs Remapping	256 per output channel	256 per output channel

Mux	Functions	PID remapping (auto/manually optional)	PID remapping (auto/manually optional)
Mux	Functions	PCR accurate adjusting	PCR accurate adjusting
Mux	Functions	PSI/SI table automatically generating	PSI/SI table automatically generating
Scrambling	Max simulcrypt CA	6	6
Scrambling	Scramble Standard	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197
Scrambling	Connection	Local/remote connection	Local/remote connection
Modulation	Modulation Standard	EN300 429/ITU-T J.83A/B/C	EN300 429/ITU-T J.83A/B/C
Modulation	Constellation	J.83A	Constellation :16/32/64/128/256QAM
Modulation	Constellation	J.83A	Bandwidth :8M
Modulation	Constellation	J.83B/C	Constellation :64/256QAM
Modulation	Constellation	J.83B/C	Bandwidth :6M
Modulation	QAM Channel	64/128 non-adjacent carrier outputs, 384Mbps bandwidth for each RF port	64/128 non-adjacent carrier outputs, 384Mbps bandwidth for each RF port
Modulation	Symbol Rate	3600~7000Ksps, 1ksps stepping 5057Ksps (J.83B, 64QAM) ; 5361Ksps (J.83B, 256QAM)	3600~7000Ksps, 1ksps stepping 5057Ksps (J.83B, 64QAM) ; 5361Ksps (J.83B, 256QAM)
Modulation	Constellation	16, 32, 64 , 128, 256QAM	16, 32, 64 , 128, 256QAM
Modulation	FEC	RS (204, 188)	RS (204, 188)
RF Output	Interface (per card)	2 F type output ports for 64 carriers, 75Ω Carrier 1~32 out thru RF1, 33~64 thru RF2	2 F type output ports for 64 carriers, 75Ω Carrier 1~32 out thru RF1, 33~64 thru RF2
RF Output	RF Range	50~960MHz, 1kHz stepping	50~960MHz, 1kHz stepping

RF Output	Output Level	-20dBm~+10dBm(87~117dbμV), 0.1dB stepping	-20dBm~+10dBm(87~117dbμV), 0.1dB stepping
RF Output	MER	≥ 40dB	≥ 40dB
TS output	Per Daughter QAM Card	64 IP output over UDP/RTP/RTSP, unicast/multicast, through SFP+/SFP ports 1-3	64 IP output over UDP/RTP/RTSP, unicast/multicast, through SFP+/SFP ports 1-3
System	Web-based Network management	Web-based Network management	Web-based Network management
General	Dimension	420mm×440mm×44.5 mm (WxLxH)	420mm×440mm×44.5 mm (WxLxH)
General	Temperature	0~45■(operation), -20~80■(storage)	0~45■(operation), -20~80■(storage)
General	Power Supply	AC 100V±10%, 50/60Hz; or AC 220V±10%, 50/60Hz Redundancy power supply (optional as per order)	AC 100V±10%, 50/60Hz; or AC 220V±10%, 50/60Hz Redundancy power supply (optional as per order)
General	Consumption	50W(1 daughter QAM card)/75W(2 daughter QAM cards)	50W(1 daughter QAM card)/75W(2 daughter QAM cards)

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)