
**FMUSER FUQ-200B QAM Modulator 256 IP Input 96 QAM Output
10G SFP+-GE Interfaces DVB-C EN300-429 ITU-T J.83A-B-C
Multiplex Scrambler Modulation for Broadcast Systems**




Product Overview

The FMUSER FUQ-200B integrates multiplex, scrambler, and modulator functions, outputting 48/96 non-adjacent DVB-C QAM carriers via 2/4 RF ports and SFP+/GE ports. It processes signals through multiplexing, scrambling, and modulating in a 1U chassis with modular design and web-based management. Ideal for broadcast operators to save costs in high-density signal distribution. The device is equipped with 1 (or 2) 48ch QAM card and characterized with dual RF output ports on each card to broaden the bandwidth for QAM carriers. Its high density helps operators to save cost to the most extent.


Key feature

Integrates multiplex, scrambler, and modulator with 6 CAS Simul-cryption., Features 2/4 RF outputs and multiple interfaces including SFP+/SFP/GE ports., Outputs 48/96 non-adjacent DVB-C QAM carriers., Supports web-based network management for easy control.

Inner Principle Chart (per card)

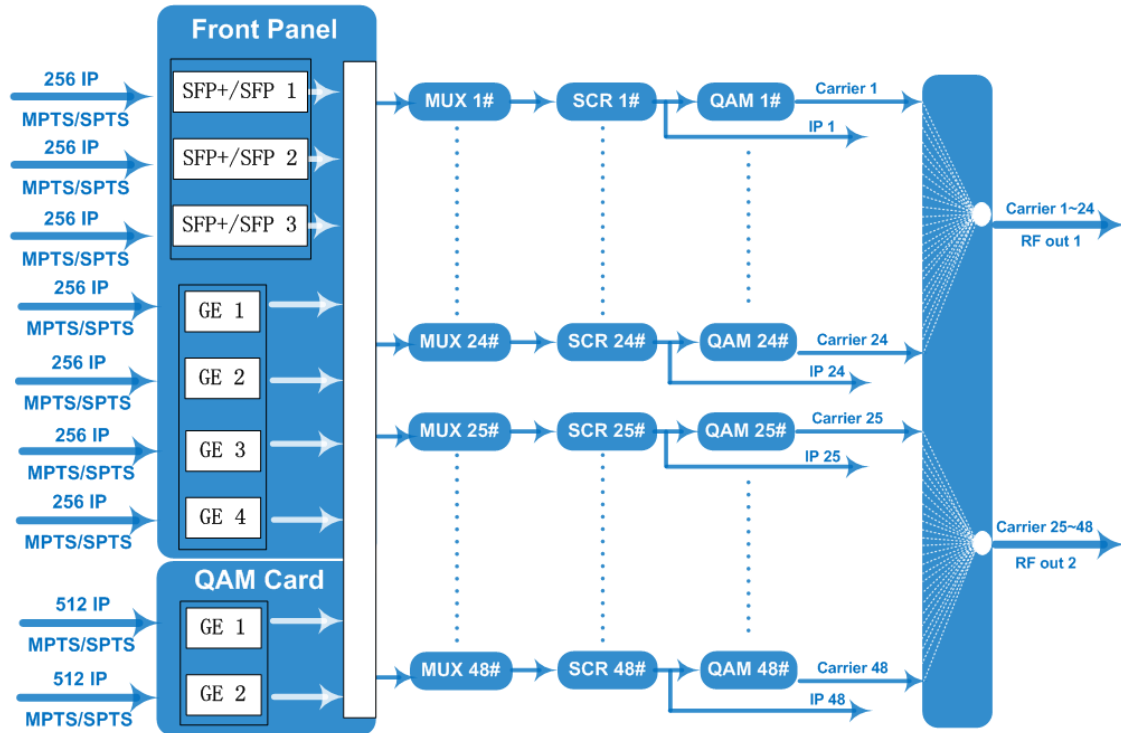

Carrier Setting Illustration (per card)

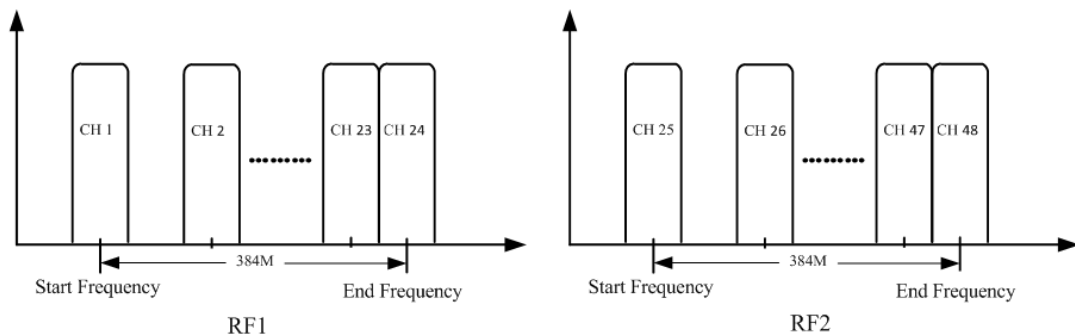

Specifications

Input	Input	Max 256*4 IP in through GE ports 1-4 Max 256*3 IP in through SFP+/SFP ports 1-3	Max 256*4 IP in through GE ports 1-4 Max 256*3 IP in through SFP+/SFP ports 1-3
Input	Transmission Rate	Max 960Mbps for each GE input, and Max 9600Mbps for each 10G SFP+/SFP input	Max 960Mbps for each GE input, and Max 9600Mbps for each 10G SFP+/SFP input

Input	Transport Protocol	TS over UDP/RTP, unicast and multicast, IGMP V2/V3	TS over UDP/RTP, unicast and multicast, IGMP V2/V3
Mux	Max PIDs Remapping	256 per output channel	256 per output channel
Mux	Functions	PID remapping (auto/manually optional)	PID remapping (auto/manually optional)
Mux	Functions	PCR accurate adjusting	PCR accurate adjusting
Mux	Functions	PSI/SI table automatically generating	PSI/SI table automatically generating
Scrambling	Max simulcrypt CA	6	6
Scrambling	Scramble Standard	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197
Scrambling	Connection	Local/remote connection	Local/remote connection
Modulation	Modulation Standard	EN300 429/ITU-T J.83A/B/C	EN300 429/ITU-T J.83A/B/C
Modulation	Constellation	J.83A	Constellation :16/32/64/128/256QAM
Modulation	Constellation	J.83A	Bandwidth :8M
Modulation	Constellation	J.83B/C	Constellation :64/256QAM
Modulation	Constellation	J.83B/C	Bandwidth :6M
Modulation	QAM Channel	48/96 non-adjacent carrier outputs, 384Mbps bandwidth for each RF port	48/96 non-adjacent carrier outputs, 384Mbps bandwidth for each RF port
Modulation	Symbol Rate	3600~7000Ksps, 1ksps stepping 5057Ksps (J.83B, 64QAM) ; 5361Ksps (J.83B, 256QAM)	3600~7000Ksps, 1ksps stepping 5057Ksps (J.83B, 64QAM) ; 5361Ksps (J.83B, 256QAM)
Modulation	Constellation	16, 32, 64 , 128, 256QAM	16, 32, 64 , 128, 256QAM
Modulation	FEC	RS (204, 188)	RS (204, 188)

RF Output	Interface (per card)	2 F type output ports for 48 carriers, 75Ω Carrier 1~24 out thru RF1, 25~48 thru RF2	2 F type output ports for 48 carriers, 75Ω Carrier 1~24 out thru RF1, 25~48 thru RF2
RF Output	RF Range	50~960MHz, 1kHz stepping	50~960MHz, 1kHz stepping
RF Output	Output Level	-20dBm~+10dBm(87~117dbμV), 0.1dB stepping	-20dBm~+10dBm(87~117dbμV), 0.1dB stepping
RF Output	MER	≥ 40dB	≥ 40dB
TS output	Per Daughter QAM Card	48 IP output over UDP/RTP/RTSP, 2*100/1000M self-adaption, Ethernet Ports, unicast/multicast IP 1~24 out thru Data1, IP 25~48 out thru Data2.	48 IP output over UDP/RTP/RTSP, 2*100/1000M self-adaption, Ethernet Ports, unicast/multicast IP 1~24 out thru Data1, IP 25~48 out thru Data2.
System	Network management software (NMS) supporting	Network management software (NMS) supporting	Network management software (NMS) supporting
General	Demission	420mm×440mm×44.5 mm (WxLxH)	420mm×440mm×44.5 mm (WxLxH)
General	Weight	5kg	5kg
General	Temperature	0~45■(operation), -20~80■(storage)	0~45■(operation), -20~80■(storage)
General	Power Supply	AC 100V±10%, 50/60Hz ; or AC 220V±10%, 50/60Hz	AC 100V±10%, 50/60Hz ; or AC 220V±10%, 50/60Hz
General	Consumption	15.4W	15.4W

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)