

**FMUSER FUQ-41086D HD IRD 8 Tuner Inputs DVB-S-S2-S2X
DVB-S2-S2X Outputs UDP-RTP Dual Mode BISS Decryption
Diseqc Broadcast IPTV**





Product overview

The FMUSER FUQ-41086D HD IRD supports up to 24 tuner inputs for DVB-S/S2/S2X, DVB-C/T, and ISDB-T standards. It processes signals in Passthrough mode for 8 MPTS output or Mux mode for 2 MPTS / 512 SPTS over UDP/RTP. Managed via web-based NMS, it includes features like Biss decryption and Diseqc function. Ideal for broadcast and IPTV systems.

Key feature

Supports expandable tuner inputs for up to 24 tuners via optional cards, compatible with DVB-S/S2/S2X, DVB-C/T, and ISDB-T.


Features dual output modes: Passthrough mode for 8 MPTS or Mux mode for 2 MPTS / 512 SPTS over UDP/RTP unicast/multicast.

Enables advanced PID handling including remapping and pass-through (up to 256 PIDs per channel) exclusively in Mux mode.


Includes security with Biss decryption (64 keys per tuner) and Diseqc function, managed via NMS.

Inner Principle Chart (Per Card/8 Input):

Version 1: Passthrough Mode

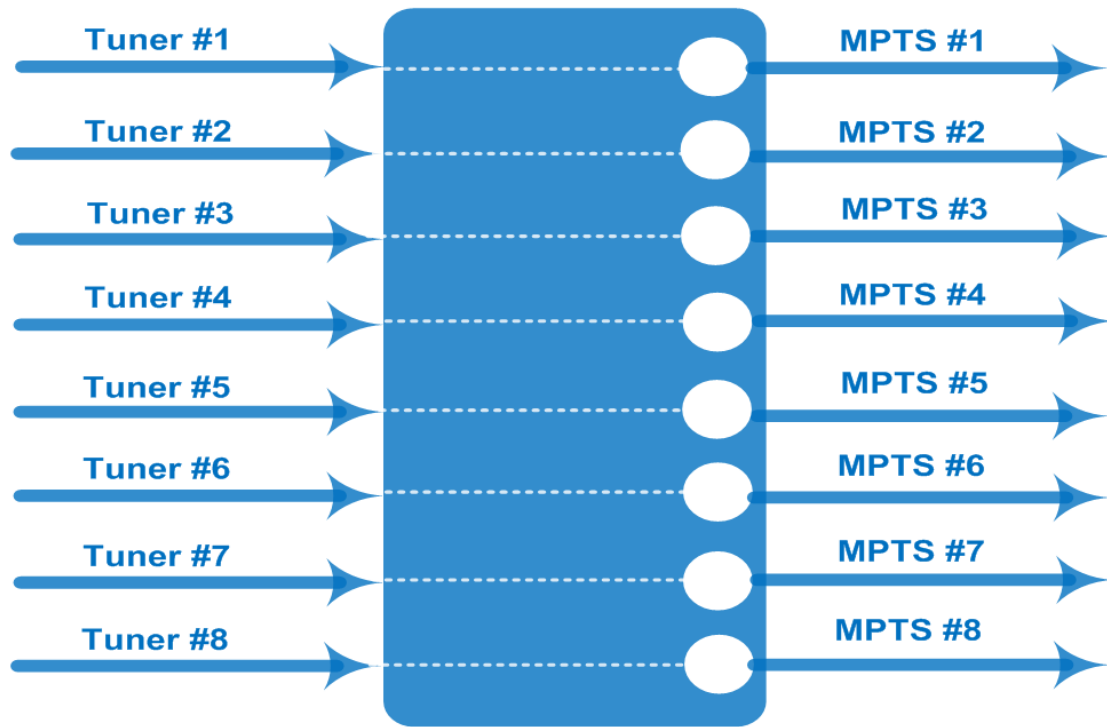

Version 2: Mux Mode (MPTS and SPTS output Switchable)

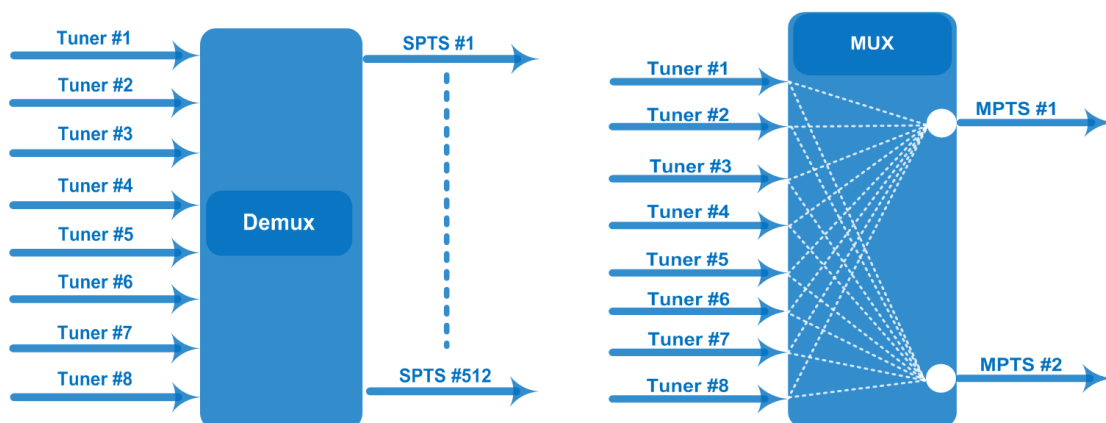

Specifications (Per Card/8 Input)

Input / Output	8 Tuner input (DVB-S/S2/S 2X or/and DV B-C/T/T2/ISD B-T), F Type 8 MPTS out thru bypassing over UDP/RT P thru Data port (Version 1) 100/1000M self-adaption, unicast/multicast	8 Tuner input (DVB-S/S2/S 2X or/and DV B-C/T/T2/ISD B-T), F Type 8 MPTS out thru bypassing over UDP/RT P thru Data port (Version 1) 100/1000M self-adaption, unicast/multicast	8 Tuner input (DVB-S/S2/S 2X or/and DV B-C/T/T2/ISD B-T), F Type 8 MPTS out thru bypassing over UDP/RT P thru Data port (Version 1) 100/1000M self-adaption, unicast/multicast	8 Tuner input (DVB-S/S2/S 2X or/and DV B-C/T/T2/ISD B-T), F Type 8 MPTS out thru bypassing over UDP/RT P thru Data port (Version 1) 100/1000M self-adaption, unicast/multicast	8 Tuner input (DVB-S/S2/S 2X or/and DV B-C/T/T2/ISD B-T), F Type 8 MPTS out thru bypassing over UDP/RT P thru Data port (Version 1) 100/1000M self-adaption, unicast/multicast
Mux (Version 2)	Max number of managing PID: 256 (for 2 MPTS out thru multiplexing) or 512 SPTS out	Max number of managing PID: 256 (for 2 MPTS out thru multiplexing) or 512 SPTS out	Max number of managing PID: 256 (for 2 MPTS out thru multiplexing) or 512 SPTS out	Max number of managing PID: 256 (for 2 MPTS out thru multiplexing) or 512 SPTS out	Max number of managing PID: 256 (for 2 MPTS out thru multiplexing) or 512 SPTS out
Mux (Version 2)	Functions	PID remapping (automatically/ manually)	PID remapping (automatically/ manually)	PID remapping (automatically/ manually)	PID remapping (automatically/ manually)
Mux (Version 2)	Functions	PID pass-through	PID pass-through	PID pass-through	PID pass-through
Tuner Section	DVB-S	Input Frequency	Input Frequency	950-2150MHz	950-2150MHz
Tuner Section	DVB-S	Symbol Rate	Symbol Rate	0.5~45 Msps	0.5~45 Msps
Tuner Section	DVB-S	Constellation	Constellation	QPSK	QPSK
Tuner Section	DVB-S	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Tuner Section	DVB-S2	Input Frequency	Input Frequency	950-2150MHz	950-2150MHz
Tuner Section	DVB-S2	Symbol Rate	Symbol Rate	QPSK/8PSK/ 16APSK: 0.5~45 Msps 32A PSK: 0.5~40 Msps	QPSK/8PSK/ 16APSK: 0.5~45 Msps 32A PSK: 0.5~40 Msps

Tuner Section	DVB-S2	Constellation	Constellation	QPSK/8PSK/ 16APSK/32A PSK	QPSK/8PSK/ 16APSK/32A PSK
Tuner Section	DVB-S2	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9
Tuner Section	DVB-S2	Max input bitrate per tuner	Max input bitrate per tuner	≤170 Mbps	≤170 Mbps
Tuner Section	DVB-S2X	Symbol Rate	Symbol Rate	QPSK/8PSK/ 16APSK: 0.5~45 Msps; 8APSK/32AP SK: 0.5~40 Msps	QPSK/8PSK/ 16APSK: 0.5~45 Msps; 8APSK/32AP SK: 0.5~40 Msps
Tuner Section	DVB-S2X	Constellation	Constellation	QPSK/8PSK/ 16APSK/8AP SK/32APSK	QPSK/8PSK/ 16APSK/8AP SK/32APSK

Tuner Section	DVB-S2X	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10, 23/36, 25/36, 13/18 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10, 23/36, 25/36, 13/18 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9
Tuner Section	DVB-S2X	Max input bitrate per tuner	Max input bitrate per tuner	≤170 Mbps	≤170 Mbps
Tuner Section	DVB-S2X	Signal Strength	Signal Strength	-65 ~ -25dBm	-65 ~ -25dBm
Tuner Section	DVB-C	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz
Tuner Section	DVB-C	Standard	Standard	J.83A, J.83C	J.83B
Tuner Section	DVB-C	Constellation	Constellation	16/32/64/128/256 QAM	64/256 QAM
Tuner Section	DVB-T/T2	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz
Tuner Section	DVB-T/T2	Bandwidth	Bandwidth	6/7/8 M	6/7/8 M
Tuner Section	ISDB-T	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz
System	Web management:100M NMS port	Web management:100M NMS port	Web management:100M NMS port	Web management:100M NMS port	Web management:100M NMS port

System	Language: English and Chinese	Language: English and Chinese	Language: English and Chinese	Language: English and Chinese	Language: English and Chinese
System	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Dimensions	Dimensions	482mm×328 mm×44mm (W×L×H)	482mm×328 mm×44mm (W×L×H)	482mm×328 mm×44mm (W×L×H)
General	Weight	Weight	3.5kg	3.5kg	3.5kg
General	Temperature	Temperature	0~45■(operat ion), -20~80■ (storage)	0~45■(operat ion), -20~80■ (storage)	0~45■(operat ion), -20~80■ (storage)
General	Power supply	Power supply	AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz	AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz	AC 110V±10%, 50/60Hz Or AC 220V±10%, 50/60Hz
General	Consumption	Consumption	≤25W (1card inside) ≤50W (2 cards inside) ≤75W (3 cards inside)	≤25W (1card inside) ≤50W (2 cards inside) ≤75W (3 cards inside)	≤25W (1card inside) ≤50W (2 cards inside) ≤75W (3 cards inside)

Order Guide

DX3908-8	8 FTA DVB-S/S2/S2X Tuner Input, Version 1 or Version 2
DX3908-16	16 FTA DVB-S/S2/S2X Tuner Input, Version 1 or Version 2
DX3908-24	24 FTA DVB-S/S2/S2X Tuner Input, Version 1 or Version 2
DX3928-8	8 FTA DVB-C/T/ISDB-T Tuner Input, Version 1 or Version 2
DX3928-16	16 FTA DVB-C/T/ISDB-T Tuner Input, Version 1 or Version 2
DX3928-24	24 FTA DVB-C/T/ISDB-T Tuner Input, Version 1 or Version 2

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227