

FMUSER FUQ-4312D 4-input SD Encoder CVBS-S-Video-SD-SDI MPEG-2 AES-EBU Audio TS over UDP output Broadcast Headend System

Product overview




The FMUSER FUQ-4312D is a professional MPEG-2 SD encoder with 4 inputs (CVBS, S-Video, SD-SDI, and analog/AES/EBU audio). It processes PAL/NTSC signals (720×480/576) with de-interlacing and outputs ASI or UDP/IP transport streams. This 1U rack-mount unit supports dual control via LCD and web interface, ideal for broadcast headends and IP-based contribution networks.

Key feature

Controls via LCD panel & web interface with GOP customization

Principle Chart

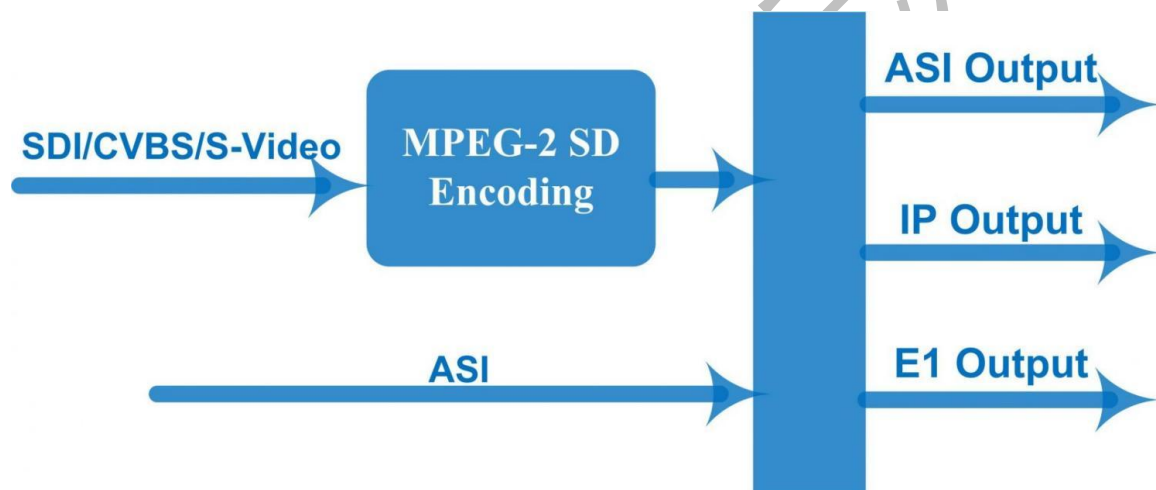

Specifications

input	Video	Analog composite video(CVBS), BNC interface
input	Video	S-Video interface
input	Video	SD-SDI, BNC interface
input	Audio	Analog stereo audio(balanced), XLR interface
input	Audio	Analog stereo audio(unbalanced), BNC interface
input	Audio	AES / EBU digital audio, XLR interface
input	Audio	SD-SDI embedded audio
Video	Resolution	720×480_59.94i, 720×576_50i
Video	Encoding	MPEG-2 MP@ML
Video	Bit-rate	0.8Mbps~19.5Mbps
Video	Rate Control	CBR/VBR
Video	GOP Structure	IIII, IPPP, IBPB, IBBP
Video	Aspect Ratio	4:3; 16:9
Video	Advanced Pretreatment	De-interlacing, noise reduction, sharpening
Audio	Encoding	MPEG-1 Layer 2
Audio	Sampling rate	48KHz, 44.1KHz, 32KHz
Audio	Bitrate	64Kbps—384Kbps
Stream output	Stream output	2-way ASI output, BNC interface
Stream output	Stream output	E1 output –Optional
Stream output	Stream output	TS output over UDP,100/1000Base-T Ethernet interface (UDP unicast / multicast)
System function	System function	LCD/keyboard, network management(NMS) Chinese and English language
System function	System function	Ethernet software upgrade
General	Dimensions (WxDxH)	482mm×455mm×44.5mm

General	Temperature range	0~45■(operation), -20~80■(storage)
General	Power Requirements	AC 110V±10%,50/60Hz or AC 220V±10%,50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)