

FMUSER FUQ-44105B V3 QAM Modulator 24-16 Tuner 128 IP 2 ASI Input DVB-S-S2-S2X-C-T-T2-ISDB-T Input 16 DVB-C 16 IP 2 ASI Output BISS ETSI Scrambling CATV Broadcasting

Product overview



The FMUSER FUQ-44105D v3 is a QAM modulator supporting 24/16 tuner inputs, 128 IP inputs via DATA1, and 2 ASI inputs, with outputs of 16 DVB-C carriers and 16 IP (MPTS) streams. It processes signals by modulating into QAM format with optional BISS scrambling. Featuring web-based management for remote control, it is ideal for CATV broadcasting systems, ensuring reliable transmission. FU-44105C v3 is also characterized with high integrated level, high performance and low cost. This is very adaptable to a new generation CATV broadcasting system.

Key feature


Supports 24/16 FTA multi-mode tuner inputs for DVB-S/S2/S2X, DVB-C/T/T2, or ISDB-T with loop-out.

Features 128 IP inputs, 2 ASI inputs, and USB TS file playback for flexible source integration.

Outputs 8 non-adjacent DVB-T carriers and 8 IP (MPTS) outputs, plus 2 TS outputs via ASI.

Ensures MER ≥ 40 dB with multiplexing, PCR adjusting, and PSI/SI editing via web control.

Working Principle

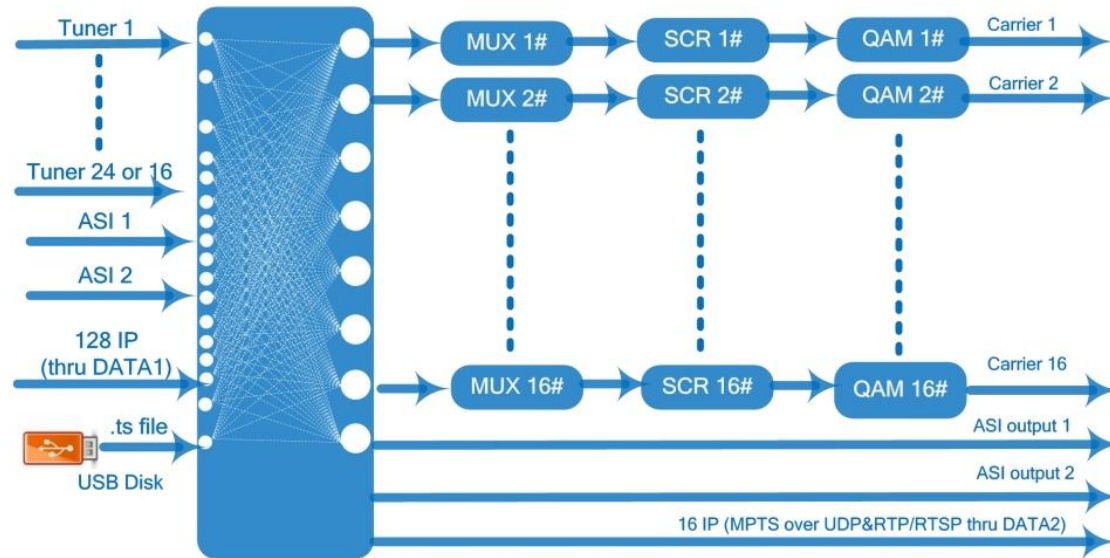

Specifications

Input	24 or 16 FTA DVB-S/S2/S2 X or DVB-C/T /T2/ISDB-T multi-mode switchable tuner inputs as per order	24 or 16 FTA DVB-S/S2/S2 X or DVB-C/T /T2/ISDB-T multi-mode switchable tuner inputs as per order	24 or 16 FTA DVB-S/S2/S2 X or DVB-C/T /T2/ISDB-T multi-mode switchable tuner inputs as per order	24 or 16 FTA DVB-S/S2/S2 X or DVB-C/T /T2/ISDB-T multi-mode switchable tuner inputs as per order	24 or 16 FTA DVB-S/S2/S2 X or DVB-C/T /T2/ISDB-T multi-mode switchable tuner inputs as per order
Input	128 IP inputs through DATA1 over UDP and RTP protocol	128 IP inputs through DATA1 over UDP and RTP protocol	128 IP inputs through DATA1 over UDP and RTP protocol	128 IP inputs through DATA1 over UDP and RTP protocol	128 IP inputs through DATA1 over UDP and RTP protocol
Input	2 ASI inputs, BNC interface	2 ASI inputs, BNC interface	2 ASI inputs, BNC interface	2 ASI inputs, BNC interface	2 ASI inputs, BNC interface
Input	TS files input by playing via the USB disk (FAT 32, USB 2.0)	TS files input by playing via the USB disk (FAT 32, USB 2.0)	TS files input by playing via the USB disk (FAT 32, USB 2.0)	TS files input by playing via the USB disk (FAT 32, USB 2.0)	TS files input by playing via the USB disk (FAT 32, USB 2.0)
Input	Tuner option 1	DVB-S	Frequency In	Frequency In	950~2150MH z
Input	Tuner option 1	DVB-S	Symbol rate	Symbol rate	0.5~45Msps

Input	Tuner option 1	DVB-S	Signal Strength	Signal Strength	- 65~-25dBm
Input	Tuner option 1	DVB-S	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Input	Tuner option 1	DVB-S	Constellation	Constellation	QPSK
Input	Tuner option 1	DVB-S	Max input bitrate	Max input bitrate	≤129 Mbps
Input	Tuner option 1	DVB-S2	Frequency In	Frequency In	950~2150MHz
Input	Tuner option 1	DVB-S2	Symbol rate	Symbol rate	QPSK/8PSK / 16APSK: 0.5~45 Msps 32APSK: 0.5~40Msps;
Input	Tuner option 1	DVB-S2	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
Input	Tuner option 1	DVB-S2	Constellation	Constellation	QPSK, 8PSK, 16APSK, 32APSK
Input	Tuner option 1	DVB-S2	Max input bitrate	Max input bitrate	≤129 Mbps
Input	Tuner option 1	DVB-S2X	Frequency In	Frequency In	950-2150MHz
Input	Tuner option 1	DVB-S2X	Symbol rate	Symbol rate	QPSK/8PSK /16APSK: 0.5~45 Msps 8APSK/32APSK: 0.5~40Msps

Input	Tuner option 1	DVB-S2X	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10, 2/3-L, 32/45, 11/15, 7/9
Input	Tuner option 1	DVB-S2X	Constellation	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK
Input	Tuner option 1	DVB-S2X	Max input bitrate	Max input bitrate	≤129 Mbps
Input	Tuner option 2	DVB-C	Standard	Standard	J.83A(DVB-C), J.83B, J.83C
Input	Tuner option 2	DVB-C	Frequency In	Frequency In	50~960MHz
Input	Tuner option 2	DVB-C	Constellation	Constellation	16/32/64/128/256 QAM
Input	Tuner option 2	DVB-T/T2	Frequency In	Frequency In	50~960MHz
Input	Tuner option 2	DVB-T/T2	Bandwidth	Bandwidth	6/7/8 M bandwidth

Input	Tuner option 2	ISDB-T	Frequency In	Frequency In	50~960MHz
Multiplexing	Max PID Remapping	Max PID Remapping	256 outputs per channel	256 outputs per channel	256 outputs per channel
Multiplexing	Function	Function	PID remapping (automatically or manually)/CA Filter	PID remapping (automatically or manually)/CA Filter	PID remapping (automatically or manually)/CA Filter
Multiplexing	Function	Function	A/V PID Filter	A/V PID Filter	A/V PID Filter
Multiplexing	Function	Function	Accurate PCR adjusting	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Function	Generate PSI/SI table automatically	Generate PSI/SI table automatically	Generate PSI/SI table automatically
Scrambling Parameters (optional)	Max simulcrypt CA	Max simulcrypt CA	4	4	4
Scrambling Parameters (optional)	Scramble Standard	Scramble Standard	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197
Scrambling Parameters (optional)	Connection	Connection	Local/remote connection	Local/remote connection	Local/remote connection
Modulation	QAM Channel	QAM Channel	16 non-adjacent carriers output, within 192MHz bandwidth	16 non-adjacent carriers output, within 192MHz bandwidth	16 non-adjacent carriers output, within 192MHz bandwidth
Modulation	Standard	Standard	EN300 429/ITU-T J.83A/B	EN300 429/ITU-T J.83A/B	EN300 429/ITU-T J.83A/B
Modulation	MER	MER	≥40db	≥40db	≥40db
Modulation	RF frequency	RF frequency	50~960MHz, 1KHz step	50~960MHz, 1KHz step	50~960MHz, 1KHz step

Modulation	RF output level	RF output level	-20~+3dbm(87~110 dbμV), 0.1db step	-20~+3dbm(87~110 dbμV), 0.1db step	-20~+3dbm(87~110 dbμV), 0.1db step
Modulation	Symbol Rate	Symbol Rate	3600ksps~6952ksps, 1ksps stepping	3600ksps~6952ksps, 1ksps stepping	3600ksps~6952ksps, 1ksps stepping
Modulation			J.83A	J.83A	J.83B
Modulation	Constellation	Constellation	16/32/64/128/256QAM	16/32/64/128/256QAM	64/256 QAM
Modulation	Bandwidth	Bandwidth	8M	8M	6M
Stream out	16 carriers output (F type interface)	16 carriers output (F type interface)	16 carriers output (F type interface)	16 carriers output (F type interface)	16 carriers output (F type interface)
Stream out	16 IP (MPTS) output over UDP and RTP/RTSP (thru DATA 2), 2 ASI outputs(2 TS as mirror)	16 IP (MPTS) output over UDP and RTP/RTSP (thru DATA 2), 2 ASI outputs(2 TS as mirror)	16 IP (MPTS) output over UDP and RTP/RTSP (thru DATA 2), 2 ASI outputs(2 TS as mirror)	16 IP (MPTS) output over UDP and RTP/RTSP (thru DATA 2), 2 ASI outputs(2 TS as mirror)	16 IP (MPTS) output over UDP and RTP/RTSP (thru DATA 2), 2 ASI outputs(2 TS as mirror)
System	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)	Network management (WEB)
System	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language	Chinese and English language
System	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
General	Dimension (W*D*H)	Dimension (W*D*H)	Dimension (W*D*H)	482mm×270mm×44mm	482mm×270mm×44mm
General	Temperature	Temperature	Temperature	0~45■(Operation) ; -20~80 ■(Storage)	0~45■(Operation) ; -20~80 ■(Storage)

General	Power	Power	Power	AC 100V±105 0/60Hz; AC 220V±10%, 50/60HZ	AC 100V±105 0/60Hz; AC 220V±10%, 50/60HZ
---------	-------	-------	-------	---	---

Major Technical Comparison

FU-44105C	v1	v2	v3
LCD/KEY Feature	NO	NO	Yes
ASI inputs	2	1	2
ASI outputs	NO	2 for one TS	2 for two TS
Tuner inputs	16	16 or 24	16 or 24 (FTA DVB-S/S2/S2X or DVB-C/T/T2/ISDB-T multi-mode switchable Tuner inputs with loop out)
RF loop out	Yes	No	Yes
IP outputs	1 MPTS output	16 MPTS output	16 MPTS output
USB	N/A	Playing TS	Playing TS
DATA Ports	IP inputs/outputs via GE1	IP inputs via DATA 1 IP outputs via DATA 2	IP inputs via DATA 1 IP outputs via DATA2
Reboot in Web after firmware upgrading	N/A	N/A	Yes

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)