

FMUSER FUQ-4475 IP QAM Modulator 512 IP Inputs 64 QAM Dual RF Outputs GE Interface DVB-C ITU-T J.83 A-B-C Multiplexing Scrambling Web-Based Management for Broadcast Headends

Product Overview




The FMUSER FUQ-4475 modulator converts IP signals to RF outputs, supporting up to 512 IP inputs via 6 GE ports and 64 QAM carriers through dual RF interfaces. It processes streams with multiplexing, scrambling, and modulation to DVB-C standards. Featuring web-based management, this device is ideal for broadcast headends and cable television distribution systems.


Key feature

- Enables web-based control for network configuration.

Inner Principle Chart

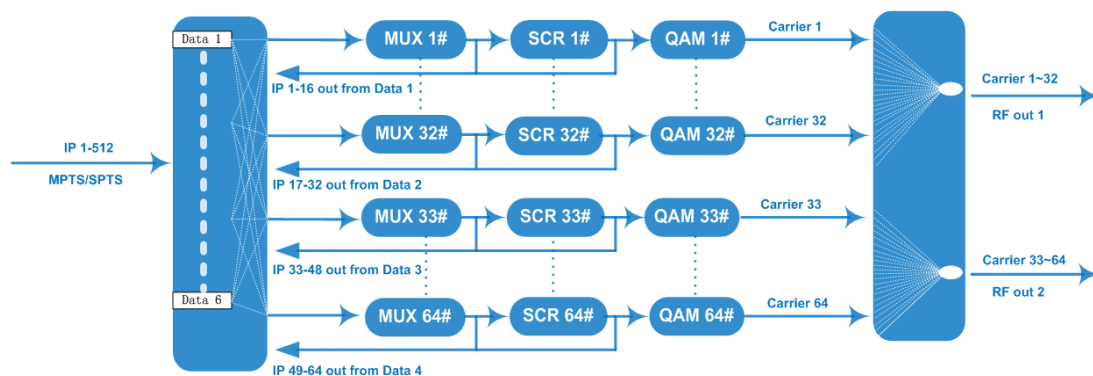

Carrier Setting Illustration

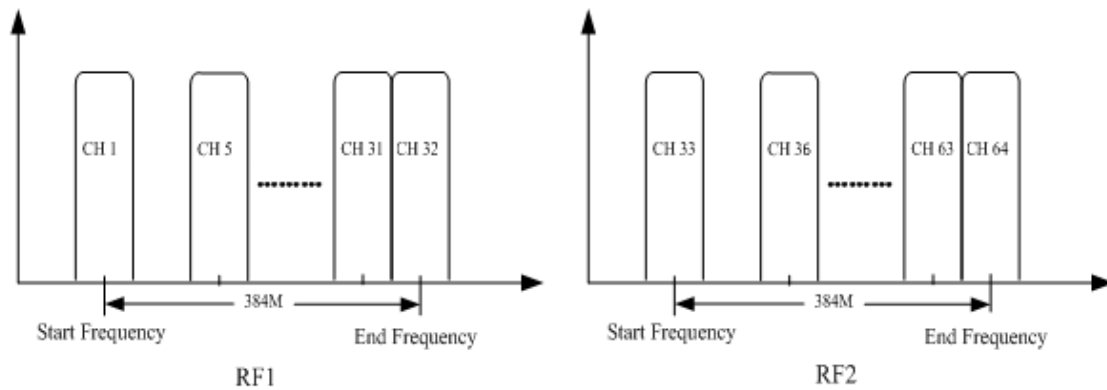

Specifications

Input	Input	Input	Max 512 IP inputs from 6*10 0/1000M Ethernet Port (4*RJ45, 2*SFP)	Max 512 IP inputs from 6*10 0/1000M Ethernet Port (4*RJ45, 2*SFP)
Input	Transport Protocol	Transport Protocol	TS over UDP/RTP, unicast and multicast, IGMP V2/V3	TS over UDP/RTP, unicast and multicast, IGMP V2/V3
Input	Transmission Rate	Transmission Rate	Max 840Mbps for each GE input	Max 840Mbps for each GE input
Mux	Input Channel	Input Channel	512	512
Mux	Output Channel	Output Channel	64	64
Mux	Max PIDs	Max PIDs	256 per channel	256 per channel
Mux	Functions	Functions	PID remapping(automatic/manual optional)	PID remapping(automatic/manual optional)
Mux	Functions	Functions	PCR accurate adjusting	PCR accurate adjusting
Mux	Functions	Functions	PSI/SI table automatically generating	PSI/SI table automatically generating
Scrambling Parameters	Max simulcrypt CA	Max simulcrypt CA	6	6

Scrambling Parameters	Scramble Standard	Scramble Standard	ETR289, ETSI 101 197, ETSI 103 197	ETR289, ETSI 101 197, ETSI 103 197
Scrambling Parameters	Connection	Connection	Local/remote connection	Local/remote connection
Modulation Parameters	Modulation Standard	Modulation Standard	EN300 429/ITU-T J.83A/B/C	EN300 429/ITU-T J.83A/B/C
Modulation Parameters	Constellation	Constellation	J.83A	Constellation :16/ 32/64/128/256Q AM
Modulation Parameters	Constellation	Constellation	J.83A	Bandwidth :8M
Modulation Parameters	Constellation	Constellation	J.83B/C	Constellation :64/256QAM
Modulation Parameters	Constellation	Constellation	J.83B/C	Bandwidth :6M
Modulation Parameters	QAM Channel	QAM Channel	64 non-adjacent carriers 384Mbps bandwidth for each RF interface	64 non-adjacent carriers 384Mbps bandwidth for each RF interface
Modulation Parameters	Symbol Rate	Symbol Rate	5.0~7.0Msps, 1ksps stepping 5057Ksps (J.83B, 64QAM) ; 5361Ksps (J.83B, 256QAM)	5.0~7.0Msps, 1ksps stepping 5057Ksps (J.83B, 64QAM) ; 5361Ksps (J.83B, 256QAM)
Modulation Parameters	Constellation	Constellation	16, 32, 64 , 128, 256QAM	16, 32, 64 , 128, 256QAM
Modulation Parameters	FEC	FEC	RS (204, 188)	RS (204, 188)
RF Output	Interface	Interface	2 F type output ports for 64 carriers, 75Ω	2 F type output ports for 64 carriers, 75Ω
RF Output	RF Range	RF Range	50~960MHz, 1kHz stepping	50~960MHz, 1kHz stepping
RF Output	Output Level	Output Level	-20dBm~+10dB m(87~117dbμV), 0.1dB stepping	-20dBm~+10dB m(87~117dbμV), 0.1dB stepping
RF Output	MER	MER	≥ 40dB	≥ 40dB

TS output	64 IP output over UDP/RTP/RTSP, unicast/multicast, 4*100/1000M Ethernet Ports (each port for 16 IP outputs)	64 IP output over UDP/RTP/RTSP, unicast/multicast, 4*100/1000M Ethernet Ports (each port for 16 IP outputs)	64 IP output over UDP/RTP/RTSP, unicast/multicast, 4*100/1000M Ethernet Ports (each port for 16 IP outputs)	64 IP output over UDP/RTP/RTSP, unicast/multicast, 4*100/1000M Ethernet Ports (each port for 16 IP outputs)
System	Web-based Network management	Web-based Network management	Web-based Network management	Web-based Network management
General	Demission	420mm×440mm ×44.5mm (W×L×H)	420mm×440mm ×44.5mm (W×L×H)	420mm×440mm ×44.5mm (W×L×H)
General	Temperature	0~45■(operation), -20~80■(storage)	0~45■(operation), -20~80■(storage)	0~45■(operation), -20~80■(storage)
General	Power Supply	AC 100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz	AC 100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz	AC 100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)