

**FMUSER FUQ-4619C Tuner to IP Gateway 16 Tuner Inputs 2 ASI Inputs
DVB-S-S2-S2X 4 IP Outputs UDP-RTP-RTSP BISS Descrambling Multiplexing
Broadcast Headends** Product overview



The FMUSER FUQ-4619C V2 is a tuner to IP gateway with 16 tuner inputs and 2 ASI inputs for IP MPTS output. It multiplexes signals and applies BISS descrambling with PSI/SI management. Controlled via web interface, it suits digital TV head-end systems for broadcasting.

Key feature


Supports up to 16 tuner inputs with DVB-S/S2/S2X standards and 2 ASI inputs.

Features embedded BISS descrambling with bit rate up to 80Mbps per channel.

Provides 4 IP outputs over UDP/RTP/RTSP and 2 GE mirrored outputs.

Enables PID filtering, re-mapping, and PSI/SI editing.

Working Principle

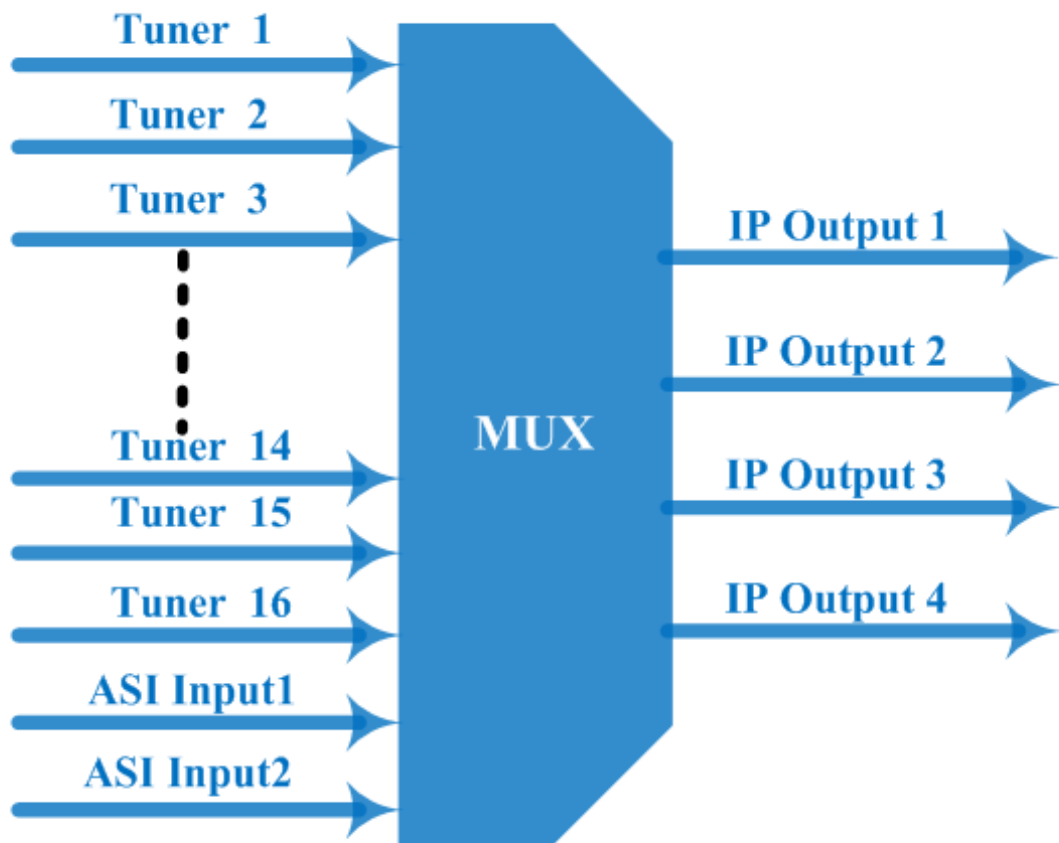

Specifications

Input	16 tuners input, (DVB-C, DVB-T/(T), ISDBT, S/S2/S2X, ATSC optional), F type 2 ASI input, BNC interface	16 tuners input, (DVB-C, DVB-T/(T), ISDBT, S/S2/S2X, ATSC optional), F type 2 ASI input, BNC interface	16 tuners input, (DVB-C, DVB-T/(T), ISDBT, S/S2/S2X, ATSC optional), F type 2 ASI input, BNC interface	16 tuners input, (DVB-C, DVB-T/(T), ISDBT, S/S2/S2X, ATSC optional), F type 2 ASI input, BNC interface	16 tuners input, (DVB-C, DVB-T/(T), ISDBT, S/S2/S2X, ATSC optional), F type 2 ASI input, BNC interface	16 tuners input, (DVB-C, DVB-T/(T), ISDBT, S/S2/S2X, ATSC optional), F type 2 ASI input, BNC interface
Tuner Section		DVB-C	Input Frequency	Input Frequency	Input Frequency	30 ~1000 MHz
Tuner Section		DVB-C	Standard	Standard	Standard	J.83A(DVB-C), J.83B, J.83C

Tuner Section		DVB-C	Constellation	Constellation	Constellation	16/32/64/128/256 QAM
Tuner Section		DVB-T/(T)	Input Frequency	Input Frequency	Input Frequency	30 ~1000 MHz
Tuner Section		DVB-T/(T)	Bandwidth	Bandwidth	Bandwidth	6/7/8 M
Tuner Section	Version 1	DVB-S	Input Frequency	Input Frequency	Input Frequency	950~2150 MHz
Tuner Section	Version 1	DVB-S	Symbol rate	Symbol rate	Symbol rate	1~45 Msps
Tuner Section	Version 1	DVB-S	FEC	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Tuner Section	Version 1	DVB-S	Constellation	Constellation	Constellation	QPSK
Tuner Section	Version 1	DVB-S	Signal Strength	Signal Strength	Signal Strength	- 65~-25dBm
Tuner Section	Version 1	DVB-S	Max input bitrate	Max input bitrate	Max input bitrate	≤120 Mbps
Tuner Section	Version 1	DVB-S2	Input Frequency	Input Frequency	Input Frequency	950~2150 MHz
Tuner Section	Version 1	DVB-S2	Symbol rate	Symbol rate	Symbol rate	1~45 Msps
Tuner Section	Version 1	DVB-S2	FEC	FEC	FEC	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
Tuner Section	Version 1	DVB-S2	Constellation	Constellation	Constellation	QPSK, 8PSK
Tuner Section	Version 1	DVB-S2	Max input bitrate	Max input bitrate	Max input bitrate	≤120 Mbps
Tuner Section	Version 2 (New)	DVB-S	Input Frequency	Input Frequency	Input Frequency	950~2150 MHz
Tuner Section	Version 2 (New)	DVB-S	Symbol rate	Symbol rate	Symbol rate	0.5~45Msps
Tuner Section	Version 2 (New)	DVB-S	Signal Strength	Signal Strength	Signal Strength	- 65~-25dBm

Tuner Section	Version 2 (New)	DVB-S	FEC	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8
Tuner Section	Version 2 (New)	DVB-S	Constellation	Constellation	Constellation	QPSK
Tuner Section	Version 2 (New)	DVB-S	Max input bitrate	Max input bitrate	Max input bitrate	≤120 Mbps
Tuner Section	Version 2 (New)	DVB-S2	Input Frequency	Input Frequency	Input Frequency	950~2150 MHz
Tuner Section	Version 2 (New)	DVB-S2	Symbol rate	Symbol rate	Symbol rate	QPSK/8PSK /16APSK :0.5~45 Msp 32APSK: 0.5~40Msp;
Tuner Section	Version 2 (New)	DVB-S2	FEC	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
Tuner Section	Version 2 (New)	DVB-S2	Constellation	Constellation	Constellation	QPSK, 8PSK, 16APSK, 32APSK
Tuner Section	Version 2 (New)	DVB-S2	Max input bitrate	Max input bitrate	Max input bitrate	≤120 Mbps

Tuner Section	Version 2 (New)	DVB-S2X	Input Frequency	Input Frequency	Input Frequency	950~2150 MHz
Tuner Section	Version 2 (New)	DVB-S2X	Symbol rate	Symbol rate	Symbol rate	QPSK/8PSK /16APSK :0.5~45 Msps 8APSK /32APSK: 0.5~40Msp s
Tuner Section	Version 2 (New)	DVB-S2X	FEC	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9

Tuner Section	Version 2 (New)	DVB-S2X	Constellation	Constellation	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK
Tuner Section	Version 2 (New)	DVB-S2X	Max input bitrate	Max input bitrate	Max input bitrate	≤120 Mbps
Tuner Section		ISDB-T	Input Frequency	Input Frequency	Input Frequency	30~1000M Hz
Tuner Section		ATSC	Input Frequency	Input Frequency	Input Frequency	50 MHz~960MHz
Tuner Section		ATSC	Bandwidth	Bandwidth	Bandwidth	6M
Tuner Section		ATSC	Constellation	Constellation	Constellation	8VSB
Re-multiple x	Re-multiple x	PID re-mapping	PID re-mapping	PID re-mapping	PID re-mapping	PID re-mapping
Re-multiple x	Re-multiple x	PCR accurate adjusting	PCR accurate adjusting	PCR accurate adjusting	PCR accurate adjusting	PCR accurate adjusting
Re-multiple x	Re-multiple x	Automatic generating PSI/SI table	Automatic generating PSI/SI table	Automatic generating PSI/SI table	Automatic generating PSI/SI table	Automatic generating PSI/SI table
PID	PID	Output range	Output range	Output range	0x0000—0x1FFF	0x0000—0x1FFF
PID	PID	PID transparent	PID transparent	PID transparent	Any PID transparent and mapping achievable	Any PID transparent and mapping achievable
PID	PID	Amount of output PID per input	Amount of output PID per input	Amount of output PID per input	128	128
BISS descrambling	BISS descrambling	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)

Output	Output	4 IP (MPTS) output over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast	4 IP (MPTS) output over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast	4 IP (MPTS) output over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast	4 IP (MPTS) output over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast	4 IP (MPTS) output over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast
System	System	Remote management	Remote management	Web-server Management	Web-server Management	Web-server Management
System	System	Language	Language	English	English	English
System	System	Upgrade	Upgrade	USB, web management	USB, web management	USB, web management
Miscellaneous	Miscellaneous	Dimension	Dimension	482mm×410mm×44mm (W×L×H)	482mm×410mm×44mm (W×L×H)	482mm×410mm×44mm (W×L×H)
Miscellaneous	Miscellaneous	Approx weight	Approx weight	3.5kg	3.5kg	3.5kg
Miscellaneous	Miscellaneous	Environment	Environment	0~45℃(work) ■-20~80℃ ■■Storage ■	0~45℃(work) ■-20~80℃ ■■Storage ■	0~45℃(work) ■-20~80℃ ■■Storage ■
Miscellaneous	Miscellaneous	Power requirements	Power requirements	100~240V AC, 50/60Hz	100~240V AC, 50/60Hz	100~240V AC, 50/60Hz
Miscellaneous	Miscellaneous	Power consumption	Power consumption	20W	20W	20W

Tuner Input Options:

8 DVB-C Tuners + 8 ATSC Tuners

8 DVB-S2/S2X Tuners + 8 DVB-(T) Tuners
8 DVB- S2/S2X Tuners + 8 ISDB-T Tuners
16 DVB-S/S2/S2X/DVB-C/(T) /ISDB-T/ATSC Tuners

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227