

**FMUSER FUQ-4667XX 1-Ch HDMI Input Encoder Modulator
1080p60 H.265-H.264 Encoding DVB-C-T ATSC ISDB-T
Multi-Standard RF-IP Output for TV Distribution and Digital
Signage**



New Comer!



--- Home Version


A device that allows audio and video signal input in TV distributions with applications in home entertainment, Digital Signage for hotels, shops, restaurants etc...

**Support CC (Closed Caption) /Teletext
Support Audio delay function**



Teletext Standard as per EN300706 & EN300472

This NDS3556HS Encoder Modulator can support Teletext function to pushing text information such as domestic news, international news, sports news, weather forecasts, TV program forecasts information and subtitle etc.

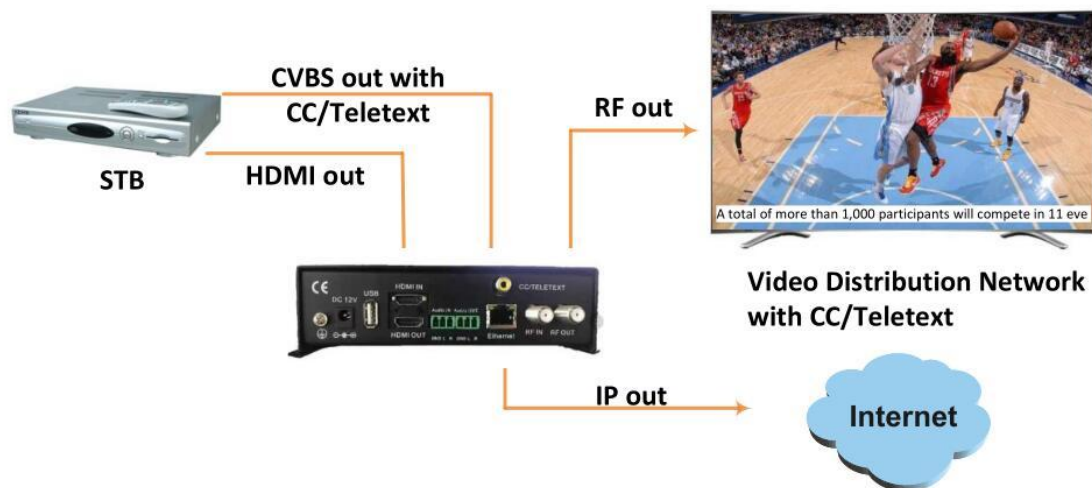


Product overview

The FUQ-4667XX is a professional encoder modulator featuring 1x HDMI input and dual RF/IP outputs. It processes 1080p60 signals via H.265/HEVC or H.264 encoding, then modulates to DVB-C/T, ATSC, or ISDB-T standards. This 1RU rack-mount device supports web-GUI and front-panel control. Ideal for cable TV headends, hospitality TV systems, and digital signage networks requiring multi-format distribution.

Key feature

Remote management via web-GUI with AC3 audio pass-through support

System Connection

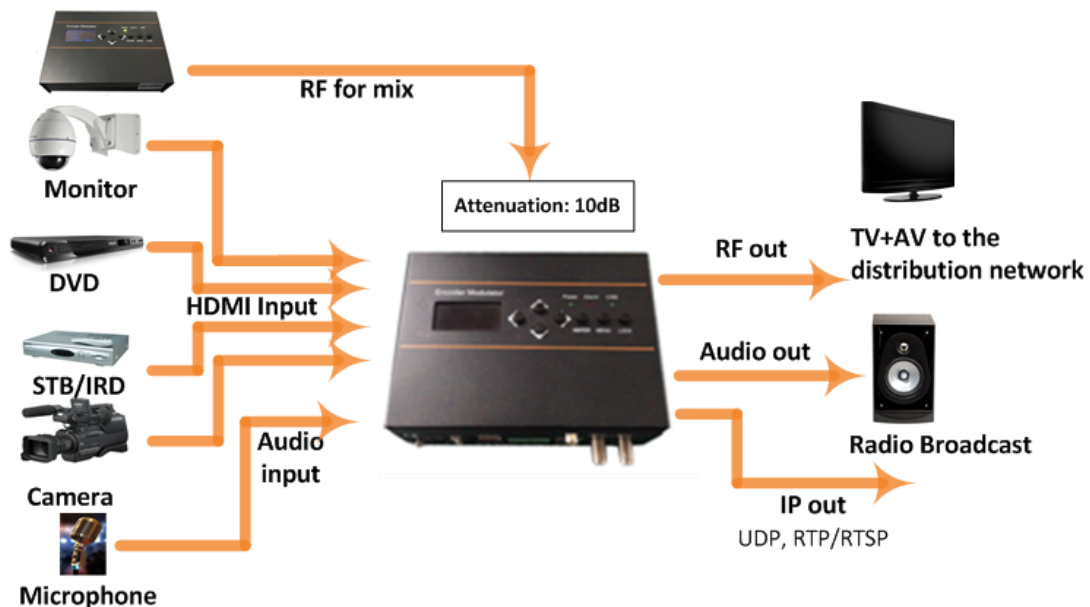

Appearance and Description

Technical Specs


HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section
Video	Encoding	HEVC/ H.265 , MPEG 4 AVC/H.264	HEVC/ H.265 , MPEG 4 AVC/H.264	HEVC/ H.265 , MPEG 4 AVC/H.264
Video	Interface	HDMI*1. HDMI loop out*1	HDMI*1. HDMI loop out*1	HDMI*1. HDMI loop out*1
Video	Resolution	Resolution	Resolution	1920*1080_60P, 1920*1080_50P; 1920*1080_59.9 4P, 1280*720_60p, 1280*720_59.94 1280*720_50P
Video	Chroma	Chroma	4:2:0	4:2:0
Video	Bitrate	Bitrate	1Mbps~15Mbps	1Mbps~15Mbps
Video	Rate Control	Rate Control	CBR/VBR	CBR/VBR
Video	GOP Structure	GOP Structure	IP	IP
Audio	Encoding Format	Encoding Format	MPEG-1 Layer 2, LC-AAC, HE-AAC, HE-AAC V2; AC3 Pass-through	MPEG-1 Layer 2, LC-AAC, HE-AAC, HE-AAC V2; AC3 Pass-through
Audio	Sample rate	Sample rate	32KHz,44.1KHz, 48KHz	32KHz,44.1KHz, 48KHz
Audio	Bit-rate	Bit-rate	48~384Kbps	48~384Kbps

IP output	IP output	IP output	IP output	IP output
IP out over UDP (Unicast/multicast), RTP/RTSP, (RJ45, 100M)	IP out over UDP (Unicast/multicast), RTP/RTSP, (RJ45, 100M)	IP out over UDP (Unicast/multicast), RTP/RTSP, (RJ45, 100M)	IP out over UDP (Unicast/multicast), RTP/RTSP, (RJ45, 100M)	IP out over UDP (Unicast/multicast), RTP/RTSP, (RJ45, 100M)
DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section
Standard	Standard	Standard	J.83A (DVB-C), J.83B	J.83A (DVB-C), J.83B
MER	MER	MER	≥40dB	≥40dB

RF frequency	RF frequency	RF frequency	100-1000MHz, 1KHz step	100-1000MHz, 1KHz step
RF output level	RF output level	RF output level	-20~ -5dBm, 1dB step	-20~ -5dBm, 1dB step
Symbol rate	Symbol rate	Symbol rate	5.000~7.000Msp s adjustable	5.000~7.000Msp s adjustable
	J.83A	J.83A	J.83A	J.83B
Constellation	16/32/64/128/ 256 QAM	16/32/64/128/ 256 QAM	16/32/64/128/ 256 QAM	64/ 256 QAM
Bandwidth	8M	8M	8M	6M
DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section
Standard	Standard	DVB-T COFDM	DVB-T COFDM	DVB-T COFDM
Bandwidth	Bandwidth	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M
Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Code rate	Code rate	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Guard Interval	Guard Interval	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4
Transmission Mode:	Transmission Mode:	2K, 8K	2K, 8K	2K, 8K
MER	MER	≥35dB	≥35dB	≥35dB
RF frequency	RF frequency	100-900MHz, 1KHz step	100-900MHz, 1KHz step	100-900MHz, 1KHz step
RF output level	RF output level	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step
ISDB-T Modulator Section (Optional)	ISDB-T Modulator Section (Optional)	ISDB-T Modulator Section (Optional)	ISDB-T Modulator Section (Optional)	ISDB-T Modulator Section (Optional)
Standard	Standard	ARIB STD-B31	ARIB STD-B31	ARIB STD-B31
Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Guard Interval	Guard Interval	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4

Transmission Mode	Transmission Mode	2K, 4K, 8K	2K, 4K, 8K	2K, 4K, 8K
Code rate	Code rate	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
RF frequency	RF frequency	100~900MHz, 1KHz step	100~900MHz, 1KHz step	100~900MHz, 1KHz step
RF output level	RF output level	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step
ATSC Modulator Section (Optional)	ATSC Modulator Section (Optional)	ATSC Modulator Section (Optional)	ATSC Modulator Section (Optional)	ATSC Modulator Section (Optional)
Standard	Standard	ATSC A/53	ATSC A/53	ATSC A/53
Constellation	Constellation	8 VSB	8 VSB	8 VSB
RF output level	RF output level	-63~-16dBm (44~91 dBμV), 1dB step	-63~-16dBm (44~91 dBμV), 1dB step	-63~-16dBm (44~91 dBμV), 1dB step
MER	MER	≥35dB	≥35dB	≥35dB
RF frequency	RF frequency	100~900MHz, 1KHz step	100~900MHz, 1KHz step	100~900MHz, 1KHz step
RF output level	RF output level	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step
System	System	System	System	System
Management	Management	Web-GUI, LED+Keyboard	Web-GUI, LED+Keyboard	Web-GUI, LED+Keyboard
Language	Language	English	English	English
Upgrade	Upgrade	Web update	Web update	Web update
General	General	General	General	General
Power supply	Power supply	DC 12V	DC 12V	DC 12V
Dimensions	Dimensions	160*120*52mm	160*120*52mm	160*120*52mm
Weight	Weight	< 1kg	< 1kg	< 1kg

OSD (Logo/QR Code/Caption) Insertion

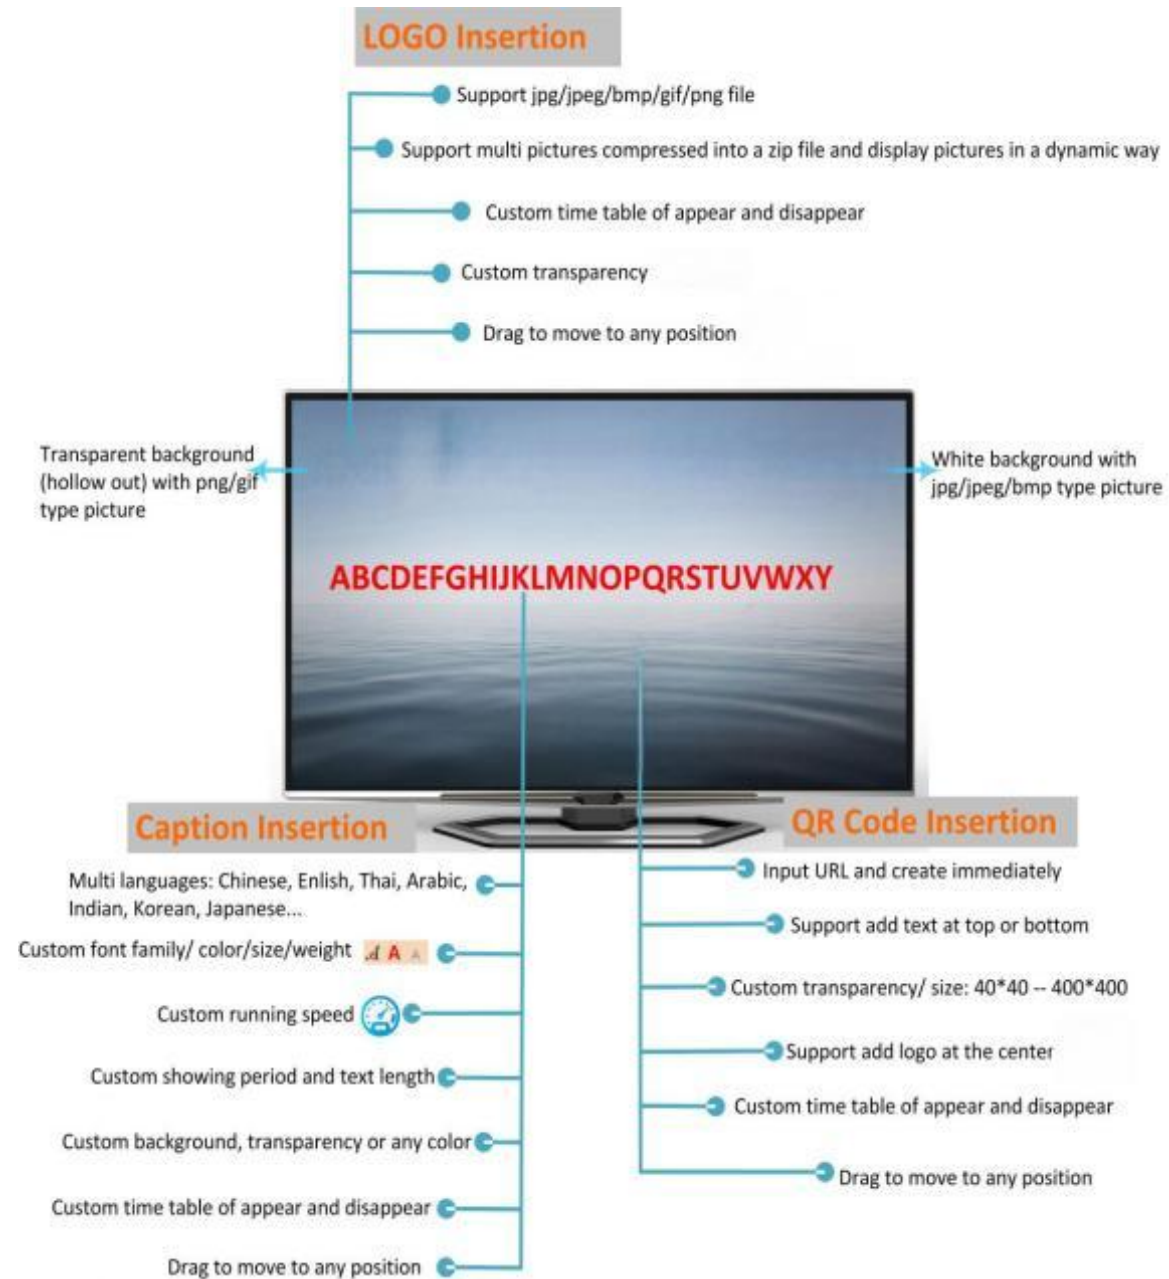

Typical Applications

...for communities of residents
an information channel on their television



...for restaurants
information about daily menus ,special deals,etc



...for hotels
meeting rooms,exhibitions,message,etc



...for hospitals
training courses, healthy guide, etc



...for Public Spaces
adversing,user information,news,etc



...for shopping centres
new collections,special deals,etc



**Create your own advertising and information channel
with Encoder Modulator**

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)