

**FMUSER FUQ-4696 CI Receiver 8 Tuner Inputs DVB-S-S2-S2X
DVB-C-T-ISDB-T ATSC IP ASI Outputs BISS Descrambling
Broadcast IPTV Headend** Each Demodulation Module = 2 or 4 *RF/Loop out + 2*CAM +
2*Smartcard



Product overview

The FUQ-4696 is a CI receiver integrating demodulation and descrambling, with inputs including 2/4 tuners for RF signals, 1 ASI input, and 16 IP inputs, and outputs such as 1 ASI output and IP TS streams (1 MPTS and 16 SPTS). It processes signals by demodulating inputs, descrambling encrypted content using CAM/CI slots and BISS, and re-muxing into transport streams. This 1-U rack-mountable device supports web-based management. Ideal for broadcast headend applications like content distribution and signal processing.

Key feature

Supports multi-standard tuner inputs for DVB-C/T/ISDB-T, DVB-S/S2/S2X, ATSC with 2/4 tuners,


Features re-mux flexibility with 1 ASI input and 16 IP inputs (UDP/RTP),

Provides decryption via 2 CAM/CI slots and BISS descrambling,

Offers versatile outputs including 1 MPTS, 16 SPTS over IP, and ASI output,

Enables web-based management for remote control and updates.

Principle Chart (each demodulation module)

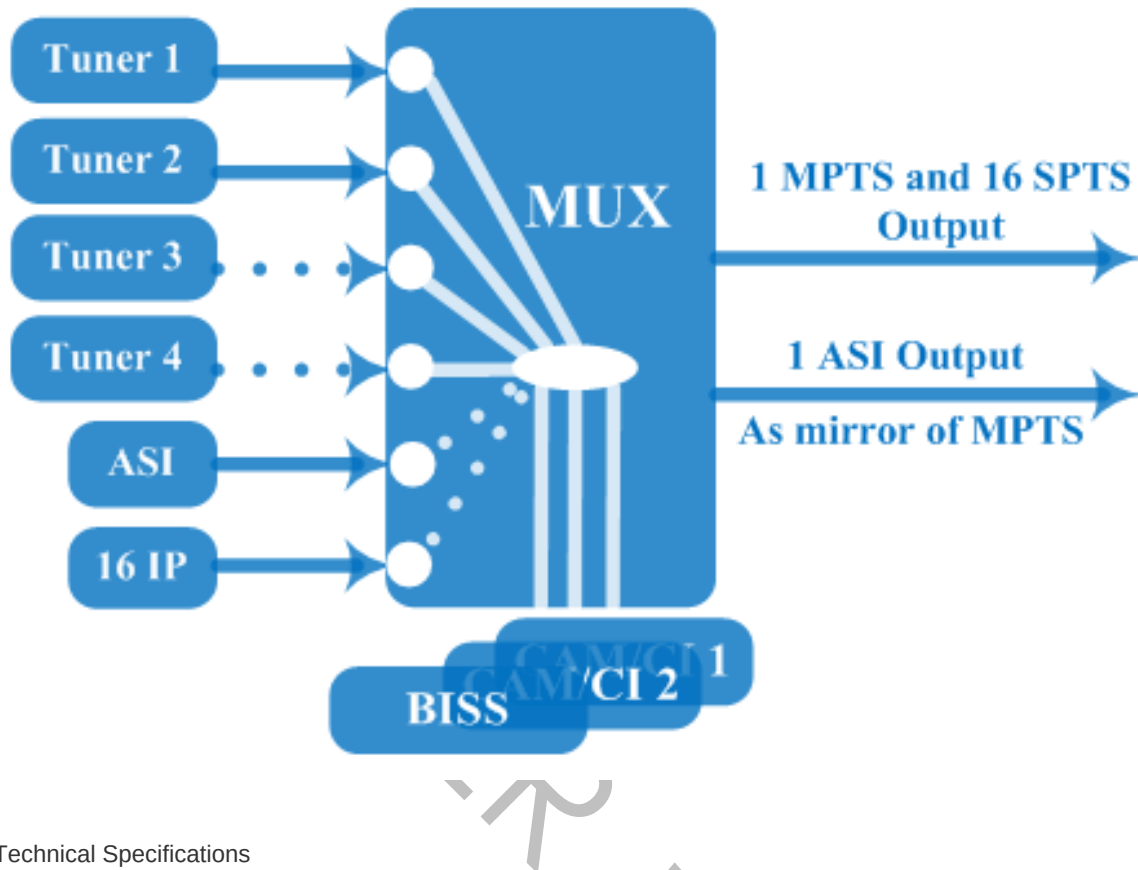

Technical Specifications

Input(per demodulation module)	2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux (UDP/RTP)	2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux (UDP/RTP)	2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux (UDP/RTP)	2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux (UDP/RTP)	2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux (UDP/RTP)	2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux (UDP/RTP)	2 or 4* tuner inputs (DVB-C/T/I SDB-T s witchable or DVB-S /S2/S2X or ATSC optional), F type 1*ASI input for re-mux, BNC interface 16*IP input for re-mux (UDP/RTP)
--------------------------------	---	---	---	---	---	---	---

Tuner Section	Multi-mode tuners switchable (New)	DVB-C	Input Frequency	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz
Tuner Section	Multi-mode tuners switchable (New)	DVB-C	Standard	Standard	Standard	J.83A, J.83C	J.83B
Tuner Section	Multi-mode tuners switchable (New)	DVB-C	Constellation	Constellation	Constellation	16/32/64/128/256 QAM	64/256 QAM
Tuner Section	Multi-mode tuners switchable (New)	DVB-T	Input Frequency	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz
Tuner Section	Multi-mode tuners switchable (New)	DVB-T	Bandwidth	Bandwidth	Bandwidth	6/7/8 M	6/7/8 M
Tuner Section	Multi-mode tuners switchable (New)	ISDB-T	Input Frequency	Input Frequency	Input Frequency	60 ~890 MHz	60 ~890 MHz
Tuner Section	Satellite	DVB-S	Input Frequency	Input Frequency	Input Frequency	950~2150MHz	950~2150MHz
Tuner Section	Satellite	DVB-S	Symbol rate	Symbol rate	Symbol rate	0.5~45Mps	0.5~45Mps
Tuner Section	Satellite	DVB-S	Signal Strength	Signal Strength	Signal Strength	- 65- -25dBm	- 65- -25dBm
Tuner Section	Satellite	DVB-S	FEC	FEC	FEC	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Tuner Section	Satellite	DVB-S	Constellation	Constellation	Constellation	QPSK	QPSK
Tuner Section	Satellite	DVB-S	Max input bitrate	Max input bitrate	Max input bitrate	≤170 Mbps	≤170 Mbps
Tuner Section	Satellite	DVB-S2	Input Frequency	Input Frequency	Input Frequency	950~2150MHz	950~2150MHz

Tuner Section	Satellite	DVB-S2	Symbol rate	Symbol rate	Symbol rate	QPSK/8PSK /16APSK :0.5~45 Msps 32APSK: 0.5~40Msps;	QPSK/8PSK /16APSK :0.5~45 Msps 32APSK: 0.5~40Msps;
Tuner Section	Satellite	DVB-S2	FEC	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10
Tuner Section	Satellite	DVB-S2	Constellation	Constellation	Constellation	QPSK, 8PSK, 16APSK, 32APSK	QPSK, 8PSK, 16APSK, 32APSK
Tuner Section	Satellite	DVB-S2	Max input bitrate	Max input bitrate	Max input bitrate	≤170 Mbps	≤170 Mbps
Tuner Section	Satellite	DVB-S2X	Input Frequency	Input Frequency	Input Frequency	950~2150MHz	950~2150MHz

Tuner Section	Satellite	DVB-S2X	Symbol rate	Symbol rate	Symbol rate	QPSK/8P SK /16APSK :0.5~45 Mps 8APSK: 0 .5~40Msp s 32APSK: 0.5~40Ms ps	QPSK/8P SK /16APSK :0.5~45 Mps 8APSK: 0 .5~40Msp s 32APSK: 0.5~40Ms ps
------------------	-----------	---------	----------------	----------------	----------------	--	--

Tuner Section	Satellite	DVB-S2X	FEC	FEC	FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36 , 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36 , 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 2/3-L, 32/45, 11/15, 7/9
Tuner Section	Satellite	DVB-S2X	Constellation	Constellation	Constellation	QPSK, 8PSK, 8APSK, 16APSK, 32APSK	QPSK, 8PSK, 8APSK, 16APSK, 32APSK
Tuner Section	Satellite	DVB-S2X	Max input bitrate	Max input bitrate	Max input bitrate	≤170 Mbps	≤170 Mbps
	ATSC	ATSC	Input Frequency	Input Frequency	Input Frequency	54-858M Hz	54-858M Hz

	ATSC	ATSC	Bandwidth	Bandwidth	Bandwidth	6 M	6 M
	ATSC	ATSC	Constellation	Constellation	Constellation	8 VSB	8 VSB
Descrambling	Descrambling	CAM/CI Quantity	CAM/CI Quantity	CAM/CI Quantity	2 (per demodulation module)	2 (per demodulation module)	2 (per demodulation module)
Descrambling	Descrambling	BISS Mode	BISS Mode	BISS Mode	Mode 1, Mode E	Mode 1, Mode E	Mode 1, Mode E
Output (per demodulation module)	Output (per demodulation module)	1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast)	1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast)	1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast)	1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast)	1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast)	1*MPTS & 16*SPTS over UDP, RTP. 1000 Base-T Ethernet interface (unicast / multicast)
Output (per demodulation module)	Output (per demodulation module)	1xASI mirrored out of MPTS, BNC interface	1xASI mirrored out of MPTS, BNC interface	1xASI mirrored out of MPTS, BNC interface	1xASI mirrored out of MPTS, BNC interface	1xASI mirrored out of MPTS, BNC interface	1xASI mirrored out of MPTS, BNC interface
System	System	Remote management	Remote management	Web-server Management	Web-server Management	Web-server Management	Web-server Management
System	System	Language	Language	English	English	English	English
System	System	Upgrade	Upgrade	web management	web management	web management	web management
Miscellaneous	Miscellaneous	Dimension	Dimension	482*300*44mm (W×L×H)	482*300*44mm (W×L×H)	482*300*44mm (W×L×H)	482*300*44mm (W×L×H)
Miscellaneous	Miscellaneous	Environment	Environment	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■	0~45℃(work)■-20~80℃■Storage■

Miscellaneous	Miscellaneous	Power requirements	Power requirements	100~240 VAC, 50/60Hz	100~240 VAC, 50/60Hz	100~240 VAC, 50/60Hz	100~240 VAC, 50/60Hz
Miscellaneous	Miscellaneous	Power consumption	Power consumption	15W	15W	15W	15W

Order Guide

Please specify both Demodulation module and Tuner Input options when you place order:

Demodulation Module	Option 1	1*Demodulation module, 2 CAM/CI Slots
Demodulation Module	Option 2	2*Demodulation modules, 4 CAM/CI Slots

Tuner Input (per demodulation module)	Option 1	2*DVB-S/S2/S2X tuner
Tuner Input (per demodulation module)	Option 2	2*DVB-C/T/ISDB-T tuner
Tuner Input (per demodulation module)	Option 3	2*ATSC tuner
Tuner Input (per demodulation module)	Option 4	4*DVB-S/S2/S2X tuner
Tuner Input (per demodulation module)	Option 5	4*DVB-C/T/ISDB-T tuner
Tuner Input (per demodulation module)	Option 6	4*ATSC tuner
Tuner Input (per demodulation module)	Option 7	2*DVB-S/S2/S2X tuner + 2*DVB-C/T/ISDB-T tuner
Tuner Input (per demodulation module)	Option 8	2*DVB-S/S2/S2X tuner + 2*ATSC tuner
Tuner Input (per demodulation module)	Option 9	2*DVB-C/T/ISDB-T tuner + 2*ATSC tuner

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227

FMUSER 广州艾盛