

3GPP TS 24.369 V20.0.0 (2026-06)

Technical Specification

**3rd Generation Partnership Project;
Technical Specification Group Core Network and Terminals;
Ambient IoT Non-Access-Stratum (AloT NAS) protocol for 5G
System (5GS);
Stage 3;
(Release 20)**



The present document has been developed within the 3rd Generation Partnership Project (3GPP™) and may be further elaborated for the purposes of 3GPP. The present document has not been subject to any approval process by the 3GPP Organizational Partners and shall not be implemented. This Specification is provided for future development work within 3GPP only. The Organizational Partners accept no liability for any use of this Specification. Specifications and Reports for implementation of the 3GPP™ system should be obtained via the 3GPP Organizational Partners' Publications Offices.

3GPP

Postal address

3GPP support office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

<http://www.3gpp.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© 2026, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
All rights reserved.

UMTS™ is a Trade Mark of ETSI registered for the benefit of its members
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners
LTE™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners
GSM® and the GSM logo are registered and owned by the GSM Association

Contents

Foreword	7
1 Scope	9
2 References.....	9
3 Definitions of terms, symbols and abbreviations.....	9
3.1 Terms.....	9
3.2 Abbreviations	10
4 General.....	10
4.1 Overview	10
4.2 AIoT NAS security.....	10
4.2.1 General.....	10
4.2.2 Authentication.....	11
4.2.3 Integrity protection of AIoT NAS signalling messages.....	11
4.2.4 Ciphering of AIoT NAS signalling messages.....	11
4.2.5 Privacy of AIoT device identifiers.....	12
5 Elementary procedures for AIoT NAS protocol.....	13
5.1 General	13
5.2 Inventory procedure	13
5.2.1 General.....	13
5.2.2 Inventory procedure initiation	13
5.2.3 Inventory procedure completion.....	14
5.2.4 Inventory procedure not accepted by AIoT device.....	16
5.2.5 Abnormal cases in the AIoT device.....	16
5.2.6 Abnormal cases in the AIOTF	16
5.3 Command procedures.....	17
5.3.1 General.....	17
5.3.2 Read command procedure	17
5.3.2.1 General	17
5.3.2.2 Read command procedure initiation	17
5.3.2.3 Read command procedure accepted by the AIoT device.....	17
5.3.2.4 Read command procedure completion by the AIOTF	18
5.3.2.5 Read command procedure not accepted by AIoT device	18
5.3.2.6 Abnormal cases in the AIoT device	18
5.3.2.7 Abnormal cases in the AIOTF	19
5.3.3 Write command procedure.....	19
5.3.3.1 General.....	19
5.3.3.2 Write command procedure initiation	19
5.3.3.3 Write command procedure accepted by AIoT device.....	19
5.3.3.4 Write command procedure completion by the AIOTF	20
5.3.3.5 Write command procedure not accepted by AIoT device.....	20
5.3.3.6 Abnormal cases in the AIoT device	20
5.3.3.7 Abnormal cases in the AIOTF	21
5.3.4 Permanent disable command procedure	21
5.3.4.1 General	21
5.3.4.2 Permanent disable command procedure initiation.....	21
5.3.4.3 Permanent disable command procedure accepted by AIoT device	21
5.3.4.4 Permanent disable command procedure completion by the AIOTF	21
5.3.4.5 Abnormal cases in the AIoT device.....	21
5.3.4.6 Abnormal cases in the AIOTF	22
5.3.5 Application-specific command procedure.....	22
5.3.5.1 General	22
5.3.5.2 Application-specific command procedure initiation.....	22
5.3.5.3 Application-specific command procedure accepted by AIoT device	22
5.3.5.4 Application-specific command procedure completion by the AIOTF.....	23
5.3.5.5 Application-specific command procedure not accepted by AIoT device	23
5.3.5.6 Abnormal cases in the AIoT device	23

5.3.5.7	Abnormal cases in the AIOTF	23
5.4	Common procedures.....	23
5.4.1	Status procedure.....	23
5.4.1.1	General.....	23
5.4.1.2	Status procedure initiation	23
5.4.1.3	Status procedure completion by the AIOTF	24
5.4.2	T-ID reallocation command procedure.....	24
5.4.2.1	General.....	24
5.4.2.2	T-ID reallocation command procedure initiation.....	24
5.4.2.3	T-ID reallocation command procedure accepted by the AIoT device	24
5.4.2.4	T-ID reallocation command procedure completion by the AIOTF	24
5.4.2.5	T-ID reallocation command procedure not accepted by AIoT device.....	25
5.4.2.6	Abnormal cases in the AIoT device.....	25
5.4.2.7	Abnormal cases in the AIOTF	25
5.5	DO-A capable AIoT device initiated procedures.....	25
5.5.1	General.....	25
5.5.2	AIoT registration procedure.....	26
5.5.2.1	General.....	26
5.5.2.2	AIoT registration procedure initiation	26
5.5.2.3	AIoT registration accepted by the network.....	26
5.5.2.4	AIoT registration not accepted by the network.....	27
5.5.2.5	Abnormal cases in the AIoT device.....	27
5.5.2.6	Abnormal cases in the AIOTF	27
5.5.3	Uplink application container transfer procedure	27
5.5.3.1	General.....	27
5.5.3.2	Uplink application container transfer procedure initiation	27
5.5.3.3	Uplink application container transfer procedure accepted by AIOTF	28
6	Handling of unknown, unforeseen, and erroneous protocol data	28
6.1	General	28
6.2	Message too short or too long	28
6.2.1	Message too short	28
6.2.2	Message too long	28
6.2A	Unknown or unforeseen security protection indication	28
6.3	Unknown or unforeseen message type.....	29
6.4	Non-semantic mandatory information element errors.....	29
6.4.1	Common procedures.....	29
6.4.2	Specific AIoT procedures.....	29
6.5	Unknown and unforeseen IEs in the non-imperative message part	29
6.5.1	IEs unknown in the message	29
6.5.2	Out of sequence IEs.....	30
6.5.3	Repeated IEs	30
6.6	Non-imperative message part errors.....	30
6.6.1	General.....	30
6.6.2	Syntactically incorrect optional IEs.....	30
6.7	Messages with semantically incorrect contents.....	30
7	Encoding of AIoT NAS protocol	30
7.1	Message functional definitions and contents.....	30
7.1.1	General.....	30
7.1.1.1	Overview.....	30
7.1.1.2	AIoT NAS message format.....	31
7.1.2	Inventory report	32
7.1.2.1	Message definition.....	32
7.1.2.2	AIoT device identity.....	32
7.1.3	Read command	33
7.1.3.1	Message definition.....	33
7.1.3.2	AIoT device T-ID.....	33
7.1.4	Read complete.....	33
7.1.4.1	Message definition.....	33
7.1.4.2	Additional command information.....	34
7.1.5	Read command reject.....	34

7.1.5.1	Message definition.....	34
7.1.6	Write command.....	34
7.1.6.1	Message definition.....	34
7.1.6.2	AIoT device T-ID.....	35
7.1.7	Write complete.....	35
7.1.7.1	Message definition.....	35
7.1.7.2	Additional command information.....	35
7.1.8	Write command reject.....	35
7.1.8.1	Message definition.....	35
7.1.9	Permanent disable command.....	36
7.1.9.1	Message definition.....	36
7.1.10	Permanent disable complete	36
7.1.10.1	Message definition.....	36
7.1.11	STATUS	37
7.1.11.1	Message definition.....	37
7.1.12	T-ID reallocation command.....	37
7.1.12.1	Message definition.....	37
7.1.13	T-ID reallocation complete.....	38
7.1.13.1	Message definition.....	38
7.1.14	T-ID reallocation command reject.....	38
7.1.14.1	Message definition.....	38
7.1.15	Uplink application container transfer	39
7.1.15.1	Message definition.....	39
7.1.16	Application-specific command.....	39
7.1.16.1	Message definition.....	39
7.1.17	Application-specific complete.....	40
7.1.17.1	Message definition.....	40
7.1.18	Application-specific command reject.....	40
7.1.18.1	Message definition.....	40
7.1.19	AIoT registration request.....	41
7.1.19.1	Message definition.....	41
7.1.20	AIoT registration accept	41
7.1.20.1	Message definition.....	41
7.1.21	AIoT registration complete.....	42
7.1.21.1	Message definition.....	42
7.1.22	AIoT registration reject.....	42
7.1.22.1	Message definition.....	42
7.2	Encoding of information elements	43
7.2.1	General.....	43
7.2.1.1	Overview.....	43
7.2.1.2	Field format and mapping.....	43
7.2.2	Message type.....	43
7.2.3	Security header	44
7.2.4	AIoT data	45
7.2.5	AIoT data length.....	45
7.2.6	AIoT device identity.....	46
7.2.7	AIoT device T-ID	46
7.2.8	Authentication response parameter.....	47
7.2.9	Cause.....	47
7.2.10	Message authentication code	48
7.2.11	Offset	48
7.2.12	RAND	49
7.2.13	Additional command information.....	49
7.2.14	Application data container	50
8	List of system parameters	50
8.1	General	50
8.2	Timers of command procedure.....	50
8.3	Timers of AIoT registration procedure	51
8.3.1	General.....	51
8.3.2	Timers of AIoT registration procedure from AIoT device side.....	51
8.3.3	Timers of AIoT registration procedure from AIOTF side.....	52

Annex A (informative): Cause values.....

53

A.1 Cause values for the AIoT NAS protocol

53

Annex B (informative): Change history

54

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document specifies the ambient internet of things (AIoT) non-access-stratum (NAS) protocol to support the transport of signalling and AIoT data between AIoT device and the AIoT function (AIOTF) in the 5G system (5GS) as specified in 3GPP TS 23.369 [2].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.369: "Architecture support for Ambient power-enabled Internet of Things; Stage 2".
- [3] 3GPP TS 24.007: "Mobile radio interface signalling layer 3; General aspects".
- [4] 3GPP TS 24.501: "Non-Access-Stratum (NAS) protocol for 5G System (5GS); Stage 3".
- [5] 3GPP TS 23.003: "Numbering, addressing and identification".
- [6] 3GPP TS 33.369: "Security aspects of Ambient Internet of Things (AIoT) services for isolated private networks".
- [7] 3GPP TS 38.300: "NR; NR and NG-RAN Overall Description; Stage 2".
- [8] 3GPP TS 38.391: "NR; Ambient IoT Medium Access Control Protocol specification".
- [9] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [10] 3GPP TS 38.413: "NG-RAN; NG Application Protocol (NGAP)".

3 Definitions of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.369 [2] apply:

AIoT Device
DO-A Capable AIoT Device
UE reader

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

AIoT	Ambient Internet of Things
AIOTF	AIoT Function
DO-A	Device-Originated Autonomous
MAC	Message Authentication Code
NAS	Non-Access-Stratum
T-ID	Temporary Identifier

4 General

4.1 Overview

The AIoT NAS protocol described in the present document provides signalling between the AIoT device and the AIOTF, for 5GS. The AIoT NAS as part of the protocol stacks for support of AIoT services in 5GS is described in 3GPP TS 23.369 [2].

The main function of the AIoT NAS protocol is to support the AIoT procedures (see 3GPP TS 23.369 [2]):

- a) inventory procedure;
- b) command procedure;
- c) DO-A capable AIoT device registration procedure; and
- d) uplink application container transfer procedure.

For the support of the above functions, the procedures are supplied within procedures for AIoT NAS, in clause 5.

The AIoT NAS messages are transported between the AIoT device and the AIOTF via AIOT1 reference point, and this transport does not involve N1 reference point. The AIoT NAS protocol specified in the present document is unrelated to the 5GMM NAS and 5GSM NAS protocols specified in 3GPP TS 24.501 [4].

Principles for the handling of AIoT NAS security, including ciphering and integrity protection of AIoT NAS messages, are provided in clause 4.2.

The AIoT NAS protocol for 5GS follows the protocol architecture model for layer 3 as described in 3GPP TS 24.007 [3].

4.2 AIoT NAS security

4.2.1 General

This clause describes the principles for the handling of AIoT security in the AIoT device and in the AIOTF and the procedures used for the security protection of AIoT NAS messages between AIoT device and AIOTF. AIoT NAS security includes authentication, AIoT NAS message security protection and AIoT device identifier privacy. AIoT NAS message security protection involves integrity protection and ciphering of the AIoT NAS messages.

When an AIoT NAS message needs to be sent both ciphered and integrity protected, the AIoT NAS message is first ciphered and then the ciphered AIoT NAS message is integrity protected by calculating the MAC.

The long-term credentials for authentication, integrity protection and ciphering are provisioned and stored in the AIoT device and in the network. The mechanism to provision and store long-term credentials is out of scope of 3GPP in this version of the present document. The relationship between the long-term credentials and security parameters is defined in 3GPP TS 33.369 [6].

The signalling procedures for the control of AIoT NAS security are part of the AIoT NAS protocol and are described in detail in clause 5.

4.2.2 Authentication

The authentication in Ambient IoT consists:

- a) authentication of the AIoT device; and
- b) authentication of the network.

Authentication of the AIoT device is done in the inventory procedure as specified in clause 5.2. A network generated $RAND_{AIOT_n}$ is provided by the AIOTF and received by the AIoT device in the AIoT paging message. The $RAND_{AIOT_n}$ value included in the AIoT paging message is provided to the AIoT NAS by lower layers. The AIoT device which is target of the AIoT paging (see clause 5.2.3), shall generate $RAND_{AIOT_d}$, and use its AIoT device permanent identifier, the $RAND_{AIOT_n}$, the generated $RAND_{AIOT_d}$ and its long-term K_{AIOT_root} to derive a RES_{AIOT} as specified in 3GPP TS 33.369 [6]. The AIoT device shall include the RES_{AIOT} and the generated $RAND_{AIOT_d}$ in the INVENTORY REPORT message to the AIOTF. The network shall verify the RES_{AIOT} to authenticate the AIoT device as specified in 3GPP TS 33.369 [6].

Upon successful verification, and when the AIOTF needs to initiate a command procedure as specified in clause 5.3 the AIOTF shall retrieve K_{AIOTF} and derive the integrity key $K_{Command_int}$ to protect the AIoT NAS command message as described in 3GPP TS 33.369 [6]. When the AIoT device receives the AIoT NAS command message, it shall also derive the integrity key $K_{Command_int}$ to verify the MAC and thereby implicitly authenticate the network, as described in 3GPP TS 33.369 [6].

The requirements for the AIoT device to derive RES_{AIOT} at receiving $RAND_{AIOT_n}$ from lower layers are described in 3GPP TS 33.369 [6].

The requirements for parameters and algorithms used at AIoT authentication are specified in 3GPP TS 33.369 [6].

NOTE: The procedure parts for authentication as specified in 3GPP TS 33.369, clause 5.2.2, are specified in clause 5.2, Inventory procedure, and clause 5.3, Command procedures.

4.2.3 Integrity protection of AIoT NAS signalling messages

For the AIoT device and AIOTF, integrity protected signalling is applied for AIoT NAS messages. Integrity protection of all AIoT NAS signalling messages, except the INVENTORY REPORT message, is mandatory and the responsibility of the AIoT NAS.

The algorithm to calculate the integrity protection information is described in clause D.3 in 3GPP TS 33.501 [9], and the integrity protection shall include octets 1 and 6 to n of the security protected AIoT NAS message as shown in figure 7.1.1.2-2. The AIoT NAS signalling message is integrity protected by calculating the message authentication code (MAC) using $K_{Command_int}$ derived from K_{AIOTF} as specified in 3GPP TS 33.369 [6]. The calculated MAC shall be included in the MAC field (see clause 7.2.10).

In case of an AIoT NAS message fails the integrity check by the AIoT NAS, the AIoT device shall discard the AIoT NAS message and provide an indication to the lower layers that the AIoT NAS message was discarded due to integrity check failure.

In case of an AIoT NAS message fails the integrity check by the AIoT NAS, the AIOTF shall discard the AIoT NAS message.

4.2.4 Ciphering of AIoT NAS signalling messages

The use of ciphering in a network is an operator option subject to AIOTF configuration.

All AIoT NAS messages, except the INVENTORY REPORT message, shall be sent ciphered. The Security header IE is always unciphered in AIoT NAS messages according to 3GPP TS 33.369 [6].

The AIOTF indicates the selected ciphering algorithm in the Security header IE of the command message to the AIoT device.

When operation of the network without ciphering is configured, the AIOTF shall indicate "Integrity protected with 128-NIA2 and ciphered with NEA0" in SPI field of the Security header IE as specified in clause 7.2.3. If the "null ciphering algorithm" NEA0 has been selected as a ciphering algorithm, the AIoT NAS message is regarded as ciphered.

The algorithm to calculate the ciphering of AIoT NAS messages is described in clause D.2 in 3GPP TS 33.501 [9], and the ciphered data shall include octets 6 to n of the security protected AIoT NAS message as shown in figure 7.1.1.2-2. In addition to the data that is to be ciphered, the constant BEARER, DIRECTION bit, COUNT, KEY and LENGTH are input to the ciphering algorithm. These parameters are described in 3GPP TS 33.369 [6].

4.2.5 Privacy of AIoT device identifiers

The AIoT NAS protocol supports privacy of AIoT device identifiers by enabling the use of Temporary Identifiers (T-IDs), as specified in 3GPP TS 33.369 [6].

The network shall support that the mechanism for privacy protection and usage of privacy protection is based on the network policy and deployment.

The AIoT device shall support the mechanism for privacy protection and usage of privacy protection is determined by operator policy and is based on AIoT device's configuration.

When privacy protection is not used:

- the AIoT device permanent identifier is included as the AIoT identification information in the paging message for individual paging; and
- the AIoT device permanent identifier is included in the INVENTORY REPORT message sent as response to any paging message.

When privacy protection is used:

- AIoT device temporary identifier information (see clause 31.6 of 3GPP TS 23.003 [5]) is included as the AIoT identification information in the paging message for individual paging; and
- no AIoT device identity is included in the INVENTORY REPORT message sent as response to any paging message.

When AIoT device temporary identifier information is provided by the network in the paging message and privacy protection is used by the AIoT device, the AIoT device shall determine whether to respond based on a match between the T-ID value of the received AIoT device temporary identifier information and the local T-ID determined based on the T-ID type of the received AIoT device temporary identifier information provided by lower layers. The T-ID type indicates whether the T-ID is a:

- concealed T-ID; or
- stored T-ID.

If the T-ID type indicates a stored T-ID and upon successful match of the AIoT device locally stored T-ID and the received T-ID value, the locally stored T-ID is updated as determined based on the stored T-ID update indication of the received AIoT device temporary identifier information. The stored T-ID update indication indicates either:

- update with command procedure; or
- update without command procedure.

If the stored T-ID update indication indicates "update with command procedure", the locally stored T-ID is replaced with the AIoT device T-ID IE value received in the subsequent AIoT NAS command message. If the stored T-ID update indication indicates "update without command procedure", the locally stored T-ID is replaced with a new T-ID value calculated as specified in 3GPP TS 33.369 [6], clause B.1.

5 Elementary procedures for AIoT NAS protocol

5.1 General

This clause describes the procedures used for AIoT NAS protocol performed between the AIoT device and the AIOTF. The format and coding of the messages and information elements are specified in clause 7.1 and 7.2 respectively.

The following AIoT NAS procedures can be distinguished:

- a) procedure related to network initiated inventory request;
- b) procedure related to network initiated command request; and
- c) AIoT NAS common procedures:
 - 1) Initiated by the AIoT device to report certain error conditions detected in a received AIoT NAS message:
status.
 - 2) Initiated by the network:
T-ID reallocation command.

AIoT NAS messages are standard L3 messages according to 3GPP TS 24.007 [3] and error behaviour specified for L3 protocol according to 3GPP TS 24.007 [3] applies for AIoT unless otherwise specified in the present document.

The support of the read command procedure and the support of the write command procedure are optional for the AIoT device.

5.2 Inventory procedure

5.2.1 General

The inventory procedure is used to discover one or more AIoT devices:

- a) if the AIoT identification information is not provided to NG-RAN or UE reader, all the AIoT devices are to be discovered. In this case, an indication from lower layer is provided as specified in clause 5.2 of 3GPP TS 38.391 [8];
- b) if the AIoT identification information is provided to NG-RAN or UE reader and the AIoT identification information includes the filtering information, a group of AIoT devices that matches the AIoT identification information are to be discovered; and
- c) if the AIoT identification information is provided to NG-RAN or UE reader and the AIoT identification information includes an AIoT device identifier (see clause 4.2.5), a specific AIoT device that matches the AIoT identification information is to be discovered.

NOTE: Details of AIOTF providing the AIoT identification information to NG-RAN or UE reader are defined in 3GPP TS 23.369 [2].

5.2.2 Inventory procedure initiation

To initiate the inventory procedure, the AIOTF sends an inventory request to:

- a) the selected NG-RAN; or
- b) the selected UE reader via AMF and NG-RAN,

as defined in 3GPP TS 23.369 [2] and 3GPP TS 38.413 [10]. The selected NG-RAN or UE reader performs the AIoT paging by broadcast of the AIoT paging message that may include the AIoT identification information received in the inventory request (see 3GPP TS 38.300 [7] and 3GPP TS 38.391 [8]).

NOTE 1: How AIOTF selects NG-RAN is defined in 3GPP TS 23.369 [2].

NOTE 2: How AIOTF selects UE reader is out of the scope of this specification.

Figure 5.2.2-1 gives an example of inventory procedure for an AIoT device which sends the INVENTORY REPORT message to AIOTF.

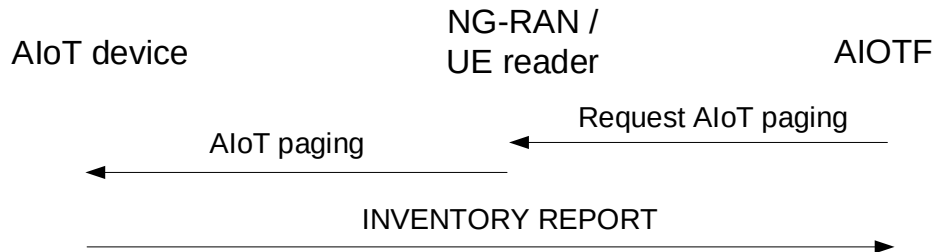


Figure 5.2.2-1: Inventory procedure

Upon receiving an AIoT paging message, the lower layers of the AIoT device determine whether to respond to the AIoT paging message as specified in 3GPP TS 38.391 [8]. The evaluation in lower layers includes interaction with upper layers to assess AIoT identification information as specified in clause 5.2.3, if the AIoT identification information is included in the AIoT paging message. If the AIoT identification information is not included in the AIoT paging message and lower layers determine to respond to the paging message, an indication is provided to upper layers. In addition to an indication to respond to the AIoT paging message or the AIoT identification information, the lower layers provide the $RAND_{AIOT_n}$ value included in the AIoT paging message to AIoT NAS layer.

5.2.3 Inventory procedure completion

The AIoT device determines to respond to the AIoT paging:

- a) based on the indication from lower layer as specified in 3GPP TS 38.391 [8]; or
- b) based on whether the AIoT identification information (see 3GPP TS 23.003 [5]) received from the lower layer is matched or not.

The AIoT identification information consists of two parts (see clause 31.7 of 3GPP TS 23.003 [5]):

- a) AIoT identification information type; and
- b) component of AIoT identification information.

The AIoT device determines whether the AIoT identification information is matched or not as follows:

- a) when the AIoT identification information type is set to "indicate component of AIoT identification information is AIoT device permanent identifier" (see clause 31.2 of 3GPP TS 23.003 [5]):
 - 1) if privacy protection is not used and the AIoT device permanent identifier of the received AIoT identification information is the same as the AIoT device permanent identifier of the AIoT device, the AIoT device determines the AIoT identification information is matched; or
 - 2) otherwise, the AIoT device determines the AIoT identification information is not matched;
- b) when the AIoT identification information type is set to "indicate component of AIoT identification information is AIoT device temporary identifier information" (see clause 31.6 of 3GPP TS 23.003 [5]):
 - 1) if the T-ID type of the received AIoT device temporary identifier information is set to "concealed T-ID type", privacy protection is used and the T-ID value of the received AIoT device temporary identifier information is the same as the T-ID generated based on the AIoT device permanent identifier, the AIoT device determines the AIoT identification information is matched;
 - 2) if the T-ID type of the received AIoT device temporary identifier information is set to "stored T-ID type", privacy protection is used and the T-ID value of the received AIoT device temporary identifier information is

the same as the locally stored T-ID of the AIoT device, the AIoT device determines the AIoT identification information is matched; or

- 3) otherwise, the AIoT device determines the AIoT identification information is not matched;
- c) when the AIoT identification information type is set to "indicate component of AIoT identification information is filtering information" (see clause 31.3 of 3GPP TS 23.003 [5]):
- 1) if all the filtering elements in the filtering information are matched, the AIoT device determines the AIoT identification information is matched. A filtering element is considered as matched if:
 - A) the filtering type of the filtering element is set to "indicate the filtering type for the filtering element is ID Type", and the component value of the filtering element for ID type is the same as the corresponding bitstring from the ID type of the AIoT device permanent identifier based on the offset field and the length field;
 - B) the filtering type of the filtering element is set to "indicate the filtering type for the filtering element is PLMN ID" and:
 - i) the PLMN ID field is included in the AIoT device permanent identifier; and
 - ii) the PLMN ID field in the AIoT device permanent identifier is the same as the filtering element for PLMN ID;
 - C) the filtering type of the filtering element is set to "indicate the filtering type for the filtering element is NID" and:
 - i) the NID field is included in the AIoT device permanent identifier; and
 - ii) the NID field in the AIoT device permanent identifier is the same as the filtering element for NID;
 - D) the filtering type of the filtering element is set to "indicate the filtering type for the filtering element is third party identifier" and:
 - i) the third party identifier field is included in the AIoT device permanent identifier; and
 - ii) the third party identifier field in the AIoT device permanent identifier is the same as the filtering element for third party identifier; or
 - E) the filtering type of the filtering element is set to "indicate the filtering type for the filtering element is identification information", and the component value of the filtering element for identification information is the same as the corresponding bitstring from the identification information of the AIoT device permanent identifier based on the offset field and the length field; or
 - 2) otherwise, the AIoT device determines the AIoT identification information is not matched.

NOTE 1: It is allowed to limit only the leftmost n bits of the AIoT device permanent identifier to be used for matching purpose by local configuration (see clause 5.4.2 of 3GPP TS 33.369 [6]). In this case, any filtering element that requires to match the not allowed bit(s) is considered as not matched.

NOTE 2: The AIoT identification information corresponds to the paging ID, as defined in 3GPP TS 38.391 [8].

Based on whether the AIoT identification information is matched:

- a) if the AIoT identification information is matched, the AIoT device shall indicate to the lower layer that the AIoT identification information is matched, and determine to respond to the AIoT paging; or
- b) otherwise, the AIoT device shall ignore the AIoT identification information, indicate to the lower layer that the AIoT identification information is not matched, and determine not to respond to the AIoT paging.

If the AIoT device determines to respond to the AIoT paging, the AIoT device shall send an INVENTORY REPORT message to the AIOTF.

The AIoT device shall derive a $RAND_{AIOT_d}$ value as specified in 3GPP TS 33.369 [6] and shall include the derived $RAND_{AIOT_d}$ value in the $RAND_{AIOT_d}$ IE in the INVENTORY REPORT message.

The AIoT device shall derive a RES_{AIOT} value, using the long-term K_{AIoT_root} , the generated $RAND_{AIOT_d}$ and the value of the $RAND_{AIOT_n}$ included in the paging message provided by lower layers as specified in 3GPP TS 33.369 [6]. The derived RES_{AIOT} value shall be included in the RES_{AIOT} IE in the INVENTORY REPORT message.

If privacy protection is not used, the AIoT device shall include the AIoT device permanent identifier in the AIoT device identity IE in the INVENTORY REPORT message.

If privacy protection is used, the AIoT device shall not include the AIoT device identity IE in the INVENTORY REPORT message.

If the AIoT identification information type is set to "indicate component of AIoT identification information is AIoT device temporary identifier information", the AIoT device determines the AIoT identification information is matched and the stored T-ID update indication indicates "update without command procedure", the AIoT device shall replace the locally stored T-ID with a new T-ID value calculated as specified in 3GPP TS 33.369 [6], clause B.1.

Upon all the selected NG-RAN indicating the inventory procedure has been completed, the inventory procedure is considered as completed by the AIOTF as specified in 3GPP TS 23.369 [2].

NOTE 3: How NG-RAN indicates the inventory procedure has been completed is defined in 3GPP TS 38.300 [7] and 3GPP TS 38.413 [10].

5.2.4 Inventory procedure not accepted by AIoT device

If the AIoT device has completed a permanent disable command procedure, the AIoT device shall not respond to the AIoT paging message.

5.2.5 Abnormal cases in the AIoT device

The following abnormal cases can be identified:

a) AIoT paging collision of AIoT paging.

If a new AIoT paging is received while an inventory procedure is in progress, the AIoT device shall abort the ongoing inventory procedure and shall proceed with the new AIoT paging.

5.2.6 Abnormal cases in the AIOTF

The following abnormal cases can be identified:

a) Lower layer failure

In the case the lower layer indication of an inventory failure received as specified by 3GPP TS 38.413 [10] from all the selected NG-RAN(s), the AIOTF shall abort the inventory procedure.

In the case of no inventory response from all the selected NG-RAN(s), the AIOTF shall abort the inventory procedure.

b) No AIoT NAS INVENTORY REPORT message received from the AIoT device

In case no AIoT NAS INVENTORY REPORT message is received from the AIoT device from all the selected NG-RAN(s); and if:

1) the AIoT identification information type included in the AIoT paging message was set to "indicate component of AIoT identification information is AIoT device temporary identifier"; and

2) the T-ID type was set to "Stored T-ID type",

the AIOTF shall initiate a T-ID sequence recovery as specified in clause 5.4.4 of 3GPP TS 33.369 [6].

5.3 Command procedures

5.3.1 General

This clause describes command procedures between the AIOTF and AIoT device. Command procedures are initiated by the AIOTF to perform read, write, or permanent disable operation on the AIoT device.

5.3.2 Read command procedure

5.3.2.1 General

The purpose of the read command procedure is to retrieve AIoT data from the AIoT device (see example in figure 5.3.2.1-1).

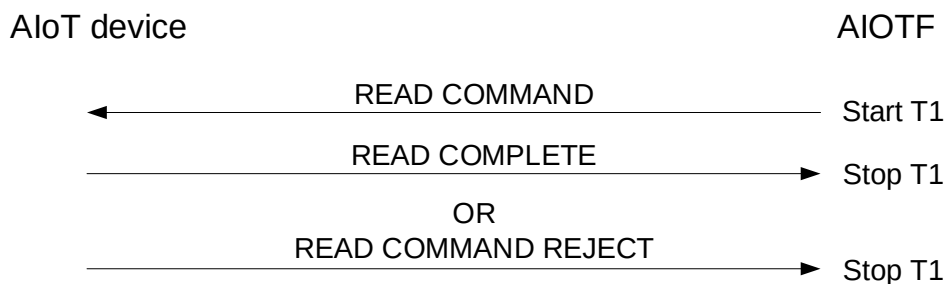


Figure 5.3.2.1-1: Read command procedure

5.3.2.2 Read command procedure initiation

The AIOTF initiates the read command procedure by sending a READ COMMAND message to the AIoT device and starting the timer T1. In the READ COMMAND message, the AIOTF:

- a) shall include the Read offset IE set to the offset from the start of the AIoT device's user memory, indicating where to read the AIoT data;
- b) shall include the Read length IE set to the length of the AIoT data to be read; and
- c) shall include the AIoT device T-ID IE set to the new AIoT device T-ID if:
 - 1) the stored T-ID update indication is set to "update with command procedure" in the preceding AIoT paging message; and
 - 2) the Security header IE in the READ COMMAND message is set to "Integrity protected with 128-NIA2 and ciphered with 128-NEA2" as specified in clause 7.2.3.

5.3.2.3 Read command procedure accepted by the AIoT device

Upon receiving the READ COMMAND message, if the AIoT device supports read command, the AIoT device:

- a) shall validate the offset in the Read offset IE and the length in the Read length IE;
- NOTE: The validation of the offset and the length is implementation-specific to the AIoT device.
- b) shall retrieve the AIoT data based on the Read offset IE and the Read length IE which are validated in a);
 - c) if the AIoT device supports "stored T-ID update with command procedure", the AIoT device T-ID IE is received in the READ COMMAND message and the SPI field in the Security header IE is set to "Integrity protected with 128-NIA2 and ciphered with 128-NEA2", shall replace the previously stored AIoT device T-ID, if any, with the received AIoT device T-ID and include the Additional command information IE in the READ COMPLETE message with the T-ID update bit set to:

- 1) "stored T-ID updated with command" if the stored T-ID update was successful; or
 - 2) "stored T-ID not updated with command" if the stored T-ID update failed; and
- d) shall send a READ COMPLETE message to the AIOTF.

In the READ COMPLETE message, the AIoT device shall include the AIoT data IE set to the retrieved AIoT data described in b).

5.3.2.4 Read command procedure completion by the AIOTF

Upon receiving the READ COMPLETE message, the AIOTF shall consider the read command procedure as successfully completed and stop the timer T1.

Upon receiving of the READ COMPLETE message, if the AIoT device T-ID IE was included in the READ COMMAND message and the READ COMPLETE message includes the Additional command information IE with the T-ID update bit set to "stored T-ID updated with command", the AIOTF shall consider the new AIoT device T-ID as valid and the old AIoT device T-ID, if any, as invalid.

Upon receiving of the READ COMPLETE message, if the AIoT device T-ID IE was included in the READ COMMAND message and the READ COMPLETE message does not include the Additional command information IE or the Additional command information IE indicates "stored T-ID not updated with command", the AIOTF shall consider the old AIoT device T-ID, if any, as valid.

NOTE: If the AIoT device T-ID IE was included in the READ COMMAND message and the READ COMPLETE message does not include the Additional command information IE, the network can take this into account to avoid initiating further procedures using "stored T-ID update with command procedure".

5.3.2.5 Read command procedure not accepted by AIoT device

Upon receiving a READ COMMAND message, if the command type specific parameter (e.g. the offset to read application data from the AIoT Device user memory, the length of the application data to read.) is invalid, the AIoT device shall send a READ COMMAND REJECT message with a cause set to #1 "Command type specific parameters invalid".

Upon receiving a READ COMMAND message, if the read command procedure cannot be performed because the energy will run out, the AIoT device shall send a READ COMMAND REJECT message with a cause set to #3 "Low energy".

Upon receiving the READ COMMAND REJECT message, the AIOTF shall consider the read command procedure is unsuccessful and stop timer T1. If the T-ID is included in the READ COMMAND message, the AIOTF shall consider the T-ID has not been updated successfully.

5.3.2.6 Abnormal cases in the AIoT device

The following abnormal cases can be identified:

- a) The read command is unsuccessfully executed (e.g. user memory operation error).

The AIoT device shall send a READ COMMAND REJECT message with a cause set to #111 "Error, unspecified".

- b) AIoT paging collision.

If a new AIoT paging is received while a read command procedure is in progress, the AIoT device shall abort the ongoing read command procedure and shall proceed with the new AIoT paging.

NOTE: In this release of the specification, implementation-specific mechanisms can be applied to avoid the collision case.

5.3.2.7 Abnormal cases in the AIOTF

The following abnormal cases can be identified:

a) Lower layer failure

In the case the lower layer indication of a command failure received as specified by 3GPP TS 38.413 [10], the AIOTF shall abort the read command procedure and the AIOTF shall consider the old T-ID as valid.

b) Expiry of timer T1

The AIOTF shall abort the read command procedure and consider the read command procedure is unsuccessful. If a new AIoT device T-ID was included in the READ COMMAND message, the AIOTF may consider the old T-ID as valid. The AIOTF may initiate a T-ID sequence recovery as specified in clause 5.4.4 of 3GPP TS 33.369 [6] to resolve the T-ID conflict.

5.3.3 Write command procedure

5.3.3.1 General

The purpose of the write command procedure is to write the AIoT data to the AIoT device's user memory (see example in figure 5.3.3.1-1).

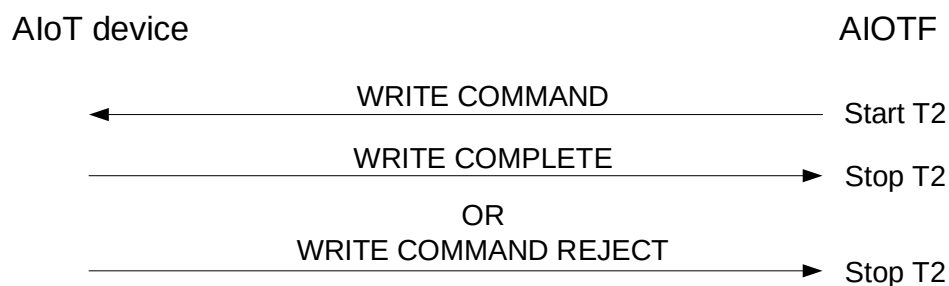


Figure 5.3.3.1-1: Write command procedure

5.3.3.2 Write command procedure initiation

The AIOTF initiates the write command procedure by sending a WRITE COMMAND message to the AIoT device and starting the timer T2. In the WRITE COMMAND message, the AIOTF:

- a) shall include the Write offset IE set to the offset from the start of the AIoT device's user memory indicating where to write the AIoT data;
- b) shall include the AIoT data IE set to the AIoT data to be written; and
- c) shall include the AIoT device T-ID IE set to the new AIoT device T-ID if:
 - 1) the stored T-ID update indication is set to "update with command procedure" in the preceding AIoT paging message; and
 - 2) the Security header IE in the WRITE COMMAND message is set to "Integrity protected with 128-NIA2 and ciphered with 128-NEA2" as specified in clause 7.2.3.

5.3.3.3 Write command procedure accepted by AIoT device

Upon receiving the WRITE COMMAND message, if the AIoT device supports write command, the AIoT device:

- a) shall validate the offset in the Write offset IE and the length of AIoT data contents in the AIoT data IE;

NOTE: The validation of the offset and the length is implementation-specific to the AIoT device.

- b) shall write the AIoT data contents in the received AIoT data IE to the AIoT device's user memory at the offset which is validated in a);
- c) if the AIoT device supports "stored T-ID update with command procedure", the AIoT device T-ID IE is received in the WRITE COMMAND message and the SPI field in the Security header IE is set to "Integrity protected with 128-NIA2 and ciphered with 128-NEA2", shall replace the previously stored AIoT device T-ID, if any, with the received T-ID and include the Additional command information IE in the WRITE COMPLETE message with the T-ID update bit set to:
 - 1) "stored T-ID updated with command" if the stored T-ID update was successful; or
 - 2) "stored T-ID not updated with command" if the stored T-ID update failed; and
- d) shall send a WRITE COMPLETE message to the AIOTF.

5.3.3.4 Write command procedure completion by the AIOTF

Upon receiving the WRITE COMPLETE message, the AIOTF shall consider the write command procedure as successfully completed and stop the timer T2.

Upon receiving of the WRITE COMPLETE message, if the AIoT device T-ID IE was included in the WRITE COMMAND message and the WRITE COMPLETE message includes the Additional command information IE with the T-ID update bit set to "stored T-ID updated with command", the AIOTF shall consider the new AIoT device T-ID as valid and the old AIoT device T-ID, if any, as invalid.

Upon receiving of the WRITE COMPLETE message, if the AIoT device T-ID IE was included in the WRITE COMMAND message and the WRITE COMPLETE message does not include the Additional command information IE or the Additional command information IE indicates "stored T-ID not updated with command", the AIOTF shall consider the old AIoT device T-ID, if any, as valid.

NOTE: If the AIoT device T-ID IE was included in the WRITE COMMAND message and the WRITE COMPLETE message does not include the Additional command information IE, the network can take this into account to avoid initiating further procedures using "stored T-ID update with command procedure".

5.3.3.5 Write command procedure not accepted by AIoT device

Upon receiving a WRITE COMMAND message, if the command type specific parameter (e.g. the offset where to write the application data, the length of the application data to write) is invalid, the AIoT device shall send a WRITE COMMAND REJECT message with a cause set to #1 "Command type specific parameters invalid".

Upon receiving a WRITE COMMAND message, if the write command procedure cannot be performed because the energy will run out, the AIoT device shall send a WRITE COMMAND REJECT message with a cause set to #3 "Low energy".

Upon receiving the WRITE COMMAND REJECT message, the AIOTF shall consider the write command procedure is unsuccessful and stop timer T2. If the T-ID is included in the WRITE COMMAND message, the AIOTF shall consider the T-ID has not been updated successfully.

5.3.3.6 Abnormal cases in the AIoT device

The following abnormal cases can be identified:

- a) The write command is unsuccessfully executed (e.g. user memory operation error)

The AIoT device shall send a WRITE COMMAND REJECT message with a cause set to #111 "Error, unspecified".
- b) AIoT paging collision.

If a new AIoT paging is received while a write command procedure is in progress, the AIoT device shall abort the ongoing write command procedure and shall proceed with the new AIoT paging.

NOTE: In this release of the specification, implementation-specific mechanisms can be applied to avoid the collision case.

5.3.3.7 Abnormal cases in the AIOTF

The following abnormal cases can be identified:

a) Lower layer failure

In the case the lower layer indication of a command failure received as specified by 3GPP TS 38.413 [10], the AIOTF shall abort the write command procedure and the AIOTF shall consider the old T-ID as valid.

b) Expiry of timer T2

The AIOTF shall abort the write command procedure and consider the write command procedure is unsuccessful. If a new AIoT device T-ID was included in the WRITE COMMAND message, the AIOTF may consider the old T-ID as valid. The AIOTF may initiate a T-ID sequence recovery as specified in clause 5.4.4 of 3GPP TS 33.369 [6] to resolve the T-ID conflict.

5.3.4 Permanent disable command procedure

5.3.4.1 General

The purpose of the permanent disable command procedure (see example in figure 5.3.4.1-1) is to permanently disable the communication capability of the AIoT device as specified in 3GPP TS 23.369 [2].

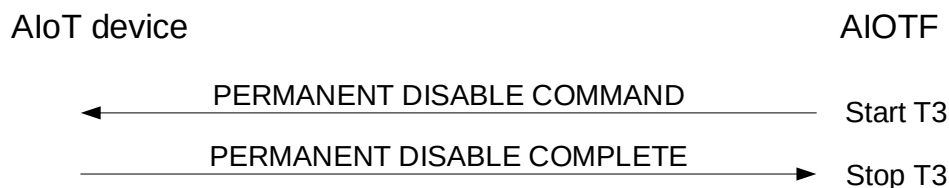


Figure 5.3.4.1-1: Permanent disable command procedure

5.3.4.2 Permanent disable command procedure initiation

The AIOTF initiates the permanent disable command procedure by sending a PERMANENT DISABLE COMMAND message to the AIoT device and starting the timer T3.

5.3.4.3 Permanent disable command procedure accepted by AIoT device

Upon receiving the PERMANENT DISABLE COMMAND message, the AIoT device shall send a PERMANENT DISABLE COMPLETE message to the AIOTF and disable the communication capability of the AIoT device.

5.3.4.4 Permanent disable command procedure completion by the AIOTF

Upon receiving the PERMANENT DISABLE COMPLETE message, the AIOTF shall consider the permanent disable command procedure as successfully completed and stop the timer T3.

5.3.4.5 Abnormal cases in the AIoT device

The following abnormal cases can be identified:

a) AIoT paging collision.

If a new AIoT paging is received while a permanent disable command procedure is in progress, the AIoT device shall abort the ongoing permanent disable command procedure and shall proceed with the new AIoT paging.

NOTE: In this release of the specification, implementation-specific mechanisms can be applied to avoid the collision case.

5.3.4.6 Abnormal cases in the AIOTF

The following abnormal cases can be identified:

a) Lower layer failure

In the case the lower layer indication of a command failure received as specified by 3GPP TS 38.413 [10], the AIOTF shall abort the permanent disable command procedure.

b) Expiry of timer T3

The AIOTF shall abort the permanent disable command procedure and consider the permanent disable command procedure is unsuccessful.

NOTE: In the case that the network determines to permanently disable an AIoT device as specified in clause 5.2.2.3 in 3GPP TS 23.369 [2] and the permanent disable command procedure was unsuccessful due to expiry of the timer T3, the network can take this into account for further actions for the AIoT device.

5.3.5 Application-specific command procedure

5.3.5.1 General

The purpose of the application-specific command procedure is to transport application-specific content to the AIoT device (see example in figure 5.3.5.1-1). The support of the application-specific command procedure is optional and only applicable to the DO-A capable AIoT device.

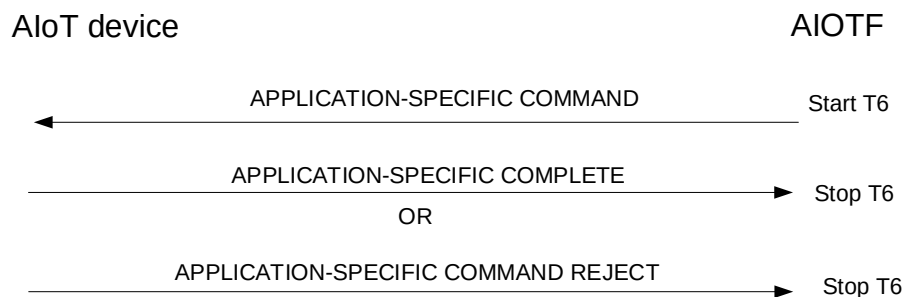


Figure 5.3.5.1-1: Application-specific command procedure

5.3.5.2 Application-specific command procedure initiation

The AIOTF initiates the application-specific command procedure by sending an APPLICATION-SPECIFIC COMMAND message to the registered AIoT device and starting the timer T6. In the APPLICATION-SPECIFIC COMMAND message, the AIOTF shall include an Application data container IE which contains the application data.

5.3.5.3 Application-specific command procedure accepted by AIoT device

Upon receiving the APPLICATION-SPECIFIC COMMAND message, if the registered AIoT device supports application-specific command, the AIoT device shall:

- a) include the application-specific response with the content from upper layers in an Application data container IE; and
- b) send an APPLICATION-SPECIFIC COMPLETE message to the AIOTF.

5.3.5.4 Application-specific command procedure completion by the AIOTF

Upon receiving the APPLICATION-SPECIFIC COMPLETE message, the AIOTF shall consider the application-specific command procedure as successfully completed and stop the timer T6.

5.3.5.5 Application-specific command procedure not accepted by AIoT device

Upon receiving the APPLICATION-SPECIFIC COMMAND message, if the APPLICATION-SPECIFIC COMMAND message is not accepted by the AIoT device due to AIoT NAS layer failure, the AIoT device shall send an APPLICATION-SPECIFIC COMMAND REJECT message to the AIOTF.

Upon receiving the APPLICATION-SPECIFIC COMMAND REJECT message, the AIOTF shall consider the application-specific command procedure is unsuccessful and stop timer T6.

5.3.5.6 Abnormal cases in the AIoT device

The following abnormal cases can be identified:

Editor's note: How to handle the application-specific command procedure with AIoT paging collision is FFS and depends on the RAN2.

5.3.5.7 Abnormal cases in the AIOTF

The following abnormal cases can be identified:

a) Lower layer failure

In the case the lower layer indication of a command failure received as specified by 3GPP TS 38.413 [10], the AIOTF shall abort the application-specific command procedure.

b) Expiry of timer T6

The AIOTF shall abort the application-specific command procedure, consider the application-specific command procedure is unsuccessful.

5.4 Common procedures

5.4.1 Status procedure

5.4.1.1 General

The purpose of the sending of the STATUS message is to report certain error conditions detected in a received AIoT NAS message by the AIoT device (see example in figure 5.4.1.1-1). The STATUS message shall be integrity protected. The same ciphering shall apply to the STATUS message as the ciphering in the received AIoT NAS message that triggers the STATUS message.



Figure 5.4.1.1-1: Status procedure

5.4.1.2 Status procedure initiation

The AIoT device initiates the status procedure by sending a STATUS message to the AIOTF as described in clause 6.

5.4.1.3 Status procedure completion by the AIOTF

If the AIOTF receives a STATUS message the AIOTF shall take different actions depending on the received cause value:

#97 message type non-existent or not implemented.

The AIOTF shall abort any ongoing AIoT NAS procedure related to the AIoT device and stop any related timer.

NOTE: If a command procedure was aborted due to reception of the STATUS message with the cause #97 "message type non-existent or not implemented", the network can take this into account to avoid initiating further command procedures of the same command type towards the AIoT device, in order to save unnecessary signalling wasting radio resources.

The local actions to be taken by the AIOTF on receipt of a STATUS message with any other cause values are implementation dependent.

5.4.2 T-ID reallocation command procedure

5.4.2.1 General

The purpose of the T-ID reallocation command procedure is to allocate a new AIoT device T-ID to the AIoT device (see example in figure 5.4.2.1.1) and to align the stored T-ID between AIoT device and network.

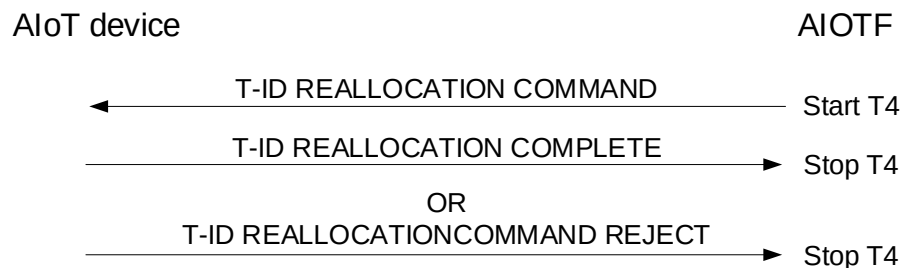


Figure 5.4.2.1.1: T-ID reallocation command procedure

5.4.2.2 T-ID reallocation command procedure initiation

The AIOTF initiates the T-ID reallocation command procedure by sending a T-ID REALLOCATION COMMAND message to the AIoT device and starting the timer T4. In the T-ID REALLOCATION COMMAND message, the AIOTF shall include the AIoT device T-ID IE set to the new AIoT device T-ID.

NOTE: The T-ID REALLOCATION COMMAND message is sent as a security protected AIoT NAS message and ciphered with a different ciphering algorithm than NEA0.

5.4.2.3 T-ID reallocation command procedure accepted by the AIoT device

Upon receiving the T-ID REALLOCATION COMMAND message, if SPI field in the Security header IE is set to "Integrity protected and ciphered with 128-NEA2", the AIoT device shall:

- replace the previously stored AIoT device T-ID, if any, with the received AIoT device T-ID; and
- send a T-ID REALLOCATION COMPLETE message to the AIOTF.

5.4.2.4 T-ID reallocation command procedure completion by the AIOTF

Upon receiving the T-ID REALLOCATION COMPLETE message, the AIOTF shall consider the T-ID reallocation command procedure as successfully completed and stop timer T4.

5.4.2.5 T-ID reallocation command procedure not accepted by AIoT device

Upon receiving a T-ID REALLOCATION COMMAND message, if the AIoT device T-ID IE value cannot be successfully stored, the AIoT device shall send a T-ID REALLOCATION COMMAND REJECT message with a cause set to #4 "T-ID update failure".

Upon receiving the T-ID REALLOCATION COMMAND REJECT message, the AIOTF shall consider the T-ID reallocation command procedure is unsuccessful and stop timer T4.

NOTE: Upon receiving the T-ID REALLOCATION COMMAND REJECT message, the AIOTF considers the T-ID provided in the T-ID REALLOCATION COMMAND message as not successfully stored in the AIoT device and this T-ID is not stored in the network as a valid stored T-ID for the AIoT device.

5.4.2.6 Abnormal cases in the AIoT device

The following abnormal cases can be identified:

- a) The T-ID reallocation command is unsuccessfully executed, except for the case specified in clause 5.4.2.5.

The AIoT device shall send a T-ID REALLOCATION COMMAND REJECT message with a cause set to #111 "Error, unspecified".

- b) AIoT paging collision.

If a new AIoT paging is received while a T-ID reallocation command procedure is in progress, the AIoT device shall abort the ongoing T-ID reallocation command procedure and shall proceed with the new AIoT paging.

NOTE: In this release of the specification, implementation-specific mechanisms can be applied to avoid the collision case.

5.4.2.7 Abnormal cases in the AIOTF

The following abnormal cases can be identified:

- a) Lower layer failure

In the case the lower layer indication of a command failure received as specified by 3GPP TS 38.413 [10], the AIOTF shall abort the T-ID reallocation command procedure.

NOTE 1: Upon lower layer indication of a command failure, the AIOTF considers the T-ID provided in the T-ID REALLOCATION COMMAND message as not successfully stored in the AIoT device and this T-ID is not stored in the network as a valid stored T-ID for the AIoT device.

- b) Expiry of timer T4

The AIOTF shall abort the T-ID reallocation command procedure, consider the T-ID reallocation command procedure is unsuccessful.

NOTE 2: The AIOTF considers the T-ID provided in the T-ID REALLOCATION COMMAND message as not successfully stored in the AIoT device and this T-ID is not stored in the network as a valid stored T-ID for the AIoT device.

5.5 DO-A capable AIoT device initiated procedures

5.5.1 General

This clause describes the DO-A capable AIoT device initiated procedures between the AIOTF and DO-A capable AIoT device.

5.5.2 AIoT registration procedure

5.5.2.1 General

The AIoT registration procedure is always initiated by the DO-A capable AIoT device. The purpose of the procedure is to get registered with the network, and establish the AIoT device context at the AIOTF. Figure 5.5.2.1-1 gives an example of AIoT registration procedure.

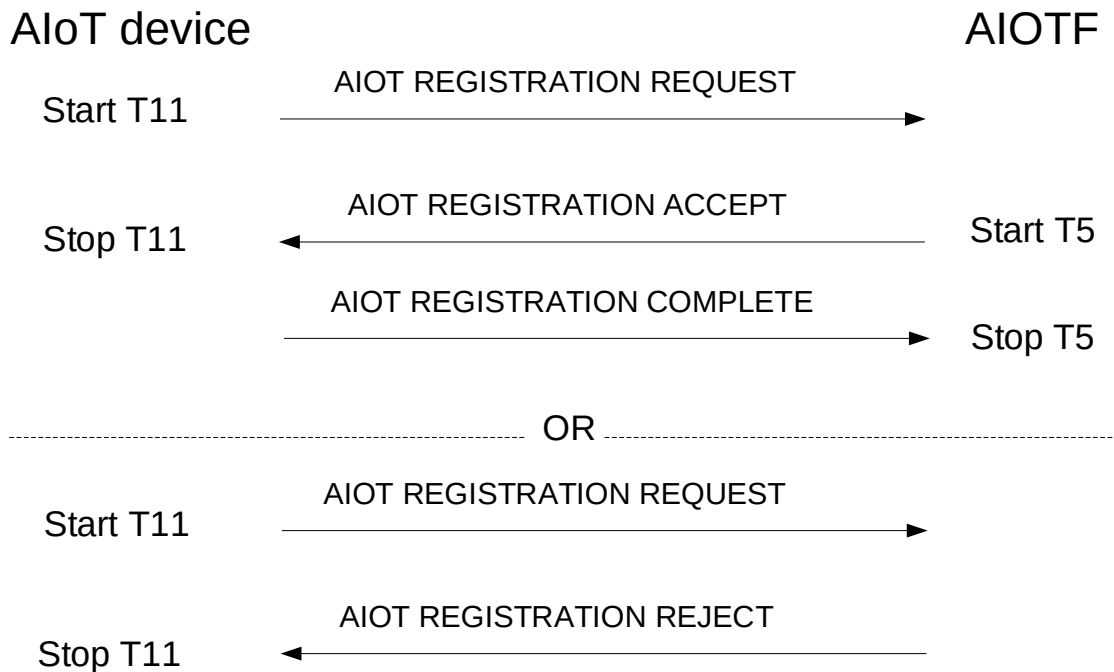


Figure 5.5.2.1-1: AIoT Registration procedure

5.5.2.2 AIoT registration procedure initiation

The AIoT device initiates the AIoT registration procedure by sending a AIOT REGISTRATION REQUEST message to the AIOTF, starting timer T11. In the AIOT REGISTRATION REQUEST message, the AIoT device:

- a) may include DO-A capable AIoT device temporary identifier; and
- b) may include protected AIoT device identifier.

The AIoT device shall provide AIOTF routing information to lower layers, if available.

Editor's note: Details of DO-A capable AIoT device temporary identifier, protected AIoT device identifier is FFS and will be aligned based on SA2 decision.

5.5.2.3 AIoT registration accepted by the network

The AIOTF sends a AIOT REGISTRATION ACCEPT message to the AIoT device and starts the timer T5. In the AIOT REGISTRATION ACCEPT message the AIOTF:

- a) shall include DO-A capable AIoT device temporary identifier; and
- b) shall include AIOTF routing information.

Upon receiving the AIOT REGISTRATION ACCEPT message the AIoT device shall stop timer T11 and send a AIOT REGISTRATION COMPLETE message to the AIOTF to acknowledge the AIOT REGISTRATION ACCEPT message.

Upon receiving the AIOT REGISTRATION COMPLETE message, the AIOTF stops the timer T5 and consider the procedure is successfully completed.

Editor's note: Details of DO-A capable AIoT device temporary identifier and AIOTF routing information is FFS and will be aligned based on SA2 decision.

5.5.2.4 AIoT registration not accepted by the network

Upon receiving the AIOT REGISTRATION REJECT message, the AIoT device shall consider the AIoT registration procedure is unsuccessful and stop timer T11.

Editor's note: Further details are FFS.

5.5.2.5 Abnormal cases in the AIoT device

The following abnormal cases can be identified:

a) Expiry of timer T11

The AIoT device shall abort the AIoT registration procedure and consider the AIoT registration procedure as unsuccessful. It is up to the AIoT device implementation how to re-run the ongoing procedure.

5.5.2.6 Abnormal cases in the AIOTF

The following abnormal cases can be identified:

a) Expiry of timer T5

The AIOTF shall abort the AIoT registration procedure and consider the AIoT registration procedure as unsuccessful.

5.5.3 Uplink application container transfer procedure

5.5.3.1 General

The purpose of the uplink application container transfer procedure is to deliver the DO-A data to the AIOTF (see example in figure 5.5.3.1-1).

The DO-A capable AIoT device shall register to the network before initiating the uplink application container transfer procedure.

The uplink application container transfer procedure is applicable to the DO-A capable AIoT device.



Figure 5.5.3.1-1: Uplink application container transfer procedure

5.5.3.2 Uplink application container transfer procedure initiation

The AIoT device initiates the uplink application container transfer procedure by sending an UPLINK APPLICATION CONTAINER TRANSFER message to the AIOTF. In the UPLINK APPLICATION CONTAINER TRANSFER message, the AIoT device shall include an Application data container IE which contains the DO-A data.

5.5.3.3 Uplink application container transfer procedure accepted by AIOTF

Upon receiving the UPLINK APPLICATION CONTAINER TRANSFER message, the AIOTF retrieves the AIoT device permanent identifier and obtains the target address(es) from the AIoT device context and routes the DO-A data to the AF according to the AIoT device context associated with the AIoT device as specified in 3GPP TS 23.369 [2].

6 Handling of unknown, unforeseen, and erroneous protocol data

6.1 General

The procedures specified in the present document apply to those messages which pass the checks described in this clause.

This clause also specifies procedures for the handling of unknown, unforeseen, and erroneous protocol data by the receiving entity. These procedures are called "error handling procedures", but in addition to providing recovery mechanisms for error situations they define a compatibility mechanism for future extensions of the protocols.

Clauses 6.2 to 6.7 shall be applied in order of precedence.

Detailed error handling procedures in the network are implementation dependent and may vary from network to network. However, when extensions of this protocol are developed, networks will be assumed to have the error handling that is indicated in this clause as mandatory ("shall") and that is indicated as strongly recommended ("should").

Also, the error handling of the network is only considered as mandatory or strongly recommended when certain thresholds for errors are not reached during a dedicated connection.

For definition of semantical and syntactical errors see 3GPP TS 24.007 [3], clause 11.4.2.

In this release of the specification, conditional IEs and comprehension required IEs are not supported by the AIoT NAS protocol.

6.2 Message too short or too long

6.2.1 Message too short

When a message is received that is too short to contain a complete message type information element, that message shall be ignored, c.f. 3GPP TS 24.007 [3], and the AIoT device shall provide an indication to the lower layers that the message was ignored.

6.2.2 Message too long

The AIoT device and the AIOTF shall not send an AIoT NAS message larger than the maximum size to prevent exceeding the value range for upper layer data specified in 3GPP TS 38.391 [8].

NOTE: In this release of the specification, the maximum size of an AIoT NAS message allowed to be sent by the AIoT device is 125 octets, while the maximum size of an AIoT NAS message allowed to be sent by the AIOTF is 119 octets.

6.2A Unknown or unforeseen security protection indication

If the network receives an AIoT NAS message with a Security header IE including a security protection indication parameter value not defined for the AIoT NAS protocol or not implemented by the receiver, it shall ignore the AIoT NAS message.

If the AIoT device receives an AIoT NAS message with a Security header IE including a security protection indication value not defined for the AIoT NAS protocol or not implemented by the receiver, the AIoT device shall ignore the message and provide an indication to the lower layers that the message was ignored.

6.3 Unknown or unforeseen message type

If the network receives an AIoT NAS message with a message type not defined for the AIoT NAS protocol or not implemented by the receiver, it shall ignore the AIoT NAS message.

If the AIoT device receives an AIoT NAS message with a message type not defined for the AIoT NAS protocol or not implemented by the receiver, it shall return a STATUS message with cause #97 "message type non-existent or not implemented".

NOTE: A message type not defined for the AIoT NAS protocol in the given direction is regarded by the receiver as a message type not defined for the AIoT NAS protocol, see 3GPP TS 24.007 [3].

6.4 Non-semantical mandatory information element errors

6.4.1 Common procedures

When on receipt of a message,

- a) an "imperative message part" error; or
- b) a "missing mandatory IE" error;

is diagnosed or when a message containing a syntactically incorrect mandatory IE is received,

- a) the AIoT device shall:
 - if the message is not one of the messages listed in clause 6.4.2, the AIoT device shall ignore the message and return a STATUS message with cause #96 "invalid mandatory information"; and
- b) the network shall either:
 - try to treat the message (the exact further actions are implementation dependent); or
 - ignore the message.

6.4.2 Specific AIoT procedures

The following procedures shall apply when the AIoT device encounters an error with a mandatory information element in an AIoT NAS message:

- a) if the message is a READ COMMAND, then a READ COMMAND REJECT message with cause #96 "invalid mandatory information", shall be returned; and
- b) if the message is a WRITE COMMAND, then a WRITE COMMAND REJECT message with cause #96 "invalid mandatory information", shall be returned.

6.5 Unknown and unforeseen IEs in the non-imperative message part

6.5.1 IEs unknown in the message

The AIoT device shall ignore all IEs with unknown IEI in a message.

The network shall take the same approach.

6.5.2 Out of sequence IEs

The AIoT device shall ignore all out of sequence IEs in a message.

The network should take the same approach.

6.5.3 Repeated IEs

If an information element with format T, TV or TLV is repeated in a message, the AIoT device shall handle only the contents of the information element appearing first and shall ignore all subsequent repetitions of the information element.

The network should follow the same procedures.

6.6 Non-imperative message part errors

6.6.1 General

This category includes syntactically incorrect optional IEs.

6.6.2 Syntactically incorrect optional IEs

The AIoT device shall treat all optional IEs that are syntactically incorrect in a message as not present in the message.

The network shall take the same approach.

6.7 Messages with semantically incorrect contents

When a message with semantically incorrect contents is received, the AIoT device shall perform the foreseen reactions of the procedural part of clause 5. If, however no such reactions are specified, the AIoT device shall ignore the message and provide an indication to the lower layers.

When a message with semantically incorrect contents is received, the AIOTF shall perform the foreseen reactions of the procedural part of clause 5. If, however no such reactions are specified, the AIOTF shall ignore the message.

7 Encoding of AIoT NAS protocol

7.1 Message functional definitions and contents

7.1.1 General

7.1.1.1 Overview

Each AIoT NAS message definition in the present clause is described using a common structure as follows:

- a) a brief description of the message direction and use, including whether the message has:
 - 1) Local significance, i.e. relevant only on the originating or terminating access;
 - 2) Access significance, i.e. relevant in the originating and terminating access, but not in the network;
 - 3) Dual significance, i.e. relevant in either the originating or terminating access and in the network; or
 - 4) Global significance, i.e. relevant in the originating and terminating access and in the network;

- b) a table listing the Information Elements (IE) known in the message and the order of their appearance in the message. All IEs that may be repeated are explicitly indicated (The V and LV formatted IEs, which compose the imperative part of the message, occur before the T, TV and TLV formatted IEs which compose the non-imperative part of the message, see 3GPP TS 24.007 [3]). In a (maximal) sequence of consecutive IEs with half octet length, the first IE with half octet length occupies bits 1 to 4 of octet N, the second IE bits 5 to 8 of octet N, the third IE bits 1 to 4 of octet N+1 etc. Such a sequence always has an even number of elements.

For each information element the table indicates:

- 1) The Information Element Identifier (IEI), in hexadecimal notation, if the IE has format T, TV or TLV. If the IEI has half octet length, it is specified by a notation representing the IEI as a hexadecimal digit followed by a "-" (example: B-);

NOTE 1: The same IEI can be used for different information element types in different messages of the same protocol.

- 2) The name of the information element (which may give an idea of the semantics of the element). The name of the information element followed by "IE" or "information element" is used in this technical report as reference to the information element within a message;
 - 3) The name of the type of the information element (which indicates the coding of the value part of the IE), and generally, the referenced clause of clause 7.2 of the present document describing the value part of the information element;
 - 4) The presence requirement indication (M or O) for the IE as defined in 3GPP TS 24.007 [3]; and
 - 5) The format of the information element (T, V, TV, LV or TLV) as defined in 3GPP TS 24.007 [3]; and
- c) clauses specifying, where appropriate, conditions for IEs with presence requirement O in the relevant message which together with other conditions specified in the present document define when the information elements shall be included or not, and what non-presence of such IEs means. If new IEs are added to a message, the respective clauses are included in the same order or sequence as the IEs appear in the message. I.e. they are appended after the existing clauses at the end of the message description.

7.1.1.2 AIoT NAS message format

Within the AIoT NAS protocol defined in the present document, every message is a standard L3 message as defined in 3GPP TS 24.007 [3]. This means that the message consists of the following parts:

- 1) if the message is an unprotected AIoT NAS message:
 - a) security header;
 - b) message type; and
 - c) other information elements, as required.
- 2) if the message is a security protected AIoT NAS message:
 - a) security header;
 - b) message authentication code;
 - c) message type; and
 - d) other information elements, as required.

The organization of an unprotected AIoT NAS message is illustrated in the example shown in figure 7.1.1.2-1.

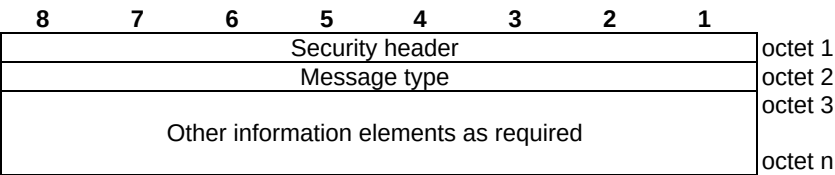


Figure 7.1.1.2-1: General message organization example for an unprotected AIoT NAS message

The INVENTORY REPORT message is an unprotected AIoT NAS message.

The organization of a security protected AIoT NAS message is illustrated in the example shown in figure 7.1.1.2-2.

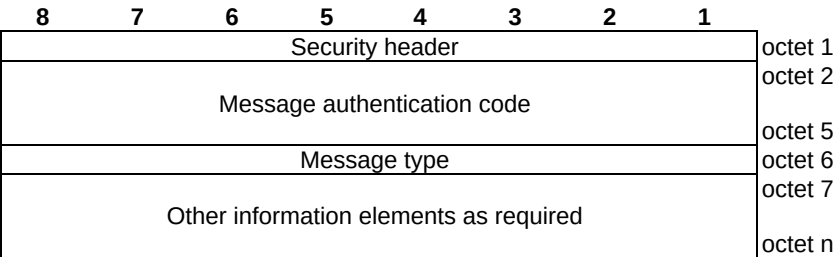


Figure 7.1.1.2-2: General message organization example for a security protected AIoT NAS message

All AIoT NAS messages except the INVENTORY REPORT message are security protected AIoT NAS messages.

7.1.2 Inventory report

7.1.2.1 Message definition

The INVENTORY REPORT message is sent by the AIoT device to the AIOTF to reply to the AIoT paging.

See table 7.1.2.1-1.

Message type: INVENTORY REPORT

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.2.1-1: INVENTORY REPORT message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message type	Message type 7.2.2	M	V	1
	RAND _{AIOT_d}	RAND 7.2.12	M	V	16
	RES _{AIOT}	Authentication response parameter 7.2.8	M	V	8
11	AIoT device identity	AIoT device identity 7.2.6	O	TLV	7-77

7.1.2.2 AIoT device identity

This IE shall be included when the AIoT device needs to provide its AIoT device permanent identifier to the AIOTF.

7.1.3 Read command

7.1.3.1 Message definition

The READ COMMAND message is sent by the AIOTF to the AIoT device to read the AIoT data from the memory.

See table 7.1.3.1-1.

Message type: READ COMMAND

Significance: dual

Direction: AIOTF to AIoT device

Table 7.1.3.1-1: READ COMMAND message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Read command message identity	Message type 7.2.2	M	V	1
	Read offset	Offset 7.2.11	M	V	2
	Read length	AIoT data length 7.2.5	M	V	1
10	AIoT device T-ID	AIoT device T-ID 7.2.7	O	TV	17

7.1.3.2 AIoT device T-ID

This IE shall be included in the message when the AIOTF needs to provide a new T-ID to the AIoT device as specified in clause 5.3.2.2.

7.1.4 Read complete

7.1.4.1 Message definition

The READ COMPLETE message is sent by the AIoT device to the AIOTF to provide the AIoT data that has been read from the memory.

See table 7.1.4.1-1.

Message type: READ COMPLETE

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.4.1-1: READ COMPLETE message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Read complete message identity	Message type 7.2.2	M	V	1
	AIoT data	AIoT data 7.2.4	M	LV	2-85
8-	Additional command information	Additional command information 7.2.13	O	TV	1

7.1.4.2 Additional command information

This IE shall be included when the AIoT device needs to provide additional information related to the read command procedure to the AIOTF.

7.1.5 Read command reject

7.1.5.1 Message definition

The READ COMMAND REJECT message is sent by the AIoT device to the AIOTF to indicate the cause of the failure of reading the AIoT data from the memory.

See table 7.1.5.1-1.

Message type: READ COMMAND REJECT

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.5.1-1: READ COMMAND REJECT message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Read command reject message identity	Message type 7.2.2	M	V	1
	Read cause	Cause 7.2.9	M	V	1

7.1.6 Write command

7.1.6.1 Message definition

The WRITE COMMAND message is sent by the AIOTF to the AIoT device to write the indicated AIoT data to the memory.

See table 7.1.6.1-1.

Message type: WRITE COMMAND

Significance: dual

Direction: AIOTF to AIoT device

Table 7.1.6.1-1: WRITE COMMAND message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Write command message identity	Message type 7.2.2	M	V	1
	Write offset	Offset 7.2.11	M	V	2
	AIoT data	AIoT data 7.2.4	M	LV	2-85
10	AIoT device T-ID	AIoT device T-ID 7.2.7	O	TV	17

7.1.6.2 AIoT device T-ID

This IE shall be included in the message when the AIOTF needs to provide a new T-ID to the AIoT device as specified in clause 5.3.3.2.

7.1.7 Write complete

7.1.7.1 Message definition

The WRITE COMPLETE message is sent by the AIoT device to the AIOTF to indicate that the AIoT data has been successfully written to the memory.

See table 7.1.7.1-1.

Message type: WRITE COMPLETE

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.7.1-1: WRITE COMPLETE message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Write complete message identity	Message type 7.2.2	M	V	1
8-	Additional command information	Additional command information 7.2.13	O	TV	1

7.1.7.2 Additional command information

This IE shall be included when the AIoT device needs to provide additional information related to the write command procedure to the AIOTF.

7.1.8 Write command reject

7.1.8.1 Message definition

The WRITE COMMAND REJECT message is sent by the AIoT device to the AIOTF to indicate the cause of the failure of writing the AIoT data from the memory.

See table 7.1.8.1-1.

Message type: WRITE COMMAND REJECT

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.8.1-1: WRITE COMMAND REJECT message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Write command reject message identity	Message type 7.2.2	M	V	1
	Write cause	Cause 7.2.9	M	V	1

7.1.9 Permanent disable command

7.1.9.1 Message definition

The PERMANENT DISABLE COMMAND message is sent by the AIOTF to the AIoT device to permanently disable the communication capability of AIoT device.

See table 7.1.9.1-1.

Message type: PERMANENT DISABLE COMMAND

Significance: dual

Direction: AIOTF to AIoT device

Table 7.1.9.1-1: PERMANENT DISABLE COMMAND message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Permanent disable command message identity	Message type 7.2.2	M	V	1

7.1.10 Permanent disable complete

7.1.10.1 Message definition

The PERMANENT DISABLE COMPLETE message is sent by the AIoT device to the AIOTF to indicate that the AIoT device communication capability has been disabled.

See table 7.1.10.1-1.

Message type: PERMANENT DISABLE COMPLETE

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.10.1-1: PERMANENT DISABLE COMPLETE message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Permanent disable complete message identity	Message type 7.2.2	M	V	1

7.1.11 STATUS

7.1.11.1 Message definition

The STATUS message is sent by the AIoT device to the AIOTF to report certain error conditions listed in clause 6.

See table 7.1.11.1-1.

Message type: STATUS

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.11.1-1: STATUS message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Status message identity	Message type 7.2.2	M	V	1
	Status cause	Cause 7.2.9	M	V	1

7.1.12 T-ID reallocation command

7.1.12.1 Message definition

The T-ID REALLOCATION COMMAND message is sent by the AIOTF to the AIoT device to update the T-ID stored in the AIoT device.

See table 7.1.12.1-1.

Message type: T-ID REALLOCATION COMMAND

Significance: dual

Direction: AIOTF to AIoT device

Table 7.1.12.1-1: T-ID REALLOCATION COMMAND message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	T-ID reallocation command message identity	Message type 7.2.2	M	V	1
	AIoT device T-ID	AIoT device T-ID 7.2.7	M	V	16

7.1.13 T-ID reallocation complete

7.1.13.1 Message definition

The T-ID REALLOCATION COMPLETE message is sent by the AIoT device to the AIOTF to respond to a request to update the T-ID stored in the AIoT device.

See table 7.1.13.1-1.

Message type: T-ID REALLOCATION COMPLETE

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.13.1-1: T-ID REALLOCATION COMPLETE message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	T-ID reallocation complete message identity	Message type 7.2.2	M	V	1

7.1.14 T-ID reallocation command reject

7.1.14.1 Message definition

The T-ID REALLOCATION COMMAND REJECT message is sent by the AIoT device to the AIOTF to indicate the cause of the failure of storing a new T-ID value in the AIoT device.

See table 7.1.14.1-1.

Message type: T-ID REALLOCATION COMMAND REJECT

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.14.1-1: T-ID REALLOCATION COMMAND REJECT message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	T-ID reallocation command reject message identity	Message type 7.2.2	M	V	1
	T-ID reallocation cause	Cause 7.2.8	M	V	1

7.1.15 Uplink application container transfer

7.1.15.1 Message definition

The UPLINK APPLICATION CONTAINER TRANSFER message is sent by the AIoT device to the AIOTF to transmit the DO-A data in an application container.

See table 7.1.15.1-1.

Message type: UPLINK APPLICATION CONTAINER TRANSFER

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.15.1-1: UPLINK APPLICATION CONTAINER TRANSFER message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Uplink application container transfer message identity	Message type 7.2.2	M	V	1
	Application data container	Application data container 7.2.14	M	LV	TBD

Editor's note: The maximum length of the Application data container IE contents is FFS and depends on RAN2 decision.

Editor's note: Whether update is needed for the security related IEs is FFS and depends on the SA3.

Editor's note: Whether to introduce a new Application data container IE is FFS.

7.1.16 Application-specific command

7.1.16.1 Message definition

The APPLICATION-SPECIFIC COMMAND message is sent by the AIOTF to the AIoT device to transmit the command in an application container.

See table 7.1.16.1-1.

Message type: APPLICATION-SPECIFIC COMMAND

Significance: dual

Direction: AIOTF to AIoT device

Table 7.1.16.1-1: APPLICATION-SPECIFIC COMMAND message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Application-specific command message identity	Message type 7.2.2	M	V	1
	Application data container	Application data container 7.2.14	M	LV	TBD

Editor's note: Whether to reuse the AIoT data IE for APPLICATION-SPECIFIC COMMAND message is FFS.

7.1.17 Application-specific complete

7.1.17.1 Message definition

The APPLICATION-SPECIFIC COMPLETE message is sent by the AIoT device to the AIOTF to reply the application-specific command.

See table 7.1.17.1-1.

Message type: APPLICATION-SPECIFIC COMPLETE

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.17.1-1: APPLICATION-SPECIFIC COMPLETE message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Application-specific command complete message identity	Message type 7.2.2	M	V	1
	Application data container	Application data container 7.2.14	M	LV	TBD

Editor's note: Whether update is needed for the security related IEs is FFS and depends on the SA3.

7.1.18 Application-specific command reject

7.1.18.1 Message definition

The APPLICATION-SPECIFIC COMMAND REJECT message is sent by the AIoT device to the AIOTF to reject the application-specific command.

See table 7.1.18.1-1.

Message type: APPLICATION-SPECIFIC COMMAND REJECT

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.18.1-1: APPLICATION-SPECIFIC COMMAND REJECT message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	Application-specific command reject message identity	Message type 7.2.2	M	V	1

Editor's note: Whether update is needed for the security related IEs is FFS and depends on the SA3.

7.1.19 ALoT registration request

7.1.19.1 Message definition

The AIOT REGISTRATION REQUEST message is sent by the ALoT device to the AIOTF to initiate the ALoT registration procedure.

See table 7.1.19.1-1.

Message type: AIOT REGISTRATION REQUEST

Significance: dual

Direction: ALoT device to AIOTF

Table 7.1.19.1-1: AIOT REGISTRATION REQUEST message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	ALoT registration request message identity	Message type 7.2.2	M	V	1
	Protected DO-A capable ALoT device identifier	TBD	TBD	TBD	TBD
	DO-A capable ALoT device temporary identifier	TBD	TBD	TBD	TBD

Editor's note: Details of the DO-A capable ALoT device temporary identifier and protected ALoT device identifier are FFS and will be aligned based on SA2 decision.

Editor's note: It is FFS whether existing IE(s) can be reused or new IE(s) are required to transport the DO-A capable ALoT device temporary identifier and the protected DO-A capable ALoT service identifier.

Editor's note: The security parameter is FFS and subject to SA3 agreement.

Editor's note: The addition of a registration type is FFS.

7.1.20 ALoT registration accept

7.1.20.1 Message definition

The AIOT REGISTRATION ACCEPT message is sent by the AIOTF to the ALoT device.

See table 7.1.20.1-1.

Message type: AIOT REGISTRATION ACCEPT

Significance: dual

Direction: AIOTF to ALoT device

Table 7.1.20.1-1: AIOT REGISTRATION ACCEPT message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	AIoT registration accept message identity	Message type 7.2.2	M	V	1
	DO-A capable AIoT device temporary identifier	TBD	TBD	TBD	TBD

Editor's note: Details of the DO-A capable AIoT device temporary identifier are FFS and will be aligned based on SA2 decision.

Editor's note: It is FFS whether existing IE can be reused or new IE is required to transport the DO-A capable AIoT device temporary identifier.

7.1.21 AIoT registration complete

7.1.21.1 Message definition

The AIOT REGISTRATION COMPLETE message is sent by the AIoT device to the AIOTF.

See table 7.1.21.1-1.

Message type: AIOT REGISTRATION COMPLETE

Significance: dual

Direction: AIoT device to AIOTF

Table 7.1.21.1-1: AIOT REGISTRATION COMPLETE message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	AIoT registration complete message identity	Message type 7.2.2	M	V	1

7.1.22 AIoT registration reject

7.1.22.1 Message definition

The AIOT REGISTRATION REJECT message is sent by the AIOTF to the AIoT device.

See table 7.1.22.1-1.

Message type: AIOT REGISTRATION REJECT

Significance: dual

Direction: AIOTF to AIoT device

Table 7.1.22.1-1: AIOT REGISTRATION REJECT message content

IEI	Information Element	Type/Reference	Presence	Format	Length
	Security header	Security header 7.2.3	M	V	1
	Message authentication code	Message authentication code 7.2.10	M	V	4
	AIoT registration reject message identity	Message type 7.2.2	M	V	1
	Reject cause	TBD	M	V	1

Editor's note: It is FFS whether an existing IE can be reused or a new IE is required to transport the reject cause.

7.2 Encoding of information elements

7.2.1 General

7.2.1.1 Overview

This clause describes the encoding of the information elements used in the messages of the AIoT NAS protocol.

7.2.1.2 Field format and mapping

When a field is contained within a single octet, the lowest numbered bit of the field represents the least significant bit.

When a field extends over more than one octet, the order of bit values progressively decreases as the octet number increases. In that part of the field contained in a given octet, the lowest numbered bit represents the least significant bit. The most significant bit of the field is represented by the highest numbered bit of the lowest numbered octet of the field. The least significant bit of the field is represented by the lowest numbered bit of the highest numbered octet of the field.

For example, a bit number can be identified as a couple (o, b) where o is the octet number and b is the relative bit number within the octet. Figure 7.2.1.2-1 illustrates a field that spans from bit (1, 3) to bit (2, 7). The most significant bit of the field is mapped on bit (1, 3) and the least significant bit is mapped on bit (2, 7).




Figure 7.2.1.2-1: Field mapping convention

7.2.2 Message type

The Message type IE and its use are defined in 3GPP TS 24.007 [3]. Table 7.2.2-1 defines the value part of the Message type IE used in the AIoT NAS protocol.

Table 7.2.2-1: Message types for AIoT NAS

Bits								
8	7	6	5	4	3	2	1	
0	0	0	0	0	0	0	1	Inventory report
0	0							
0	0	0	0	0	0	1	0	Read command
0	0	0	0	0	0	1	1	Read complete
0	0	0	0	0	1	0	0	Read command reject
0	0							
0	0	0	0	0	1	0	1	Write command
0	0	0	0	0	1	1	0	Write complete
0	0	0	0	0	1	1	1	Write command reject
0	0							
0	0	0	0	1	0	0	0	Permanent disable command
0	0	0	0	1	0	0	1	Permanent disable complete
0	0	0	0	1	0	1	0	Status
0	0	0	0	1	0	1	1	T-ID reallocation command
0	0	0	0	1	1	0	0	T-ID reallocation complete
0	0	0	0	1	1	0	1	T-ID reallocation command reject
0	0	0	0	1	1	1	0	AIoT registration request
0	0	0	0	1	1	1	1	AIoT registration accept
0	0	0	1	0	0	0	0	AIoT registration complete
0	0	0	1	0	0	0	1	AIoT registration reject
0	0	0	1	0	0	1	0	Application-specific command
0	0	0	1	0	0	1	1	Application-specific complete
0	0	0	1	0	1	0	0	Application-specific command reject
0	0	0	1	0	1	0	1	Uplink application container transfer

7.2.3 Security header

The purpose of the security header information element is to indicate security related properties for the message in which the information element is included as first octet.

The security header information element is coded as shown in figure 7.2.3-1 and table 7.2.3-1.

The security header information element is a type 3 information element with length of 2 octets.




Figure 7.2.3-1: Security header information element

Table 7.2.3-1: Security header information element

Security protection indication (SPI) (octet 2, bit 1 to 3)			
Bits			
3	2	1	
0	0	0	Unprotected AIoT NAS message
			Security protected AIoT NAS message:
0	0	1	Integrity protected with 128-NIA2 and ciphered with NEA0
0	1	0	Integrity protected with 128-NIA2 and ciphered with 128-NEA2
Bits 4 to 8 of octet 2 are spare and shall be coded as zero.			

7.2.4 AIoT data

The purpose of the AIoT data information element is to carry the AIoT data that has been read from the memory or that is to be written to the memory of the AIoT device.

The AIoT data information element is coded as shown in figure 7.2.4-1 and table 7.2.4-1.

The AIoT data is a type 4 information element with a minimum length of 3 octets and a maximum length of 86 octets.

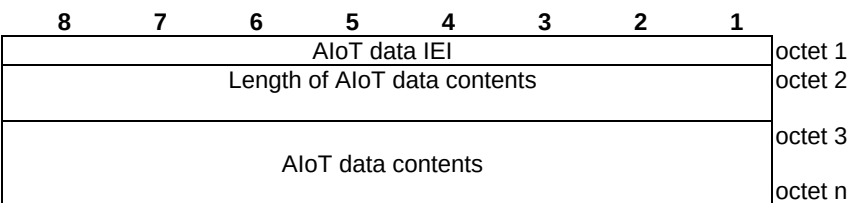


Figure 7.2.4-1: AIoT data information element

Table 7.2.4-1: AIoT data information element

AIoT data contents (octets 3 to n):	
The AIoT data contents contain the contents of the AIoT data that has been read from the memory or that is to be written in the memory of the AIoT device. The minimum length of the AIoT data contents field is 1 octet, and the maximum length is 84 octets.	
NOTE:	If the value of the length of AIoT data contents is greater than 84, the receiver shall diagnose a syntactical error.

7.2.5 AIoT data length

The purpose of the AIoT data length information element is to indicate the length of the AIoT data to be read in a read operation.

The AIoT data length information element is coded as shown in figure 7.2.5-1 and table 7.2.5-1.

The AIoT data length is a type 3 information element with length of 2 octets.




Figure 7.2.5-1: AIoT data length information element

Table 7.2.5-1: AIoT data length information element

AIoT data length value (octet 2)
This field contains the binary encoded length of data to be read from AIoT device memory in the unit of bytes. The minimum value of the AIoT data length is 1, and the maximum value is 84. AIoT data length value of 0 and all AIoT data length values greater than 84 are reserved.

7.2.6 AIoT device identity

The purpose of the AIoT device identity information element is to provide the network with the AIoT device identity of the AIoT device.

The AIoT device identity information element is coded as shown in figure 7.2.6-1 and table 7.2.6-1.

The AIoT device identity is a type 4 information element with minimum length of 7 octets and maximum length of 77 octets.

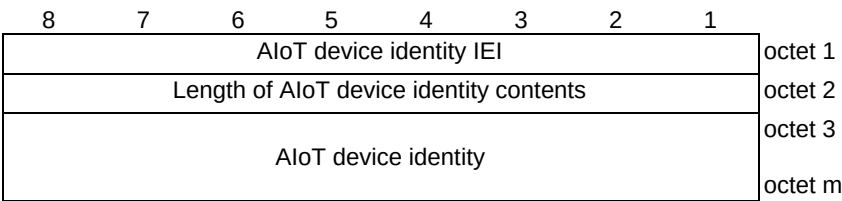


Figure 7.2.6-1: AIoT device identity information element

Table 7.2.6-1: AIoT device identity

AIoT device identity(octets 3 to m)
This field is encoded as the structure of AIoT device permanent identifier as specified in clause 31.2 in 3GPP TS 23.003 [5]. When the ID Type is set to "NID part is included", bits 5 to 8 of the last octet of the NID field are coded as zero.

7.2.7 AIoT device T-ID

The purpose of the AIoT device T-ID information element is to provide the AIoT device T-ID to the AIoT device.

The AIoT device T-ID information element is coded as shown in figure 7.2.7-1 and table 7.2.7-1.

The AIoT device T-ID is a type 3 information element with length of 17 octets.

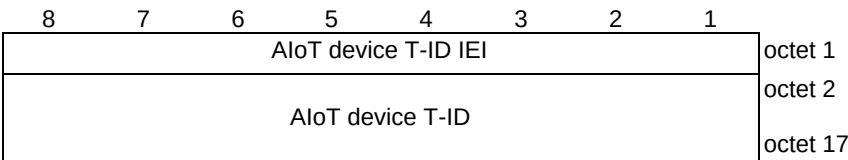


Figure 7.2.7-1: AIoT device T-ID information element

Table 7.2.7-1: AIoT device T-ID

AIoT device T-ID (octets 2 to 17) This field is encoded as the structure of AIoT device temporary identifier as specified in 3GPP TS 23.003 [5].

7.2.8 Authentication response parameter

The purpose of the authentication response parameter information element is to provide the network with the authentication response calculated in the AIoT device.

The Authentication response parameter information element is coded as shown in figure 7.2.8-1 and table 7.2.8-1.

The Authentication response parameter is a type 3 information element with 9 octets length. In an AIoT authentication challenge, the response calculated in the AIoT device is 8 octets in length, and is placed in the Authentication response parameter information element.

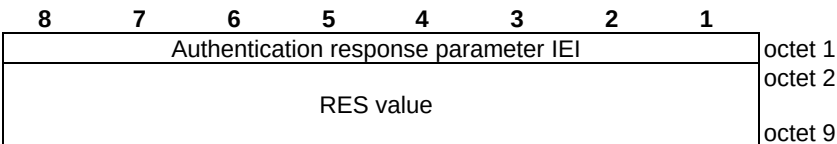


Figure 7.2.8-1 Authentication response parameter information element

Table 7.2.8-1: Authentication response parameter information element

RES value (octet 2 to 9) The RES value consists of 64 bits. Bit 8 of octet 2 is the most significant bit while bit 1 of octet 9 is the least significant bit.
--

7.2.9 Cause

The purpose of the cause information element is to indicate the cause of the failure of the AIoT NAS message.

The cause information element is coded as shown in figure 7.2.9-1 and table 7.2.9-1.

The cause is a type 3 information element with length of 2 octets.




Figure 7.2.9-1: Cause information element

Table 7.2.9-1: Cause information element

Cause value (octet 2)								
Bits								
8	7	6	5	4	3	2	1	
0	0	0	0	0	0	0	1	Command type specific parameters invalid
0	0	0	0	0	0	1	1	Low energy
0	0	0	0	0	1	0	0	T-ID update failure
0	1	1	0	0	0	0	0	Invalid mandatory information
0	1	1	0	0	0	0	1	Message type non-existent or not implemented
0	1	1	0	1	1	1	1	Error, unspecified
All other values are spare and if received shall be interpreted as 0110 1111, "Error, unspecified".								

7.2.10 Message authentication code

The purpose of the Message authentication code information element is to protect the integrity of an AIoT NAS message.

The Message authentication code is a type 3 information element with 5 octets length.

The Message authentication code information element is coded as shown in figure 7.2.10-1 and table 7.2.10-1.

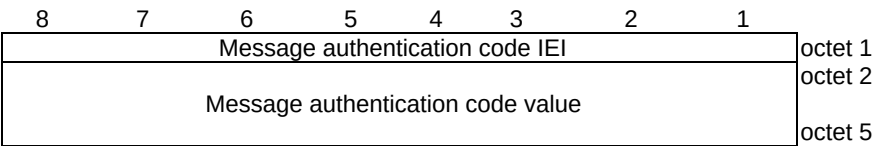


Figure 7.2.10-1: Message authentication code information element

Table 7.2.10-1: Message authentication code information element

Message authentication code value (octet 2 to 5)							
This field contains the 32 bit message authentication code calculated for AIoT integrity protection. Bit 8 of octet 2 is the most significant bit, and bit 1 of octet 5 is the least significant bit of these 4 octets.							

7.2.11 Offset

The purpose of the Offset information element is to provide the AIoT device offset indication, i.e. where to read the AIoT data from or where to write the AIoT data to.

The Offset information element is coded as shown in figure 7.2.11-1 and table 7.2.11-1.

The Offset is a type 3 information element with a length of 3 octets.

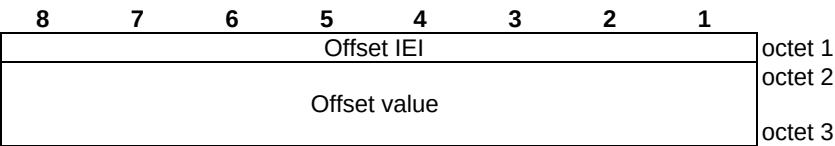


Figure 7.2.11-1 Offset information element

Table 7.2.11-1: Offset information element

Offset value (octet 2 to 3)
This field contains 2 octet binary encoded offset value in the unit of bytes. Bit 8 of octet 2 is the most significant bit, and bit 1 of octet 3 is the least significant bit.

7.2.12 RAND

The purpose of the RAND information element is to provide the AIoT device or the AIOTF with a non-predictable number to be used in security calculations.

The RAND information element is coded as shown in figure 7.2.12-1 and table 7.2.12-1.

The RAND is a type 3 information element with 17 octets length.

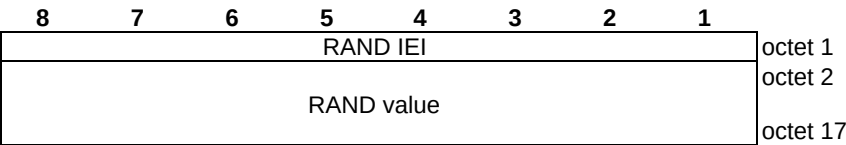


Figure 7.2.12-1 RAND information element

Table 7.2.12-1: RAND information element

RAND value (octet 2 to 17)
The RAND value consists of 128 bits. Bit 8 of octet 2 is the most significant bit while bit 1 of octet 17 is the least significant bit.

7.2.13 Additional command information

The purpose of the Additional command information information element is to indicate additional information associated with command procedures.

The Additional command information information element is coded as shown in figure 7.2.13-1 and table 7.2.13-1.

The Additional command information information element is a type 1 information element.




Figure 7.2.13-1: Additional command information information element

Table 7.2.13-1: Additional command information information element

T-ID update (TIDU) (octet 1, bit 1)	
Bit	
1	
0	stored T-ID not updated with command
1	stored T-ID updated with command
Bits 2 to 4 are spare and shall be coded as zero.	

7.2.14 Application data container

The purpose of the Application data container information element is to carry the application data from or to the AIOTF.

The Application data container information element is coded as shown in figure 7.2.14-1 and table 7.2.14-1.

The Application data container information element is a type 4 information element with a minimum length of 3 octets and a maximum length of TBD octets.

Editor's note: The maximum length of the Application data container IE contents is FFS and depends on RAN2 decision.

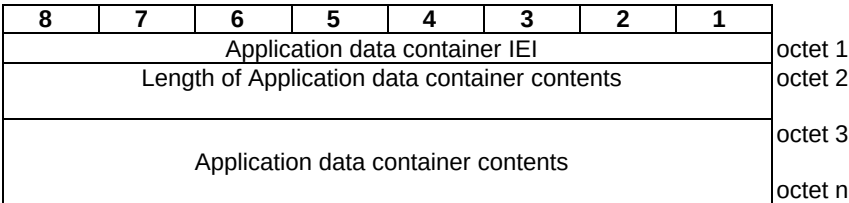


Figure 7.2.14-1: Application data container information element

Table 7.2.14-1: Application data container information element

Application data container contents (octets 3 to n): The AIoT data contents contain the contents of the Application data from or to the AIOTF.

8 List of system parameters

8.1 General

This clause describes the definition of the timers for AIoT.

8.2 Timers of command procedure

Timers of command procedure are shown in table 8.2-1.

Table 8.2-1: Timers of command procedure – AIOTF side

TIMER NUM.	TIMER VALUE	DEFINITION	CONDITION OF START	NORMAL STOP	ON EXPIRY
T1	NOTE	Timer for the read command procedure	Read command procedure initiated	Read command procedure completed or rejected. STATUS message received.	Abort the read command procedure and consider the read command procedure is unsuccessful.
T2	NOTE	Timer for the write command procedure	Write command procedure initiated	Write command procedure completed or rejected. STATUS message received.	Abort the write command procedure and consider the write command procedure is unsuccessful.
T3	NOTE	Timer for the permanent disable command procedure	Permanent disable command procedure initiated	Permanent disable command procedure completed.	Abort the permanent disable command procedure and consider the permanent disable command procedure is unsuccessful.
T4	NOTE	Timer for the T-ID reallocation command procedure	T-ID reallocation command procedure initiated	T-ID reallocation command procedure completed or rejected. STATUS message received.	Abort the T-ID reallocation command procedure and consider the T-ID reallocation command procedure is unsuccessful.
T6	NOTE	Timer for the Application-specific command procedure	Application-specific command procedure initiated	Application-specific command procedure completed or rejected. STATUS message received.	Abort the application-specific command procedure and consider the application-specific command procedure is unsuccessful.
NOTE: The value of this timer is network dependent.					

8.3 Timers of AIoT registration procedure

8.3.1 General

Timers of AIoT registration procedure are described in clause 8.3.2 and clause 8.3.3.

8.3.2 Timers of AIoT registration procedure from AIoT device side

Table 8.3.2-1: Timers of AIoT registration procedure – AIoT device side

TIMER NUM.	TIMER VALUE	DEFINITION	CONDITION OF START	NORMAL STOP	ON EXPIRY
T11	NOTE	Timer for the AIoT registration procedure	AIoT registration procedure initiated	AIOT REGISTRATION ACCEPT message received or AIOT REGISTRATION REJECT message received.	Abort the AIoT registration procedure and consider it as unsuccessful.
NOTE: The value of this timer is AIoT device dependent.					

8.3.3 Timers of AIoT registration procedure from AIOTF side

Table 8.3.3-1: Timers of AIoT registration procedure – AIOTF side

TIMER NUM.	TIMER VALUE	DEFINITION	CONDITION OF START	NORMAL STOP	ON EXPIRY
T5	NOTE	Timer for the AIoT registration procedure	AIOT REGISTRATION ACCEPT message sent to the AIoT device	AIOT REGISTRATION COMPLETE message received.	Abort the AIoT registration procedure and consider it as unsuccessful.
NOTE: The value of this timer is network dependent.					

Annex A (informative): Cause values

A.1 Cause values for the AIoT NAS protocol

Cause #1 – Command type specific parameters invalid

This cause is used to indicate that the command type specific parameter (e.g. the offset to read application data from the AIoT device user memory, the length of the application data to read, the offset where to write the application data, or the length of the application data to write) is invalid.

Cause #3 – Low energy

This cause is used to indicate that the command procedure cannot be performed because the energy will run out.

Cause #4 – T-ID update failure

This cause is used to indicate that a provided T-ID value was not stored by the AIoT device.

Cause #96 – Invalid mandatory information

This cause is used to indicate that the equipment sending this cause has received a message with a non-semantic mandatory IE error.

Cause #97 – Message type non-existent or not implemented

This cause is used to indicate that the equipment sending this cause has received a message with a message type it does not recognize either because this is a message not defined, or defined but not implemented by the equipment sending this cause.

Cause #111 – Error, unspecified

This cause is used to indicate that the requested read or write command was not executed successfully.

Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2025-04	CT1#154					TS skeleton draft. C1-252552, C1-252553.	0.1.0
2025-05	CT1#155					Inclusion of pCRs agreed during CT1#155: C1-253642, C1-253643, C1-253754, C1-253756, C1-254097, C1-254111, C1-254112, C1-254133.	0.2.0
2025-08	CT1#156					Inclusion of pCRs agreed during CT1#156: C1-255166, C1-255170, C1-255186, C1-255189, C1-255286, C1-255330, C1-255623, C1-255624, C1-255625, C1-255626, C1-255643, C1-255644, C1-255646, C1-255647, C1-255660, C1-255661, C1-255675, C1-255704.	0.3.0
2025-09	CT#109	CP-252116				Presenting 3GPP TS 24.369 to CT#109 for information.	1.0.0
2025-10	CT1#157					Inclusion of pCRs agreed during CT1#157: C1-256042, C1-256289, C1-256291, C1-256310, C1-256467, C1-256531, C1-256534, C1-256537, C1-256538, C1-256540, C1-256630, C1-256631, C1-256635, C1-256636, C1-256637, C1-256640, C1-256643, C1-256647, C1-256664, C1-256667, C1-256881, C1-256887, C1-256895.	1.1.0
2025-11	CT1#158					Inclusion of pCRs agreed during CT1#158: C1-257013, C1-257299, C1-257410, C1-257414, C1-257415, C1-257495, C1-257500, C1-257501, C1-257504, C1-257508, C1-257509, C1-257511, C1-257512, C1-257517, C1-257521, C1-257522, C1-257523, C1-257525, C1-257563, C1-257566, C1-257568, C1-257597, C1-257598, C1-257599, C1-257600, C1-257617, C1-257632, C1-257633, C1-257634, C1-257638	1.2.0
2025-12	CT#110	CP-253069				Presenting 3GPP TS 24.369 to CT#110 for approval.	2.0.0
2025-12	CT#110	CP-253069				Approved by TSG CT.	19.0.0
2026-03	CT#111	CP-260121	0005	1	F	Clarification on handling of AloT identification information	19.1.0
2026-03	CT#111	CP-260121	0006	1	F	Clarification on the indication from lower layers when handling of paging request	19.1.0
2026-03	CT#111	CP-260121	0010		F	Parameter alignment	19.1.0
2026-03	CT#111	CP-260121	0011	1	F	Missing optional IE clauses	19.1.0
2026-03	CT#111	CP-260121	0013	2	F	AloT data IE maximum size	19.1.0
2026-03	CT#111	CP-260121	0014	1	F	T-ID length	19.1.0
2026-03	CT#111	CP-260121	0016	2	F	RES length	19.1.0
2026-03	CT#111	CP-260121	0018	3	F	Undefined security header codepoints	19.1.0
2026-03	CT#111	CP-260121	0019	1	F	Indicate the integrity failure to the lower layer	19.1.0
2026-03	CT#111	CP-260121	0022	2	F	Cause#3 in Read Command Reject	19.1.0
2026-03	CT#111	CP-260121	0024	2	F	Handling of T-ID due to lower layer failure	19.1.0
2026-03	CT#111	CP-260121	0025	1	F	Miscellaneous corrections	19.1.0
2026-03	CT#111	CP-260121	0026	1	F	Alignment of "AloT paging message" terminology	19.1.0
2026-03	CT#111	CP-260121	0027		F	Clarification on AloT NAS message in ciphering	19.1.0
2026-03	CT#111	CP-260121	0029	1	F	Correction to the length of AloT device identity IE	19.1.0
2026-03	CT#111	CP-260122	0032		F	AloT Authentication correction	19.1.0
2026-03	CT#111	CP-260122	0033	1	F	Correction to stored T-ID update indication	19.1.0
2026-03	CT#111	CP-260122	0034	1	F	Correction to T-ID inclusion in command message	19.1.0
2026-03	CT#111	CP-260122	0037		F	Correction on usage of privacy protection	19.1.0
2026-03	CT#111	CP-260122	0039	1	F	Correction on redundant description, optional device id, and the paging name	19.1.0
2026-06	CT#112	CP-261116	0003	6	F	Fixing AloT data length	19.2.0
2026-06	CT#112	CP-261116	0023	4	F	Failed T-ID update with command	19.2.0
2026-06	CT#112	CP-261116	0048		F	Correction on the AloT identification information	19.2.0
2026-06	CT#112	CP-261116	0050	4	F	T-ID reallocation using a new command procedure, Alternative 1	19.2.0
2026-06	CT#112	CP-261116	0052	1	F	Missing protocol information for AloT NAS messages and IEs	19.2.0
2026-06	CT#112	CP-261116	0053	4	F	Correction of T-ID handling at abnormal cases	19.2.0
2026-06	CT#112	CP-261116	0054	1	F	AloT data memory unit specification	19.2.0
2026-06	CT#112	CP-261116	0056	1	F	T-ID valid in the AIOTF	19.2.0
2026-06	CT#112	CP-261116	0057		F	Correction of figures	19.2.0
2026-06	CT#112	CP-261116	0059	1	F	Clarification on inclusion and handling of T-ID in command procedures	19.2.0
2026-06	CT#112	CP-261116	0068	1	F	Add description on support of common procedures	19.2.0
2026-06	CT#112	CP-261116	0069	1	F	Apply STATUS cause #97 handling to command procedures	19.2.0
2026-06	CT#112	CP-261116	0084		F	Correction on misaligned naming	19.2.0
2026-06	CT#112	CP-261118	0058	2	F	NAS protocol extensions	20.0.0
2026-06	CT#112	CP-261118	0060	1	F	Clarification on T-ID in paging message	20.0.0
2026-06	CT#112	CP-261118	0062	1	F	Clarification on AloT NAS security	20.0.0
2026-06	CT#112	CP-261132	0065	3	B	AloT paging initiated by UE reader	20.0.0
2026-06	CT#112	CP-261132	0071	2	B	Introduction of DO-A capable AloT device related procedures	20.0.0
2026-06	CT#112	CP-261119	0082	1	F	Correction on message format	20.0.0

2026-06	CT#112	CP-261132	0083	1	B	Registration procedure	20.0.0
2026-06	CT#112	CP-261132	0086	1	B	Term and abbreviation for DO-A capable AIoT device	20.0.0
2026-06	CT#112	CP-261132	0087	2	B	AIoT device DO-A data transfer	20.0.0
2026-06	CT#112	CP-261132	0088	1	B	Support of application-specific command	20.0.0
2026-06	CT#112	CP-261132	0094	1	B	Adding message encoding for AIoT device registration	20.0.0
2026-06	CT#112	CP-261132	0099	2	B	Timers for registration procedure	20.0.0
2026-06	CT#112	CP-261132	0100	2	B	Message Type coding	20.0.0