DATE	REVISION	LOCATION	COMMENT
14 MAY 2025	A		INITIAL ISSUE AND VERIFICATION.
21 MAY 2026	B	B5–B7	ADDED 'SUCKBASS' SWITCH AND ADD'L COMMENTS

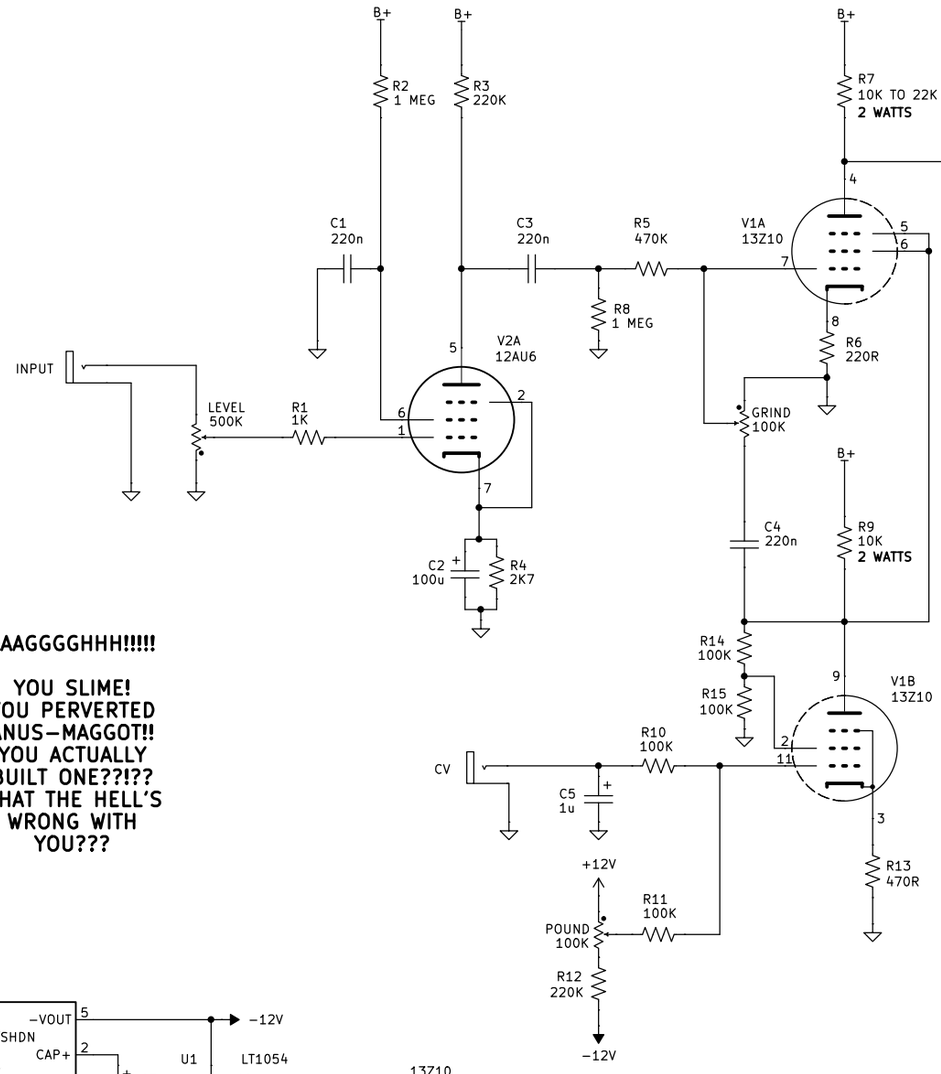

ALTERNATIVE WIRING
FOR STRANGLE CONTROL.

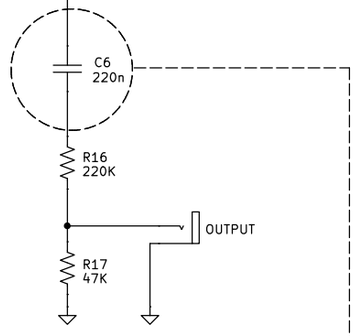

OPTIONAL:
SPECIAL UNACCEPTABLE EDITION
'SUCKBASS' SWITCH – REPLACE C6
WITH THIS BLOCK

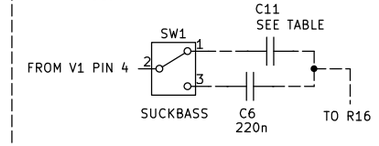

AAAGGGGHHH!!!!!

**YOU SLIME!
YOU PERVERTED
ANUS–MAGGOT!!
YOU ACTUALLY
BUILT ONE??!??
WHAT THE HELL'S
WRONG WITH
YOU???**

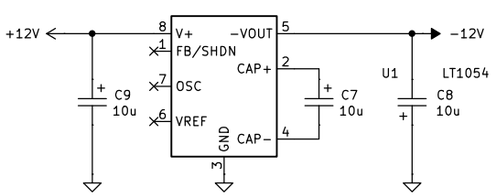



Eric on 'SUCKBASS' switch:
"Secrets"? It was just a smaller value coupling capacitor on the output, a switch put in a larger value. No I don't remember what they were."

I believe the original 220n coupling cap gives a −3 dB high pass cut of 2.8 Hz

$$f_c = \frac{1}{2\pi RC}$$, with R = R16 + R17)

So if you're someone who cares about exact numbers, my American high school level understanding of math provides the following using my suggested values:

C11 VALUE	HP CUTOFF (rounded to nearest whole number)
10nF	60 Hz
4.7nF	127 Hz
2.2nF	271 Hz
1nF	596 Hz
500pF	1.1 kHz

(I'm joking... mostly)
very detail-oriented LTSpice user

Or you could stop being a ~~neurotic wreck~~, put down the calculator, and actually experiment to get the sound you're after.

DISCLAIMER:

PROVIDED WITH NO GUARANTEES, WARRANTIES, OR SUPPORT FROM EITHER TOWMOTOR OR METASONIX.

ORIGINAL CIRCUIT DESIGNED FOR ~~+50VDC,~~ **+100VDC** BUT MAY BE OPERATED AS LOW AS 48 VDC OR AS HIGH AS 200 VDC. THE SOURCE, TOPOLOGY, QUALITY, AND RELIABILITY OF THIS VOLTAGE AS WELL AS THE CORRECT RE–RATING OF RELEVANT COMPONENTS IS THE RESPONSIBILITY OF THE BUILDER. IF THE BUILDER DOESN'T KNOW HOW TO SAFELY GET THAT VOLTAGE OR HOW (AND WHY) TO RE–RATE COMPONENTS, THE BUILDER IS STRONGLY ADVISED TO RECONSIDER CONSTRUCTING THIS CIRCUIT.

MADE WITH DRAWINGS GRACIOUSLY PROVIDED BY ERIC BARBOUR, OWNER OF METASONIX.
DRAWN BY TOWMOTOR ON MODWIGGLER (NOT ASSOCIATED WITH METASONIX)

TX–1 VACUUM–TUBE AGONIZER

Size: USLegal	Date: 2026–05–21	**Rev: B**
KiCad E.D.A. 10.0.1		Id: 1/1