SE(3)-WAM: What Should a Robot Remember and Predict for Dynamic Manipulation?

Anonymous CVPR submission

Paper ID *****

Abstract

Dynamic manipulation requires a robot to coordinate contact with a scene that continues to change between observation and execution. This raises a question beyond predicting more of the scene: which historical and future information actually improves the action? We study history encoding, future representation, and world–action coupling in a common dynamic-manipulation framework. Our guiding hypothesis is that prediction should preserve target motion and task-relevant context at the granularity required by interaction. A completed fifteen-condition future-supervision study on fourteen simulated tasks shows why this hypothesis requires controlled testing. On 1,260 paired evaluation scenes, the highest point estimates are 64.13% and 64.05%, compared with 62.78% without future supervision, with no clear overall advantage. Dense 2-D displacement supervision reaches 59.21% and is worse under the reported multiplicity correction. These results use privileged current object state and motion history, one training seed, and an auxiliary prediction path. History and combination studies further separate information access from representation choice. We specify the remaining backbone, online information-flow, pretraining, and external evaluations that will determine the final SE(3)-WAM instance. The present evidence supports conditional design decisions, while leaving the value of deployable online foresight to those comparisons.

1. Introduction

A moving object can leave its observed position before a robot reaches it. The same problem arises when a receptacle moves during release or an obstacle changes the available approach corridor. Dynamic manipulation therefore requires spatial accuracy at the right time. Faster inference and more responsive execution reduce observation age [12], while temporal observations help distinguish motions that look similar in a single image [3, 7]. Together, these demands motivate a practical question: *what should a robot remember and predict so that its action remains useful when interaction occurs?*

The answer depends on the role of information in the task. Target translation and rotation determine where and how to make contact. A moving occluder or obstacle matters through its effect on visibility, reachability, or collision. Static geometry can remain essential even though it has no motion to predict. This suggests organizing scene evolution by interaction needs: preserve fine target information when contact requires it, and represent surrounding changes at sufficient resolution to support the decision. Both a fixed target/context decomposition and a shared representation with task-dependent readout can implement this idea. Their relative value is an empirical question.

World–action models provide a framework for learning scene evolution alongside robot actions [13, 14]. However, a future objective changes several things at once: the supervised variables, the gradients shaping shared features, and sometimes the computation used before acting. The action may benefit from auxiliary supervision even when no forecast is generated at deployment [15]. Conversely, a geometrically accurate forecast may add no useful information to an already strong state-conditioned policy. Prediction error, action improvement, and online forecast use must therefore be measured separately.

We organize the SE(3)-WAM Study around three connected questions. **Q1** asks how a finite history should encode motion. **Q2** asks which future variables, regions, and resolutions support action. **Q3** asks how world and action computation should share parameters and exchange information. The study first establishes a common reference, compares history and future choices, and then selects a backbone and its information flow. Targeted cross-comparisons revisit earlier choices before the complete design is used for robot-data pretraining. This ordering exposes interactions between design decisions without requiring an exhaustive Cartesian product.

The completed evidence already constrains the story. Fifteen future-supervision conditions have been trained and evaluated on a 1,260-scene complement of the development

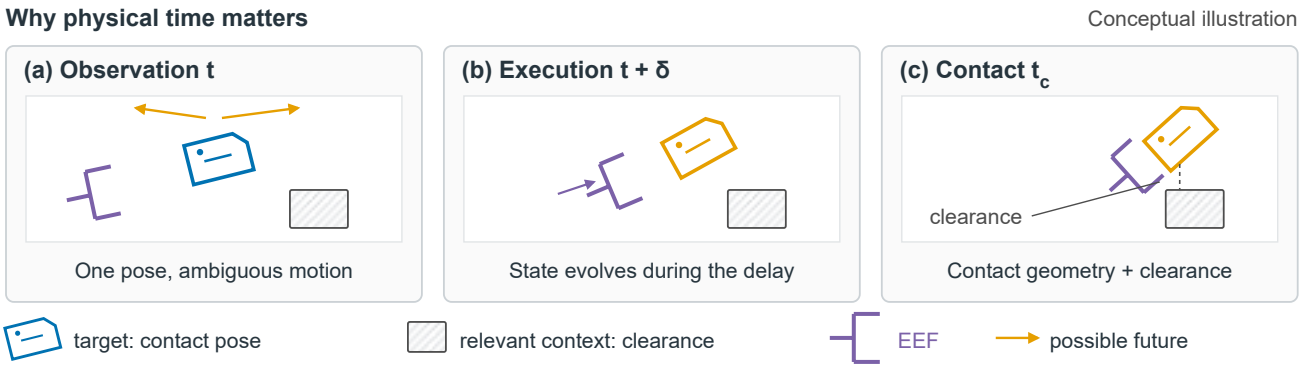


Figure 1. The interaction-time problem. Conceptual illustration: observations, command application, and contact occur at different physical times. Similar current target poses can have different motion histories. Target motion informs contact geometry and timing; relevant context constrains visibility and access. The illustration defines the research question and contains no measured rollout.

set. Sparse scene or target trajectories give the highest point estimates, but neither clearly exceeds the no-future reference overall. Dense 2-D future displacement decreases success under the same comparison. A subsequent twelve-condition combination screen selects a candidate with 66.59% success on that complement, while its exact matched controls remain incomplete. An adapted DreamVLA reference reaches 79.60% under its own recipe. These observations motivate investigating how information is encoded and used, rather than treating the addition of future targets as an established benefit.

Our contributions at this stage are:

- A dynamic-manipulation study protocol that separates task outcomes, available information, training supervision, and execution conditions.
- A completed comparison of fifteen future-supervision conditions, with paired results and adverse findings, complemented by history and combination studies that identify the next controlled contrasts.
- A unified design and evaluation framework for selecting SE(3)-WAM through history, future-representation, backbone, and information-flow comparisons, followed by a specified pretraining and transfer study.

This manuscript reports completed measurements and explicitly marks the remaining experiments. The independent supplement contains the configuration definitions, expanded results, and the protocols needed to finish the study.

2. Related Work

Dynamic manipulation. Dynamic grasping connects motion prediction to reachability and interception [1]. PUMA and its DOMINO benchmark study manipulation in dynamic environments using historical motion and future-feature supervision [3]. DynamicVLA combines a compact model with continuous inference and latency-aware action streaming [12]; DynamicWAM brings world–action modeling to changing scenes [7]. AHEAD uses predictive latent information for dynamic control [10], and PhysMani introduces an explicit 3-D motion interface [16]. These approaches motivate complementary questions about observation history, predicted variables, and execution. Our study compares choices along these axes within declared information and evaluation conditions. Native method adaptations provide system references, while matched internal comparisons address design attribution.

World–action models. DreamVLA combines dynamic-region, spatial, and semantic future prediction with a diffusion action decoder [17]. Our future-supervision comparisons vary related target families under a common action path; its adapted policy provides a stronger system reference. DreamZero learns world and action dynamics from robot video [13]. OpenWAM studies alternative world–action programs within a common Mixture-of-Transformers framework [14], providing a methodological reference for controlled design comparisons. Fast-WAM examines the need for test-time future imagination [15]; PointWorld represents world dynamics through 3-D point motion [4]. These works show that the choice between visual, latent, and geometric futures is coupled to the program that uses them. We study that coupling for contact-sensitive dynamic manipulation. ACT and Diffusion Policy provide action-model references [2, 18], while $\pi_{0.5}$ provides a pretrained VLA reference [8]. The planned robot-data stage uses DROID [5]; its transfer benefit is evaluated separately from simulation training and from representation selection.

3. Problem and Evaluation Protocol

Interaction in physical time. Let $\mathcal{H}_t = \{(o_i, s_i, \tau_i)\}_{i \le t}$ denote the available finite history of observations, robot state, and timestamps. A policy produces an action chunk $A_t = (a_{t,0}, \ldots, a_{t,H_a-1})$. If the latest image was captured

at τ_t^s and the first command is applied after delay ℓ_t, its application times are

$$\tau_{t,j}^{\text{apply}} = \tau_t^s + \ell_t + j\Delta_a. \quad (1)$$

The relevant future is defined relative to these physical times and the task's contact event. Forecast horizons, action intervals, and computation time are different quantities. In the completed representation screen, labels use eight future samples from 50 to 400 ms, while evaluation uses synchronous policy queries and executes one action per replan. Real computation delay is not injected into the physical evolution by those synchronous results.

Tasks and data. The reported experiments use the migrated DB0 v0.6 data and the fourteen-task evaluation suite. The suite covers moving-target grasping, orientation-sensitive grasping, physical occlusion, moving-receptacle placement, phase-constrained passage, free rolling/sliding motion, and post-impact adaptation. The simulation infrastructure uses MuJoCo and robosuite [11, 19]. Task success is determined by each native evaluator's physical outcome; all fourteen tasks receive equal weight. The common demonstration pool contains 11,200 trajectories, 800 per task. P0 motion-only prediction and later fresh-data production are separate from this learning/evaluation record. Appendix A describes the task and split identities used here.

Information tracks. The future-supervision screen uses a current fixed-camera RGB image, exact depth/camera geometry, an eight-sample robot-state history, and privileged current target pose plus seven intervals of target kinematics. We call this the *object-motion information track*. It isolates future objectives when substantial target motion information is already available. The current-pose history study removes privileged interval kinematics and asks whether visual history supplies useful additional information. Both tracks still use privileged current target pose. A deployable visual system must estimate such quantities from allowed sensors and is evaluated separately. Current-only RGB with robot-state history is denoted H0V; it retains memory.

Evaluation partitions. The fixed140 development set contains ten scenes per task. The disjoint 1,260-scene complement contains ninety per task, giving 1,400 scenes together. The complement is independent of fixed140 membership but belongs to the same validation distribution and has now informed development. The combined 1,400-scene score includes development scenes and is used for combination selection; it is not a new out-of-distribution test. We preserve these identities in every table. Checkpoints in the completed future screen use the fixed fourth-epoch endpoint and one fresh training seed. Paired comparisons share scenes and specified rollout seeds; scenario uncertainty does not include between-training-seed variation.

Outcomes and comparison scope. For $K = 14$ tasks with n_k episodes each, the primary score is

$$\text{SR}(m) = \frac{1}{K}\sum_{k=1}^{K}\frac{1}{n_k}\sum_{i=1}^{n_k} y_{mki}, \qquad y_{mki} \in \{0,1\}. \quad (2)$$

Equal per-task counts make pooled and task-balanced SR identical here. We report counts as well as percentages. Paired differences use the same episodes and the uncertainty procedure attached to the source analysis. The completed future comparison corrects its twenty-seven overall contrasts as one family. Per-task findings are exploratory.

Matched internal studies share observation fields, training exposure, action interface, and execution settings. The external-method adaptation table instead compares complete systems with different pretraining, training budgets, and decoders. It records a useful performance reference without identifying a particular architecture's effect. Contact-time and relative-pose errors, safety outcomes, and measured action age are reserved for the mechanism and deployment studies where their measurement interfaces are available. Missing readouts are not assigned zero. Representation-specific errors retain their native units; a latent loss is not ranked numerically against a metric pose error.

4. The SE(3)-WAM Design Study

The study represents a design by (H, Z, B, G): a history encoder H, future targets Z, backbone B, and information-flow program G. Figure 2 shows their roles. The completed screen changes Z under a fixed reference; subsequent stages examine H, B, and G and revisit retained alternatives. A single component's point-estimate ranking does not determine the final composition.

4.1. Q1: Information Access and History Encoding

The encoder maps timestamped history into conditioning tokens, $X_t = H(\mathcal{H}_t)$. Its design includes the physical window, temporal spacing, visibility, and motion coordinates. Current RGB, stacked RGB windows, codec motion vectors, optical flow, latent history, and per-frame query compression provide different descriptions of the same recent evolution. Encoding and information access are separate factors: supplying a ground-truth velocity changes what is known, while reorganizing the same visual samples changes how it is represented.

The current-pose study holds current target pose and eight robot-state samples fixed, removes target-history kinematics, and compares eight visual-history conditions plus a freshly trained GT-history reference. The object-motion track instead supplies seven intervals of target kinematics. This

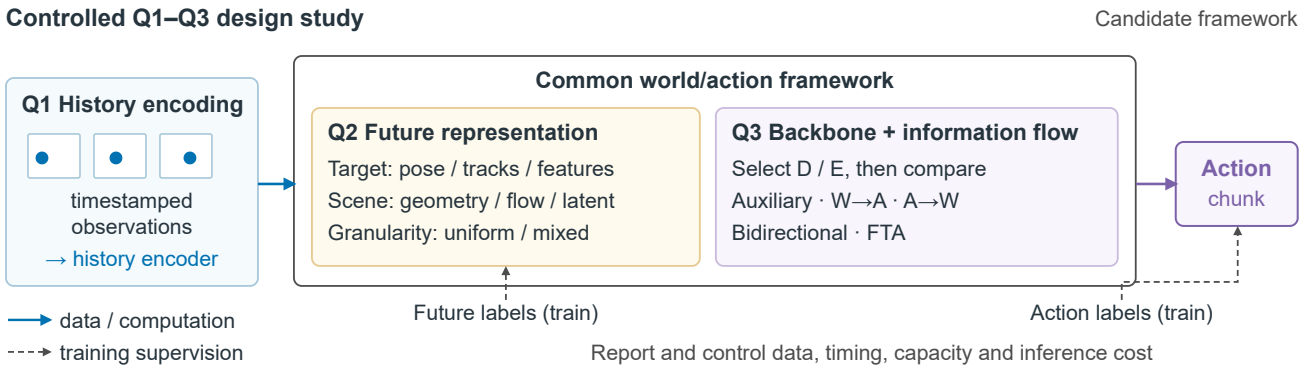


Figure 2. Design axes in the common world–action framework. Q1 specifies history encoding, Q2 specifies future targets and granularity, and Q3 specifies backbone organization and information flow. Solid arrows carry available observations or actions; dashed arrows indicate training supervision. Candidate panels do not define a single selected architecture. Backbone D/E and forecast-then-act (FTA) are defined in the text.

separation tests the conditional value of visual history rather than conflating temporal encoding with target localization. Window length and timestamp spacing are recorded independently of token count. A motion displacement also carries its time interval; a trajectory contains visibility rather than treating an absent point as stationary.

The diagnostic program complements task success with motion probes, matched-current history substitutions, occlusion, and sampling-gap tests. A probe measures what is decodable. A history substitution tests whether a policy responds to temporal information. Useful memory additionally requires better action outcomes under valid matched conditions. The necessary-current matching and closed-loop diagnostics remain part of the unfinished Q1 study.

4.2. Q2: Predicting Interaction-Relevant Variables

Q2 separates *scope* (target, context, or both), *variables* (pose, motion, visual features), and *granularity* (spatial and temporal allocation). The completed comparison includes no future target, scene-flow only, target-pose only, their combination, alternative scene/target descriptions, and additional future supervision. Table 2 gives the central contrasts; Appendix D provides all fifteen conditions. Scene flow also covers target regions, so the scene-flow-only condition is not a context-only control. Pure role separation and allocation require additional matched comparisons.

For the rigid-target condition, let (p_t, R_t) be the current target pose in the fixed metric frame. At physical offset $\delta_h = 0.05h$ seconds, $h = 1, \ldots, 8$, the supervised variables are

$$d_h = p_{t+\delta_h} - p_t, \qquad \phi_h = \mathrm{Log}(R_{t+\delta_h} R_t^\top)^\vee. \quad (3)$$

Predicted poses reconstruct as $\hat{p}_{t+\delta_h} = p_t + \hat{d}_h$ and $\hat{R}_{t+\delta_h} = \mathrm{Exp}(\hat{\phi}_h^\wedge) R_t$. Translation and left-relative rotation are parameterized separately. The pose readout pools sixteen meta tokens and predicts eight cumulative transforms. Its valid-target loss combines squared translation error with 0.1 times squared rotation geodesic error. This geometric parameterization does not impose equivariance on the network.

Scene-flow supervision describes metric cumulative point displacement. Alternatives describe dense 2-D displacement, codec block motion, sparse scene trajectories with visibility, or future video latents. Target alternatives use pooled DINO features or target trajectories. The added-supervision conditions predict depth, DINO features, dynamic-region RGB, or their combination. Their labels have different units, support, and dimensionality. Replacing scene flow with dense 2-D motion consequently tests a representation package, not dimensionality alone. Likewise, pose plus sparse tracks is not by itself a matched proof that fine-target/coarse-context allocation is optimal.

The completed study uses these quantities as auxiliary training targets. Future labels and validity masks remain in their supervision branches; neither is an action input. Deterministic readouts and generated variables have distinct interfaces. To compare uniform and heterogeneous allocation directly, the remaining study must hold role information, temporal support, and an applicable token/compute budget common, then vary the allocation within a compatible representation. A target mask used to construct a training label does not establish deployable target assignment.

4.3. Reference Training and Action Generation

The common Q2 reference uses a four-layer transformer of width 768 with eight attention heads. A frozen DINOv3 ViT-L/16 encoder [9] provides 196 tokens from a 224×224 current image. The D backbone shares attention projections and uses separate feed-forward networks for world/meta, flow, and action streams. Action attends to meta and action tokens; it does not attend to predicted flow or flow hidden

states. Future objectives can still shape shared trainable features through their gradients.

Action generation uses flow matching [6]. With normalized action target a_1, source $a_0 \sim \mathcal{N}(0, I)$, and interpolation time $u \in [0, 1]$,

$$a_u = (1-u)a_0+ua_1, \quad \mathcal{L}_A = \mathbb{E}\|v_\theta(a_u, u, X_t)-(a_1-a_0)\|^2. \tag{4}$$

The complete objective adds only the enabled future losses, $\mathcal{L} = \mathcal{L}_A + \sum_{r\in Z} \lambda_r \mathcal{L}_r$. Masks restrict each loss to its valid support. A missing head contributes no measurement; raw total losses with different terms are not compared as one quality metric. Appendix B specifies the reference source distributions, coordinates, and implementation settings.

The action chunk contains eight seven-dimensional commands: translation increment, left-relative rotation vector, and a gripper command. At deployment, five Euler steps generate the action chunk, its first command is executed, and the policy replans. Conditioning caching is enabled; temporal and velocity caching are disabled. The training translation bound is 0.05 m per axis, whereas the inherited evaluator permits 0.10 m per axis. We retain that reported convention rather than silently identifying the two bounds. Only the action stream is solved online in the completed Q2 screen.

4.4. Q3: Backbone and Information Flow

The next backbone comparison holds selected H/Z and the reference action-only deployment program G_0 fixed. It compares D's stream-specific feed-forward organization with an adapted E world/action parameter organization. Both are freshly trained; the proposed active-backbone parameter difference is bounded by approximately 5%. This E is distinct from the object-input condition called E in earlier experiments and from the older native two-column E implementation. It is a planned matched backbone comparison, with no completed GPU result.

The subsequent seven-condition information-flow study holds $H/Z/B$ fixed: R0 removes the studied future loss; R1 retains it without cross-stream edges; R2 allows future-to-action access; R3 allows action-to-future access; R4 allows both; R5 generates future then action; R6 generates action then future. R1 also compares action-only and joint deployment of the same checkpoint. These contrasts distinguish supervision, information access, and generation programs. The sequential conditions use clean ground-truth first-stage values for second-stage training and predicted values at deployment, so their difference includes teacher forcing and its deployment mismatch.

The current generative interface is defined for scene flow. If representation selection retains sparse tracks or video latents, their generated states, normalization, noise, and loss must be specified before the information-flow comparison. Five joint evaluations and five-plus-five sequential evaluations match per-modality steps but not total compute. The planned comparison therefore reports actual calls, parameters, and same-device latency. Online substitutions of future, including oracle and valid swaps, are used only after a replaceable forecast interface exists.

5. Experiments

We report completed system references, future-supervision comparisons, combination selection, and the available history results. The backbone, information-flow, pretraining, and external studies are specified in Sec. 5.6. Tables distinguish measured values from pending cells.

5.1. System References and Training Conditions

Table 1 places the study against adapted action and world–action models on the same fourteen-task evaluation scenes. The two DreamVLA schedules reach 1,000/1,260 and 1,003/1,260 successes. The study's combination candidate I reaches 839/1,260, and the no-future reference reaches 791/1,260. These are system-level observations. Candidate I and the reference have privileged target information; the adapted methods differ in initialization, training exposure, observation processing, and action execution. The table therefore motivates improving the current system while retaining the stronger reference, without attributing the gap to future representation.

Within the fifteen-condition future screen, all task networks start fresh with training seed 0 and run four epochs, 40,104 updates, and 641,664 sampled chunks at global batch 16. They use the fixed fourth-epoch checkpoint. Training is distributed over eight or sixteen devices with the same global batch; topology histories are retained in Appendix B. A single trained endpoint per condition supports paired scene comparisons but does not measure training-seed robustness. Current pose, motion history, action objective, and one-step receding-horizon execution are held common across this screen.

5.2. Q2: Which Future Supervision Helps?

Adding scene-flow and target-pose objectives. Figure 3 places the core contrasts in the full comparison. The no-future reference P00 succeeds in 791 scenes. Scene-flow P01, target-pose P02, and their combination P03 succeed in 782, 789, and 786 scenes, respectively. The combined objective does not show an overall improvement over either component or the reference in this setting. This result concerns auxiliary training with privileged motion input; online forecast consumption is a separate contrast.

Changing the predicted variables. Sparse scene tracks with target pose (P07) reach 807/1,260, and scene flow with

Table 1. System references on the same fourteen tasks. Counts keep fixed140 and the disjoint 1,260-scene complement separate. Training seed is 0 for these endpoints. Budgets, initialization, inputs, and execution differ across methods; this is not a matched architecture ablation. The bottom rows receive privileged current target pose and interval kinematics. I is the development-selected combination.

System	Updates	Global batch	fixed140	Complement	SR (%)
ACT [18]	50,000	32	50/140	424/1,260	33.65
Diffusion Policy [2]	50,000	32	54/140	432/1,260	34.29
$\pi_{0.5}$ [8]	30,000	256	89/140	751/1,260	59.60
DynamicVLA [12]	50,000	44	24/140	363/1,260	28.81
OpenWAM [14]	34,490	192	76/140	708/1,260	56.19
DynamicWAM [7]	40,000	128	72/140	670/1,260	53.17
DreamVLA, 20-epoch schedule [17]	48,220	512	112/140	1,000/1,260	79.37
DreamVLA, 40-epoch schedule [17]	96,440	512	114/140	1,003/1,260	79.60
Study P00: no future supervision	40,104	16	88/140	791/1,260	62.78
Study P03: scene flow + pose	40,104	16	93/140	786/1,260	62.38
Study I: tracks + pose, CNN, reconstruction	40,104	16	96/140	839/1,260	66.59

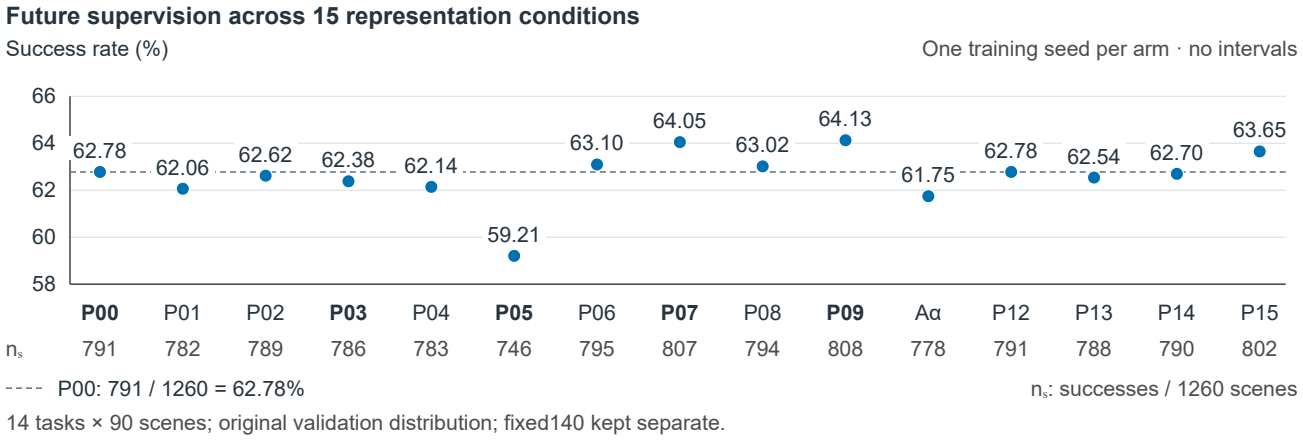


Figure 3. All fifteen future-supervision conditions at the fourth-epoch endpoint, with one training seed and 1,260 paired scenes each (fourteen tasks, ninety per task). Dots are point estimates; counts appear below labels. The dashed line is P00. Bold names identify discussed conditions, not significance. No confidence intervals are shown. P05 is adverse after the reported multiplicity correction; P07/P09 do not establish an overall gain. The development 140 remains separate.

target tracks (P09) reaches 808/1,260. Relative to P00, P07 gains 85 scenes and loses 69; P09 gains 91 and loses 74. Their raw two-sided exact McNemar p values are 0.227 and 0.213. The small net gains do not establish a reliable overall advantage. Non-rejection also does not establish equivalence: P12, for example, has the same total as P00 but exchanges 73 successes and 73 failures.

Dense 2-D future displacement with pose (P05) reaches 746/1,260, a decrease of 3.57 percentage points from P00 and 3.17 points from P03. The corresponding Bonferroni-adjusted p values over twenty-seven overall contrasts are 0.00844 and 0.01877. The comparison supports an adverse effect for this representation condition under the reported recipe. It does not isolate a universal 2-D versus 3-D ordering: P07 and P09 also use 2-D trajectories, with different support and target definitions.

Task variation and failure evidence. All fifteen conditions obtain zero successes on rigid-motion receptacle placement (`t2_se3`). On full constrained passage (`t3_full`), P00 and P06 obtain 3/90 and 4/90, with zero for the remaining conditions. Prediction changes have therefore not removed these shared task failures. P05's loss relative to P03 includes 27 fewer successes on rolling-sphere capture; its native `tray_contact` failures increase from 40 to 67 in that task. P09 gains on moving placement and replanning but loses on orientation-sensitive grasping. These observed failure codes and counts identify where to investigate; they do not identify a representation mechanism without an aligned intervention.

Table 2. Core future-supervision contrasts. All use the object-motion information track, one fresh training seed, and 1,260 paired scenes. Δ is SR minus P00 in percentage points. Positive point estimates do not establish improvement. Appendix D gives all fifteen conditions and paired tests.

ID	Future supervision	Success	SR	Δ
P00	None	791	62.78	—
P01	Scene flow	782	62.06	−0.71
P02	Target pose	789	62.62	−0.16
P03	Flow + pose	786	62.38	−0.40
P05	Dense 2-D + pose	746	59.21	−3.57
P07	Scene tracks + pose	807	64.05	+1.27
P09	Flow + target tracks	808	64.13	+1.35
P15	P03 + three targets	802	63.65	+0.87

Table 3. Combination selection: successes out of 1,400, including fixed140. Columns cross visual encoder with current-target RGB reconstruction (rec.). All conditions use a full visual window and GT target motion. Selection uses this development score; parentheses identify candidate IDs.

Future	DINO-S	+rec.	CNN	+rec.
P15	873 (B)	836 (A)	875 (D)	867 (C)
P07	840 (H)	849 (G)	896 (J)	935 (I)
P09	820 (L)	830 (K)	829 (N)	870 (M)
Matched P03/P00 with CNN + rec.: **[pending]**.				

Development-set ordering. P01 has the highest fixed140 point estimate, while P09 has the highest 1,260-scene point estimate. The development-set ranking does not persist across the remaining validation scenes. Appendix D reports all conditions, paired gain/loss counts, and per-task results. The evidence favors retaining competitive alternatives for joint comparison instead of treating the first ranking as a final design principle.

5.3. Combining Future Targets with Visual Encoding

The twelve-condition combination study crosses P07/P09/P15 with DINO-S or a CNN encoder and with or without current-target RGB reconstruction. It uses a full visual window and privileged target-motion information. The predefined selection score is success over all 1,400 development/evaluation scenes. Candidate I, P07 with CNN and reconstruction, obtains 935/1,400 (66.79%), including 839/1,260 (66.59%) on the complement, and is selected for matched controls (Table 3).

Its 39-scene net gain over the same P07/CNN condition without reconstruction is concentrated: phase passage gains 44 scenes and orientation-sensitive grasping gains 17, while translational placement loses 10 and XYZ grasping loses 7. Both rigid-motion placement and full passage remain at zero for all twelve conditions. Thus the selection is useful for subsequent experimentation, but its overall score does not imply uniform task improvement. The matched P03 and P00 conditions using CNN and reconstruction are **[pending complete evaluation]**. Their outcomes are necessary to attribute any gain to the selected future target.

Table 4. Completed current-pose history conditions. Current GT target pose and robot history are retained; object-history kinematics are removed. Counts show fixed140, the 1,260 complement, and their 1,400-scene development total. Four additional conditions remain pending.

Visual history	/140	/1,260	Total /1,400
Current image	80	668	748
Window	69	593	662
Codec-MV	77	656	733
Flow	76	644	720
PACT-Age	65	569	634

5.4. Q1: Visual History Given Current Target Pose

Five of the nine current-pose study conditions have complete scores (Table 4). The current-image condition obtains 748/1,400 (53.43%); Window, Codec-MV, Flow, and PACT-Age obtain 662, 733, 720, and 634 successes. None of these completed history conditions exceeds the current-image control in point estimate. The remaining conditions and the fresh GT-history reference are pending, so the full Q1 comparison remains open.

This experiment preserves robot-state history and current GT target pose while removing target-history kinematics. It addresses visual motion information conditional on current localization. Its frozen DINO-L encoder, Alpha objective, and learning-rate schedule differ from the combination study. Consequently, the difference between their aggregate scores is not an estimate of a history-by-future interaction. The planned matched current-pose/GT-motion and current-image/history contrasts will test whether privileged motion reduces the incremental value of visual history. Completed probe extraction alone does not answer that question.

5.5. Execution and Learning Diagnostics

Future-screen public policy calls have same-device mean times of 177.071–184.212 ms and p95 times of 178.726–185.133 ms across conditions. Peak allocated memory is 1.571–1.617 GiB. These measurements include internal perception and action computation but exclude external oracle access, I/O, rendering, loading, and priming. They come from one fixed-order profiling round; small differences do not support a stable efficiency ranking. In particular, the simulation's 50 ms action interval is not evidence of 20 Hz

wall-clock deployment.

The hard-task diagnostic also identifies a supervision/execution mismatch. In the historical full-passage set, all 800 demonstrations release at the final action, with release supervision at chunk position h_7 and none at the executed h_0. This is a coverage issue under one-step deployment, rather than absence of every release label. Short diagnostic training gives inconsistent successes, and the tested first-action weighting endpoints do not establish a solution. This evidence motivates checking supervision at the executed action position before explaining difficult-task failure through future representation alone. Appendix G gives the scope and negative results.

5.6. Remaining Studies and Final Model Selection

Backbone and information flow. After completing the combination and history controls, the matched D/E study uses three fresh training seeds per backbone, followed by the seven information-flow conditions in Sec. 4. The planned paired comparisons measure auxiliary supervision, online access, and generation order; their result slots are **[D/E and R0–R6 outcomes and cost]**. A retained representation is revisited after changing information flow, and the selected flow is applied to the previously unselected backbone. Necessary multi-seed and unused-scene confirmation precedes the final design. Appendix E gives the comparisons and missing generative interface.

Robot-data pretraining and independent adaptation. The next stage fixes the confirmed design and studies training recipe, model size, data scale, and compute. DROID preparation must supply the selected future targets with calibrated geometry and valid time alignment; the dataset does not provide target pose GT directly. The formal base is pretrained on real robot data. Simulation and real-robot policies are then independently post-trained from that same base. Simulation-trained weights are not the initialization of the formal real-robot branch. Shared downstream budgets measure initialization effects; equally budgeted recipe searches test whether either initialization is disadvantaged by the chosen optimizer settings. The result slot is **[base pretraining, scaling, and both adaptations]**.

External and deployment evidence. Single-arm DOMINO, static compatibility, and real conveyor manipulation provide complementary evaluation tracks after model selection. The final stage reuses completed scale and adaptation results and fills uncovered generalization and measured-delay tests. Native scores remain separate from the fourteen-task simulation score. Contact errors, safety, actual action age, and end-to-end costs accompany the relevant comparisons. The final SE(3)-WAM configuration and these results are **[pending]**; Appendix F specifies what each experiment will establish.

6. Discussion and Conclusion

Dynamic manipulation calls for a representation of the future that supports the interaction the robot must perform. The completed study shows that adding target and scene prediction objectives does not automatically improve a motion-informed policy: sparse trajectories give modest point-estimate gains, dense 2-D displacement is adverse under the tested recipe, and difficult tasks retain shared failures. Combination and history results further show why information access, training recipe, and execution must accompany a representation comparison.

The evidence currently covers fourteen simulated tasks, one training seed for the main screens, privileged target information, and synchronous execution. The fine-target/coarse-context hypothesis, useful online foresight, multi-seed design stability, and real-robot transfer remain questions for the specified comparisons. Completing them will determine the final SE(3)-WAM instance. The contribution of the current evidence is a concrete basis for those choices: retain competitive alternatives, report task-specific gains and losses, and connect any claimed prediction benefit to an action-level comparison.

References

[1] Iretiayo Akinola, Jie Xu, Shuran Song, and Peter K. Allen. Dynamic grasping with reachability and motion awareness. In *IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 9422–9429, 2021. 2

[2] Cheng Chi, Siyuan Feng, Yilun Du, Zhenjia Xu, Eric Cousineau, Benjamin C. M. Burchfiel, and Shuran Song. Diffusion policy: Visuomotor policy learning via action diffusion. In *Proceedings of Robotics: Science and Systems*, 2023. 2, 6

[3] Heng Fang, Shangru Li, Shuhan Wang, Xuanyang Xi, Dingkang Liang, and Xiang Bai. Towards generalizable robotic manipulation in dynamic environments. In *European Conference on Computer Vision*, 2026. 1, 2

[4] Wenlong Huang, Yu-Wei Chao, Arsalan Mousavian, Ming-Yu Liu, Dieter Fox, Kaichun Mo, and Fei-Fei Li. PointWorld: Scaling 3D world models for in-the-wild robotic manipulation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026. 2

[5] Alexander Khazatsky, Karl Pertsch, Suraj Nair, et al. DROID: A large-scale in-the-wild robot manipulation dataset. *arXiv preprint arXiv:2403.12945*, 2024. 2

[6] Yaron Lipman, Ricky T. Q. Chen, Heli Ben-Hamu, Maximilian Nickel, and Matthew Le. Flow matching for generative modeling. In *International Conference on Learning Representations*, 2023. 5

[7] Yunfan Lou, Hewen Gao, Xiyu Zhu, Zhuoran Qiao, Xuan Han, Yifan Yang, Yifan Ye, Boxian Yao, and Zhibo Pang. DynamicWAM: Dual-path motion conditioning for world-action models in dynamic manipulation. *arXiv preprint arXiv:2608.00793*, 2026. 1, 2, 6

[8] Physical Intelligence, Kevin Black, Noah Brown, James Darpinian, et al. $\pi_{0.5}$: a vision-language-action model with open-world generalization. *arXiv preprint arXiv:2504.16054*, 2025. 2, 6

[9] Oriane Siméoni, Huy V. Vo, Maximilian Seitzer, Federico Baldassarre, Maxime Oquab, Cijo Jose, Vasil Khalidov, Marc Szafraniec, Seungeun Yi, Michaël Ramamonjisoa, et al. DINOv3. *arXiv preprint arXiv:2508.10104*, 2025. 4

[10] Shahram Najam Syed, Arthur Jakobsson, Haoran Hao, and Jeffrey Ichnowski. Intercepting the future: Latent-space predictive world model for dynamic VLA manipulation. In *Conference on Robot Learning*, 2026. 2

[11] Emanuel Todorov, Tom Erez, and Yuval Tassa. MuJoCo: A physics engine for model-based control. In *IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 5026–5033, 2012. 3

[12] Haozhe Xie, Beichen Wen, Jiarui Zheng, Zhaoxi Chen, Fangzhou Hong, Haiwen Diao, and Ziwei Liu. DynamicVLA: A vision-language-action model for dynamic object manipulation. In *Advances in Neural Information Processing Systems*, 2026. 1, 2, 6

[13] Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyuan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, et al. World action models are zero-shot policies. *arXiv preprint arXiv:2602.15922*, 2026. 1, 2

[14] Heng Yu, David D. Yuan, Juze Zhang, Changan Chen, Yao Feng, Michelle Baldonado, Steve Cousins, Fei-Fei Li, Jiajun Wu, and Ehsan Adeli. OpenWAM: An open framework for composable world-action models. *arXiv preprint arXiv:2610.07922*, 2026. 1, 2, 6

[15] Tianyuan Yuan, Zibin Dong, Yicheng Liu, and Hang Zhao. Fast-WAM: Do world action models need test-time future imagination? *arXiv preprint arXiv:2603.16666*, 2026. 1, 2

[16] Peng Yun, Shouwang Huang, Hao Li, Jinxi Li, Jianan Wang, and Bo Yang. PhysMani: Physics-principled 3D world model for dynamic object manipulation. In *European Conference on Computer Vision*, 2026. 2

[17] Wenyao Zhang, Hongsi Liu, Zekun Qi, Yunnan Wang, Xin-Qiang Yu, Jiazhao Zhang, Runpei Dong, Jiawei He, He Wang, Zhizheng Zhang, Li Yi, Wenjun Zeng, and Xin Jin. DreamVLA: A vision-language-action model dreamed with comprehensive world knowledge. In *Advances in Neural Information Processing Systems*, pages 24195–24228, 2025. 2, 6

[18] Tony Z. Zhao, Vikash Kumar, Sergey Levine, and Chelsea Finn. Learning fine-grained bimanual manipulation with low-cost hardware. *arXiv preprint arXiv:2304.13705*, 2023. 2, 6

[19] Yuke Zhu, Josiah Wong, Ajay Mandlekar, Roberto Martín-Martín, Abhishek Joshi, Kevin Lin, Abhiram Maddukuri, Soroush Nasiriany, and Yifeng Zhu. robosuite: A modular simulation framework and benchmark for robot learning. *arXiv preprint arXiv:2009.12293*, 2020. 3