

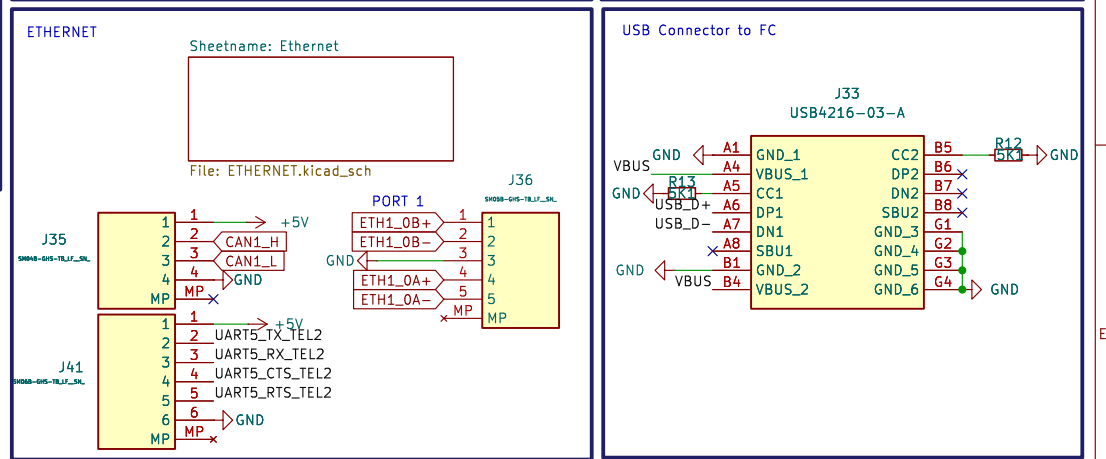
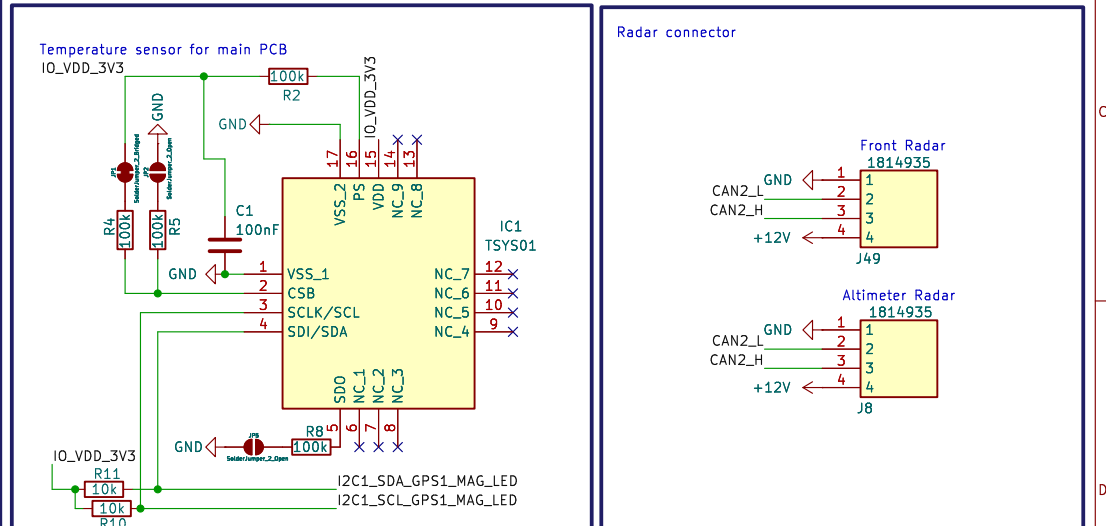
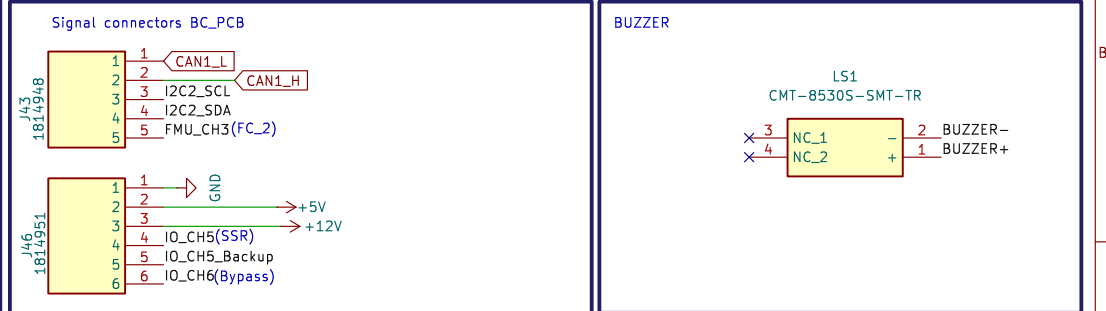
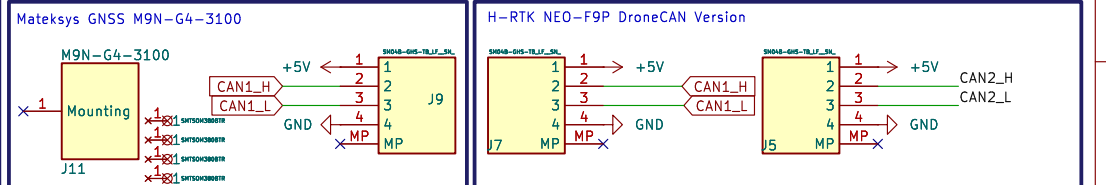
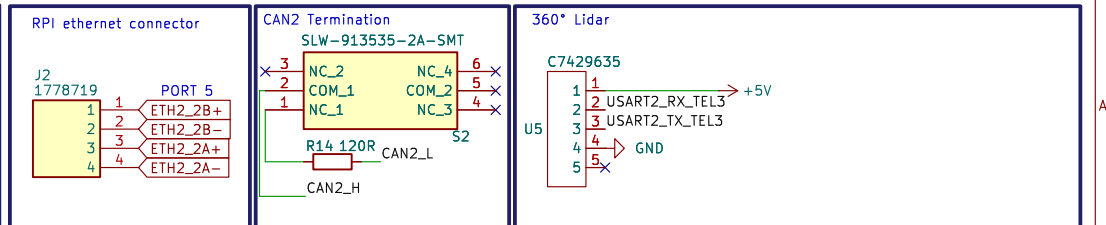
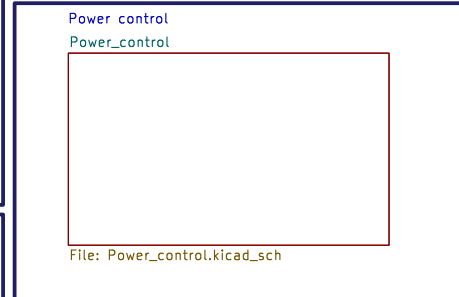
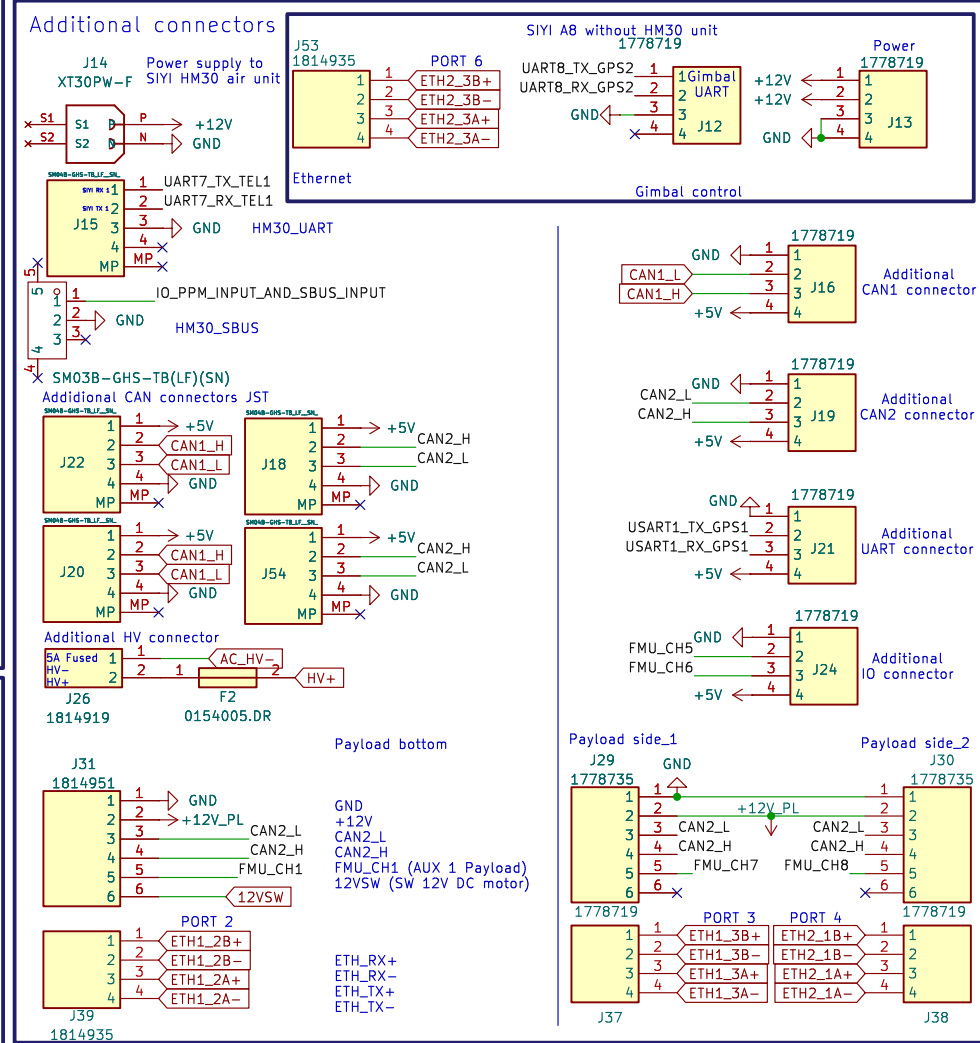
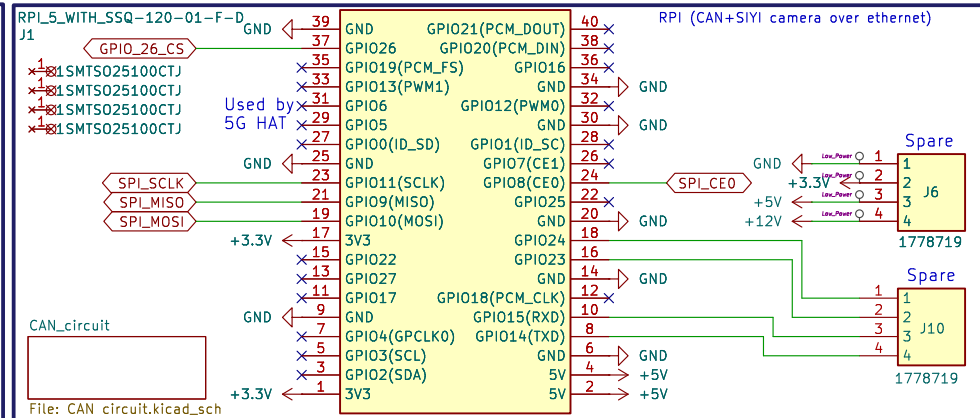
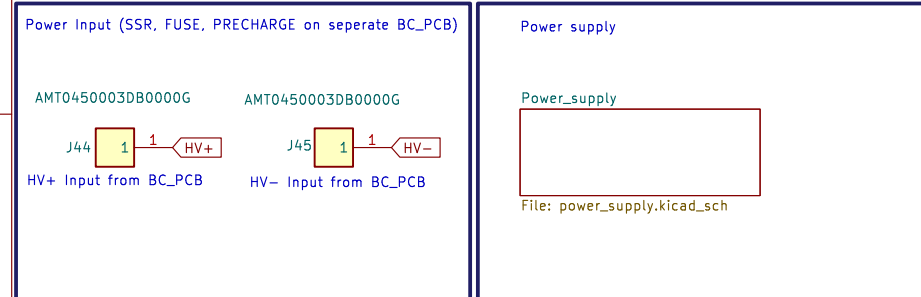
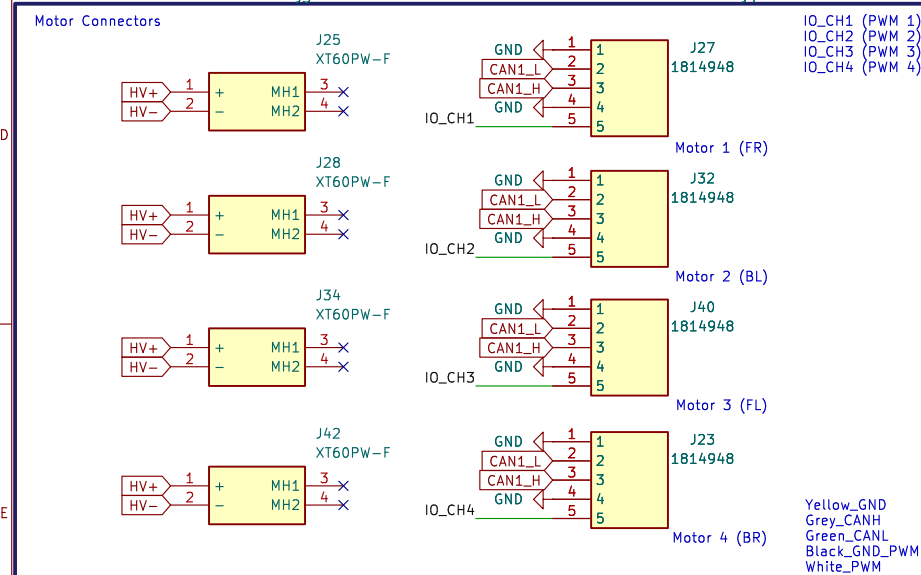


Quiver PT3 Main PCB

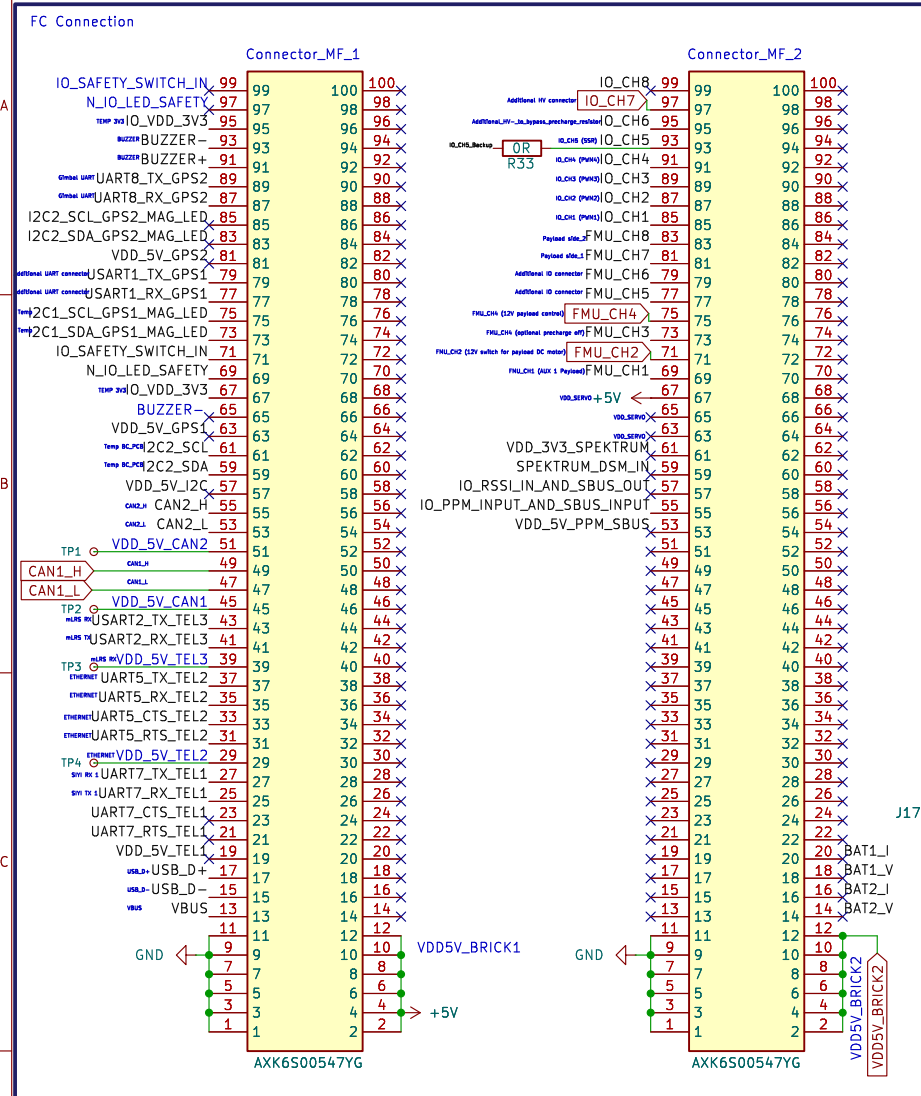


Sheet: /
File: Quiver_PT3_Main_PCB-rounded.kicad_sch

Title:


Size: A3	
KiCad E.D.A. 9.0.7	

Rev: 1/5

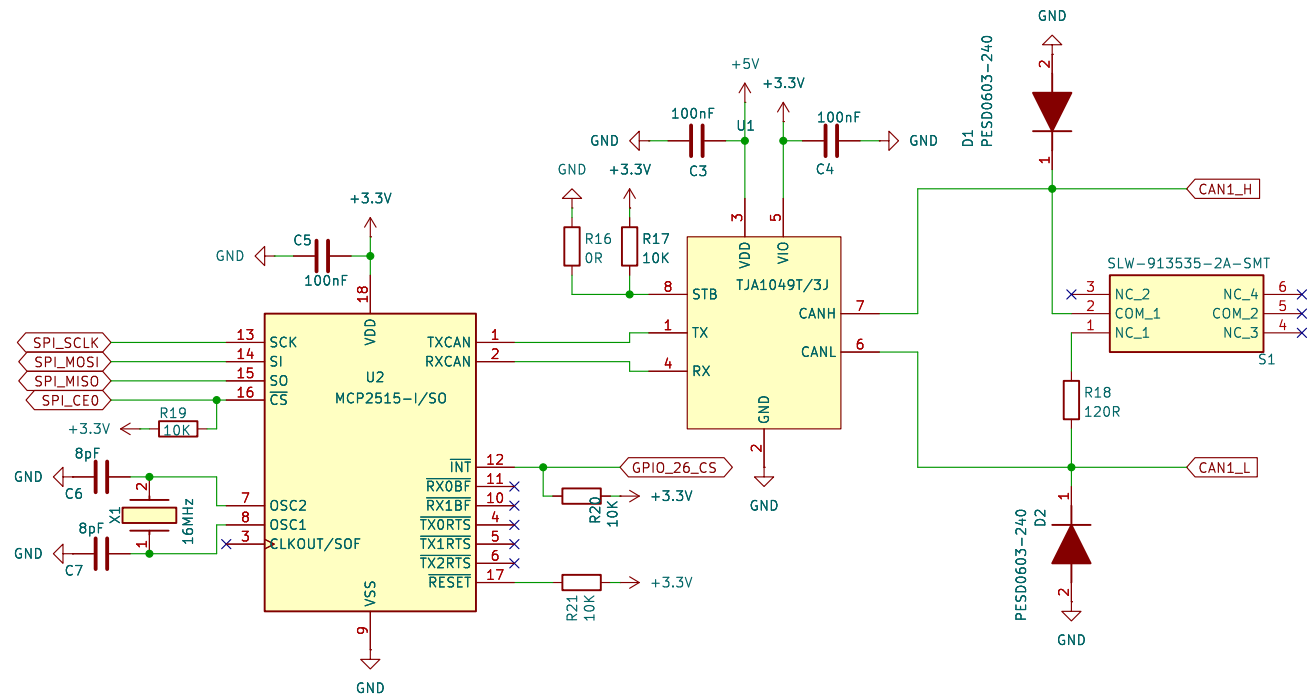

Sheet: /CAN_circuit/
File: CAN_circuit.kicad_sch

Title:			
Size: A4	Date:	Rev:	
KiCad E.D.A. 9.0.7		Id: 2/5	

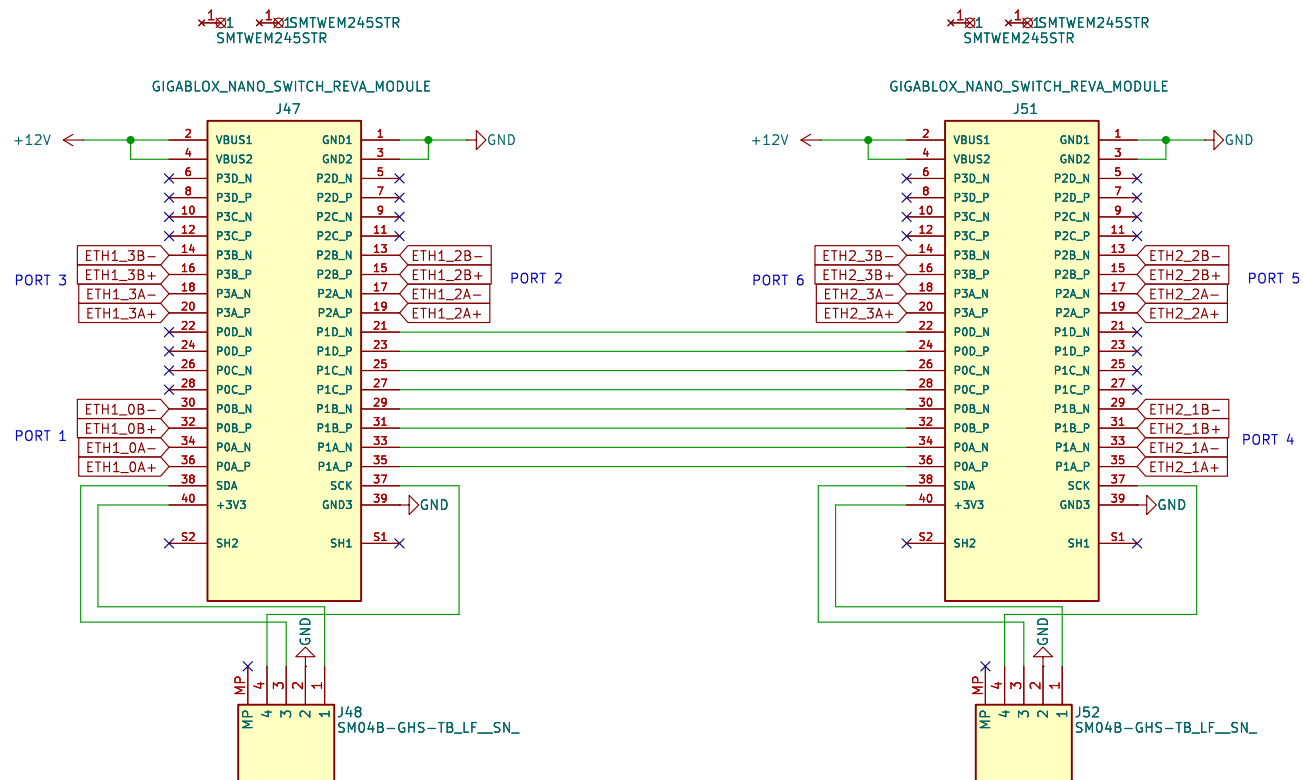

For 1000Base-T operation, differential data from the media is transmitted and received on all four pairs.
 For 100Base-TX and 10Base-T operation, only MDIAP/N and MDIBP/N are used.
 Auto MDIX can reverse the pairs MDIAP/N and MDIBP/N. Each of the differential pairs has an internal 100-ohm termination resistor

Sheet: /Ethernet/
 File: ETHERNET.kicad_sch

Title:




Size: A4

Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 3/5

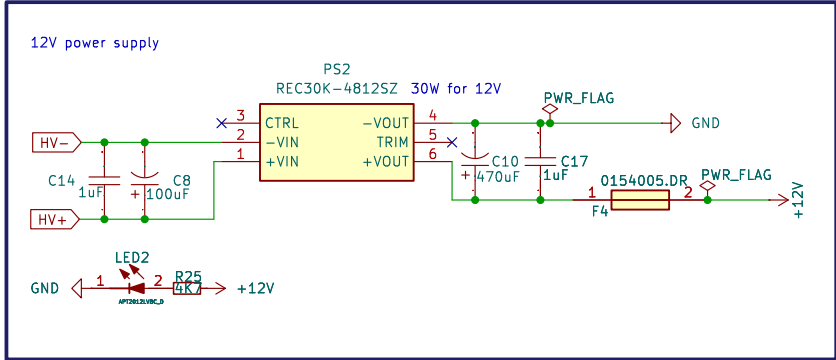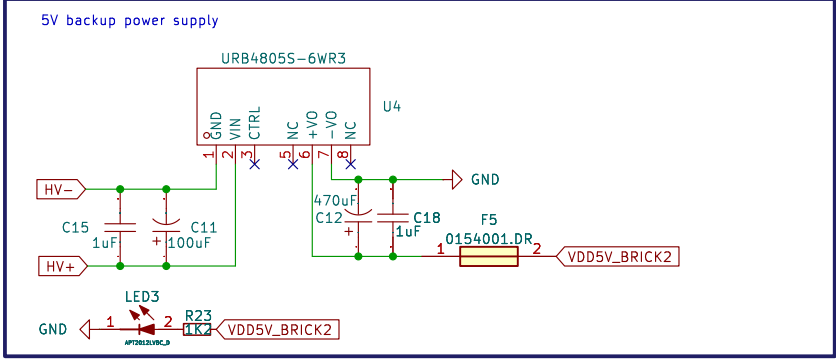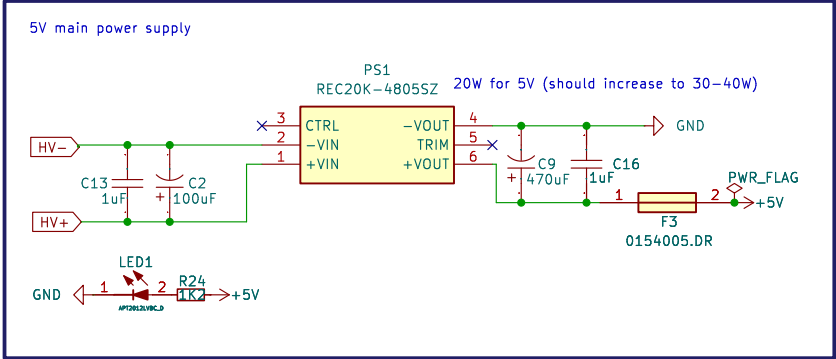

Sheet: /Power_supply/
File: power_supply.kicad_sch

Title:




Size: A4

Date:

KiCad E.D.A. 9.0.7

Rev:

Id: 4/5

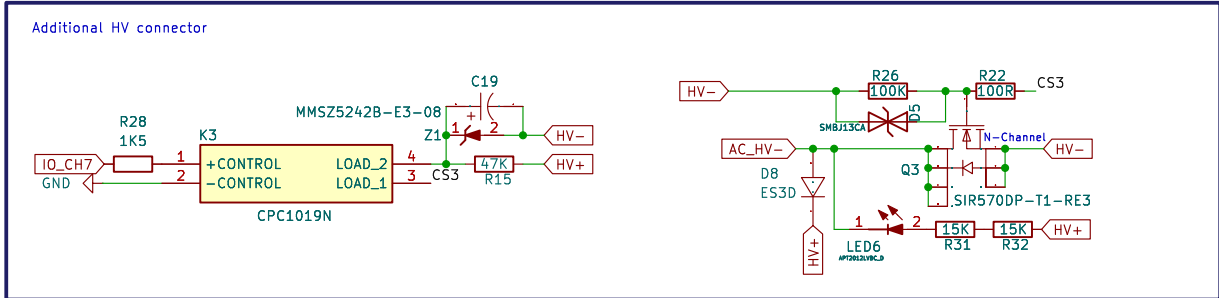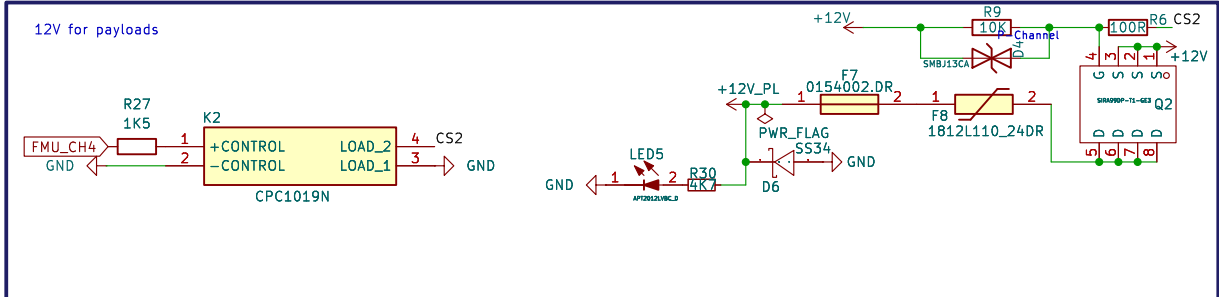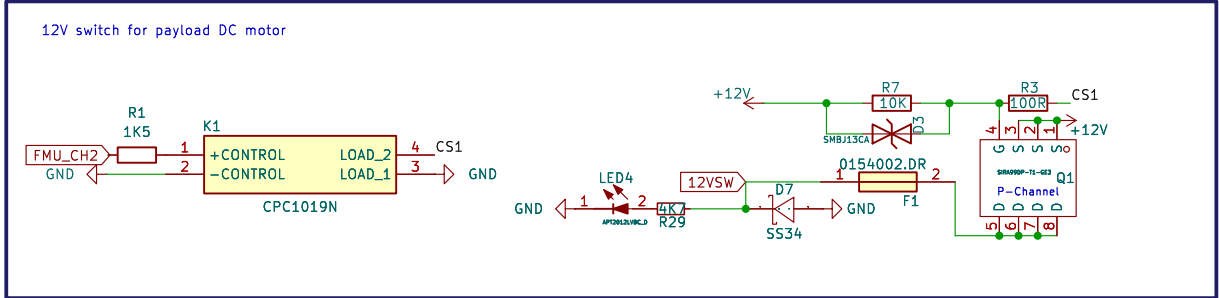

Sheet: /Power_control/
File: Power_control.kicad_sch

Title:

Size: A4
KiCad E.D.A. 9.0.7

Date:

Rev:

Id: 5/5