


# HSB-HAWK

## Arrow Holoscan Sensor Bridge Appliance
## Altera® Agilex™ 5 E-series



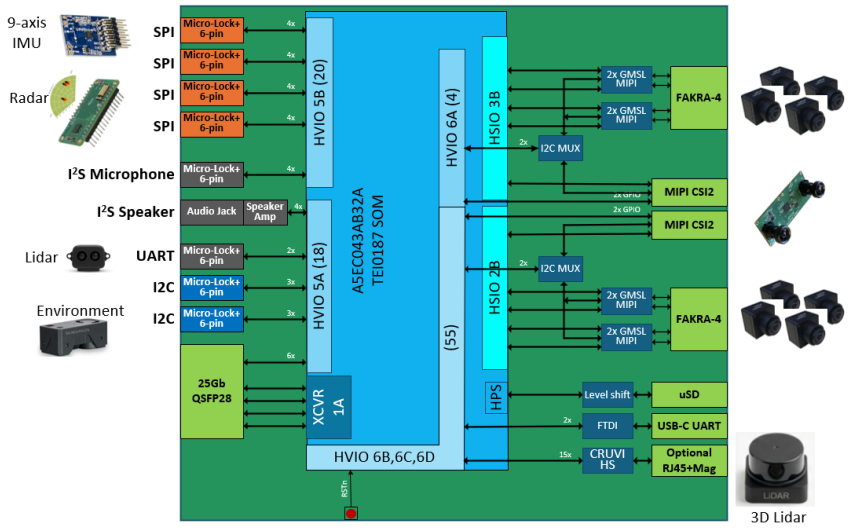


The Arrow HSB-HAWK is a Holoscan Sensor Bridge (HSB) appliance based on the Altera® Agilex™-5E FPGA having a 434KLE capacity.

It uses the NVIDIA HSB FPGA code to expose SIF interfaces used for 10 cameras, 1 Ethernet, and 1 I²S Audio data plane channels. Additionally, 4 SPI, 2 I2C, and 1 UART are exposed via the Control plane.

The Host transport is done via a QSFP28 Ethernet interface.

**Partners:**

altera An Intel Company

trenz electronic

**Key Features: Arrow HSB-HAWK**

- Agilex-5E Group A FPGA (434KLE)
- 4x 25Gb Ethernet Link
- 2x MIPI camera inputs for stereo vision
- 8x GMSL(2) Camera Inputs
  - 2x 4-position FAKRA connectors
  - 12VDC PoC for GMSL cameras
- 1x 10/100/1G Ethernet port for 3D Lidar
- 4x SPI Interfaces
- 2x I²C Interfaces
- 1x UART Interface
- 1x I²S Microphone Interface
- 1x I²S Speaker Jack
- On-board USB Blaster III Programmer (USB-C)
- 12V Power via Barrel Jack
- Size: 86mm x 126mmx 51mm

**Ordering number:** **HSB-HAWK**