Quick Start Guide Security Starter Kit with STM32WB55 and OPTIGA™ Trust M

Date: November 4, 2020 | Version 1.0

FINAL



Confidentiality Notice

Copyright (c) 2020 eInfochips. - All rights reserved

This document is authored by elnfochips and is elnfochips intellectual property, including the copyrights in all countries in the world. This document is provided under a license to use only with all other rights, including ownership rights, being retained by elnfochips. This file may not be distributed, copied, or reproduced in any manner, electronic or otherwise, without the express written consent of elnfochips.

CONTENTS

1	INT	RODUCTION	3
	1.1	Purpose of the Document Prerequisite	3
		TALLATION STEPS	
	2.1	Hardware setup	4
		Software Setup	
	2.2.	1 Setup Serial console on your PC.	5
	2.2.	2 AWS Account creation and Arrow Cloud Connect tool configuration	7
	2.2.		7
3	DEN	MO SETUP	.11
	3.1	FreeRTOS MQTT Demo configuration	.11
		Demo Inference	

DEFINITION, ACRONYMS AND ABBREVIATIONS

Definition/Acronym/Abbreviation	Description
AWS	Amazon Web Services
BLE	Bluetooth Low Energy
OTA	Over-the-Air
SSK	Security Starter Kit
STM	STMicroelectronics
APP	Mobile Application
MQTT	An open OASIS and ISO standard (ISO/IEC 20922) lightweight, publish- subscribe network protocol that transports messages between
	devices

1 INTRODUCTION

1.1 Purpose of the Document

The Quick Start Guide for Security Starter Kit with STM32WB55 and OPTIGA™ Trust M will showcase FreeRTOS and MQTT running on the STM32WB55 using the OPTIGA™ TrustM (shield2go) with secure communications to the cloud via a Mobile Application (SSK APP). This demo also covers the use of AWS Cognito for Mutual authentication & provisioning between AWS IoT Core and the STM32WB55.

1.2 Prerequisite

This guide presumes that the below Hardware and software are available to enable demonstration of the FreeRTOS running on the STM32WB55 and OPTIGA™ Trust M secure element:

- SSK kit
 - o Infineon Shield2Go Cloud Security OPTIGA™ Trust M
 - o ST Micro STM32WB55 evaluation kit (P-NUCLEO-WB55)
 - o Custom cable connecting OPTIGA™ Trust M with STM32WB55 P-Nucleo kit
 - o Micro USB cable (required for power and communication with the Host PC)
- HOST PC Linux or Windows system
- Android or IOS mobile phone (with internet connectivity) Not included



Figure 1: Architecture

2 INSTALLATION STEPS

2.1 Hardware setup

The Security Starter Kit with STM32WB55 and OPTIGA™ Trust M has been shipped pre-configured with the correct jumper settings.

If this is not a new kit right out of the box, please refer to the <u>Developer Guide stm32wb55 SSK.docx</u> Section 2.1 for the proper jumper settings.

https://www.arrow.com/en/products/stm32wb55-ssk/arrow-development-tools

Connect the Micro USB cable to the PC & the STM32WB55 board USB connector (shown below) to supply power and serial console connectivity:

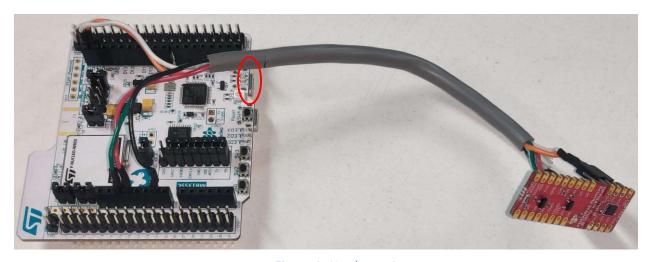


Figure 2: Hardware Setup

Connection between OPTIGA™ Trust M with STM32WB55 board with the cable as per below table.

Connections No	OPTIGA™ TrustM	STM32WB55
1(Red)	VCC	CN6.4 (+3v3)
2(Black)	GND	CN6.6 (GND)
3(Green)	RST	CN6.3 (NRST)
4(White)	SCL	CN5.10(D15)
5(Orange)	SDA	CN5.9(D14)

2.2 Software Setup

2.2.1 Setup Serial console on your PC.

For Linux:

- 1. Ensure **minicom** is installed in Linux PC
- 2. Use Minicom for the Linux PC.
- 3. Open minicom serial setup window using below command

```
einfochips@dell:~$ sudo minicom -s
```


- 4. Set baud rate and other setting as per below
 - Baud rate = 115200
 - o Data = 8 bits
 - Parity = none
 - Stop = 1 bit
 - o Flow control = none
 - Serial device /dev/ttyACM0
 - save setup as dfl

For Windows:

- 1. Use Putty for the windows PC.
- 2. Open Device Manager and check your COM Port as shown below.



3. Launch Putty application, select the connection type: **Serial** set the COM Port: **COM13** (or PC assigned COM port) and Speed: **115200** as shown below and click on "**Open**" button.



FREERTOS AND OPTIGA™ TRUST M SECURITY FOR STM32WB55

Power ON the STM32WB55 Board.

Power ON the board. The serial console will start showing logs as seen below. Initial SBOOT logs indicate the Secure Bootloader and then the Application.

```
= (C) COPYRIGHT 2017 STMicroelectronics = 
= Secure Boot and Secure Firmware Update = 
= Secure Boot in Firmware Info: A securition detected error was:No error. Success.

= Secure Boot on error counter = 0
    IMFO: Last execution detected error was:No error. Success.

= Secure Boot in Firmware Info: Success Firmware Info: A valid Firmware Info: Last execution detected error was:No error. Success.

= Secure Boot in Firmware Info: Success Firmware Info: Success.

= Secure Boot in Firmware Info: Success Firmware Info: Success.

= Secure Boot in Firmware Info: Success Firmware Info: Success.

= Secure Boot in Firmware Info: Success Firmware Info: Success.

= Secure Boot in Firmware Info: Success Firmware Info: Success Info: Success Info: Success Firmware Info:
```

NOTE: If this is not a new kit right out of the box and the user does not see the SBOOT logs as shown above, please refer to **Developer_Guide_stm32wb55_SSK.docx** Section 2.2 Software Setup for further instructions.

2.2.2 AWS Account creation and Arrow Cloud Connect tool configuration

The items mentioned below are specific to enabling AWS Cloud Services with the Security Starter Kit and only need to be completed once. The output from these configuration steps can be reused to connect other Security Starter Kits to AWS Cloud Services. These steps <u>must be completed</u> prior to running the included demo.

- It is presumed that the user has an AWS Management Console account needed to complete the steps listed below. Otherwise, you will need to create an account; https://aws.amazon.com/console/
- 2. Amazon Elastic Compute Cloud (Amazon EC2) is a web service that provides secure, resizable compute capacity in the cloud. It is designed to make web-scale cloud computing easier for developers.
 - o The user will need to configure a unique EC2 instance, which will provide a unique URL and login credentials (tied to your AWS account, for the Arrow Cloud Connect Tool. The EC2 configuration instructions are outlined in the Setup Guide.docx; https://www.arrow.com/en/products/stm32wb55-ssk/arrow-development-tools

2.2.3 Setup for Mobile APP

Mobile App contains following feature:

- Scan and connect to nearby BLE devices running FreeRTOS
- Act as a proxy to transmit MQTT messages between a STM32WB55 and the AWS IoT cloud
- Mutual Authentication between STM32WB55 and Mobile App

Prerequisite:

• Amazon Cognito lets you add user sign-up, sign-in, and access control to your web and mobile apps quickly and easily. Amazon Cognito scales to millions of users and supports sign-in with social identity providers.

Please follow below steps to create AWS Cognito user. This is needed to login into the Mobile APP.

- 1. If you have created the Amazon Cognito user pool in AWS console then jump to step 5, otherwise continue to step 2
- 2. To create an Amazon Cognito user pool in AWS Console
 - In AWS console, Open the Amazon Cognito console (Service), and choose Manage User Pools.
 - Choose Create a user pool.
 - Give the user pool a name, and then choose Review defaults.
 - From the navigation pane, choose App clients, and then choose Add an app client.
 - Enter a name for the app client, and then choose Create app client.
 - From the navigation pane, choose Review, and then choose Create pool.
 - Make a note of the pool ID that appears on the General Settings page of your user pool.
 - From the navigation pane, choose App clients, and then choose Show details.
 - Make a note of the app client ID and app client secret.
- 3. To create an Amazon Cognito identity pool in AWS Console

- In AWS Console, Open the Amazon Cognito console (Service), and choose Manage Identity Pools.
- Choose Create new identity pool
- Enter a name for your identity pool.
- Expand Authentication providers, choose the Cognito tab, and then enter your user pool ID and app client ID.
- Choose Create Pool.
- Expand View Details, and make a note of the two IAM role names. Choose Allow to create
 the IAM roles for authenticated and unauthenticated identities to access Amazon
 Cognito.
- Choose Edit identity pool. Make a note of the identity pool ID. It should be of the form; us-west-2:12345678-1234-1234-1234-123456789012.

4. To create and attach an IAM policy to the authenticated identity

- In AWS console, Open the IAM console, and from the navigation pane, choose Roles.
- Find and choose your authenticated identity's role, choose **Attach policies**, and then choose **Add inline policy**.
- Choose the JSON tab and paste the following:


```
{
  "Version":"2012-10-17",
  "Statement":[
    {
        "Effect":"Allow",
        "Action":[
            "iot:AttachPolicy",
            "iot:Connect",
            "iot:Publish",
            "iot:Receive",
            "iot:GetThingShadow",
            "iot:DeleteThingShadow",
            "iot:DeleteThingShadow"
        ],
        "Resource":[
            "*"
        ]
    }
   ]
}
```

• Choose Review policy, enter a name for the policy, and then choose Create policy.

5. Create New User in Cognito User pool

This can be done either from the Android application (login screen) or from the AWS console. In case, if a confirmation is needed this can be done from the AWS Cognito console (in Users and groups).

- Login AWS console https://aws.amazon.com/console/
- AWS Console >> Cognito Service >> Manage User pool >>
 - i. Select your newly created user pool from step #3
- General Settings >> Users and groups >> Create user

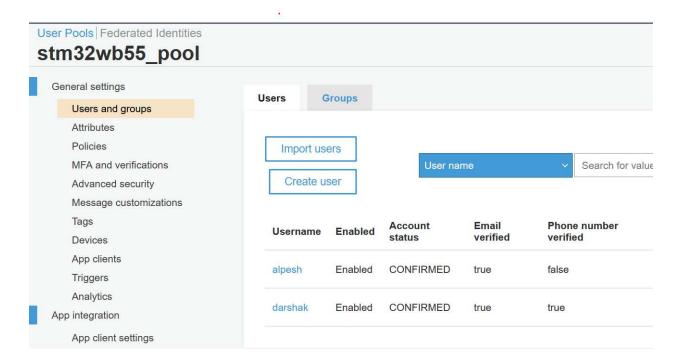


- Make a note of Username and Password, which is used for login into the Mobile APP.
- 6. Create a new txt file with the following name AWS_Config.txt and enter the above noted parameters in the file i.e.

```
AWS_REGION#<Enter-Region>
AWS_IOT_POLICY#STM32WB55-policy
AWS_COGNITO_IDENTITY_POOLID#<Enter-Identity-Pool-ID>
AWS_COGNITO_USER_POOLID#<Enter-User-Pool-ID>
AWS_COGNITO_USER_APPCLIENTID#<Enter-User-App-ID>
AWS_COGNITO_USER_APPCLIENTSECRET#<Enter-User-App-SECRET>
```

- 7. Install Mobile APK and run. Can be found on the link listed below; https://www.arrow.com/en/products/stm32wb55-ssk/arrow-development-tools
- 8. Follow for FIRST TIME SETUP ONLY, (otherwise press "SKIP")

 Click on "Browse for the Cognito details" and upload the AWS_Config.txt file created in step#6, verify the configurations, and then Press "Save" button on screen as shown First Time configuration screen

<u>Note</u>: If the Mobile App crashes after clicking "save", please ensure the information in the AWS_Config.txt file was entered exactly as shown

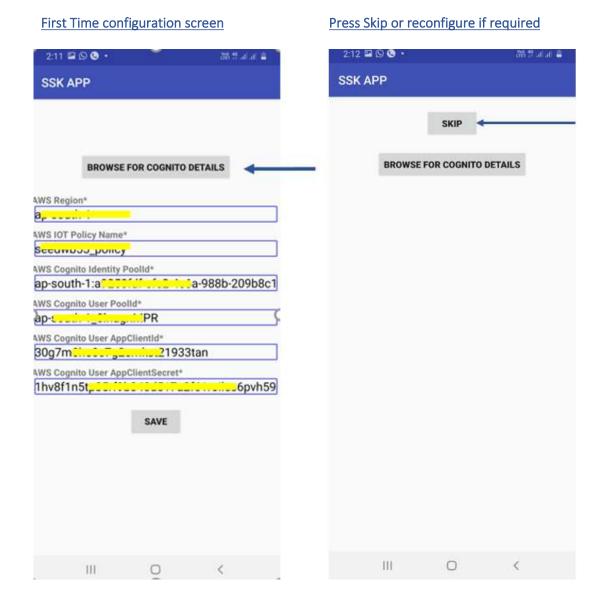


3 DEMO SETUP

3.1 FreeRTOS MQTT Demo configuration

[Note: It is presumed that user has successfully created their own AWS account and completed the creation of an AWS EC2 instance for the Cloud Connect Tool, as outlined in Section 2.2.2.

- 1. Enter the URL that was provided during the configuration of the AWS EC2 instance and outlined in the Security Starter Kit Cloud Connect Installation Guide
- 2. Login to the SSK Cloud Connect tool with your AWS Active Credentials, which were created when configuring your AWS EC2 instance.

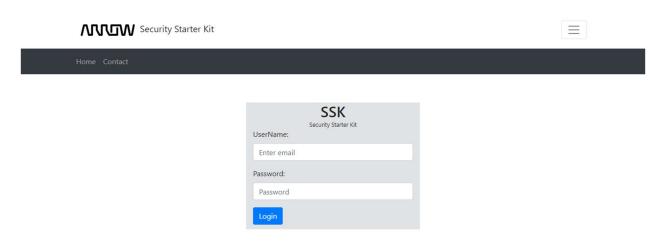


© 2020 Arrow Electronics, Inc. All rights reserved

1. STM32WB55 Quick Demo Setup


1. Collect STM32WB55 MAC Address from serial console by pressing the reset button of the board.

2. Open the STM32WB55 demo page. Go to SSK Cloud Connect >> Demo >> STM32WB55-SSK.

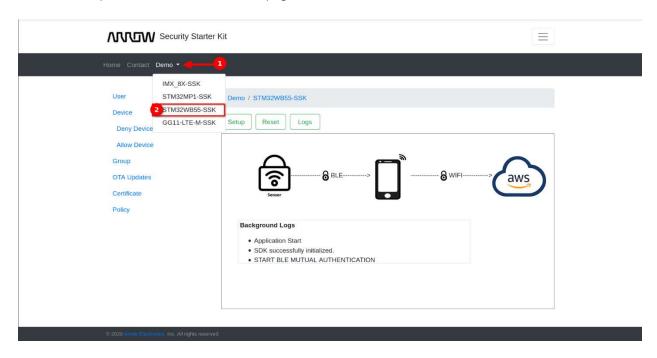


- 3. Click on "Setup" button.
- 4. Enter MAC address and click on "setup" button.

Note: If "Setup Failed" error is seen, press Reset button and follow steps 3 & 4 again.

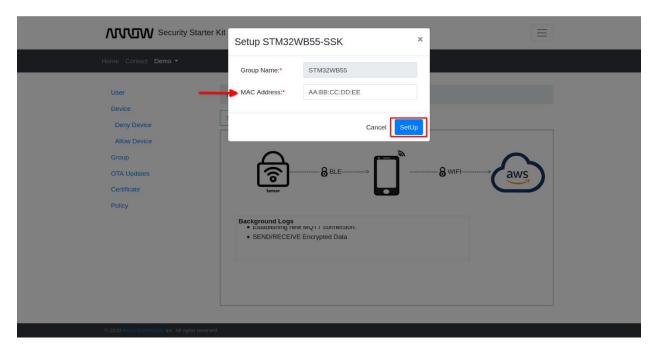

FREERTOS AND OPTIGA™ TRUST M SECURITY FOR STM32WB55




2. Sign into the App using the Cognito user credentials as mentioned above section 2.2.3 Setup for Mobile App step #5.



3. Configure Endpoint URL into the device

1. Copy Endpoint URL from SSK Cloud Connect >> settings

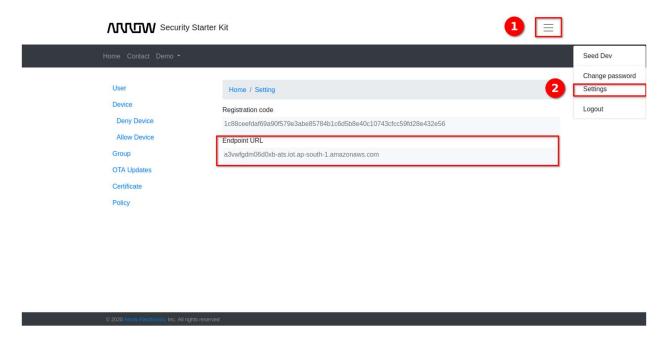


Press the SW2 button and Reset the board (By Pressing "Reset" button as shown in figure 2). It will ask to enter endpoint URL on Serial console screen as below.

Paste the Endpoint URL here and press the "Enter" key on keyboard. (Note: Default Echo is OFF, so cannot see your Endpoint URL value.)

So, to verify that the correct endpoint URL was entered, on the serial console it will display the URL as shown above (with yellow marked).


- 4. Scan and Pairing the STM32WB55 with Mobile.
 - 1. Click on the SCAN FOR BLE DEVICES button. Connect and Pair with STM32WB55 device. On the serial console to Press "Y" if passkey is match with mobile pair key.

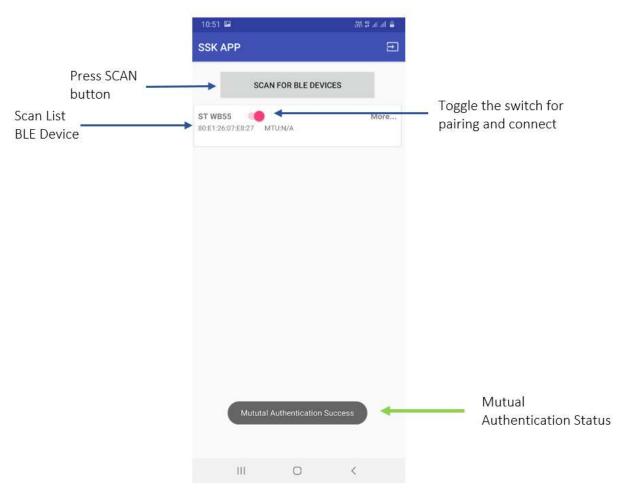

SSK STM32WB55 - MQTT Demo


This Demo shows how FreeRTOS based BLE device can securely communicate with AWS IoT Core Services via Mobile APP as a proxy. Only Authenticated devices can communicate with the Mobile app and the AWS cloud, which is achieved by implementing the **mutual authentication service** with help of OPTIGA™ Trust M Chip.

On SSK Cloud Connect, one can check the demo SSK Cloud Connect >> Demo >> STM32WB55-SSK

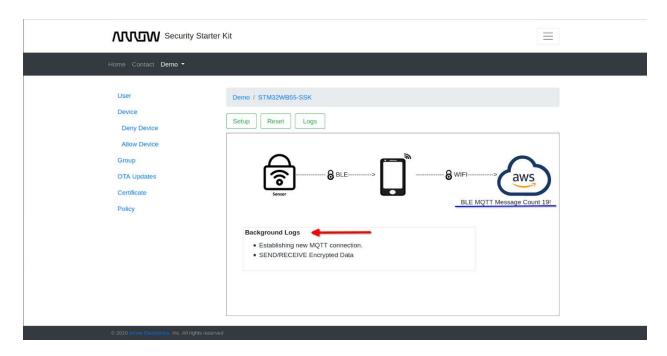

MQTT Message will display on the screen i.e. BLE MQTT Message Count 2!

- On SSK Cloud Connect dashboard, MQTT Messages are received to AWS Cloud securely using hardware security chip OPTIGA™ Trust M.
- Background Logs Displays the Secure bootloader, BLE Application and OPTIGA™ Trust M message on dashboard as continuous scroller.
- If a user wants to reset the Setup
 - Please follow SSK Cloud Connect >> Demo >> STM32WB55-SSK >> Press "Reset" button
 - Reboot the STM32WB55 board by pressing the "Reset" Button.

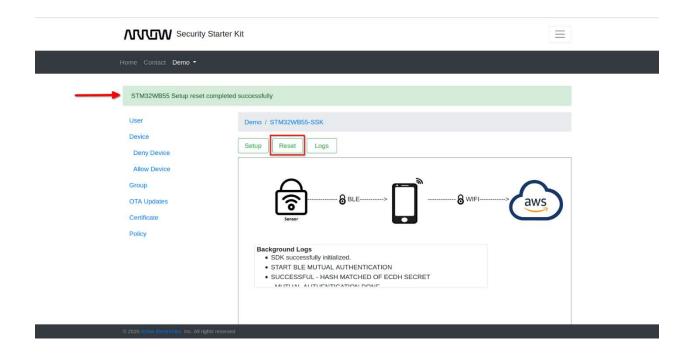

3.2 Demo Inference

The Security Stater kit with STM32WB55 and OPTIGA™ Trust M Demo provides examples of the below listed functionalities:

- AWS Cognito It provides simple user identity and data synchronization service that helps securely manage and synchronize App data for your users across their mobile devices
- 2. Mutual Authentication the STM32WB55 device performs mutual authentication with the Mobile APP using OPTIGA™ Trust M before starting any communication. So only, an authenticated device can communicate with the AWS IoT Core Services via Mobile APP.
- 3. **Secure Communication** secure communications between AWS IoT Core Services and the STM32WB55 are ensured by storing the session credentials in the OPTIGA™ Trust M
- FreeRTOS Used open-sourced FreeRTOS for the driver and Application development, includes securely connecting your small, low-power devices to AWS cloud services like AWS IoT Core
- 5. Secure Boot Enabled secure bootloader features on STM32WB55 Board.

Note: For more details about all above functionalities, please refer the following documents, located here; https://www.arrow.com/en/products/stm32wb55-ssk/arrow-development-tools

- Developer_Guide_STM32WB55_SSK.docx
- Security Starter Kit Cloud Connect Installation & Setup Guide.docx
- Security Starter Kit Cloud Connect Users Guide.docx