
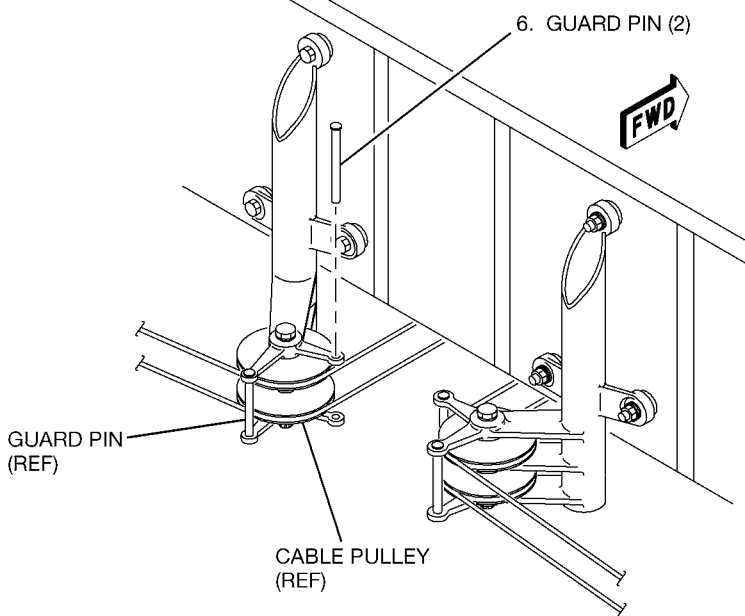




ICN-88277-G2742104-003-01

6. (A) Remove guard pins from cable pulley at STA 227.

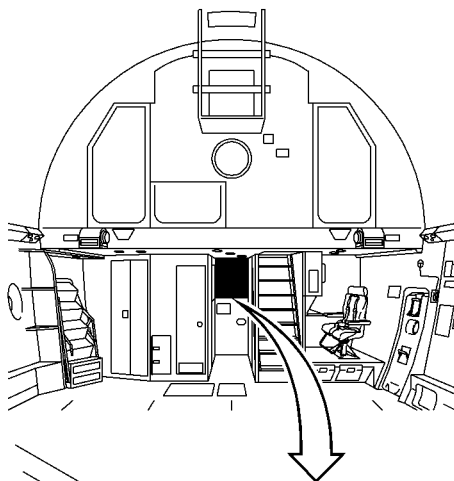

ICN-88277-G2742105-003-01


7. (A) Remove guard pins from cable pulley at STA 240.

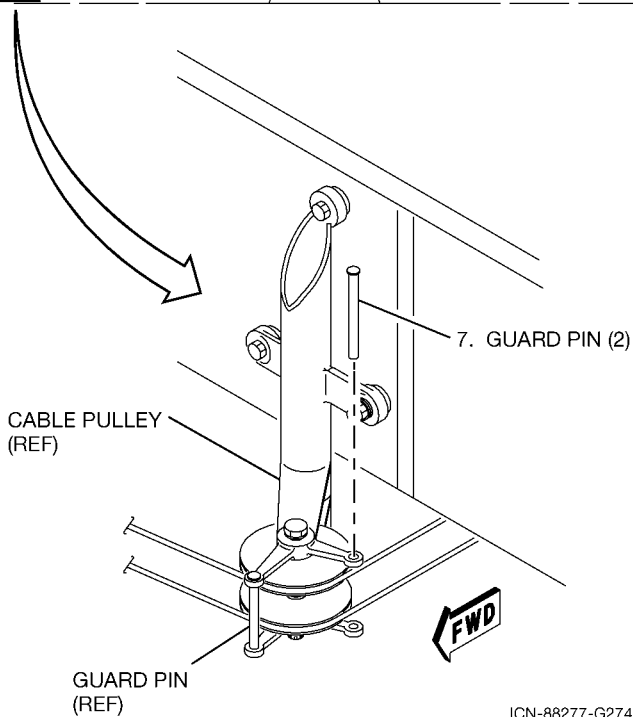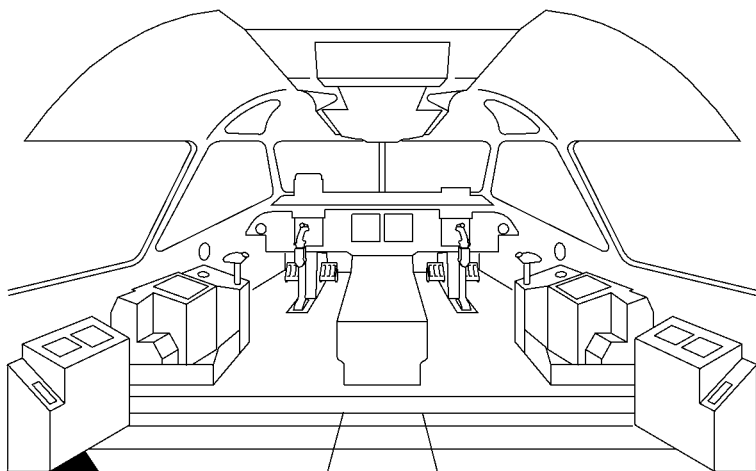

ICN-88277-G2742106-003-01

TO 1300i-2-27JG-40-3

8. (A) Remove guard pin from cable pulley at STA 340.
9. (A) Remove guard pin from cable pulley at STA 413.
10. (A,B) Attach nylon utility cord on cable assembly end; remove cable and untie cord.

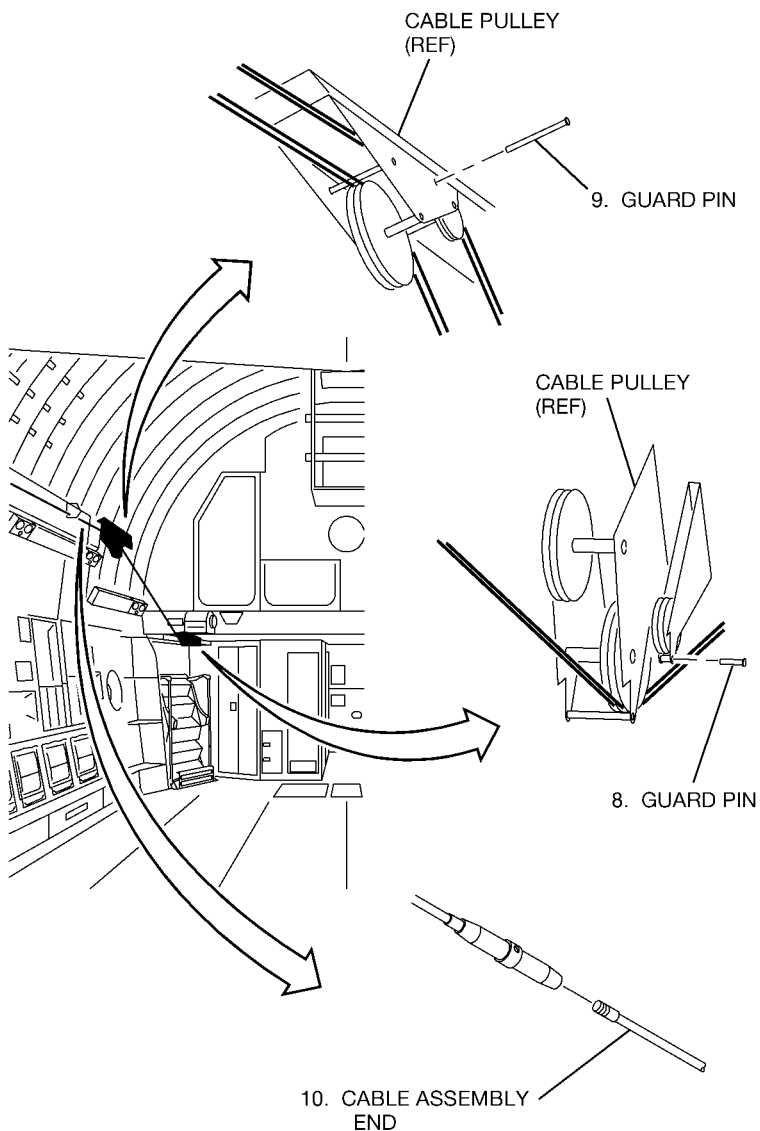



ICN-88277-G2742107-003-01

**2-8. REMOVAL FOR CABLE RUN 29B, REF DES
2742MP007.**

NOTE

Cable assembly 2742MP007 is identified on fairleads
by the number 29.


1. (A) Install clamp assembly on cable runs 29 and 30 aft cable pulley
at Station (STA) 413.

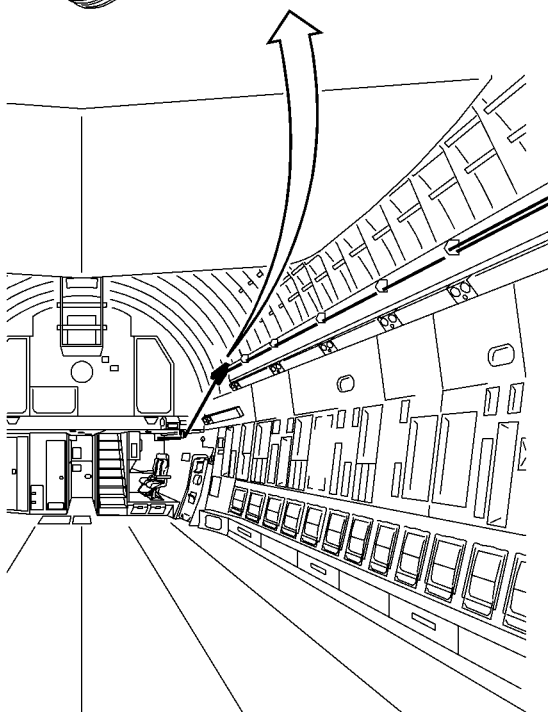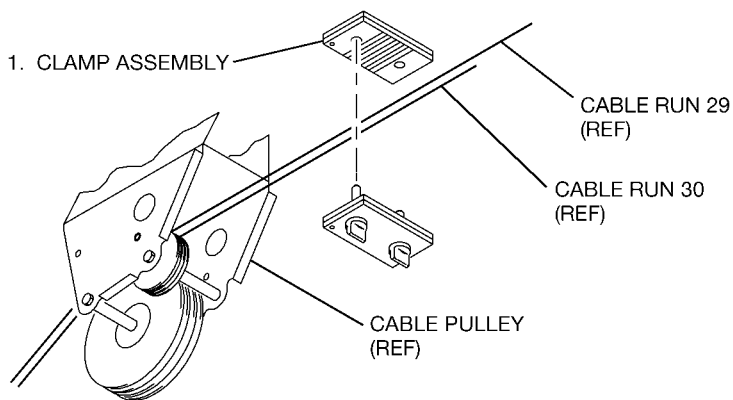

ICN-88277-G2742111-003-01

TO 1300i-2-27JG-40-3



2. (A) Install clamp assembly on cable runs 29 and 30 forward of fairlead at STA 1446.

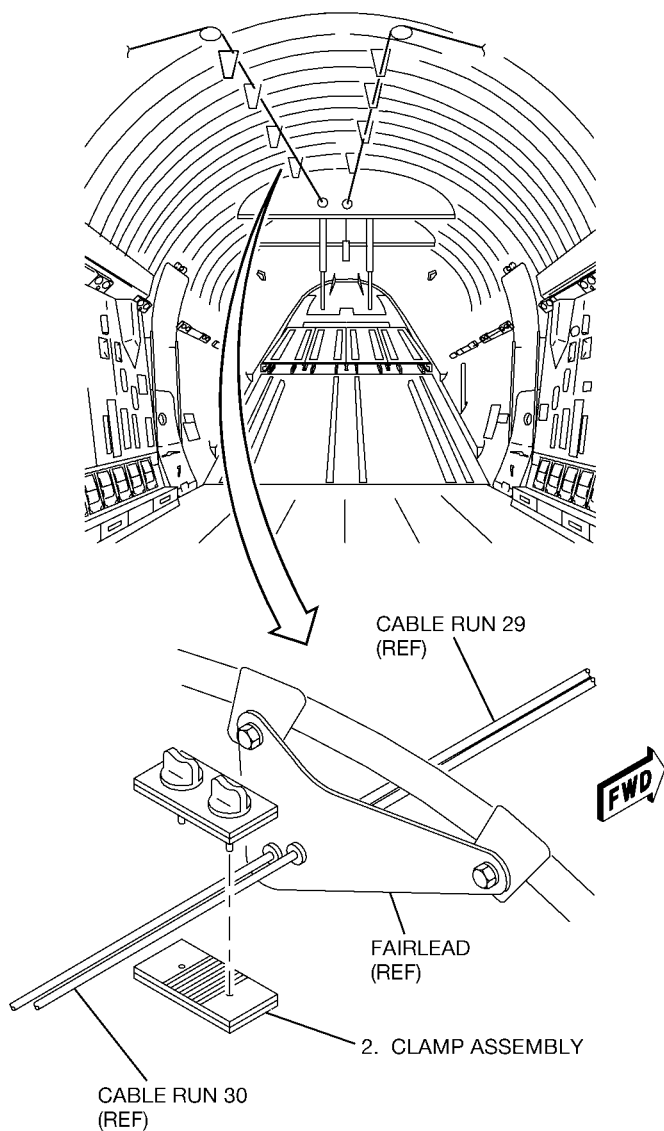

ICN-88277-G2742112-003-01

TO 1300i-2-27JG-40-3


3. (A) Remove and discard safety clips; loosen turnbuckle on cable run 30 at STA 450.
4. (A) Remove and discard safety clips; remove turnbuckle from cable run 29 at STA 432.

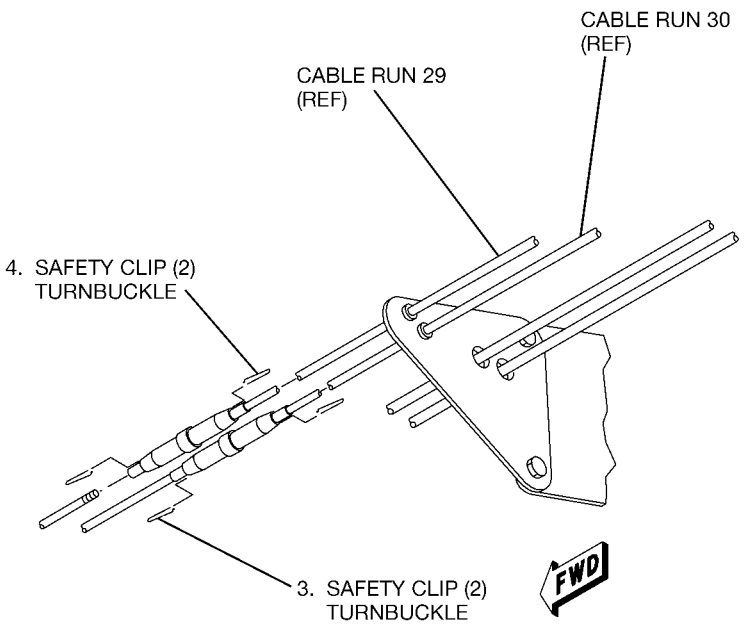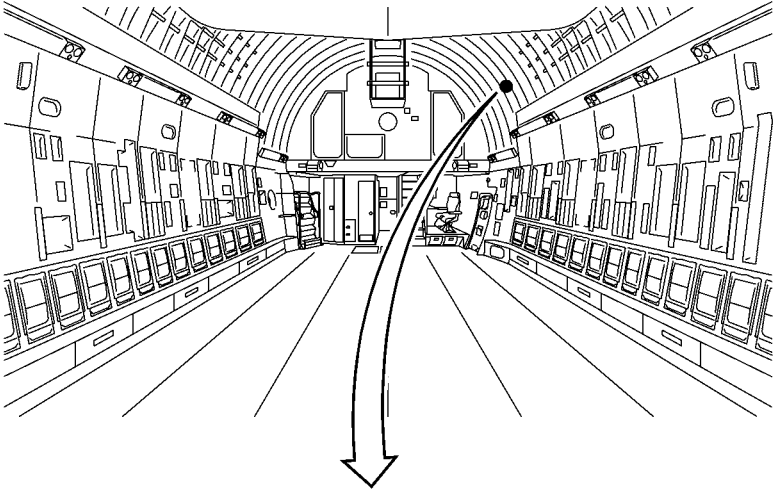

ICN-88277-G2742113-002-01

TO 1300i-2-27JG-40-3


5. (A) Remove guard pins from cable pulleys at STA 955, 956, and 1026.

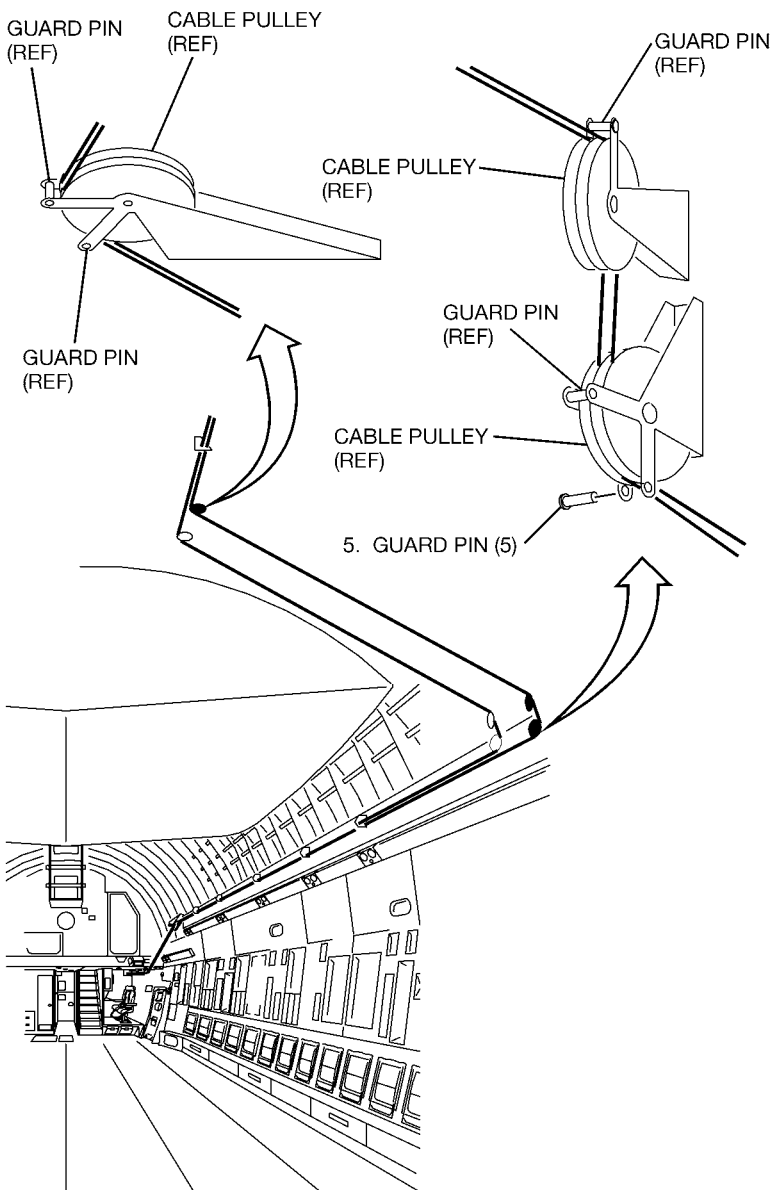


ICN-88277-G2742114-003-01

TO 1300i-2-27JG-40-3

6. (A) Remove grommets on fairleads for cable run 29 at STA 511, 609, 708, 808, 910, 1112, 1208, and 1300.

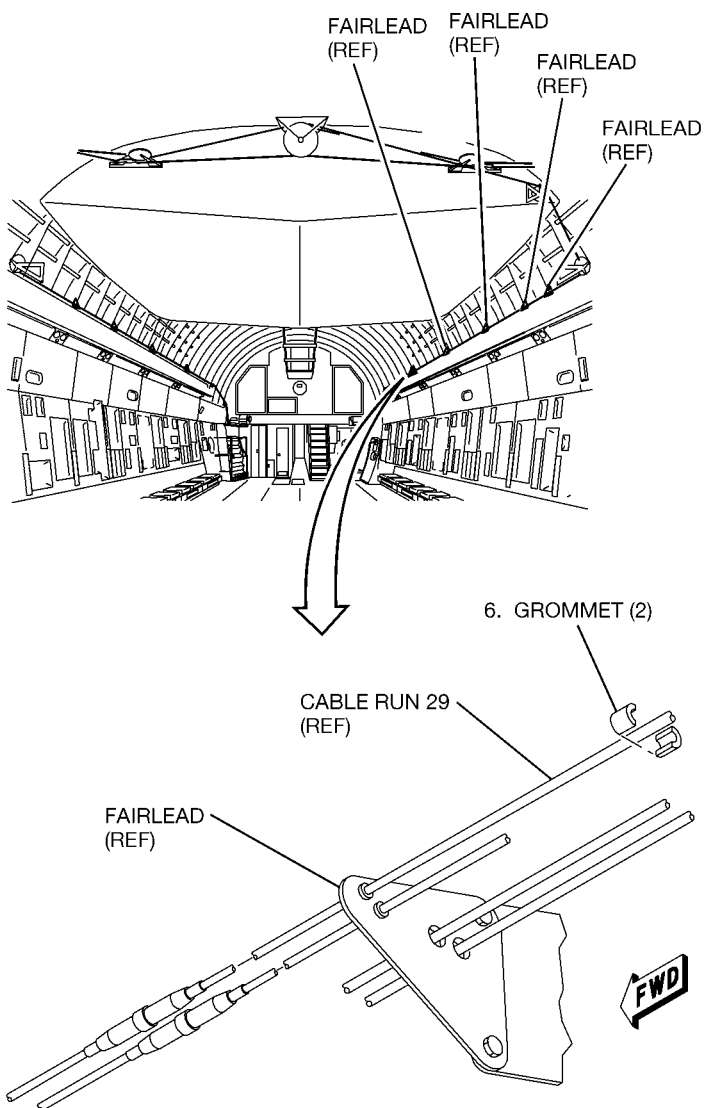


ICN-88277-G2742115-003-01

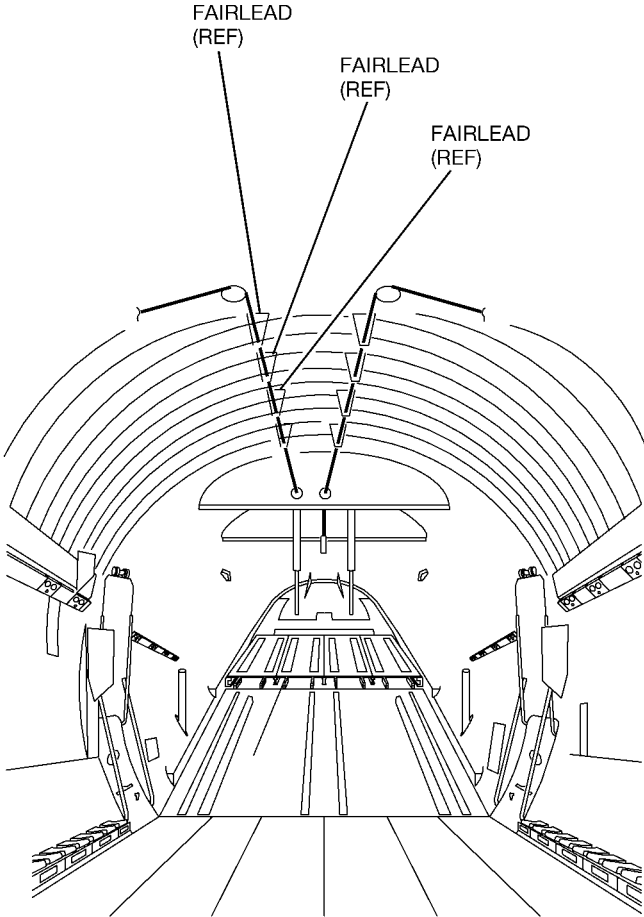

ICN-88277-G2742116-002-01

TO 1300i-2-27JG-40-3

7. $\langle \text{AA} \rangle \rightarrow \langle \text{DK} \rangle$ (A) Remove and discard safety clips; remove turnbuckle from cable run 29 at STA 1358.
7. $\langle \text{DL} \rangle \rightarrow$ (A) Remove and discard safety clips; remove turnbuckle from cable run 29 at STA 1138.
8. (A,B) Attach nylon utility cord on cable assembly end; remove cable and untie cord.

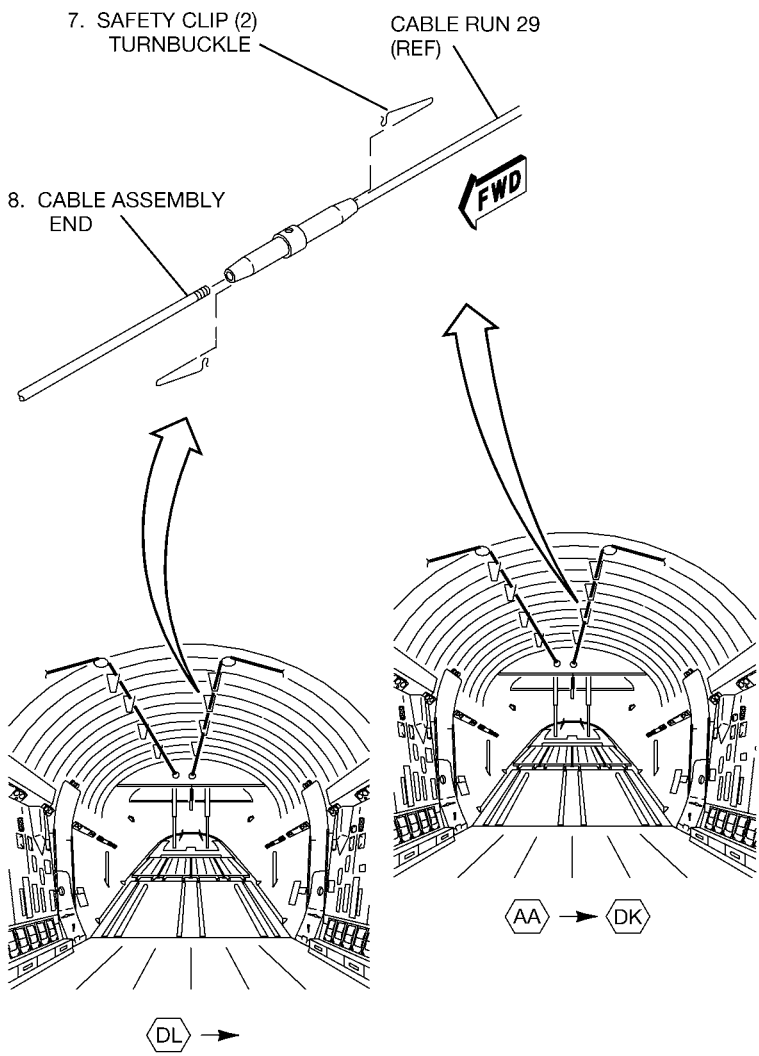



ICN-88277-G2742117-004-01

**2-9. REMOVAL FOR CABLE RUN 30B, REF DES
2742MP008.**

NOTE

Cable assembly 2742MP008 is identified on fairleads
by the number 30.


1. (A) Install clamp assembly on cable runs 29 and 30 aft cable pulley
at Station (STA) 413.

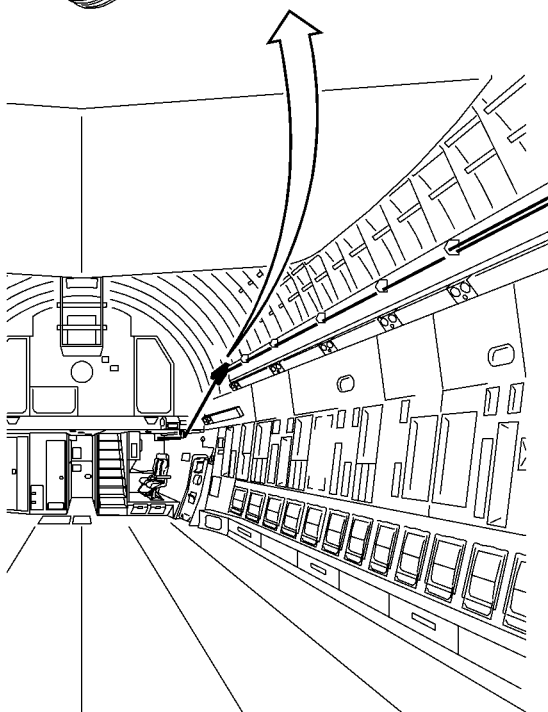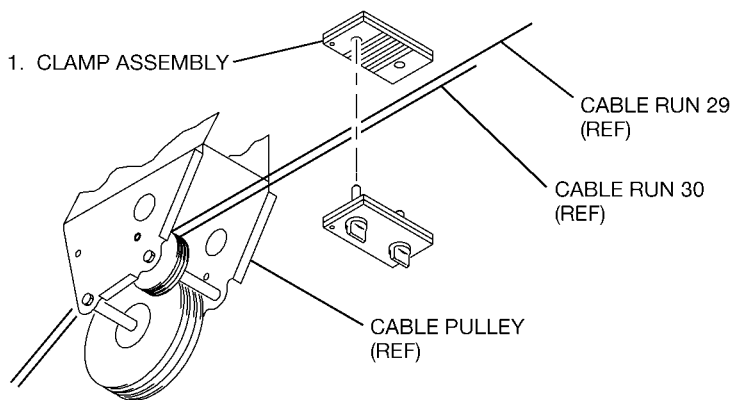

ICN-88277-G2742118-003-01

TO 1300i-2-27JG-40-3



2. (A) Install clamp assembly on cable runs 29 and 30 forward of fairlead at STA 1446.

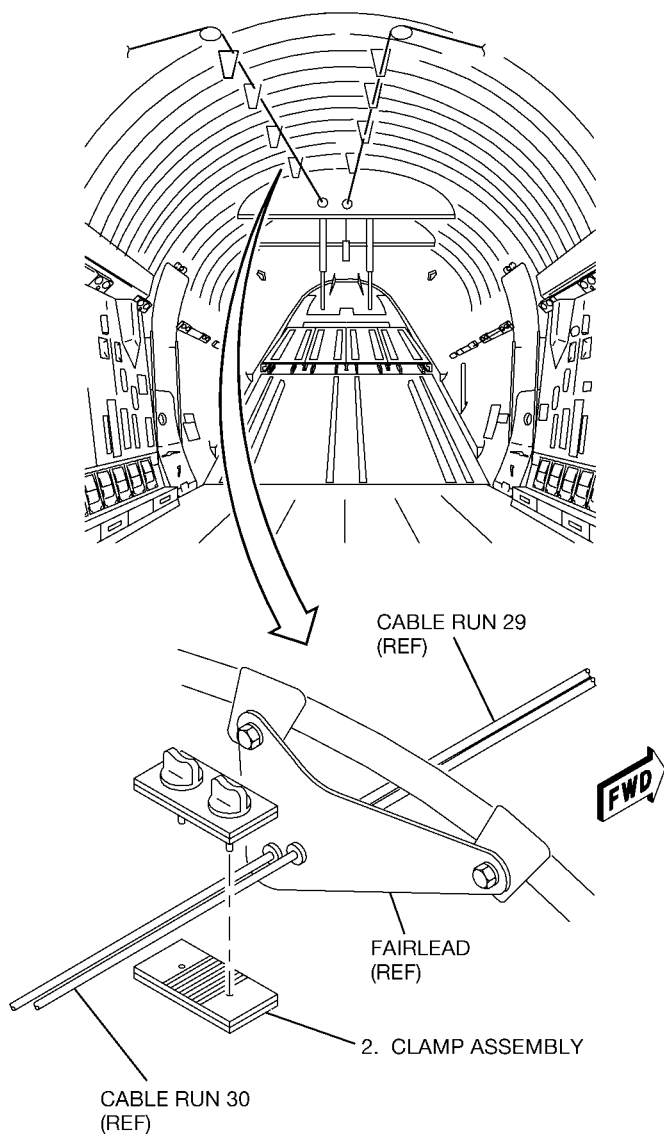

ICN-88277-G2742119-003-01

TO 1300i-2-27JG-40-3


3. (A) Remove and discard safety clips; loosen turnbuckle on cable run 29 at STA 432.
4. (A) Remove and discard safety clips; remove turnbuckle from cable run 30 at STA 450.

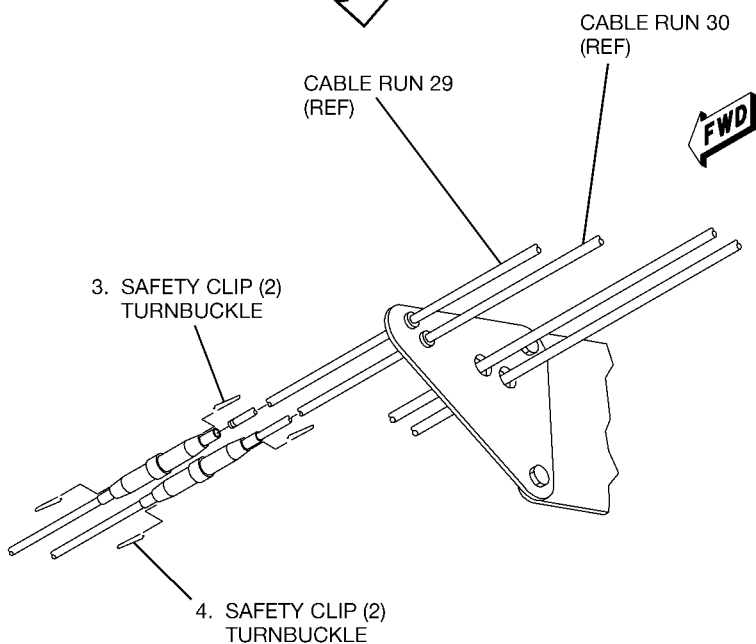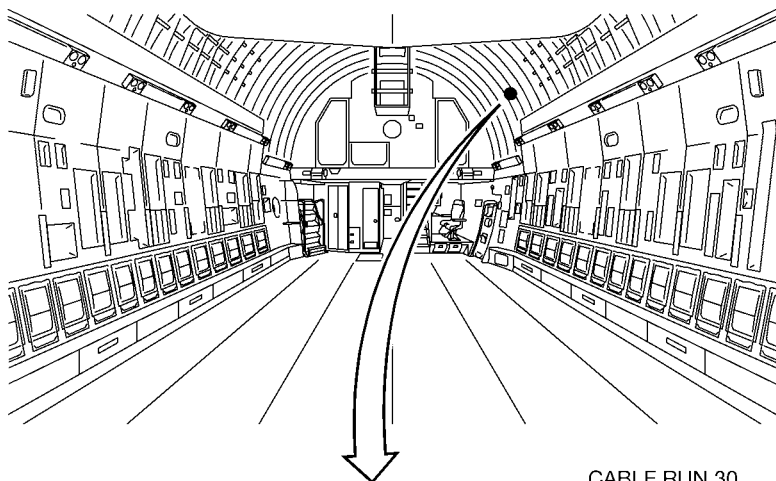

ICN-88277-G2742120-002-01

TO 1300i-2-27JG-40-3



5. (A) Remove guard pins from cable pulleys at STA 955, 956, and 1026.

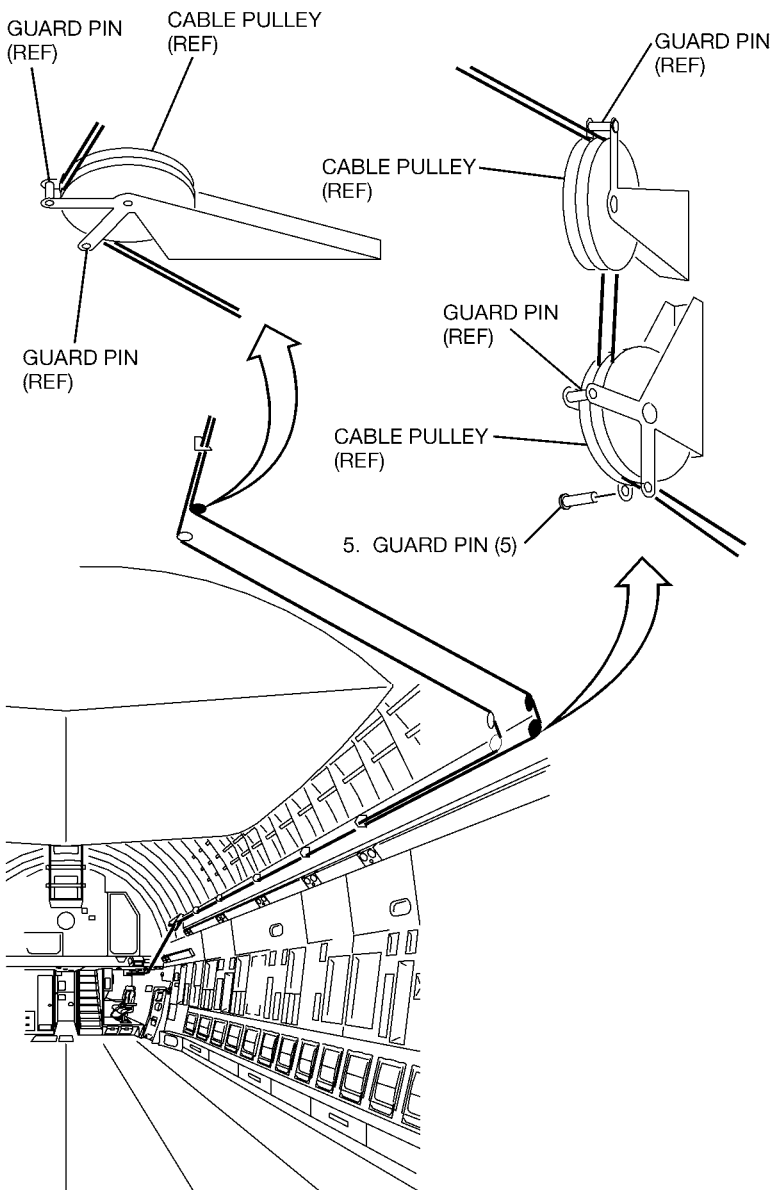


ICN-88277-G2742121-003-01

TO 1300i-2-27JG-40-3

6. (A) Remove grommets on fairleads for cable run 30 at STA 511, 609, 708, 808, 910, 1112, 1208, and 1300.

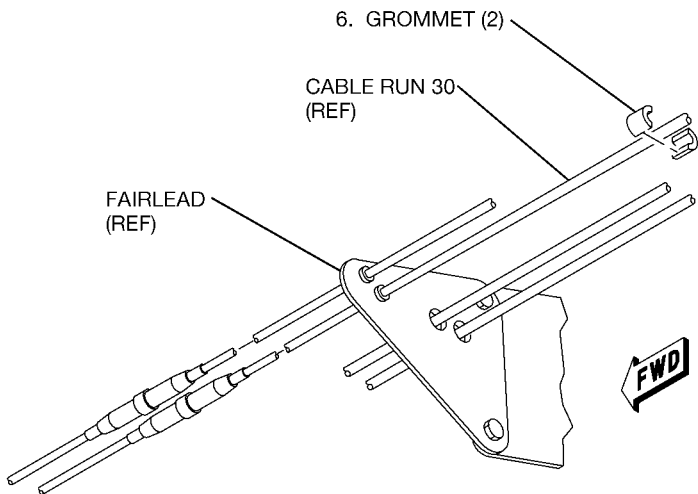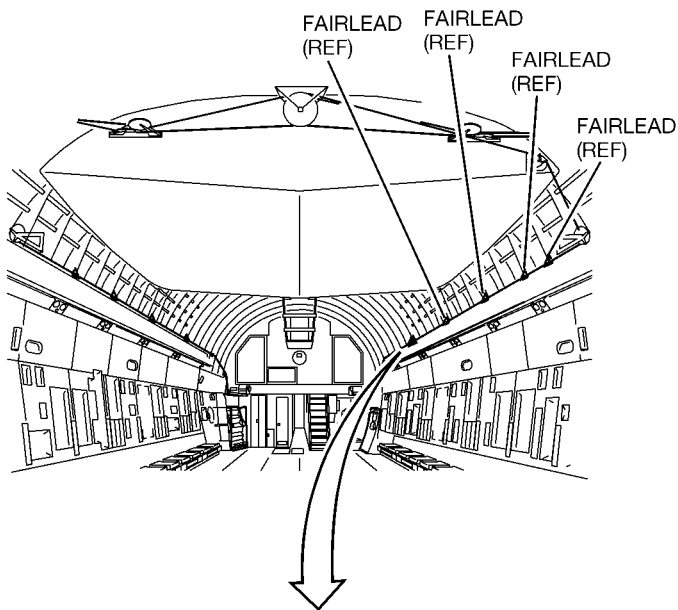



ICN-88277-G2742122-003-01

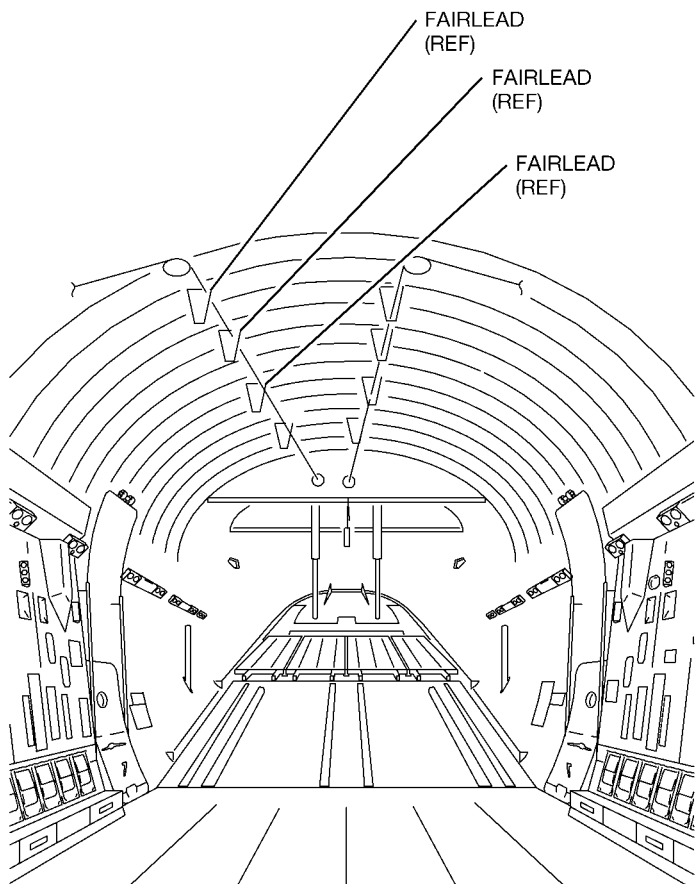

ICN-88277-G2742123-002-01

TO 1300i-2-27JG-40-3

7. $\langle \overline{AA} \rangle \rightarrow \langle \overline{DK} \rangle$ (A) Remove and discard safety clips; remove turnbuckle from cable run 30 at STA 1340.
7. $\langle \overline{DL} \rangle \rightarrow$ (A) Remove and discard safety clips; remove turnbuckle from cable run 30 at STA 1182.
8. (A,B) Attach nylon utility cord on cable assembly end; remove cable and untie cord.

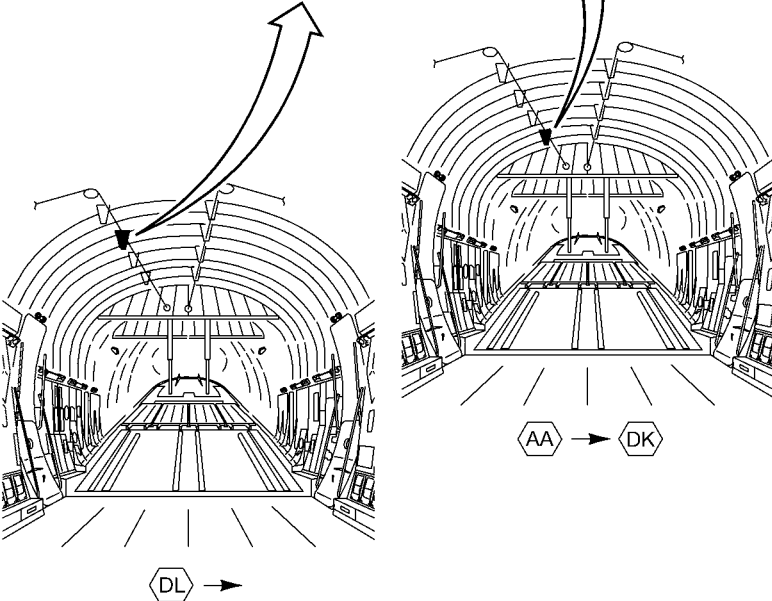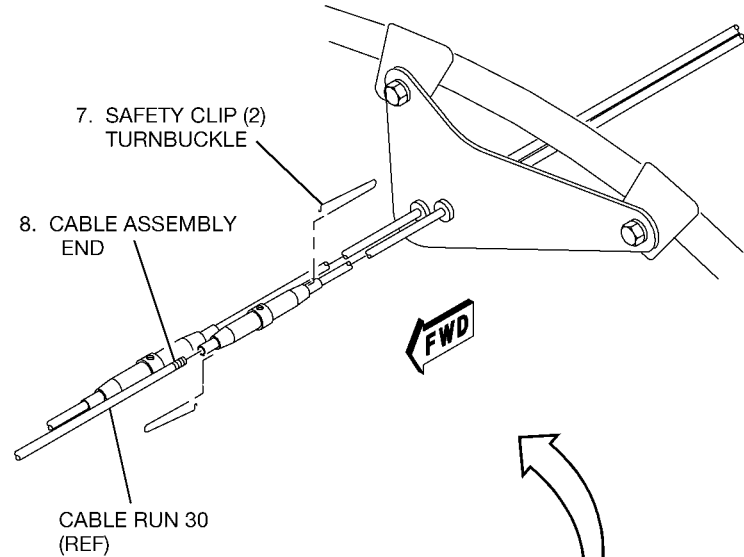


ICN-88277-G2742124-004-01

**2-10. REMOVAL FOR CABLE RUN 31B, REF DES
2742MP009.**

NOTE

Cable assembly 2742MP009 is identified on fairleads
by the number 31.



1. (A) Install clamp assembly on cable runs 31 and 32 aft of cable guard at Station (STA) 438.

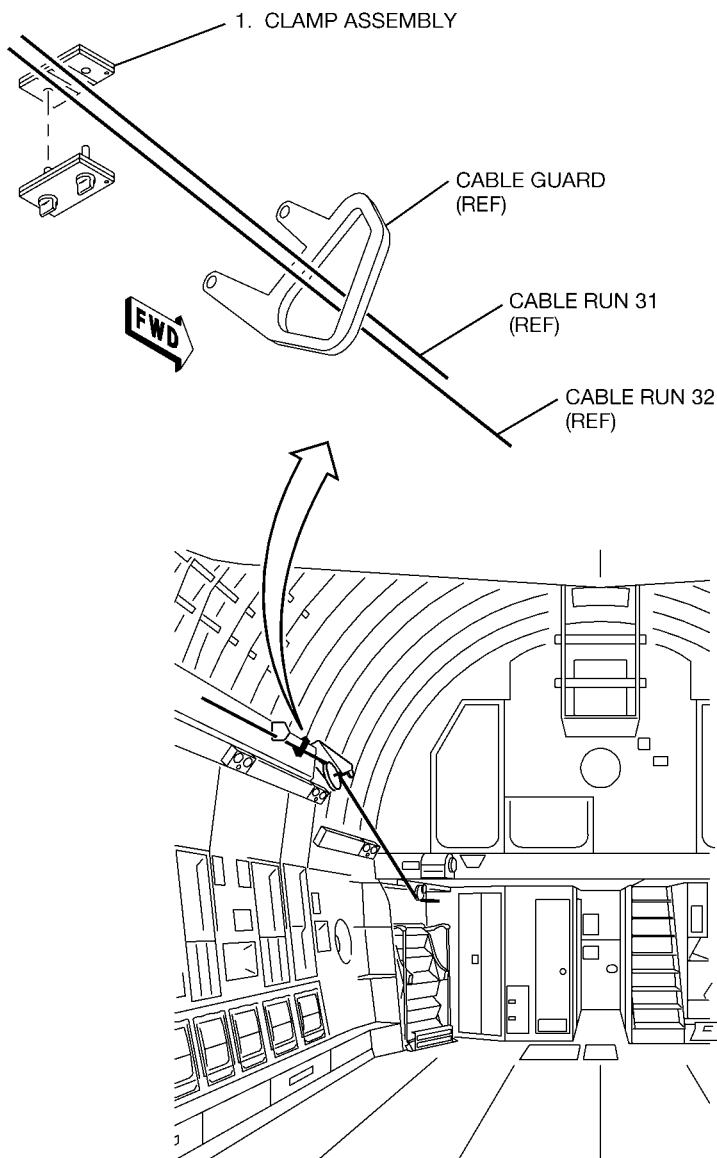

ICN-88277-G2742125-004-01

TO 1300i-2-27JG-40-3



2. (A) Install clamp assembly on cable runs 31 and 32 forward of fairlead at STA 1420.

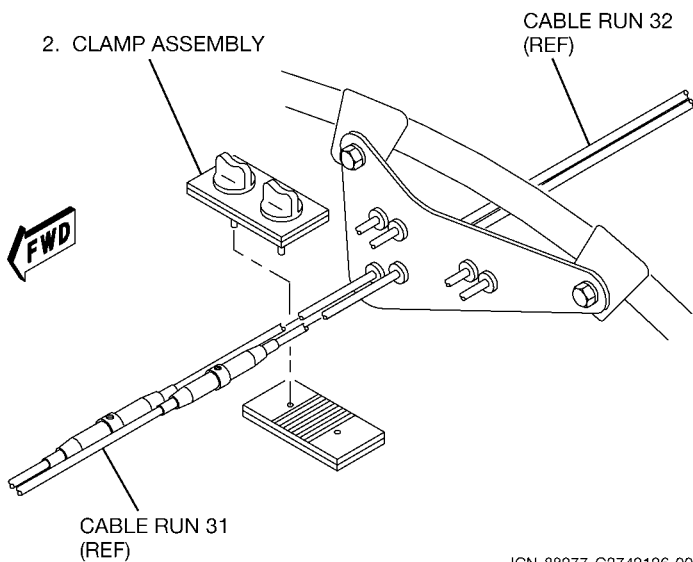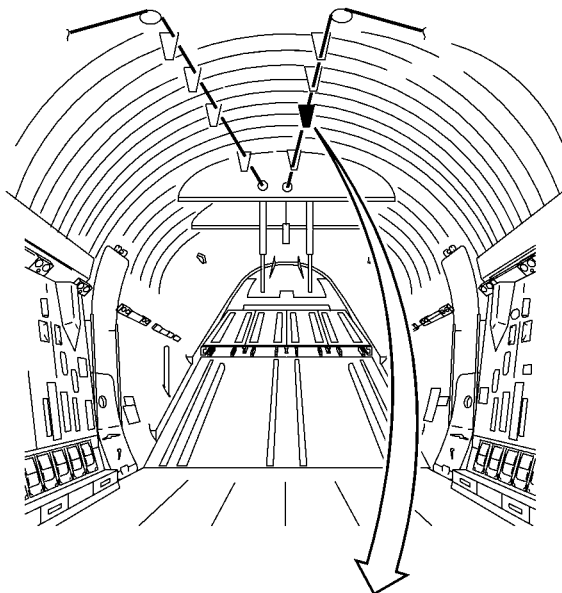

ICN-88277-G2742126-004-01

TO 1300i-2-27JG-40-3


3. (A) Remove and discard safety clips; loosen turnbuckle on cable run 32 at STA 478.
4. (A) Remove and discard safety clips; remove turnbuckle from cable run 31 at STA 446.

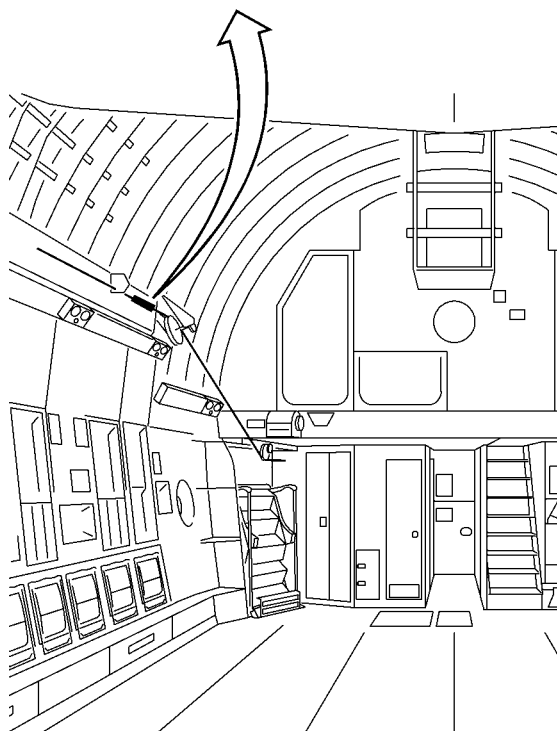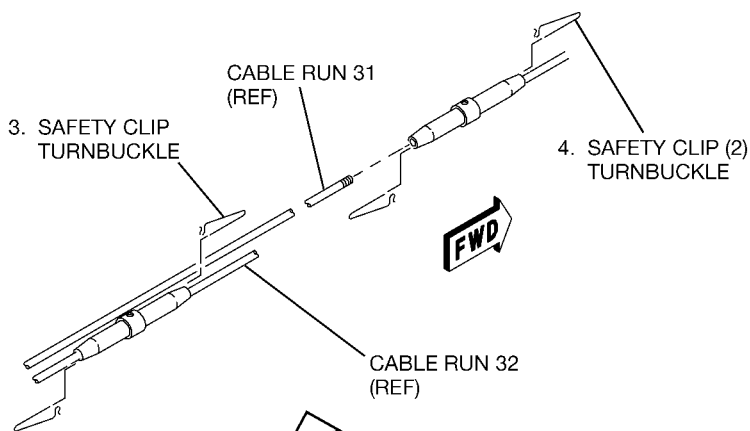

ICN-88277-G2742127-003-01

TO 1300i-2-27JG-40-3


5. (A) Remove guard pins from cable pulleys at STA 955, 956, and 1026.

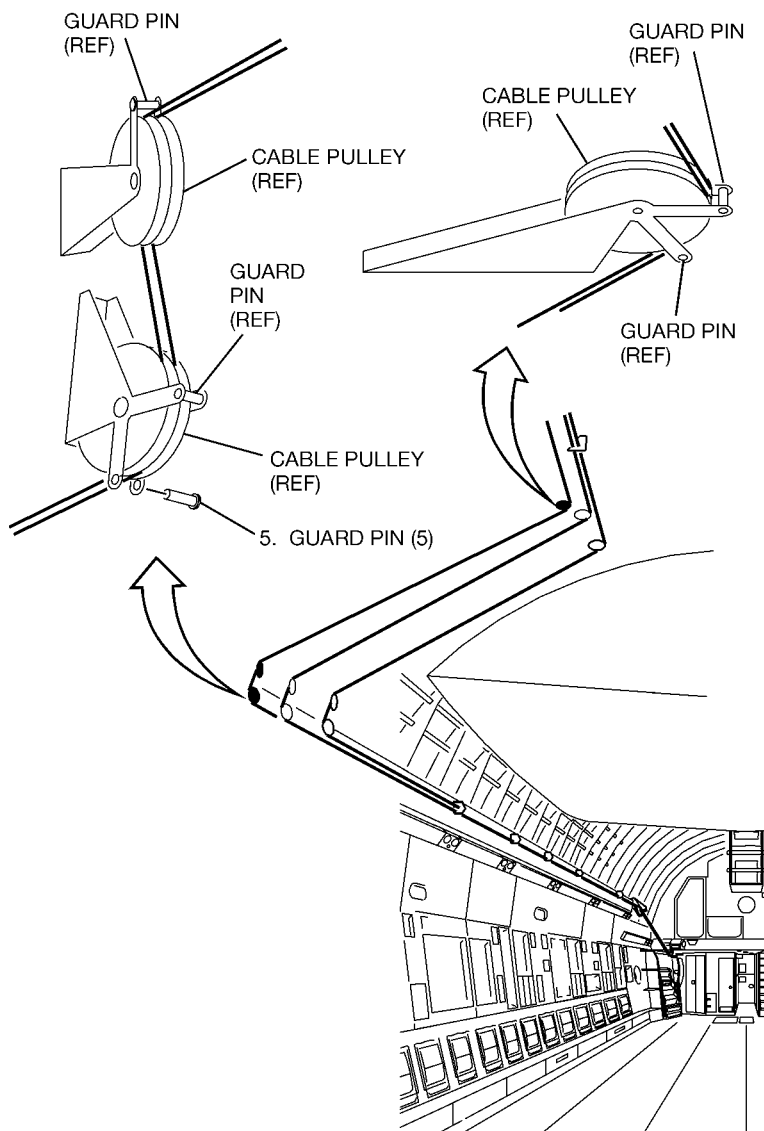


ICN-88277-G2742128-003-01

TO 1300i-2-27JG-40-3

6. (A) Remove grommets on fairleads for cable run 31 at STA 511, 609, 708, 808, 910, 1112, 1160, 1208, 1255, and 1300.

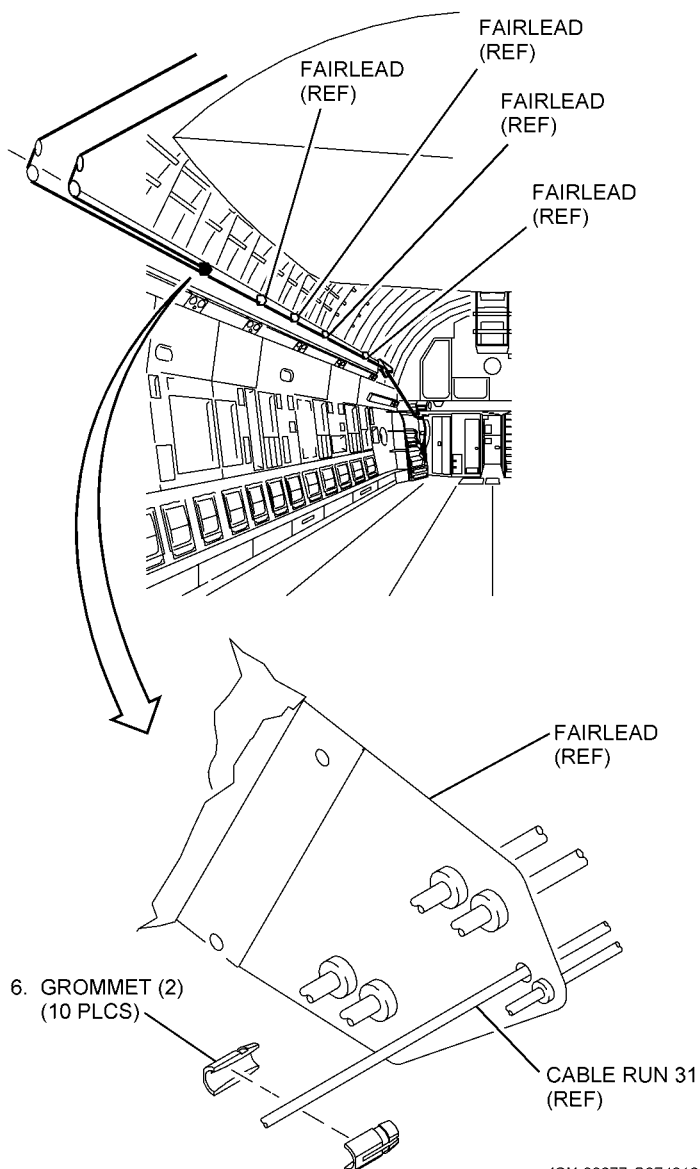


ICN-88277-G2742129-008-01

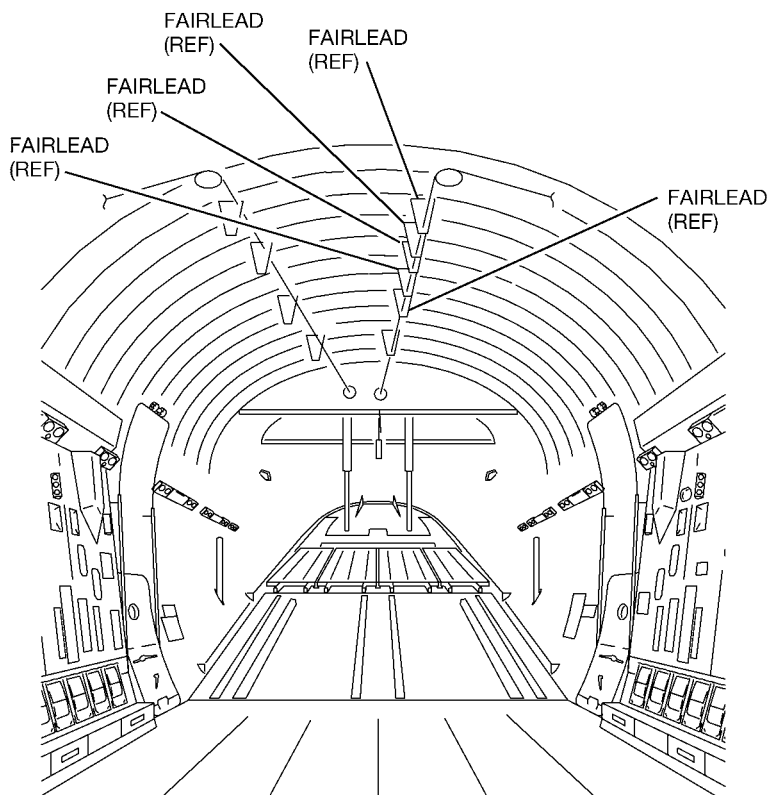

ICN-88277-G2742130-005-01

TO 1300i-2-27JG-40-3

7. $\langle \text{AA} \rangle \rightarrow \langle \text{DK} \rangle$ (A) Remove and discard safety clips; remove turnbuckle from cable run 31 at STA 1274.
7. $\langle \text{DL} \rangle \rightarrow$ (A) Remove and discard safety clips; remove turnbuckle from cable run 31 at STA 1184.
8. (A,B) Attach nylon utility cord on cable assembly end; remove cable and untie cord.

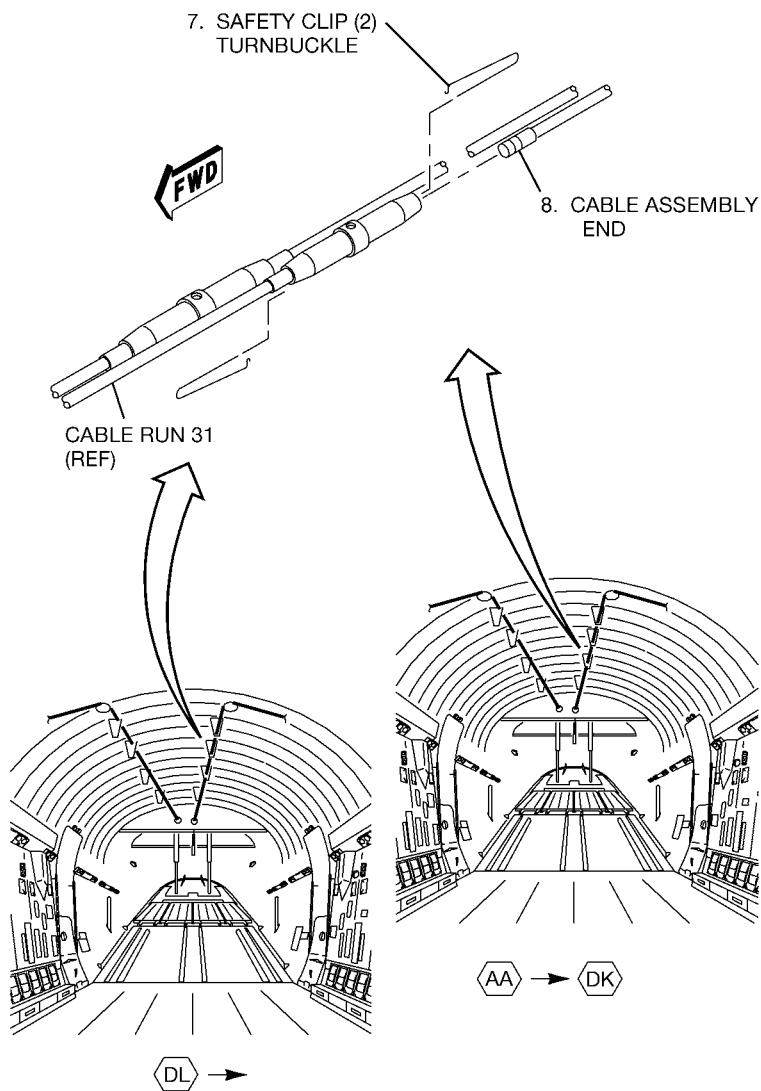


ICN-88277-G2742102-005-01

**2-11. REMOVAL FOR CABLE RUN 32B, REF DES
2742MP010.**

NOTE

Cable assembly 2742MP010 is identified on fairleads
by the number 32.



1. (A) Install clamp assembly on cable runs 31 and 32 aft of cable guard at Station (STA) 438.

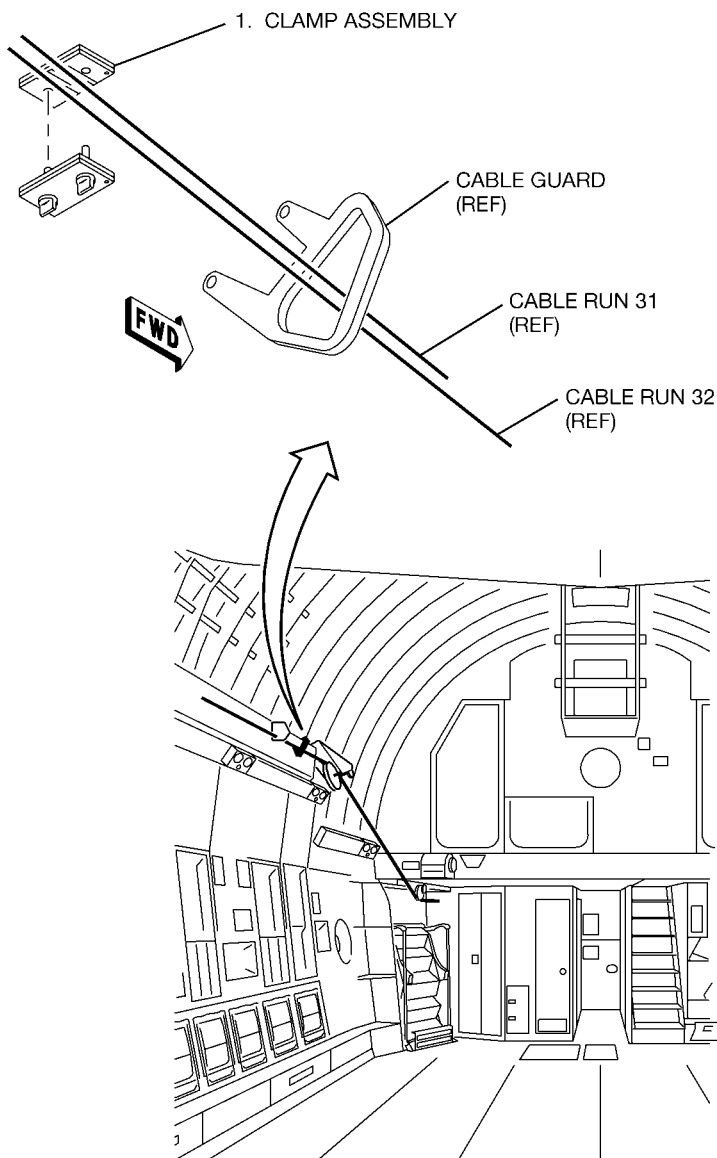

ICN-88277-G2742131-004-01

TO 1300i-2-27JG-40-3



2. (A) Install clamp assembly on cable runs 31 and 32 forward of fairlead at STA 1420.

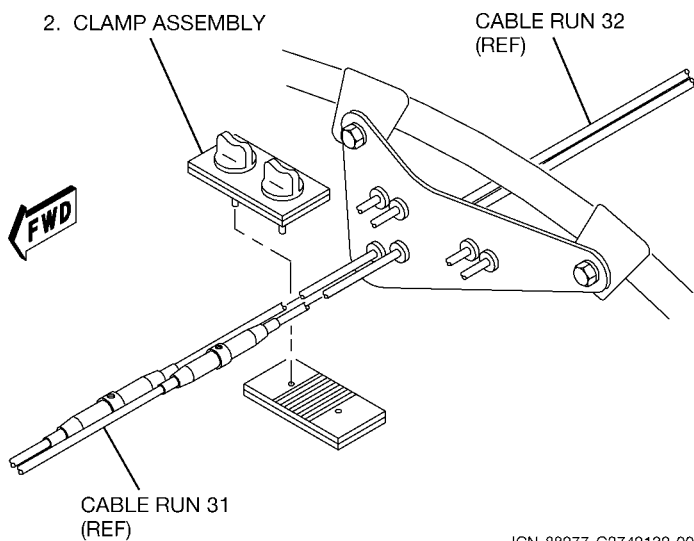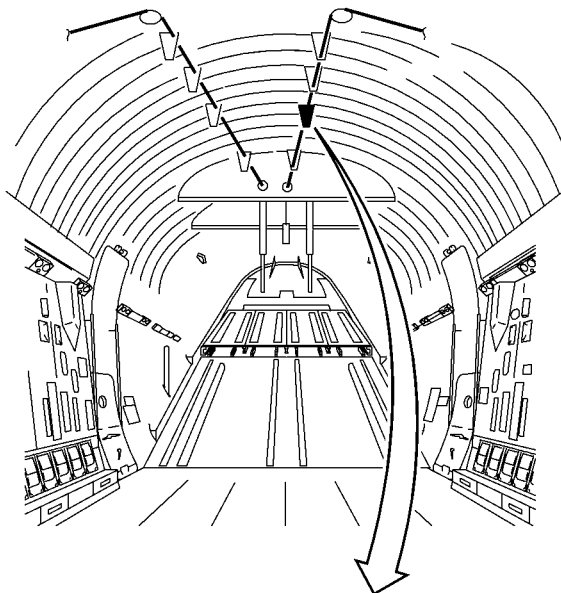

ICN-88277-G2742132-004-01

TO 1300i-2-27JG-40-3


3. (A) Remove and discard safety clips; loosen turnbuckle on cable run 31 at STA 446.
4. (A) Remove and discard safety clips; remove turnbuckle from cable run 32 at STA 478.

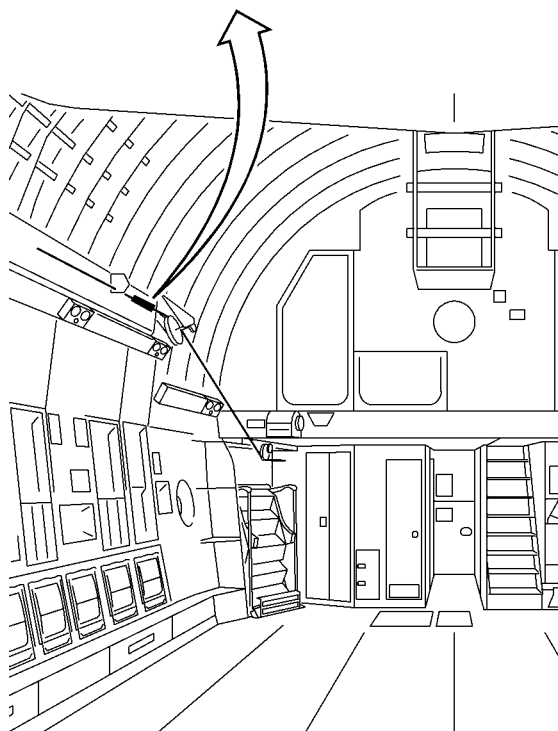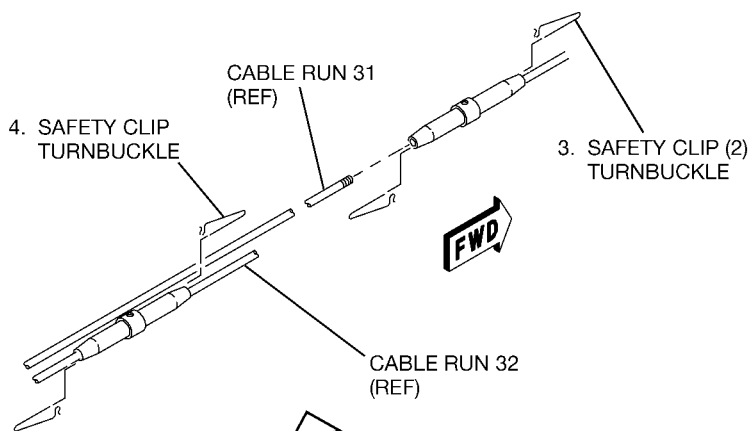

ICN-88277-G2742133-003-01

TO 1300i-2-27JG-40-3


5. (A) Remove guard pins from cable pulleys at STA 955, 956, and 1026.

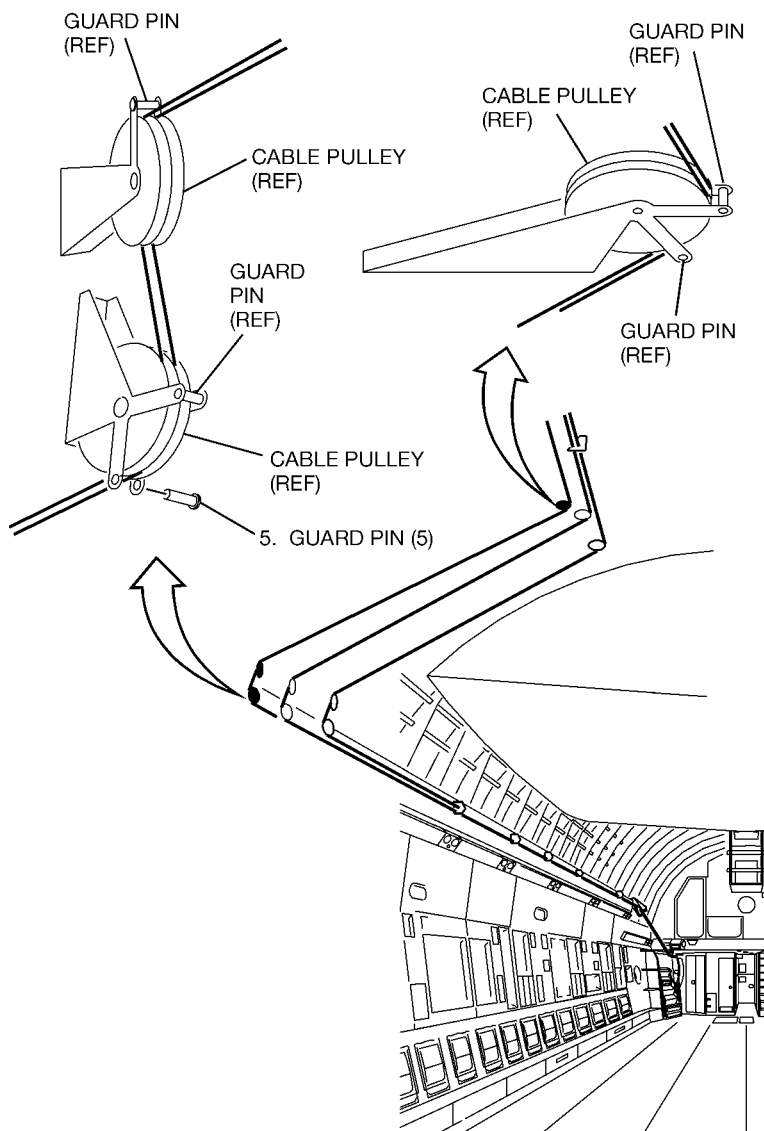


ICN-88277-G2742134-003-01

TO 1300i-2-27JG-40-3

6. (A) Remove grommets on fairleads for cable run 32 at STA 511, 609, 708, 808, 910, 1112, 1160, 1208, 1255, and 1300.

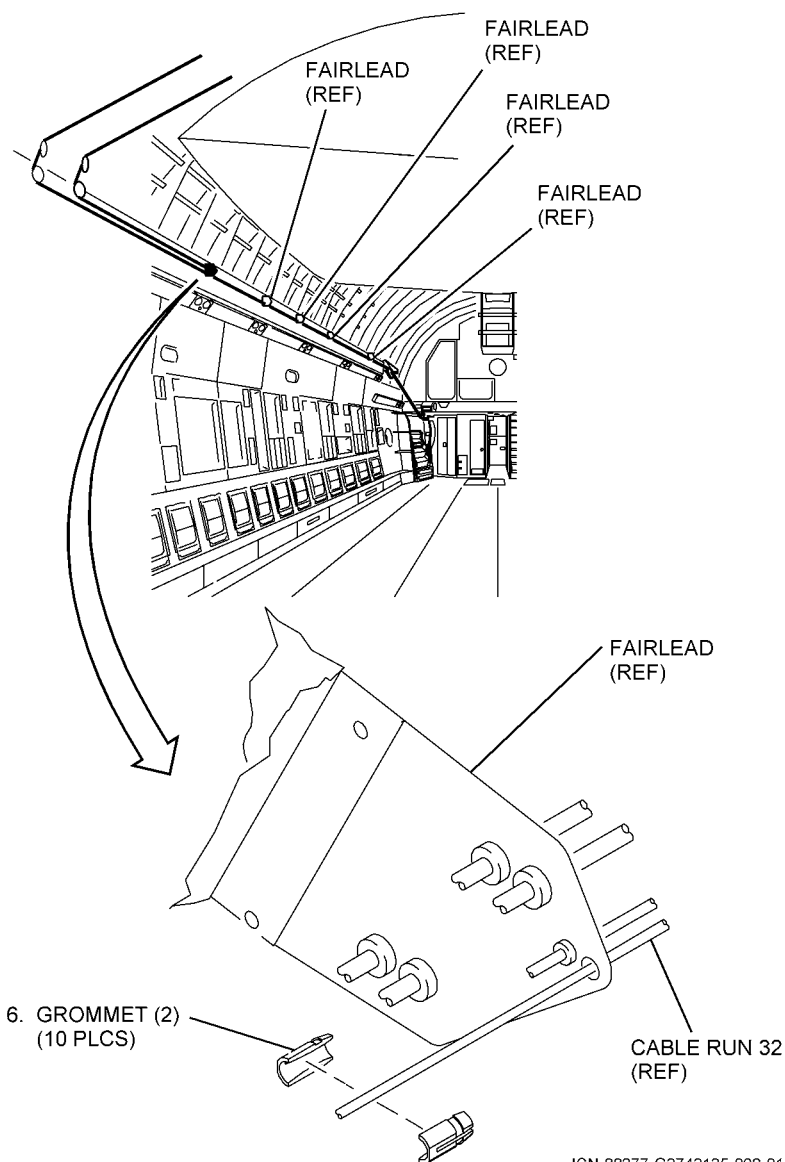


ICN-88277-G2742135-008-01

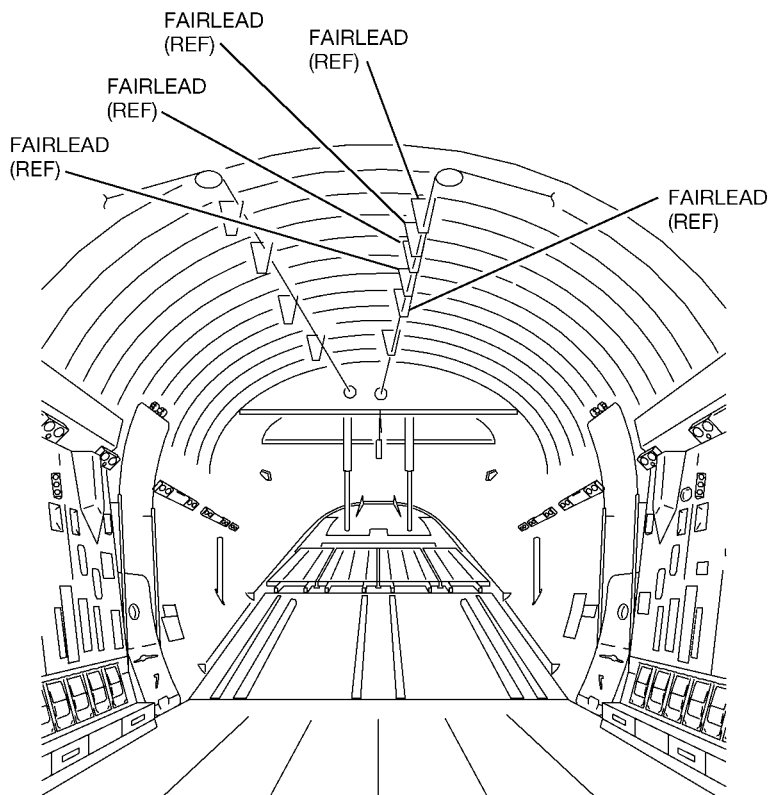

ICN-88277-G2742136-005-01

TO 1300i-2-27JG-40-3

7. $\langle \overline{AA} \rangle \rightarrow \langle \overline{DK} \rangle$ (A) Remove and discard safety clips; remove turnbuckle from cable run 32 at STA 1344.
7. $\langle \overline{DL} \rangle \rightarrow$ (A) Remove and discard safety clips; remove turnbuckle from cable run 32 at STA 1136.
8. (A,B) Attach nylon utility cord on cable assembly end; remove cable and untie cord.

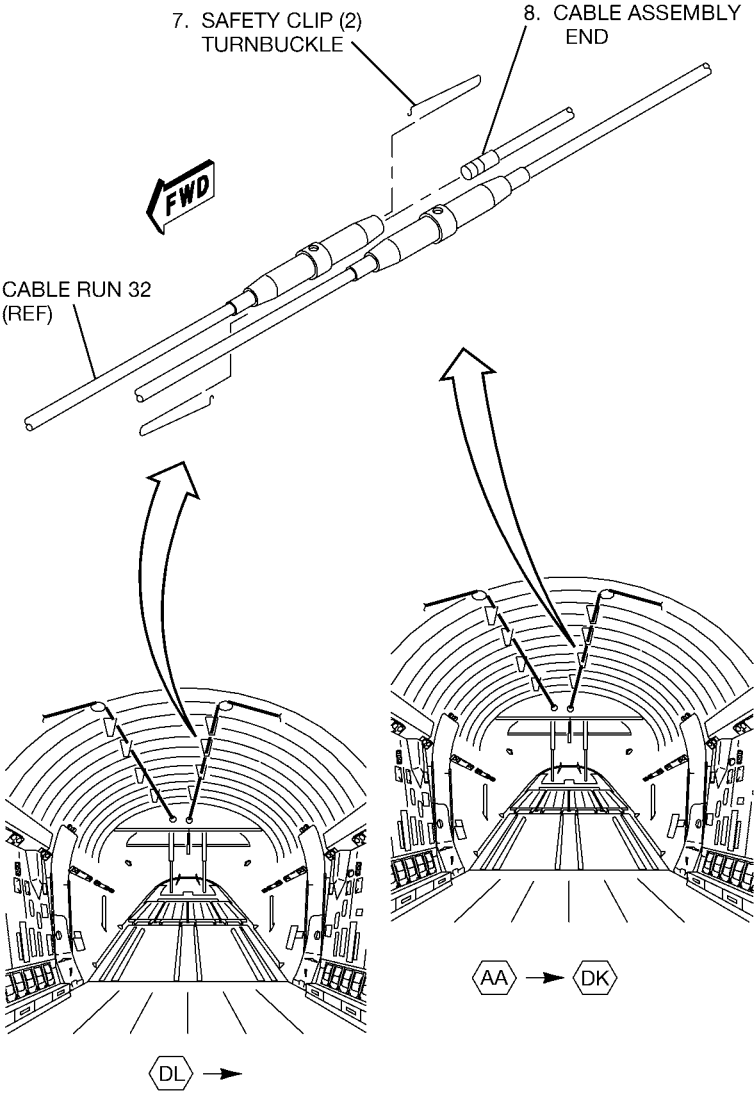


ICN-88277-G2742137-004-01

**2-12. REMOVAL FOR CABLE RUN 29C, REF DES
2742MP013.**

NOTE

Cable assembly 2742MP013 is identified on fairleads
by the number 29.



1. (A) Install clamp assembly on cable runs 29 and 30 aft of fairlead
at Station (STA) 1300.

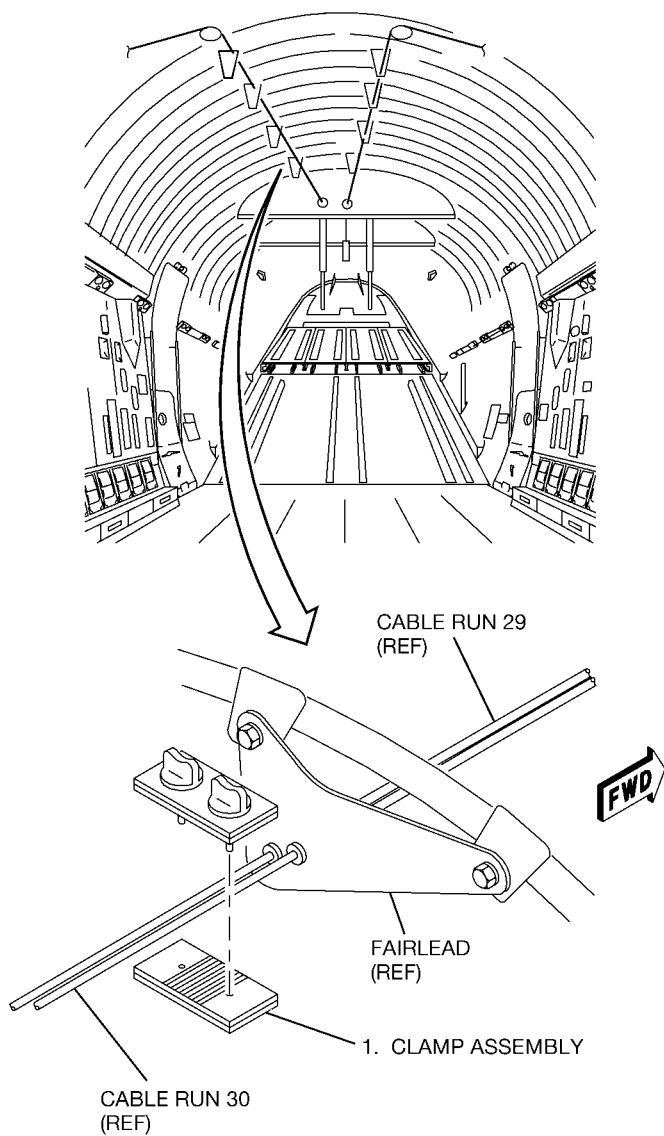

ICN-88277-G2742138-003-01

TO 1300i-2-27JG-40-3


2. $\langle \overline{AA} \rangle \rightarrow \langle \overline{DK} \rangle$ (A) Remove and discard safety clips; loosen turnbuckle on cable run 30 at STA 1340.
2. $\langle \overline{DL} \rangle \rightarrow$ (A) Remove and discard safety clips; loosen turnbuckle on cable run 30 at STA 1182.
3. $\langle \overline{AA} \rangle \rightarrow \langle \overline{DK} \rangle$ (A) Remove and discard safety clips; remove turnbuckle from cable run 29 at STA 1358.
3. $\langle \overline{DL} \rangle \rightarrow$ (A) Remove and discard safety clips; remove turnbuckle from cable run 29 at STA 1138.

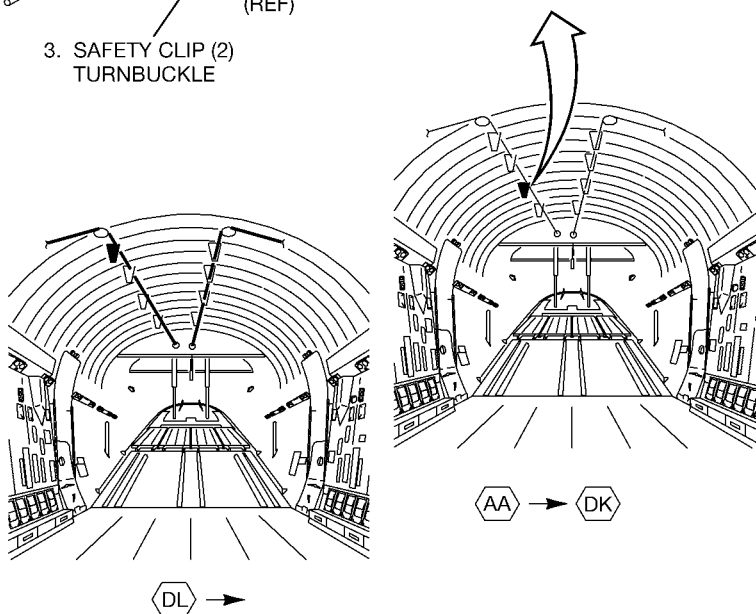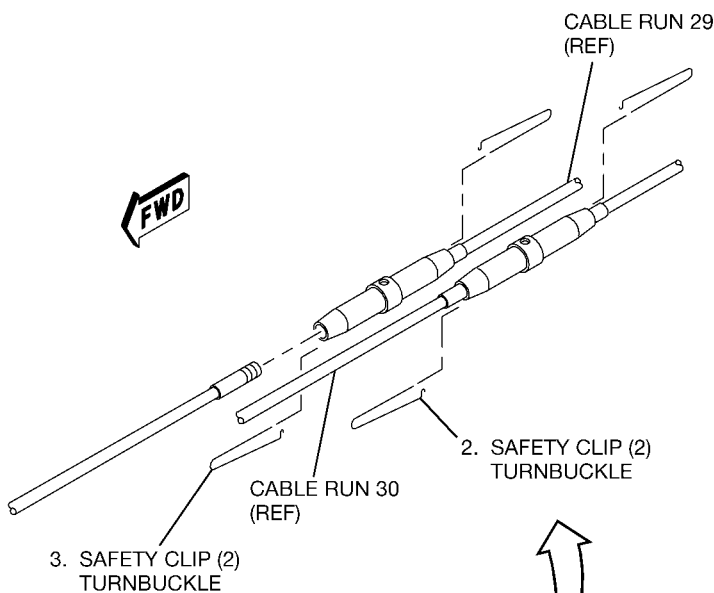

ICN-88277-G2742139-003-01



TO 1300i-2-27JG-40-3

4. (A) Remove grommets on fairlead for cable run 29 at STA 1446.
5. (A) Remove bolts, washers, pressure seal cover, and bushings at STA 1600.

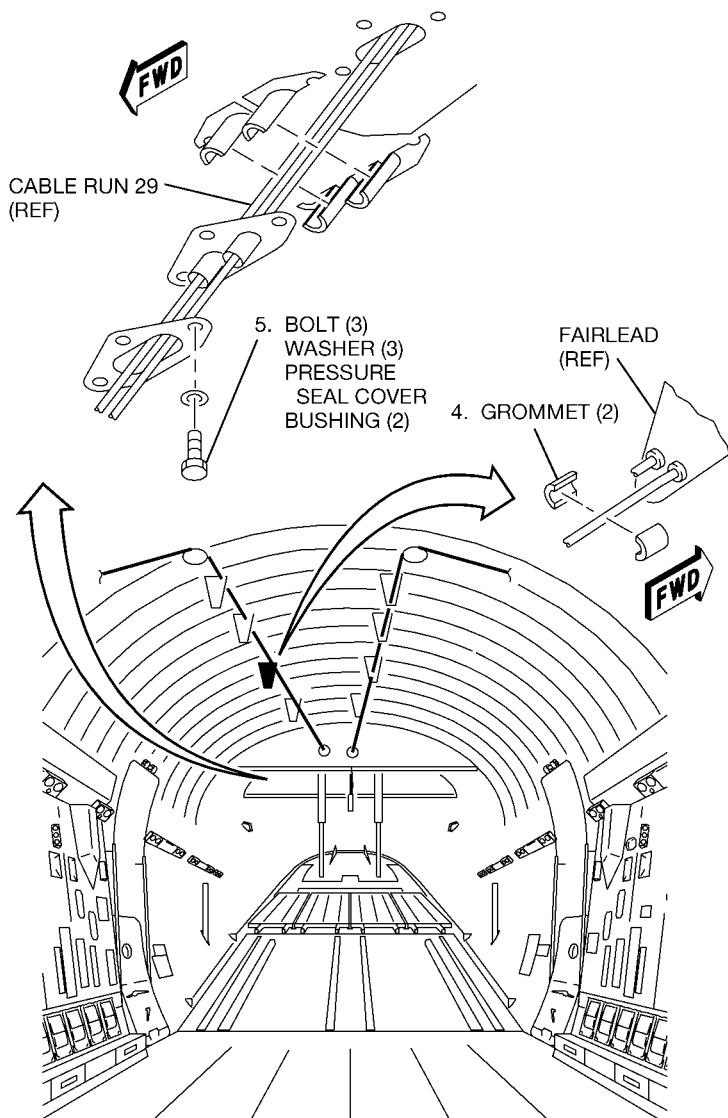

ICN-88277-G2742140-003-01


6. (A) Remove guard pins from cable pulley.

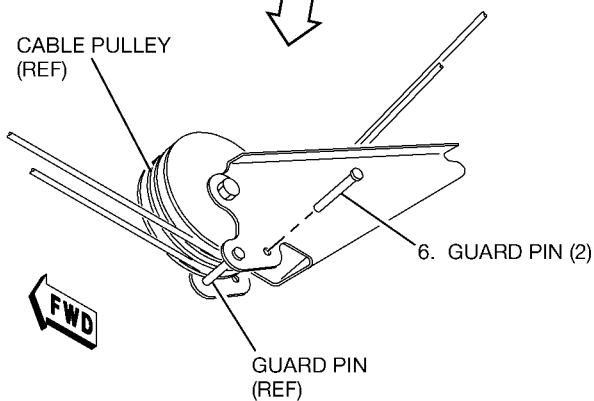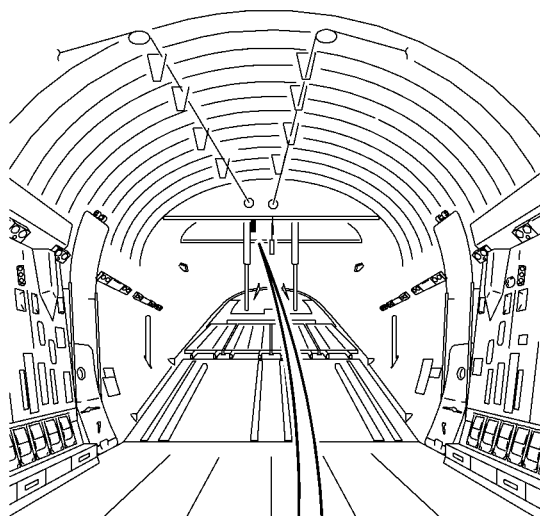

ICN-88277-G2742158-003-01

TO 1300i-2-27JG-40-3


7. (A) Remove grommets on fairlead for cable run 29.
8. (A) Remove guard pin from cable pulley.

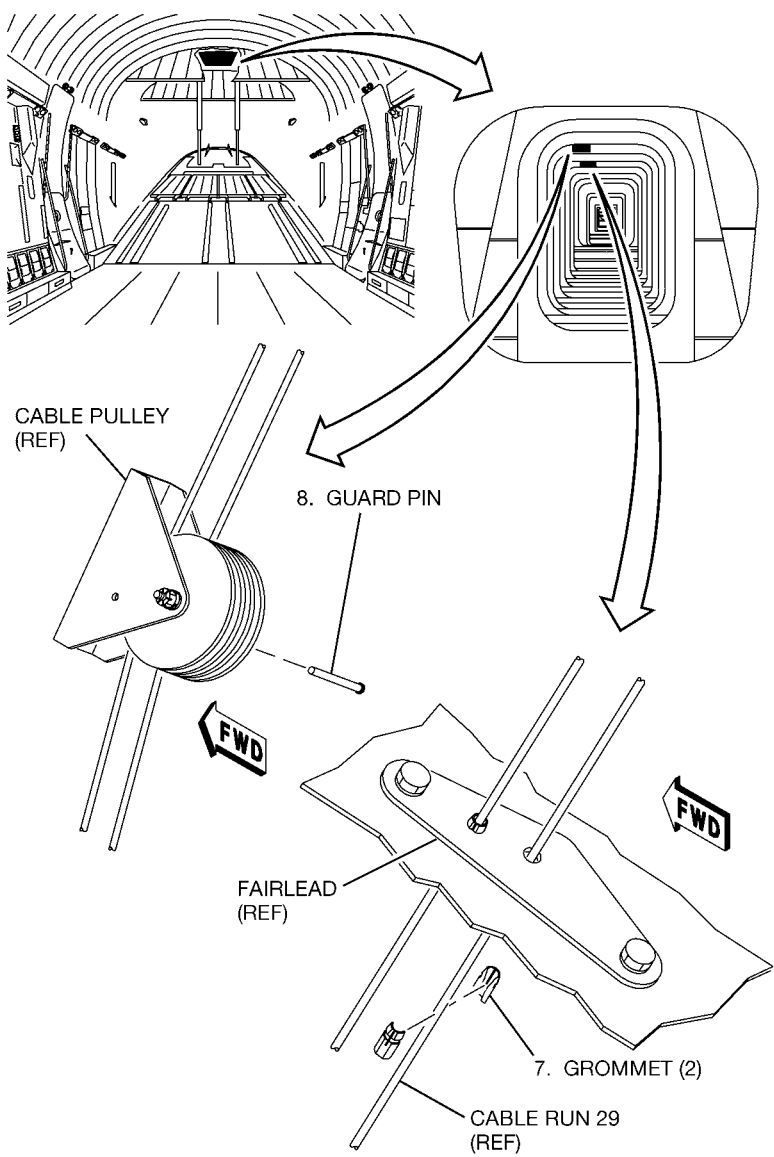

ICN-88277-G2742141-004-01

TO 1300i-2-27JG-40-3

9. (A) Remove cotter pin, nut, washer, and bolt from crank.
10. (A,B) Attach nylon utility cord on cable assembly; remove cable and untie cord.

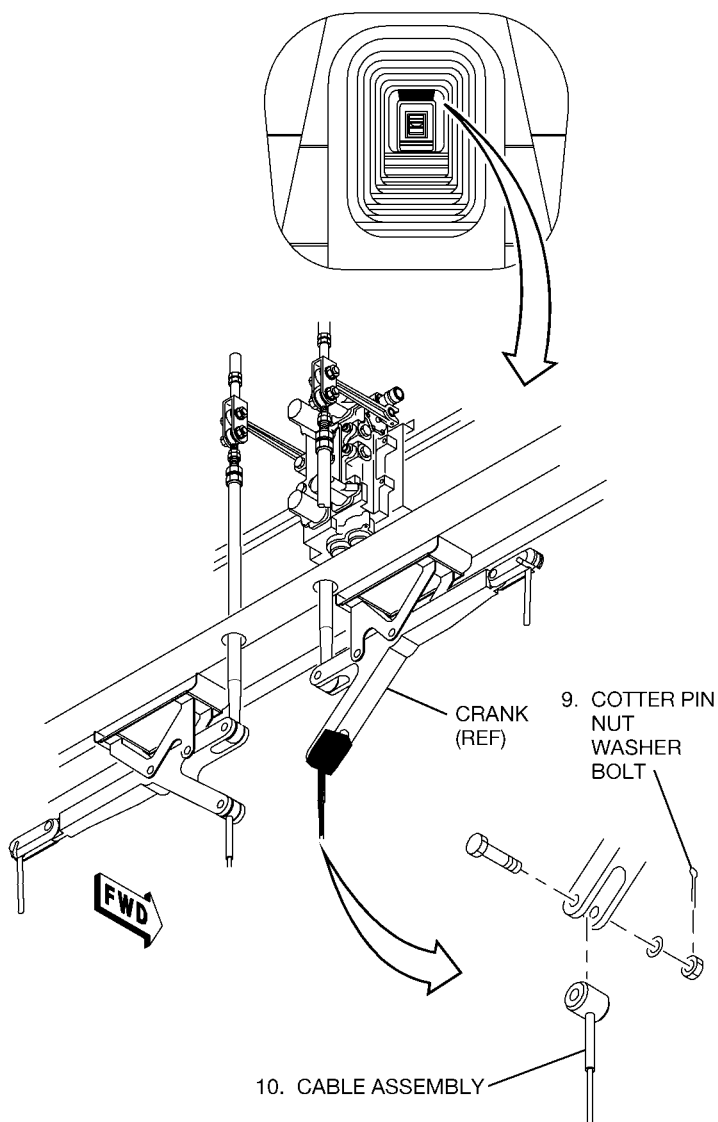


ICN-88277-G2742142-003-01

**2-13. REMOVAL FOR CABLE RUN 30C, REF DES
2742MP012.**

NOTE

Cable assembly 2742MP012 is identified on fairleads
by the number 30.




1. (A) Install clamp assembly on cable runs 29 and 30 aft of fairlead
at Station (STA) 1300.

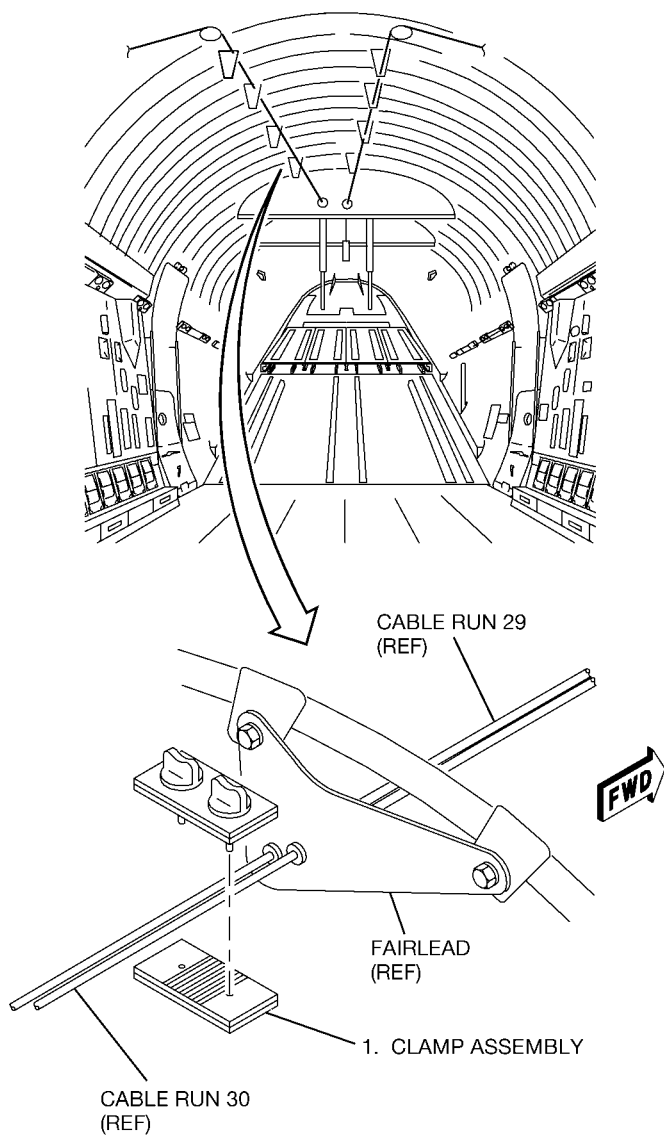

ICN-88277-G2742143-003-01


TO 1300i-2-27JG-40-3

2. $\langle \overline{AA} \rangle \rightarrow \langle \overline{DK} \rangle$ (A) Remove and discard safety clips; loosen turnbuckle on cable run 29 at STA 1358.
2. $\langle \overline{DL} \rangle \rightarrow$ (A) Remove and discard safety clips; loosen turnbuckle on cable run 29 at STA 1138.
3. $\langle \overline{AA} \rangle \rightarrow \langle \overline{DK} \rangle$ (A) Remove and discard safety clips; remove turnbuckle from cable run 30 at STA 1340.
3. $\langle \overline{DL} \rangle \rightarrow$ (A) Remove and discard safety clips; remove turnbuckle from cable run 30 at STA 1182.

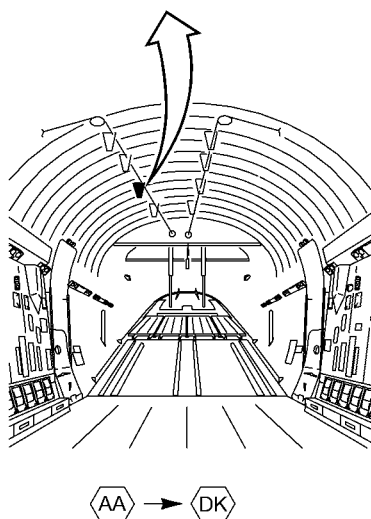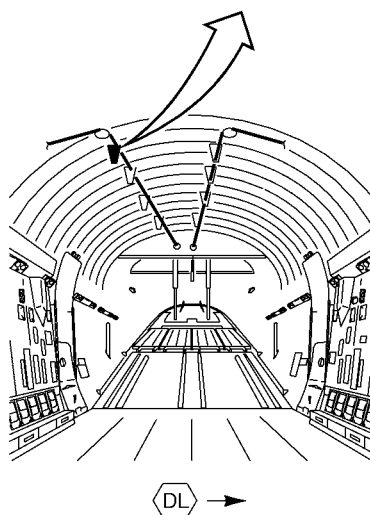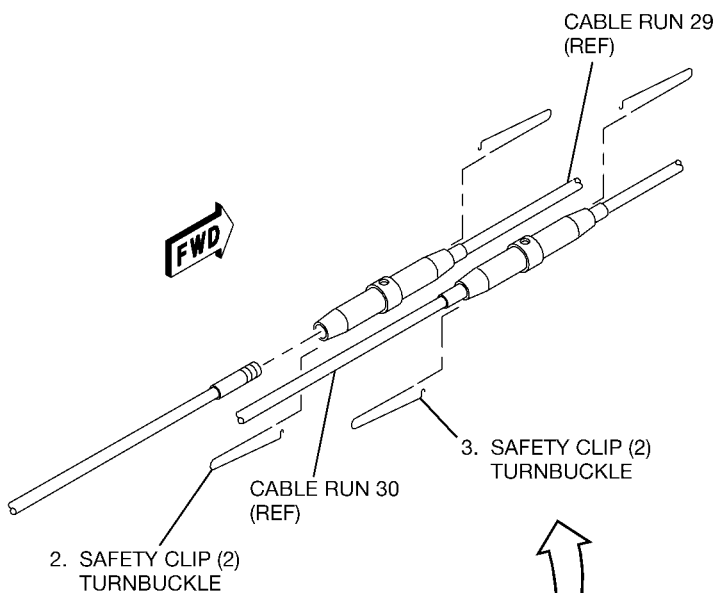



TO 1300i-2-27JG-40-3

4. (A) Remove grommets on fairlead for cable run 30 at STA 1446.
5. (A) Remove bolts, washers, pressure seal cover, and bushings at STA 1600.

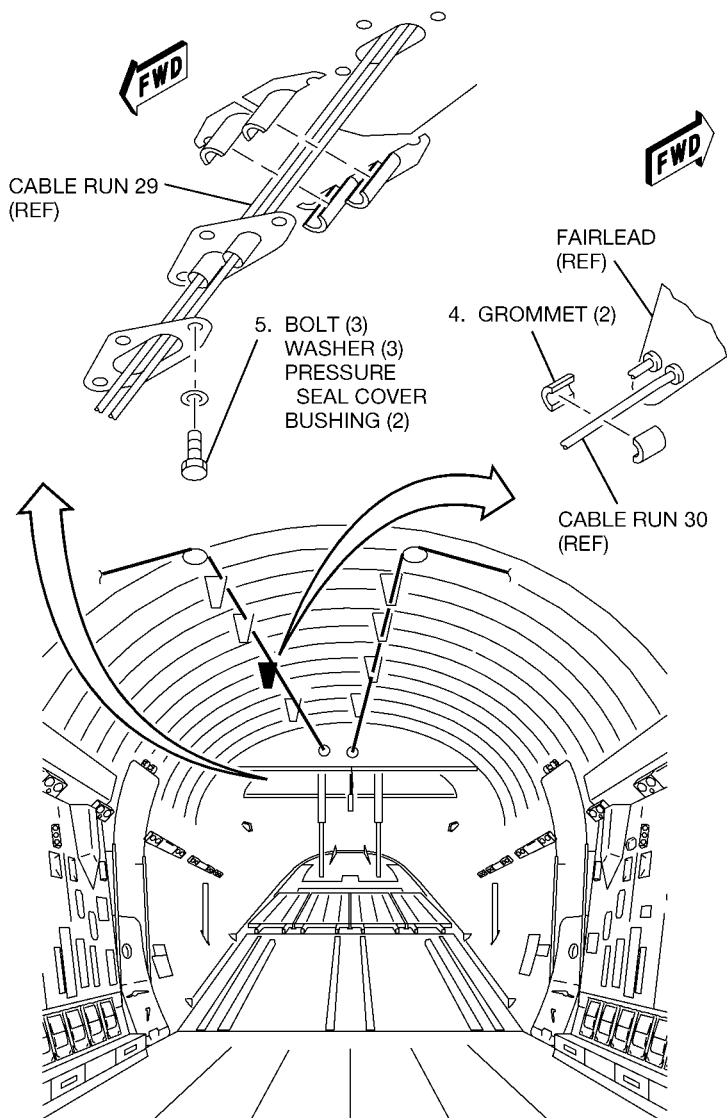

ICN-88277-G2742145-003-01


6. (A) Remove guard pins from cable pulley.

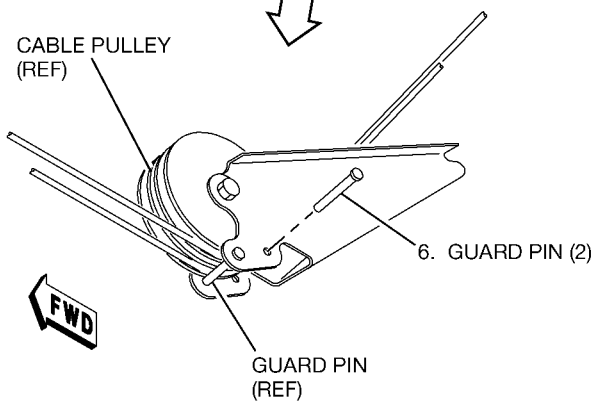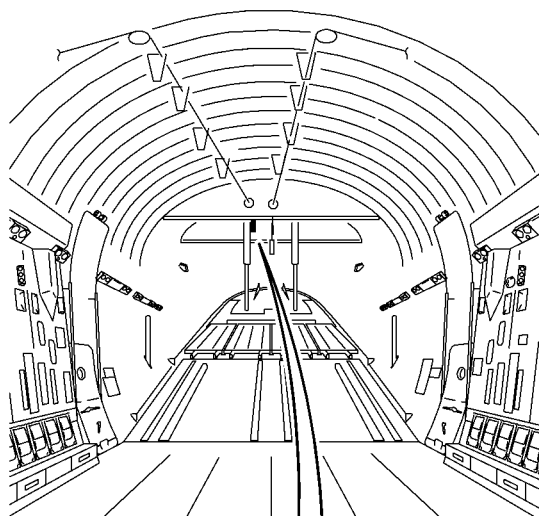

ICN-88277-G2742159-003-01

TO 1300i-2-27JG-40-3


7. (A) Remove grommets on fairlead for cable run 30.
8. (A) Remove guard pin from cable pulley.

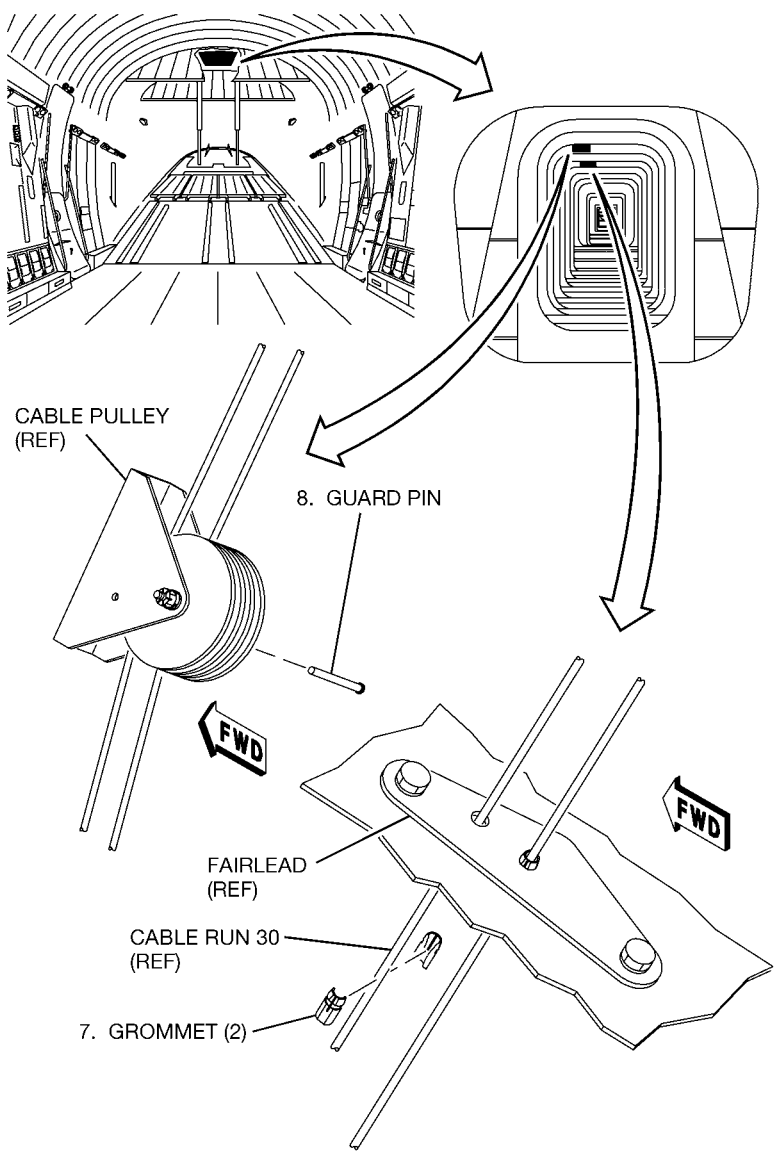

ICN-88277-G2742146-004-01

TO 1300i-2-27JG-40-3

9. (A) Remove cotter pin; remove cable assembly from pedestal end.
10. (A,B) Attach nylon utility cord on cable assembly; remove cable and untie cord.

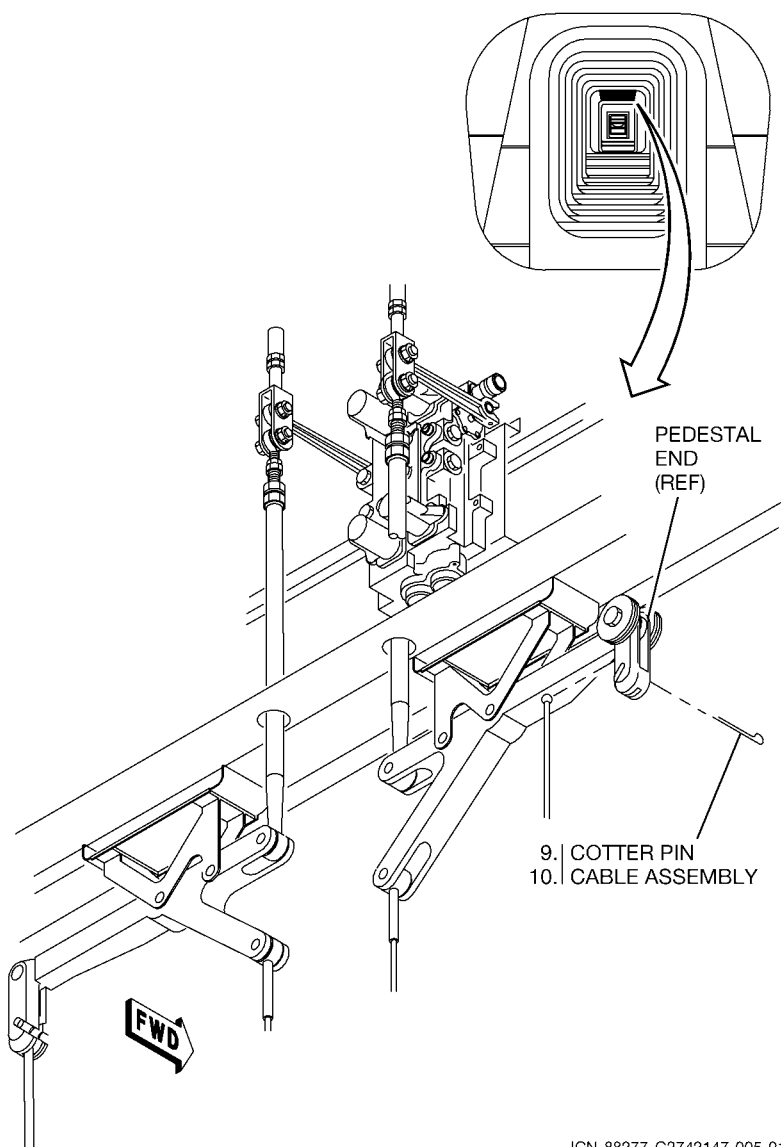


ICN-88277-G2742147-005-01

**2-14. REMOVAL FOR CABLE RUN 31C, REF DES
2742MP011.**

NOTE

Cable assembly 2742MP011 is identified on fairleads
by the number 31.


1. (A) Install clamp assembly on cable runs 31 and 32 aft of fairlead
at Station (STA) 1255.

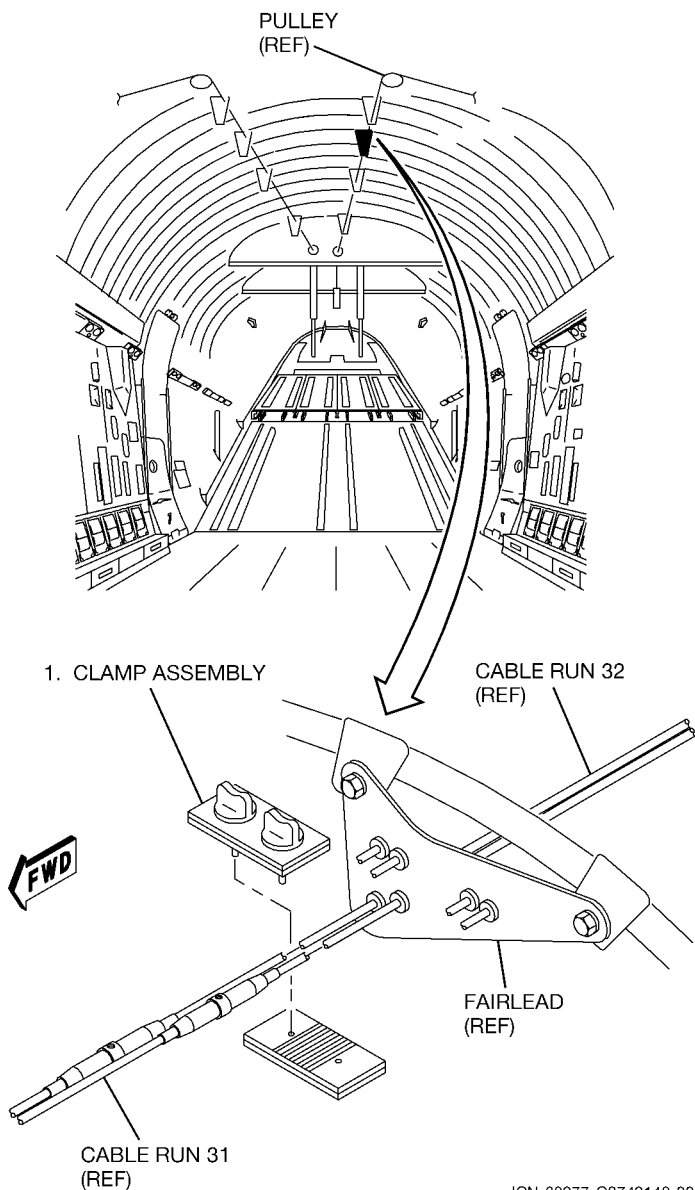

ICN-88277-G2742148-004-01

TO 1300i-2-27JG-40-3


2. $\langle \overline{AA} \rangle \rightarrow \langle \overline{DK} \rangle$ (A) Remove and discard safety clips; loosen turnbuckle on cable run 31 at STA 1344.
2. $\langle \overline{DL} \rangle \rightarrow$ (A) Remove and discard safety clips; loosen turnbuckle on cable run 31 at STA 1136.
3. $\langle \overline{AA} \rangle \rightarrow \langle \overline{DK} \rangle$ (A) Remove and discard safety clips; remove turnbuckle from cable run 32 at STA 1274.
3. $\langle \overline{DL} \rangle \rightarrow$ (A) Remove and discard safety clips; remove turnbuckle from cable run 32 at STA 1184.

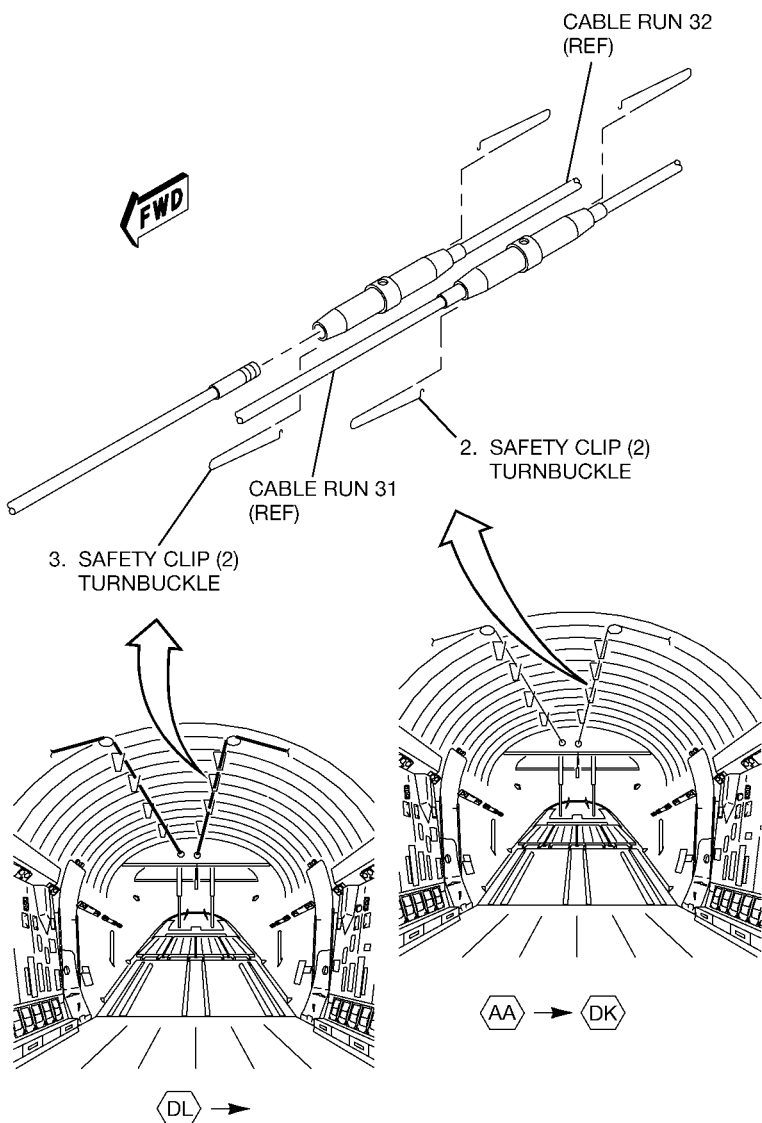

ICN-88277-G2742149-003-01



TO 1300i-2-27JG-40-3

4. (A) Remove grommets on fairlead for cable run 31 at STA 1300, 1420, and 1490.
5. (A) Remove bolts, washers, pressure seal cover, and bushings at STA 1620.

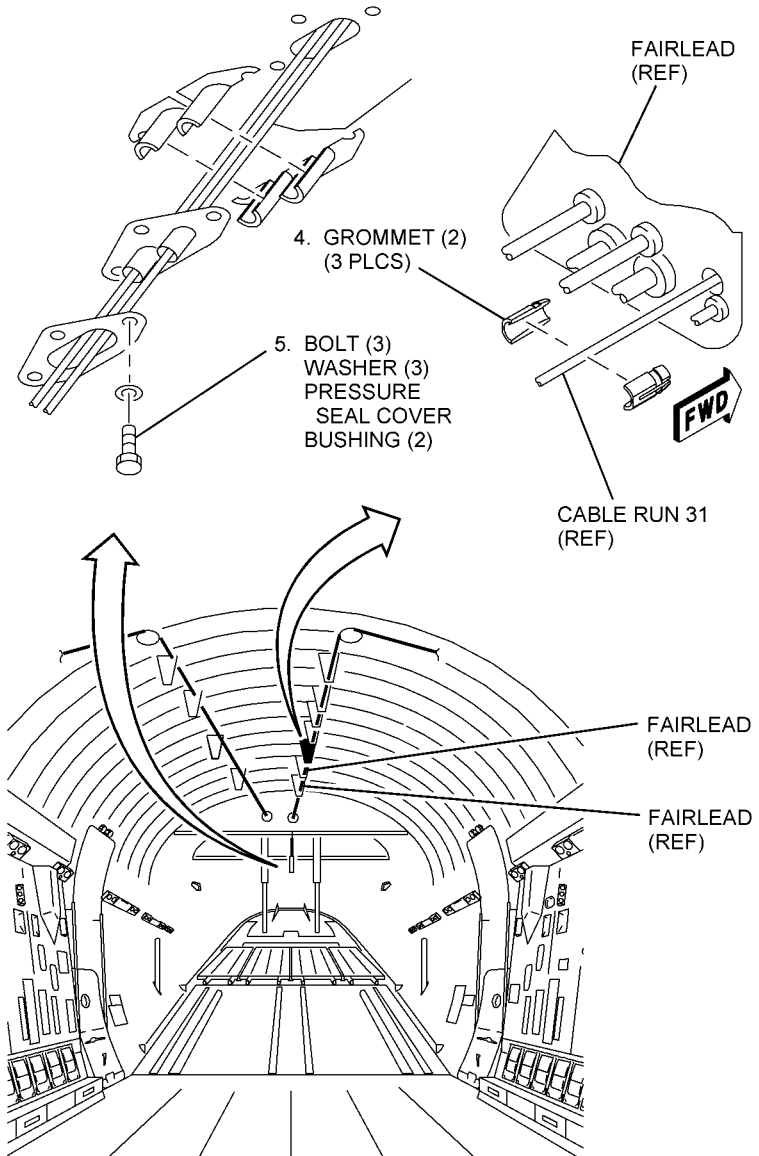

ICN-88277-G2742155-008-01


6. (A) Remove guard pins from cable pulley.

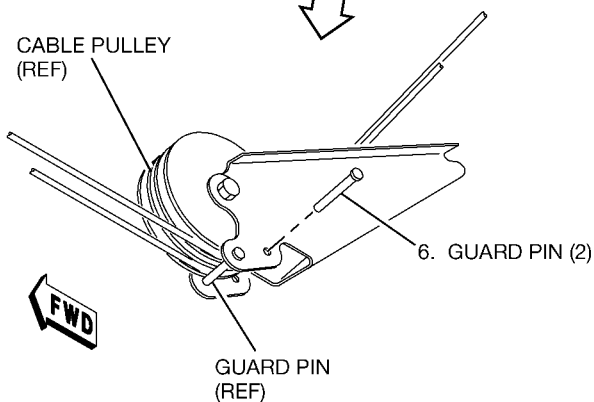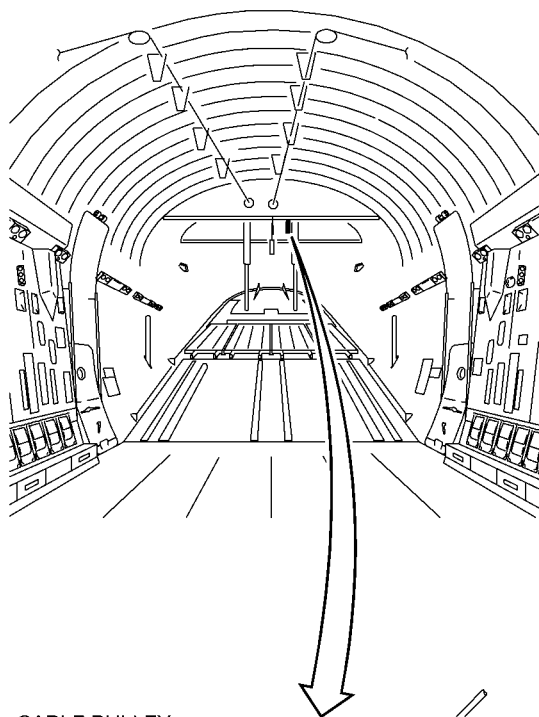

ICN-88277-G2742160-003-01

TO 1300i-2-27JG-40-3


7. (A) Remove grommets on fairlead for cable run 31.
8. (A) Remove guard pin from cable pulley.

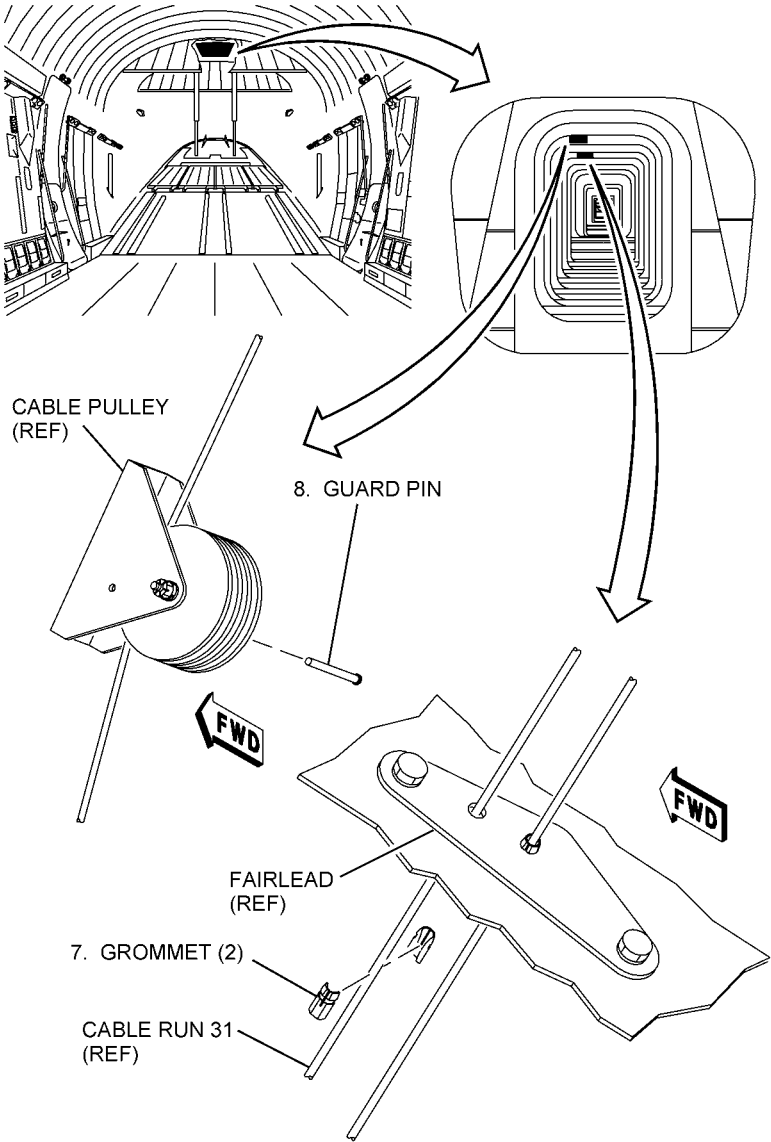

ICN-88277-G2742151-006-01

TO 1300i-2-27JG-40-3

9. (A) Identify and remove cotter pin, nut, washers, and bolt; disconnect cable assembly.
10. (A,B) Attach nylon utility cord on cable assembly; remove cable and untie cord.

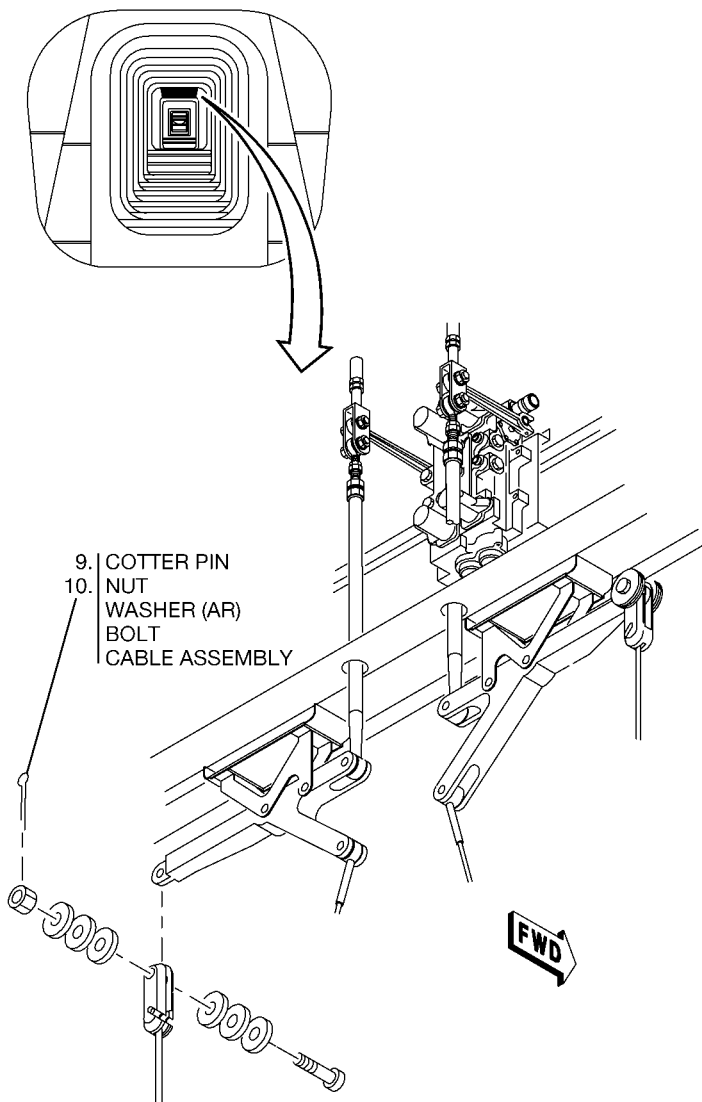

ICN-88277-G2742152-004-01

**2-15. REMOVAL FOR CABLE RUN 32C, REF DES
2742MP014.**

NOTE

Cable assembly 2742MP014 is identified on fairleads
by the number 32.

1. (A) Install clamp assembly on cable runs 31 and 32 aft of fairlead
at Station (STA) 1208.