

Exp No: 14**EMBEDDED C PROGRAM TO DISPLAY “HELLO WORLD” MESSAGE****AIM:**

To write an Embedded C program to display “HELLO WORLD” message using Keil Software.

SOFTWARE REQUIRED:

- Keil software

PROGRAM

```
#include <reg51.h>
#include <stdio.h>


char putchar(char c)
{
    SBUF = c;        // Load character into UART buffer
    while(TI == 0);  // Wait until transmission is complete
    TI = 0;          // Clear transmit interrupt flag
    return c;
}

void main(void)
{
    SCON = 0x50;      // UART Mode 1, 8-bit UART, enable receiver
    TMOD = 0x20;      // Timer1 Mode2 (8-bit auto reload)
    TH1 = 0xFD;       // 9600 baud rate (11.0592 MHz crystal)
    TL1 = 0xFD;

    TR1 = 1;          // Start Timer1
    TI = 1;           // Set TI initially

    while(1)
    {
        printf("Hello World!\r\n");
    }
}
```

OUTPUT

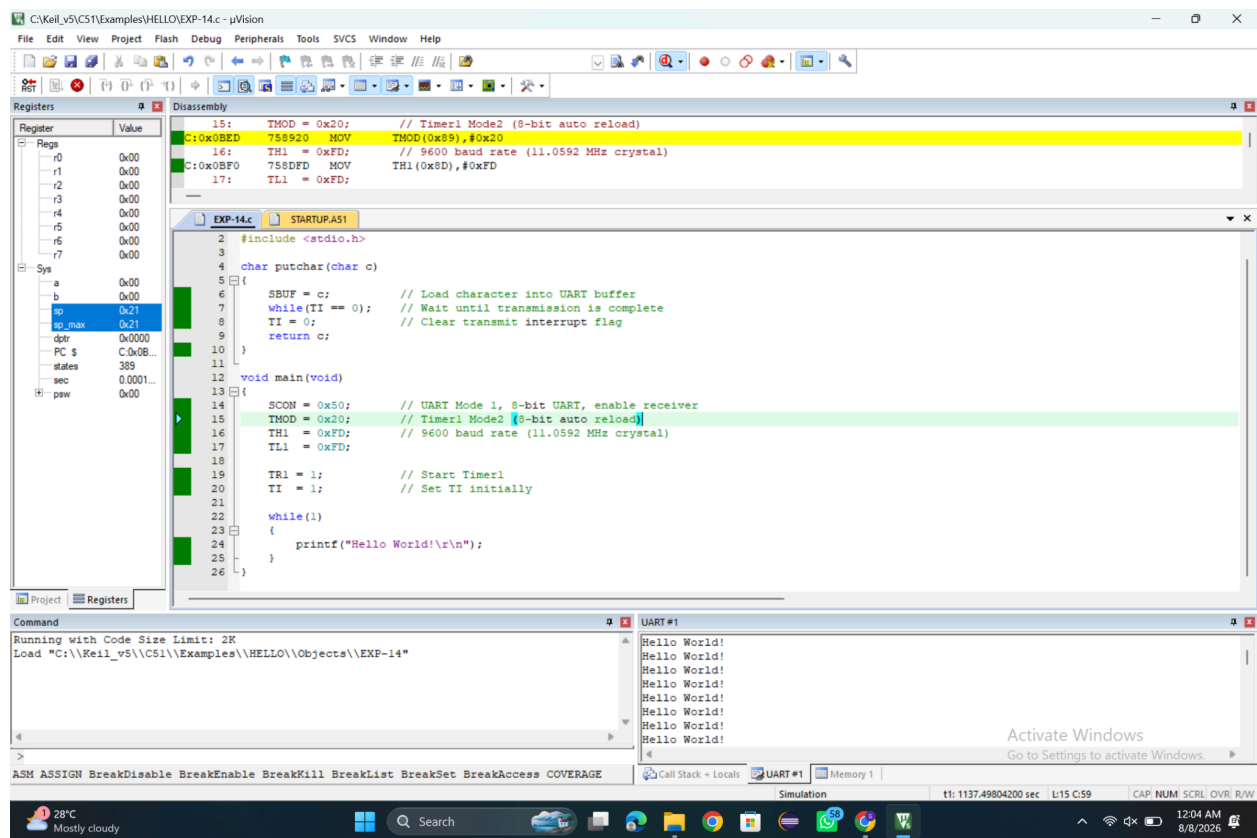

RESULT

Thus the program has been successfully verified and executed.