


CTR4A01 1-channel RS485 current transformer manual

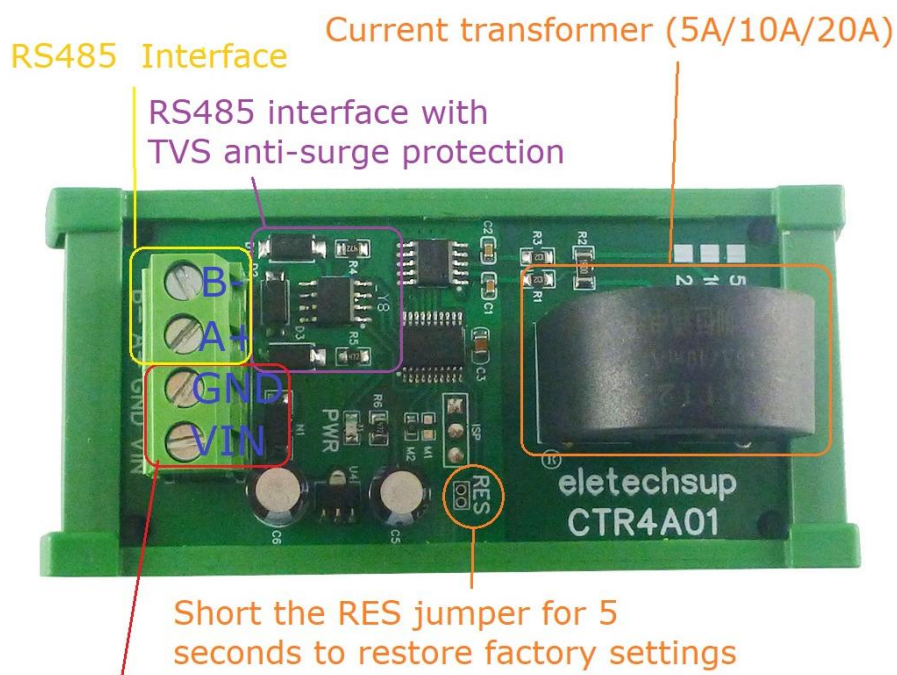

Power Supply Interface: DC 5-15V

Function description:

- 1 Working voltage 5-15V (DC 5V 9V 12V)
- 2 Working current: 8-12mA
- 3 MODBUS RTU command supports 03/04/06/16 function code
- 4 It can measure AC current with a voltage of 85-265V (frequency 50HZ/60HZ)
- 5 Current measurement ranges are 0.05-5A, 0.01-10A, 0.02-20A three versions
- 6 The current resolution is 0.001A, the measurement accuracy is 1%, if the error is greater than 1%, it can be calibrated
- 7 MODBUS RTU commands can be input by PLC in addition to computer serial port super terminal input
- 8 MODBUS RTU command mode, can support up to 247 devices in parallel
- 9 Size: 72*37*30 (board only), 89*40*50 (with shell)
- 10 Weight: 31 grams (board only), 69 grams (with case)


For command details, see "CTR4A01 MODBUS RTU Command"

Typical application:



IoT smart home
industrial control, industrial automation
Energy meter
Single-phase/three-phase AC detection

PLC Motor Fan

Wiring diagram:

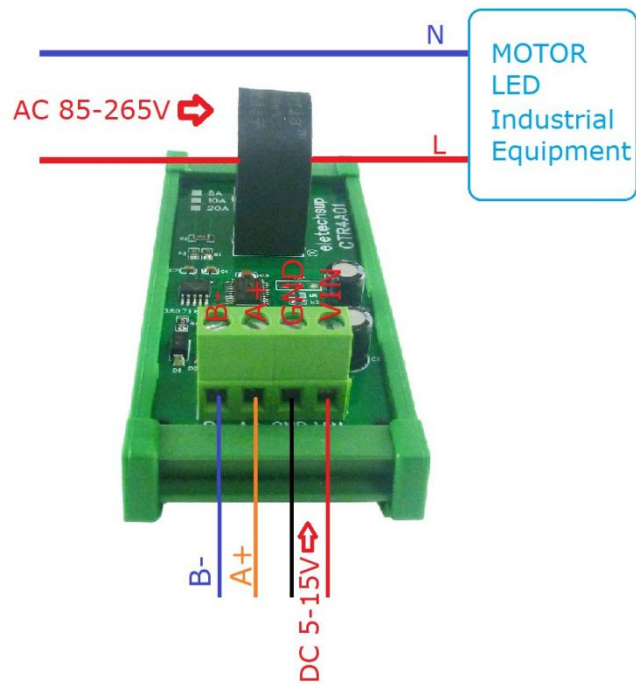


Single-phase and three-phase AC wiring diagram

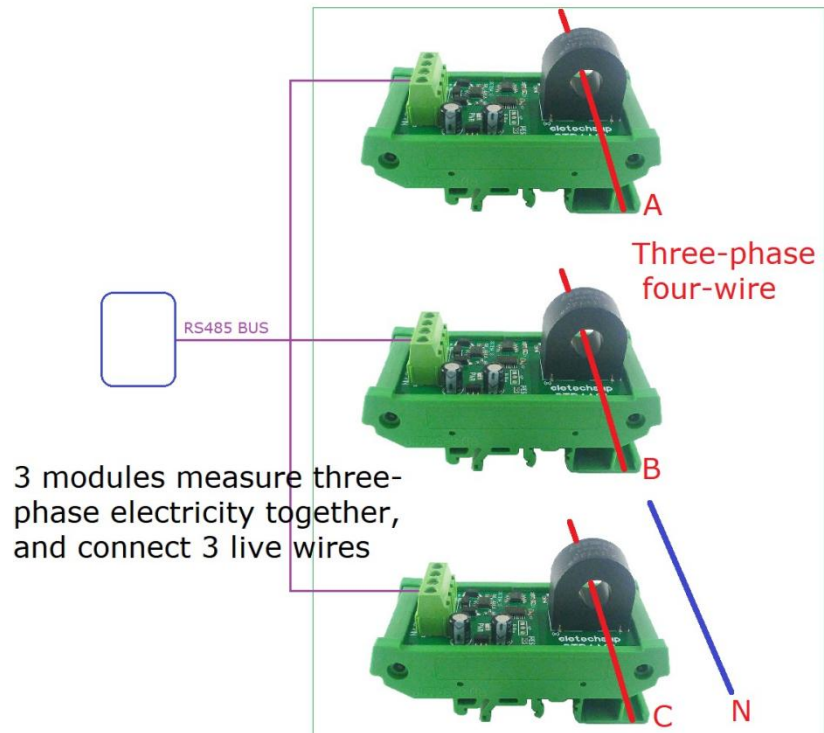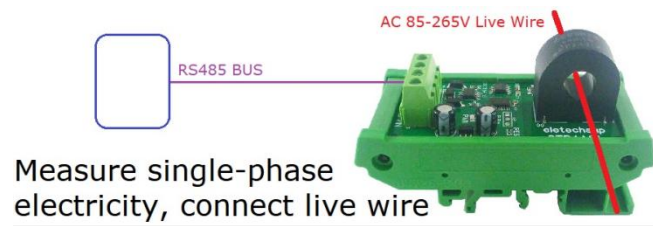

RS485 wiring diagram:

MODBUS command
PC

You can set different "Slave ID" by command

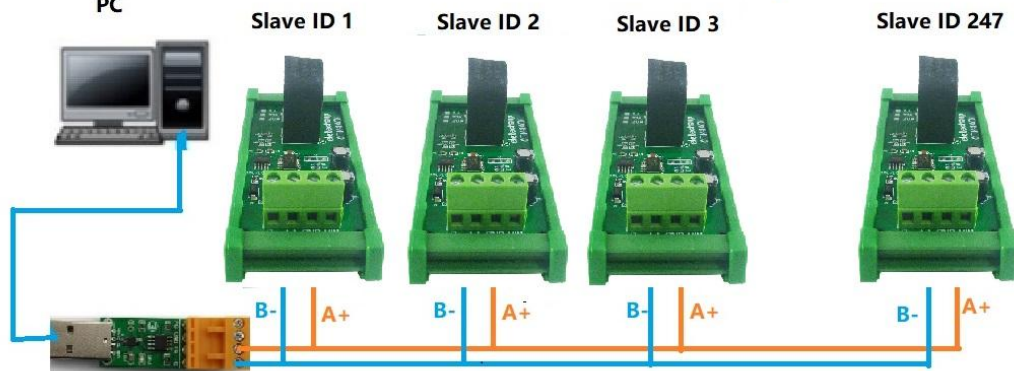

PLC

You can set different "Slave ID" by command

