
PRODUCTION MEETING · ANCIENT SPANISH MONASTERY GARDEN

Visiting Stage Tuning Map

Option B · Side stacks, subs behind the stage

TUNEIT SCORE	FLOOR EVEN	BASS SWING	HEADROOM	BOXES
98 — Excellent — out of 100	96% — within ±3 dB	3.6 dB — bass, 50-80 Hz	+19.0 dB — 98 dB show	8 — Main, Sub, Stage

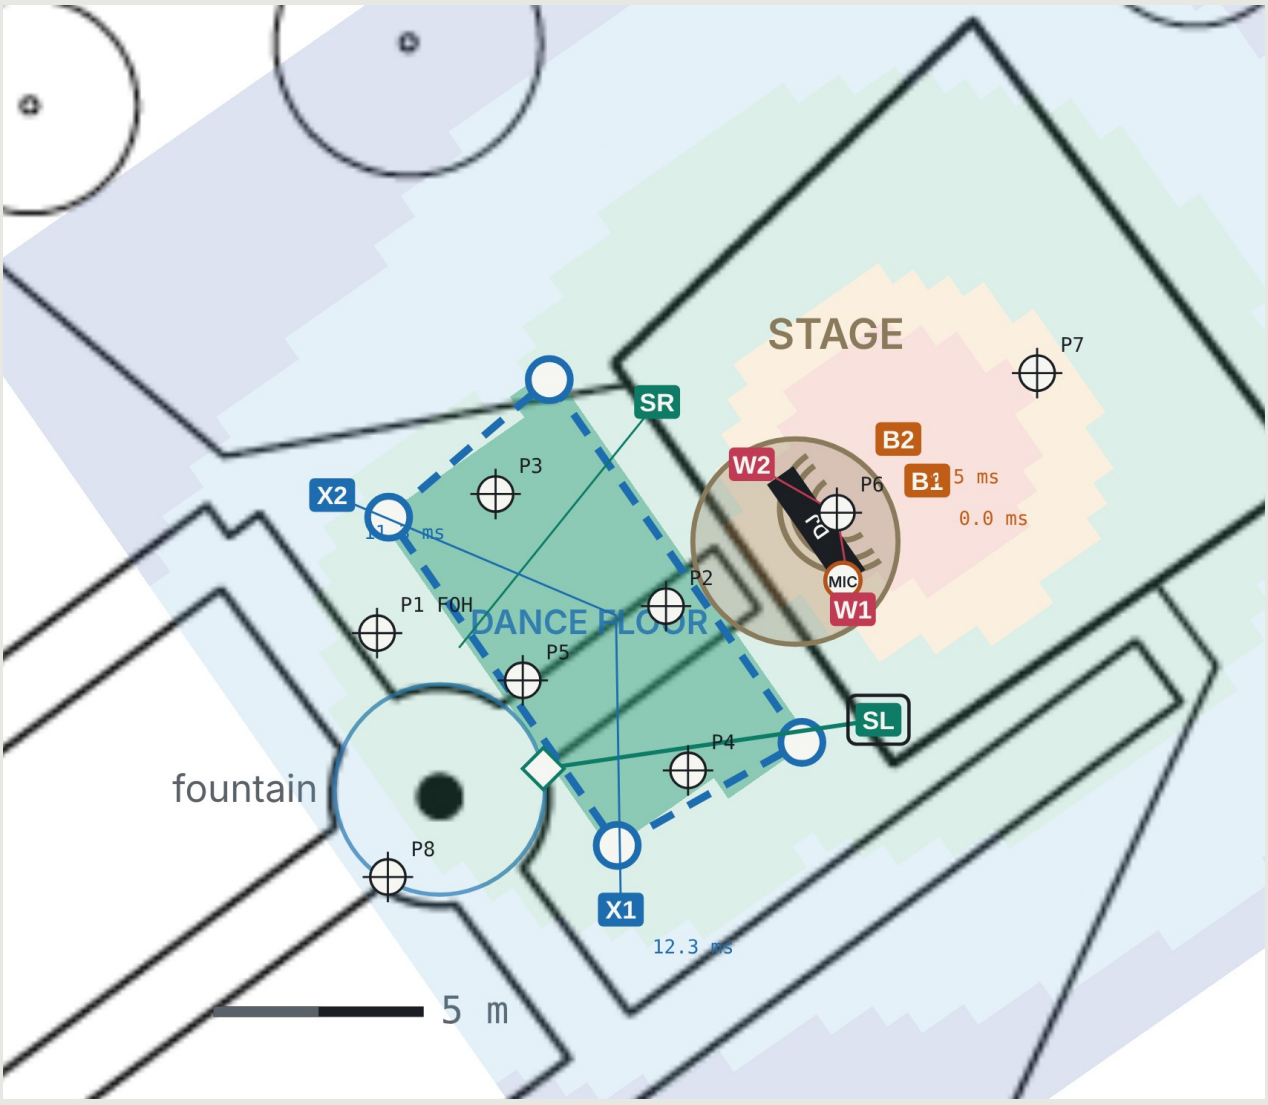

The plan as shown on the map, with the layers that were switched on. Coverage colours compare each spot with the middle of the dance floor.

01 · SUMMARY

What this layout delivers

Stage at P5, facing the fountain area; the dance floor is in front of it, between the stage and the fountain. Two VRX tops on a stand each side of the stage, toed in a little. Both subs side by side behind the stage in the old square. SRX fillers at the far corners. Simplest rig.

- 96% of the dance floor sits within ±3 dB of the middle of the dance floor, 99% within ±6 dB.
- Bass varies 3.6 dB across the floor, which is even.
- Tops on the stage: -12.5 dB against the floor, which keeps the stage clean.
- Level available at the middle of the dance floor: about 117 dB, +19.0 dB over a 98 dB show.
- Every rule kept: nothing on the dance floor, the front of the stage clear.
- Air 24 °C, 70% humidity, sound at 345.8 m/s.

02 · SPEAKERS

Speaker schedule

Position from the reference shown on the map. Delays and trims as set in the map; confirm by measurement.

ID	UNIT	MOUNTED	POSITION	HEIGHT	AIM OFF	TILT	DELAY MS	TRIM DB	TUNE AT
SL	JBL VRX: 2 line-array tops on a stand	Stand	0.8 out, 4.6 right	2.8 m	27° left	8.5° down	9.3	0	P1
SR	JBL VRX: 2 line-array tops on a stand	Stand	0.8 out, 4.6 left	2.8 m	16° right	9.1° down	9.3	0	P1
B1	JBL VRX sub	Floor	-3.4 out, 0.6 right	0.4 m	stage axis	-	0.0	0	P1
B2	JBL VRX sub	Floor	-3.4 out, 0.6 left	0.4 m	stage axis	-	0.5	0	P1
W1	JBL SRX stage monitor	Stage deck	-0.2 out, 2.1 right	0.6 m	at P6	23.3° up	-	0	P6
W2	JBL SRX stage monitor	Stage deck	-0.2 out, 2.1 left	0.6 m	at P6	23.3° up	-	0	P6
X1	JBL SRX on a stand	Stand	8.4 out, 4.8 right	2.2 m	124° left	4.9° down	12.3	-6	P5
X2	JBL SRX on a stand	Stand	8.4 out, 7.2 left	2.2 m	122° right	4.7° down	11.3	-6	P5

03 · TUNING POINTS

Where to measure

Type each reading into the map; the Off by column shows how far the model is from the room.

POINT	WHERE	TARGET	USE IT TO	PREDICTED	MEASURED	OFF BY
P1	FOH reference, behind the floor beside the fountain	98-100 dB(A) LAeq at peak	System EQ for the tops; sub-to-top alignment	95.7 dB	-	-
P2	Front of the floor	No more than the floor average + 4 dB	Front row not overpowered	98.5 dB	-	-
P3	Floor, house left	Floor average ± 3 dB	Set F2 (Option A)	97.4 dB	-	-
P4	Floor, house right	Floor average ± 3 dB	Set F1 (Option A)	98.2 dB	-	-

POINT	WHERE	TARGET	USE IT TO	PREDICTED	MEASURED	OFF BY
P5	Back of the floor, at the fountain	Floor average ± 3 dB	Set the SRX fillers X1, X2	96.5 dB	-	-
P6	DJ position	95-100 dB(A) from the monitors	Mains at least 10 dB under the monitors here	105.6 dB	-	-
P7	Behind the stage, the old square	As low as the show allows	Spill back into the square and toward the trees	102.1 dB	-	-
P8	Path beyond the fountain	Floor average - 6 dB	Spill toward the walkway and neighbours	93.7 dB	-	-

04 · ON SITE

Tuning sequence

- 1. Walk and mark. Tape the stage centre at P5, the four floor corners, every speaker, tower and tuning point using the out / left / right numbers from the stage.
- 2. Stage, subs and stands. Subs side by side behind the stage at the edge of the old square, tops on stands at the listed height and tilt, SRX fillers at the far corners. Cable ramps over the walkway.
- 3. Polarity and signal check. Pink noise through every box one at a time.
- 4. Mains at the middle of the floor, then FOH. System EQ for the garden: little low-mid build-up outdoors, watch the wind. Set the reference level.
- 5. Subs to tops. Align phase at the crossover in the middle of the floor; the map lists the delay that waits for the subs behind the stage. Check P2.
- 6. Fills and ambience fillers at their points. Mains on, speaker on: set delay so the stage leads, then level to land within ±3 dB of the floor average. Type each reading into its tuning point.
- 7. Stage. Monitors with a DJ on the decks; ring out the MC mic with everything running; mains at P6 at least 10 dB under the monitors.
- 8. Neighbours. Walk P7 in the old square behind the stage, P8 on the path beyond the fountain and toward the cloister at show level; trim the subs if the Shared Ball can hear them.
- 9. Full walk with music. Floor, walkway, stage. Log the final values, save a full-house version with the fillers 2 to 3 dB brighter, and lock the processors.

05 · SIGN-OFF

Agreed for the show

TECHNICAL DIRECTION

DJ UZO

signature _____ date _____

AUDIO VENDOR

signature _____ date _____

VENUE / PRODUCTION

signature _____ date _____