
PRODUCTION MEETING · ANCIENT SPANISH MONASTERY CLOISTER

Shared Ball Cloister Tuning Map

Option 4 · Team layout 15 Oct, tuned

TUNEIT SCORE	FLOOR EVEN	BASS SWING	HEADROOM	BOXES
58 Fair, out of 100	58% within ±3 dB	14.3 dB bass, 50-80 Hz	+11.8 dB 98 dB show	15 Subwoofer block,

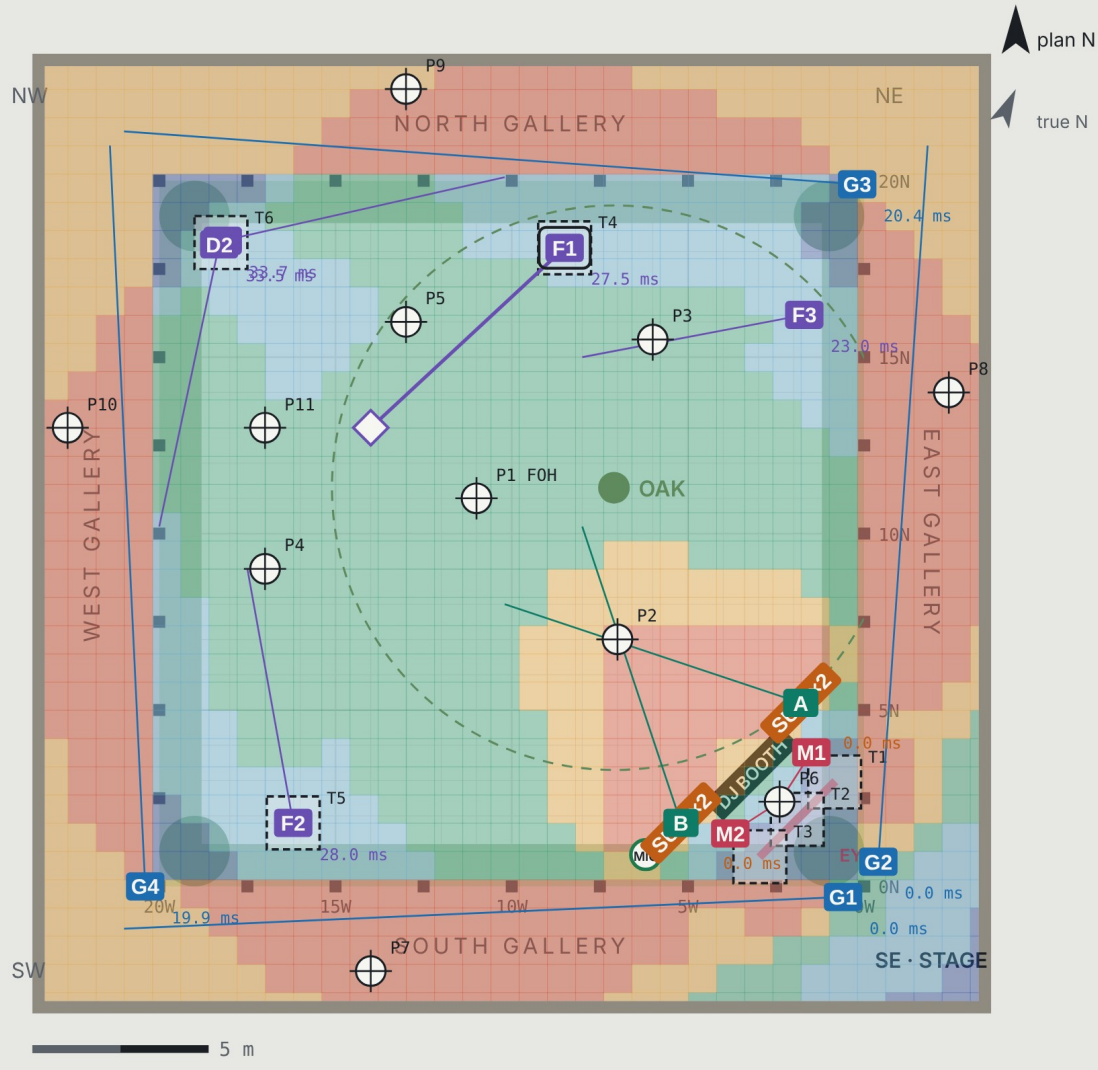

The plan as shown on the map, with the layers that were switched on. Coverage colours compare each spot with P1 (FOH).

01 · SUMMARY

What this layout delivers

Your 15 Oct layout with three changes: F1 turned away from the booth, one added 15" top (F3) hidden behind the NE corner palm to fill the weak NE corner of the floor, and gallery speakers kept tucked behind the corner piers. Needs 1 extra top from FPS.

- 58% of the dance floor sits within ±3 dB of P1 (FOH), 76% within ±6 dB.
- Bass varies 14.3 dB across the floor, so expect some build-up and gaps.
- Tops on the stage: -10.8 dB against the floor, which keeps the stage clean.
- Level available at P1 (FOH): about 110 dB, +11.8 dB over a 98 dB show.
- Every rule kept: nothing on the dance floor.
- Air 24 °C, 70% humidity, sound at 345.8 m/s.

02 · TOWERS

Towers and what they carry

TOWER	NAME	POSITION (FROM	HEIGHT	LIGHTS ON TOP	SPEAKERS	SPEAKER LOAD	MASKING
T1	Eye, east leg	3.0 N, 0.8 W	3.05 m	Sharpy Beam	none	~ 0 kg	Clad in the eye scenic
T2	Eye, centre	1.9 N, 1.9 W	3.05 m	Robe Mega Pointe through the pupil	none	~ 0 kg	Clad in the eye scenic
T3	Eye, south leg	0.8 N, 3.0 W	3.05 m	Sharpy Beam	none	~ 0 kg	Clad in the eye scenic
T4	North wall	18.1 N, 8.5 W	3.05 m	Sharpy Beam + laser, hazer at base	F1 @ 2.6 m	~ 30 kg	Scrim wrap, open speaker front
T5	SW corner	1.8 N, 16.2 W	3.05 m	Sharpy Beam + laser, hazer at base	F2 @ 2.6 m	~ 30 kg	Scrim wrap, open speaker front
T6	NW corner	18.3 N, 18.3 W	3.05 m	Sharpy Beam + laser, hazer at base	D1 @ 2.6 m, D2 @ 2.6 m	~ 60 kg	Full drape on the corner faces: soaks the corner echo

03 · SPEAKERS

Speaker schedule

Position from the reference shown on the map. Delays and trims as set in the map; confirm by measurement.

ID	UNIT	MOUNTED	POSITION	HEIGHT	AIM (PLAN)	TILT	DELAY MS	TRIM DB	TUNE AT
S1	2 × L-Acoustics 18" sub, cardioid	Floor	5.2 N, 1.8 W	0.5 m	stage axis	-	0.0	-3	P1
S2	2 × L-Acoustics 18" sub, cardioid	Floor	1.8 N, 5.2 W	0.5 m	stage axis	-	0.0	-3	P1
A	L-Acoustics 15" coaxial top	Pole on sub	5.2 N, 1.8 W	2.8 m	288°	7.7° down	0.0	0	P1
B	L-Acoustics 15" coaxial top	Pole on sub	1.8 N, 5.2 W	2.8 m	342°	7.7° down	0.0	0	P1

ID	UNIT	MOUNTED	POSITION	HEIGHT	AIM (PLAN)	TILT	DELAY MS	TRIM DB	TUNE AT
F1	L-Acoustics 15" coaxial top	T4 North wall	18.1 N, 8.5 W	2.6 m	227°	7.6° down	27.5	-8	P5
F2	L-Acoustics 15" coaxial top	T5 SW corner	1.8 N, 16.2 W	2.6 m	350°	7.8° down	28.0	-8	P4
F3	L-Acoustics 15" coaxial top (ADD to FPS quote)	Pole on sub	16.2 N, 1.7 W	2.4 m	259°	7.1° down	23.0	-10	P3
D1	L-Acoustics 15" coaxial top	T6 NW corner	18.3 N, 18.2 W	2.6 m	77°	7.0° down	33.7	-6	P5
D2	L-Acoustics 15" coaxial top	T6 NW corner	18.2 N, 18.3 W	2.6 m	192°	7.0° down	33.5	-6	P11
G1	JBL SRX812P	Stand	-0.3 N, 0.6 W	2.0 m	267°	1.1° down	0.0	-14	P7
G2	JBL SRX812P	Stand	0.7 N, -0.4 W	2.0 m	4°	1.1° down	0.0	-14	P8
G3	JBL SRX812P	Stand	19.9 N, 0.2 W	2.0 m	274°	1.1° down	20.4	-18	P9
G4	JBL SRX812P	Stand	0.0 N, 20.4 W	2.0 m	357°	1.1° down	19.9	-18	P10
M1	JBL SRX812P	Stand	3.8 N, 1.5 W	1.4 m	213°	6.9° up	-	0	P6
M2	JBL SRX812P	Stand	1.5 N, 3.8 W	1.4 m	57°	6.9° up	-	0	P6

04 · TUNING POINTS

Where to measure

Type each reading into the map; the Off by column shows how far the model is from the room.

POINT	WHERE	TARGET	USE IT TO	PREDICTED	MEASURED	OFF BY
P1	FOH reference	98-100 dB(A) LAeq at peak	System EQ for the mains; sub-to-top alignment	98.0 dB	-	-
P2	Front of floor	No more than P1 + 4 dB	Front rows not overpowered	104.0 dB	-	-
P3	NE floor corner	P1 ± 3 dB	Set F3	96.4 dB	-	-
P4	West band	P1 ± 3 dB	Set F2	95.8 dB	-	-
P5	North band	P1 - 3 to 0 dB	Set F1 and D1	95.8 dB	-	-
P6	DJ position	95-100 dB(A) from the monitors	Sub quieter here than at P2	93.2 dB	-	-
P7	South gallery	82-86 dB(A)	Set G1	91.3 dB	-	-
P8	East gallery	82-86 dB(A)	Set G2	91.2 dB	-	-
P9	North gallery	82-86 dB(A)	Set G3	90.2 dB	-	-
P10	West gallery	82-86 dB(A)	Set G4	90.4 dB	-	-
P11	West band	P1 ± 3 dB	Set D2	95.4 dB	-	-

05 · ON SITE

Tuning sequence

- 1. Walk and mark. Tape every tower, speaker and tuning point from the SE pier using the N / W numbers.
- 2. Build and mask the towers. Ballast, light on top, speakers hung under it at the listed height and tilt, scrim on.
- 3. Polarity and signal check. Pink noise through every box one at a time.
- 4. Mains at P1. System EQ for the stone: trim low-mid build-up, then top end. Set the FOH reference level.
- 5. Subs to tops at P1. Align phase at the crossover; confirm the cardioid rejection at P6.
- 6. Fills and delays at their points. Mains on, speaker on: set delay so the stage leads, then level to land within ±3 dB of P1.
- 7. Galleries at P7 to P10. Delay, then level to 82-86 dB(A).
- 8. Booth and singer. Monitors with a DJ on the decks; ring out the opera mic with everything running.
- 9. Full walk with music. Floor, galleries, booth. Log the final values and lock the processors.

06 · SIGN-OFF

Agreed for the show

TECHNICAL DIRECTION

DJ UZO

signature _____ date _____

AUDIO VENDOR

signature _____ date _____

VENUE / PRODUCTION

signature _____ date _____