Cody / Dal collegamento alla decisione

Conservo il PC; distinguo notifica, scelta e conferma di consegna.

Conservo il PC, poi ricevo il lavoro

Tengo distinti pairing, presenza LAN e attivita' dell'ultimo prompt reale. L'estensione EVENT porta avvisi e domande esplicite; non inventa una chat quando manca un hook. Il contesto dichiarato e' un'etichetta.

Decido soltanto dopo aver letto

Da Codex needs you apro due o tre scelte. La selezione apre un riepilogo con Send e Back. Mostro Reply sent solo dopo l'ACK del destinatario. Una domanda dura 180 secondi; la scadenza non sceglie al mio posto.

Le PR restano in sola lettura

Conservo la decisione A03: gli screen 21-24 riportano stati e nomi dei check falliti. Il 25 e' ritirato; diagnosi e azioni PR restano sul PC. Un'approvazione nativa rimanda a On your PC, senza Allow o Deny su Cody.

Come leggo questa revisione


Ho aggiornato pagine principali e limiti del flow. Conservo gli addenda precedenti e aggiungo errata datate. Distinguo il contratto nei sorgenti dalle prove host e fisiche; registro gli esiti correnti in done.md.

From the code to the retained PC


Screens 12 -> 13 -> 14 -> 15 / association and presence are different facts.



CODE

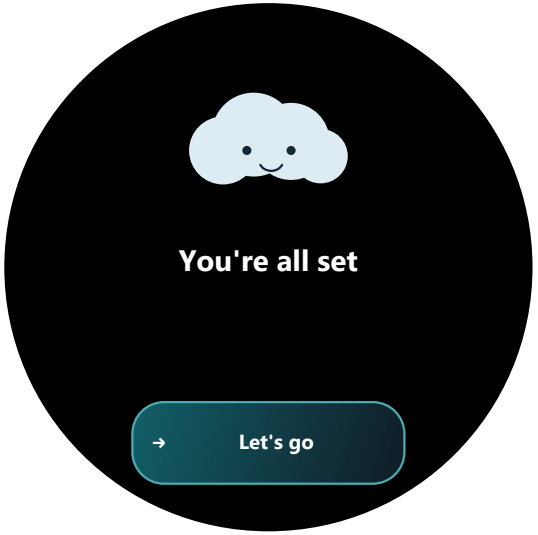

ALL-SET

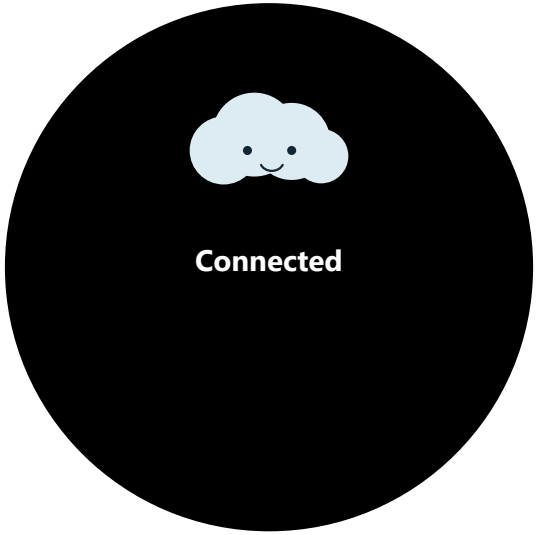

CONNECTED

Prepare, then read

12 shows Preparing secure code / Please wait / About 30 seconds until a code exists. The estimate is not measured progress. Use only all six characters visible on the intended Cody after discovery. The backend window is five minutes; screen inactivity is three minutes from code readiness.

Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.

STATIC SCHEMATICS / illustrative fonts and values / no device capture

Before connecting Codex

Screens 04-09 and 42 / provisioning is separate from Codex pairing.

A real local connection

09 offers Continue only with valid current Wi-Fi/IP. No connection on 42 offers Network setup or Later. CCP needs the local LAN; public Internet availability is a separate fact. Debug handoff 39 needs a fresh tap; Release continues to 09.

Reopen choices

Hold the visible character still for 1.5 seconds to open Setup. Connect Codex and Network setup share one row; Options is centered below. Release the opening contact before selecting. Back retraces the valid previous route.

Wait for the actual secure code

Screens 12 -> 13 -> 14 -> 15 / association and presence are different facts.



CODE

Prepare, then read

12 shows Preparing secure code / Please wait / About 30 seconds until a code exists. The estimate is not measured progress. Use only all six characters visible on the intended Cody after discovery. The backend window is five minutes; screen inactivity is three minutes from code readiness.

Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.

STATIC SCHEMATICS / illustrative fonts and values / no device capture

Associo dal PC giusto

Prima scopro Cody; poi uso solo il codice visibile sul dispositivo.

Chiedo a Codex di collegarlo

Con CCP attivo chiedo di scoprire Cody e associarlo con il codice attuale. Uso il dispositivo fisico come fonte, senza recuperare vecchi codici da immagini o documenti.

Trovo un solo dispositivo

Il codice deve corrispondere a una sola offerta corrente. Con nessuna o piu' corrispondenze tengo l'errore esplicito. Non scelgo chi risponde per primo.

Aspetto il risultato


Lascio aperta la schermata del codice. Una richiesta ammessa non e' ancora pairing concluso: attendo salvataggio e conferma su entrambi i lati.

Poi invio lavoro normale


Seguo automaticamente la chat dell'ultimo prompt reale. Se vedo Waiting for Codex controllo hook ed esecuzione locale; cambiare pairing non crea eventi.

All set, then connect immediately

Screens 12 -> 13 -> 14 -> 15 / association and presence are different facts.

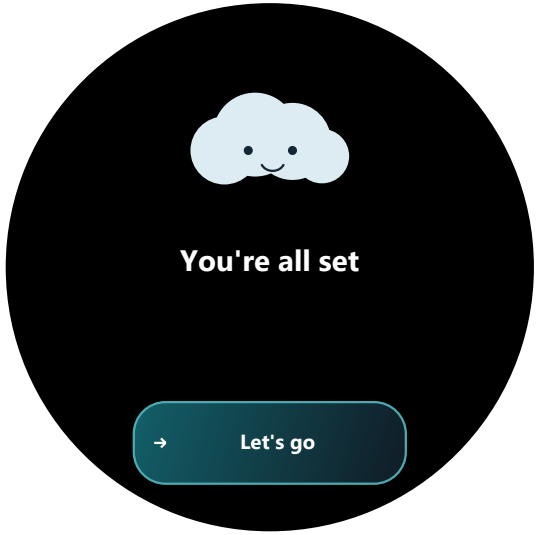

ALL-SET

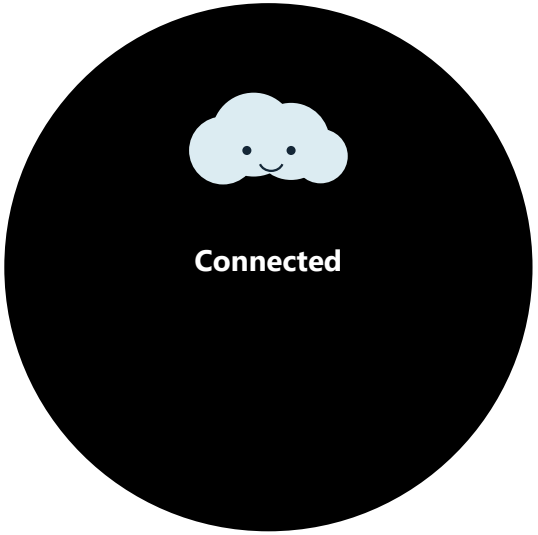

CONNECTED

Prepare, then read

12 shows Preparing secure code / Please wait / About 30 seconds until a code exists. The estimate is not measured progress. Use only all six characters visible on the intended Cody after discovery. The backend window is five minutes; screen inactivity is three minutes from code readiness.


Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.


STATIC SCHEMATICS / illustrative fonts and values / no device capture

Setup keeps the saved PC explicit


Screen 41, decision 40 and retained-pairing variants / no implicit replacement.

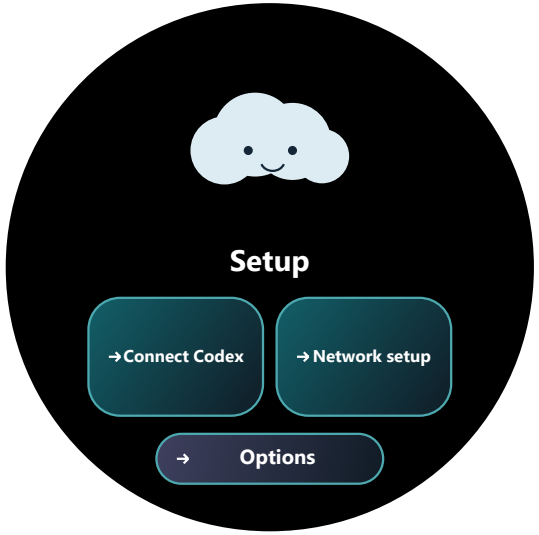

SETUP

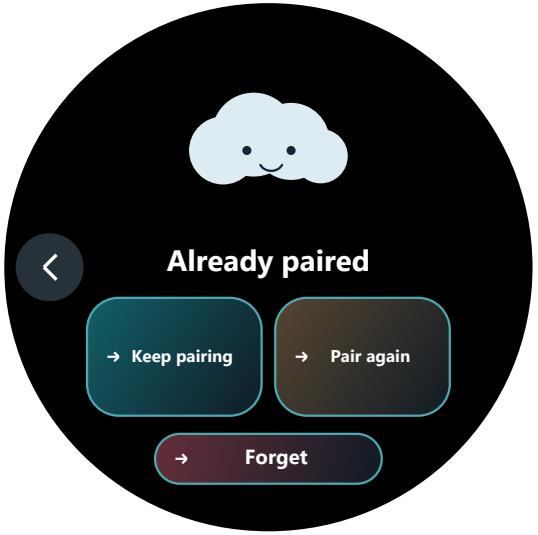

RETAINED

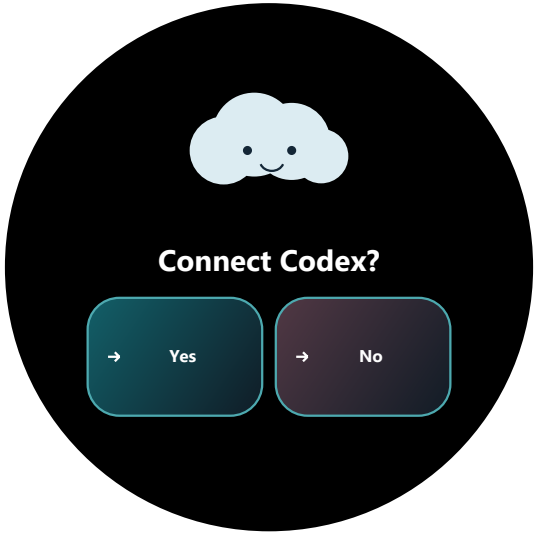

CHOICE

Reopen choices

Hold the visible character still for 1.5 seconds to open Setup. Connect Codex and Network setup share one row; Options is centered below. Release the opening contact before selecting. Back retraces the valid previous route.

Keep, replace or forget

Already paired offers Keep pairing, Pair again and Forget. Only Pair again authorizes replacement; Forget opens a second confirmation. Pairing paused identifies an incomplete candidate. Pairing error preserves the storage cause and admits explicit removal only.

STATIC SCHEMATICS / illustrative fonts and values / no device capture

Search the same retained PC

Screen 14 / absence of a PC is not absence of pairing.

Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.

Keep, replace or forget


Already paired offers Keep pairing, Pair again and Forget. Only Pair again authorizes replacement; Forget opens a second confirmation. Pairing paused identifies an incomplete candidate. Pairing error preserves the storage cause and admits explicit removal only.

08 / 100 PCs. One chosen connection.

You choose by pairing from your Codex PC. Cody then remembers that relationship.



ONE NETWORK

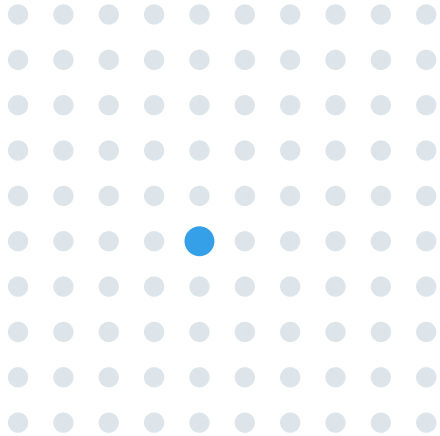

100 PCs / 1 paired

Other PCs stay outside this connection.

Cody follows the saved pairing, regardless of which PC answers first.

SHARED OFFICE / MANY-PC NOTES

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

Connected, poi avvisi e domande

Screen 15, 26 e 27 / l'etichetta context non e' l'identita' della chat.

26 / Codex needs you

Ricevo una domanda dal chiamante MCP esplicito; per gli avvisi mostro From Codex. Leggo testo inglese ASCII. Il contesto e' dichiarato dal chiamante, senza attribuirgli l'identita' verificata della chat o degli hook.

26 -> 27 / Apro la domanda

Con Open leggo le due o tre risposte e le rispettive descrizioni. Conservo una sola domanda aperta per dispositivo. Attivita', notifiche successive e indicatori batteria non la sostituiscono.

Approvazioni / On your PC

Un PermissionRequest puo' richiamare la mia attenzione, ma la decisione nativa resta nel computer. Non aggiungo Allow, Deny o un'autorizzazione generica ricavata da un testo incompleto.

Notifica non significa risposta

Una notifica non offre scelte e non produce REPLY. Riservo Reply sent alle risposte consegnate. Per le PR ammetto soltanto gli stati e la lista read-only previsti da A03; nessuna azione operativa.

Offline non risponde per me

Screen 26/27, 32 e 35A/35B / conservo il percorso e rispetto la scadenza.

Domanda protetta

Una domanda aperta resta davanti agli aggiornamenti ordinari. Conservo selezione e percorso. Batteria, charging o un avviso successivo non fanno sparire una decisione che devo ancora leggere.

32 / Offline

Conservo il contenuto e cerco il PC salvato. La scadenza continua: tornare sulla LAN non rinnova i 180 secondi. Timeout, Cancel e disconnessione non scelgono un'opzione e non confermano consegna.

Scadenza e annullamento

Prima di Send mostro Request expired; dopo Send, Reply unconfirmed e Check on your PC. Uso Request cancelled o Reply rejected per gli altri esiti, con Done. Non riapro stati terminali.

35A / 35B e nuovi avvisi

Mantengo Wi-Fi durante lo standby di Cody associato. Accodo il wake per un avviso autenticato al worker power, preservando AFE e wake word. Registro a parte gli esiti del risveglio fisico.

Retry the failed operation

Screens 08, 12, 14 and 40 / preserve the original error and identity.

Show QR, then Pair Cody

05 opens the installation QR on 06 without starting radios. Pair Cody starts Bluetooth on 07. A session QR appears only at ReadyToScan, then retires when credentials or connection are in progress. Cancel waits for confirmed cleanup.

Save before confirming

Next opens Settings: Personalization / Choose Cody's look. Continue opens Skin: Pearl Mist, Aurora Veil, Cosmic Stardust, Enchanted Mosaic and Dreamwave, saved by stable ID. Saving retains the prior value; successful write/readback confirms the change. Save failed and Retry preserve the cause and requested value; no silent repair.

Keep, replace or forget

Already paired offers Keep pairing, Pair again and Forget. Only Pair again authorizes replacement; Forget opens a second confirmation. Pairing paused identifies an incomplete candidate. Pairing error preserves the storage cause and admits explicit removal only.

Chi conferma la risposta?

Screen 31 / il destinatario MCP deve riconoscere la ricezione.

Ticket e capability privati

Il chiamante MCP crea un ticket di 128 bit con capability privata. Poll e cancel richiedono entrambi i valori. La capability resta sul PC e non viaggia sulla LAN.

received non e' delivered

Il poll restituisce scelta e answer_id. Un poll successivo con acknowledge_answer_id uguale prova la ricezione del chiamante: solo allora passo a delivered e allo screen 31.

Invio e risposta ripetuta

Dopo pending entro in Sending locale, senza cambiare scelta. Received non e' ancora delivered. Ripetere la stessa risposta e' idempotente; una diversa non sovrascrive la prima.

Scadenza e consegna incerta

I 180 secondi valgono anche in received. Se ho gia' ammesso Send mostro Reply unconfirmed: puo' mancare solo l'ACK. Prima di Send uso Request expired. Nessun Retry o ACK tardivo riapre la domanda.

13 / Sketch the next refinement

Use this page to mark decisions, redraw a moment, or capture what feels unclear.

DEVICE

PC / CODEX

CONNECTION FLOW

DECISIONS TO KEEP

OPEN QUESTIONS

Visual references: Cody Planning Atlas v1 and Navigation Atlas v1. Connection flow: current CCP source checkpoint.
AI-generated concept scenes and illustrative screen layouts; device, PC and LAN behavior still require runtime validation.

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

Startup: two saved decisions

Local Wi-Fi/IP first. Then the retained Codex pairing. Public Internet is not required.

1 / No saved Wi-Fi profile

A valid absent-profile observation opens 04 > 05 > 06 > 07 > 09. Debug may show 39 before 09. Continue: 10 > 36 > 11 (skin), then the Codex decision.

2 / Saved Wi-Fi; waiting for the network


42 / No connection keeps the profile while the Wi-Fi owner reconnects. Network setup reopens 04-09; Later returns to Idle. Invalid/stale data shows UNAVAILABLE.

3 / LAN ready; no saved Codex pairing

40 / Connect Codex? Yes starts the code on 12. No returns to 16 / Idle without a settings write or CCP request. The next boot may ask again.

4 / LAN ready; saved Codex pairing

Adopt the saved attempt and search on 14. Only authenticated READY enters 15. A retained identity alone never means the PC is connected.

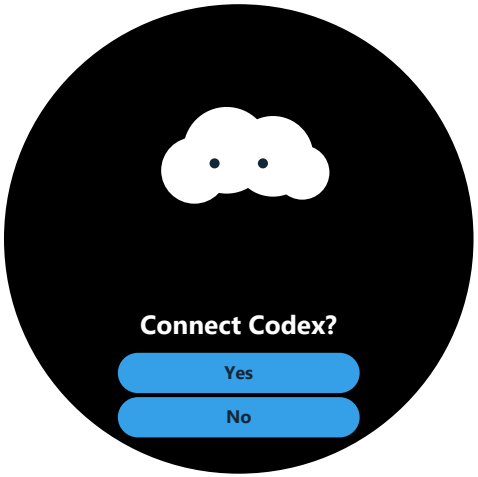

40 / Explicit Yes or No

Illustrative UI. Choice controls do not start pairing until the user acts.

Reopen setup from Cody

Hold the visible character still for 1.5 seconds. No button-based factory reset is added.

41 / Setup

Connect Codex opens a fresh display-code attempt. Network setup reopens 04-09. Left Back returns to Idle. Opening or leaving the menu erases no Wi-Fi, skin or pairing.

Keep the gesture deliberate


Available from stable Idle, PC search/connected and terminal CCP errors. Moving more than 12 px, a sample gap over 250 ms, rotation or a lifecycle interruption cancels the hold. Busy work and active provisioning are excluded; release before choosing.

PWR / existing policy

Single: standby/wake; active Debug defaults to screenshot countdown. Long release: standby. Debug double within 500 ms, or a continuous 3-second hold: restart preserving data.

BOOT / existing policy

Short: restore a dim/sleeping panel first, otherwise toggle fullscreen/status arcs. Hold 3 seconds: Debug restart; Release has no firmware reset action. Saved Wi-Fi and CCP survive restart.

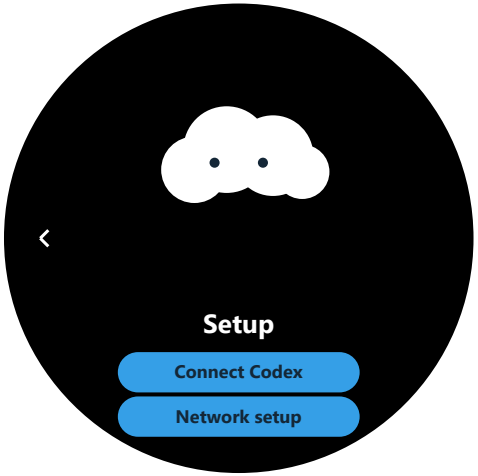

41 / Reversible setup access

Illustrative UI. A true factory erase is a separate explicitly requested operation.

Errata and corrections

Revision date: 09 October 2026 / CODY-SETUP-20261009

Original analysis gap

The initial analysis omitted startup with Wi-Fi already configured but no saved Codex pairing, and did not define a reversible user entry to setup. This was an original analysis gap (buco di analisi iniziale), now addressed in source.

Affected original pages and screen IDs

Original pages 02 (whole journey), 03 (prerequisites), 04 (code), 07-08 (Idle/search), 11 (returning PC) and 13 (owners); screens 11-16.

Corrections

Add 40 / optional Yes-No Codex choice, 41 / character-hold Setup, and 42 / reconnect wait. 09 means local Wi-Fi/IP; 11 selects a skin. No/Later performs no persistence or new CCP request. Saved pairing returns to 14 and requires authenticated READY for 15. PWR/BOOT do not clear pairing.

Preservation

All 14 previous pages, earlier corrections, bookmarks and unrelated content are retained. This dated addendum supersedes only the cited startup/setup/install statements; the original numbering stays stable.

Evidence and limits

Firmware source implementation and static integration review completed. PDF pages rendered and visually reviewed. No firmware tests, validation scans, configure/build/size, simulator execution, device pairing/input, flash or erase accompanied this revision. Runtime validation is pending.

Setup after standby

Hold Cody for 1.5 seconds to choose Network setup or Connect Codex.

04-06 / Escape the network loop


After inactivity, Welcome previously sent its first touch straight back to Let's pair. Welcome now opens 41 on a stationary tap release. A character hold also opens 41 from timeout Welcome, Let's pair or the installation QR page when no operation is busy.

35B / Wake, then hold

A finger already down during wake starts its 1.5-second hold only on a fresh acquired sample with the restored visible character. Hidden standby/wake time never counts. Movement over 12 px, report gaps over 250 ms or rotation cancel the hold. Release before choosing.

41 / Two explicit destinations

Upper Connect Codex opens 12 and its six-character CCP code using the local Wi-Fi/IP connection. Lower Network setup explicitly opens 04-09. No Internet probe is required. Active provisioning, worker admission and pending cancellation block menu access.

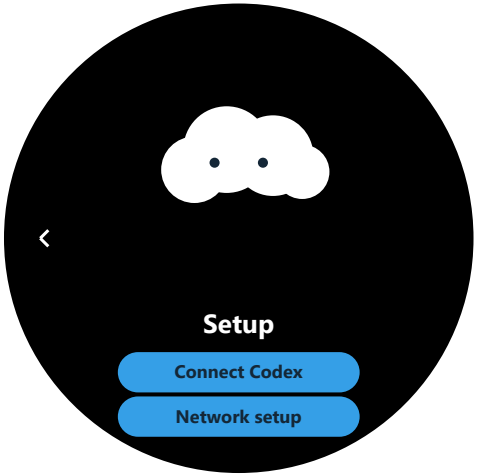

41 / Same choices after wake

Illustrative UI. Existing credentials and retained CCP pairing are preserved.

Errata and corrections

Revision date: 09 October 2026 / recovery correction

Original analysis gap

The first analysis did not reconcile the legacy Welcome timeout/touch path with reopening setup after standby. This was an original analysis gap (buco di analisi iniziale).

Affected pages and screens

Previous setup addendum: page 16. Affected screen IDs: 04, 05, 06, 12, 35B and 41. Earlier dated errata remain intact.

Corrections

Timeout Welcome tap release and stationary character holds on resting 04-06 reopen 41. A hold spanning wake starts only after visible restoration. Connect Codex goes to 12; Network setup goes to 04-09. Busy work and pending cleanup cannot be bypassed.

Evidence and limits

A user-authorized 90-second passive serial capture confirmed LAN/DHCP, Welcome inactivity return and standby. No Connect Codex press occurred in that capture; the initial wrong-selection report remains unresolved. The correction has static source review; corrected physical behavior still needs observation.


Preservation

All 17 preceding pages, prior errata and unrelated content are retained. This addendum supersedes only the cited escape/gesture behavior. Saved credentials are not erased.

Cody action language

IMPORTANT UI DECISION / approved 09 October 2026 / binding for future screens



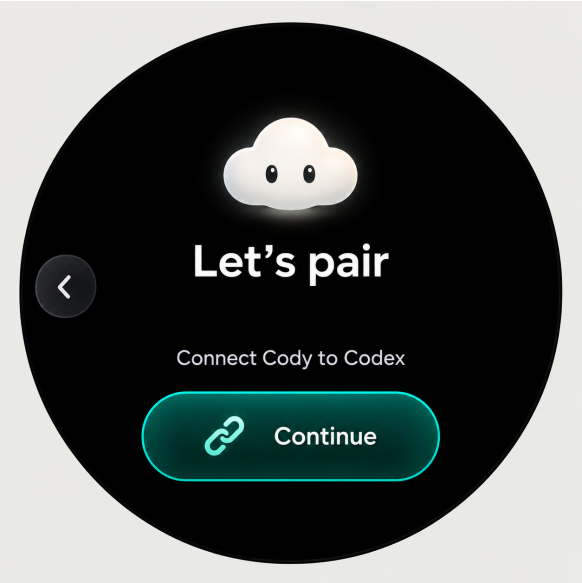

Layout rule

Two actions: rounded cards side by side. Three: the same pair plus one centered action below. One: a wide centered capsule with its icon left of the label.

Shared visual language

Dark restrained gradients, thin semantic borders, white labels and action icons. Teal: affirmative/Codex; blue: network; graphite: No/Later/Options; amber: Retry/Cancel.

Circular geometry

Keep Back separate at the left. Share rendering and touch bounds in every orientation. QR pages keep the quiet zone and use the compact single-action variant.

Options and touch continuity

Setup keeps Network setup and Connect Codex distinct. Options opens screen 10.

41 / Setup

Left card: Connect Codex. Right card: Network setup. Centered third action: Options. Options opens 10 / Make it yours, then 36 and 11 / skin. Done returns to Setup; Back retraces this local preferences path. No network or Codex association is erased or implicitly started.

40 / Connect Codex? and 42 / No connection

Yes/No and Network setup/Later are side by side, with purpose-specific icons and colors. Their existing explicit backend admission stays intact. Screen IDs 05-15 and 36 share the action styling where an action is present.

Observed freeze / original cause

An authorized 90-second reset/capture recorded Yes at 16497 ms, entry to Connect Codex at 16498 ms, then a CST9217 report with fifteen FF bytes and ACK=FF at 17112 ms (expected AB). ESP_ERR_INVALID_RESPONSE stopped the renderer. LAN/IP was ready.

Scoped runtime correction

The touch owner still rejects malformed reports and publishes the real error. After startup only, that acquisition error is optional for rendering. Discard queued gesture reports, cancel the gesture and require a real acquired release before another press. No release is invented. The same acquisition error can mean an I2C NACK; its origin is not inferred. Startup, other acquisition errors, locks and route failures remain terminal.

Evidence boundary

Native source integration and approved mockups are documented here. The underlying cause of the FF report and corrected physical touch/standby behavior remain unverified. A successful build/flash alone does not establish those outcomes.

Errata and corrections

Revision date: 09 October 2026 / important UI decision and touch correction

Important design decision

The user approved the two-column pair plus centered third action, and the wide single action with icon to the left. These are binding layouts from this revision onward. Gradients, icons and semantic colors are required across Cody screens.

Affected original material

Original pages 02 (whole journey), 03 (prerequisites), 04 (code), 07-08 (Idle/search), 11 (returning PC) and 13 (owners); screens 11-16. Also affected: screens 05-15, 35B, 36 and 40-42. Earlier stacked-blue control illustrations are superseded only in their action layout/styling.

Original analysis gaps

The initial analysis omitted Options re-entry and did not distinguish an optional malformed runtime touch report from renderer failure. This was a buco di analisi iniziale. Options now opens 10 and returns to Setup after preferences/skin.

Corrections and limits

Yes/No become horizontal and semantic. The measured invalid touch report retains its original error while rendering continues with interrupted gestures. Hardware FF root cause and physical corrected behavior remain open.

Preservation

All 19 preceding pages, earlier errata and unrelated content remain unchanged. Approved images are design references, not physical device screenshots.

Follow one Codex chat

10 October 2026 / CCP 0.3 / screens 16-20 and 32

Codex hooks	CCP runtime	Cody snapshot

Install and trust

Update CCP to 0.3. Review and trust its hooks in Codex. Installation alone does not trust them. The hidden PC runtime is shared by open chats; the saved device pairing remains intact.

Choose the chat

Send a prompt, list observed sessions, then explicitly select one session ID and paired Cody. Supply a short ASCII project label. Another chat cannot replace that selection. Runtime restart requires selection again.

Read actual activity

17: project active. 18: working, editing or running. 19: response ready, not task success. 20A: paused or awaiting approval. 20B: session ended, then 16 after five active seconds. 32: paired PC lost.

Freshness and scope

The device receives authenticated snapshots every two seconds. Missing packets expire after eight seconds; active hook observations expire after 120 seconds. UNAVAILABLE is explicit. Messages, answers, PR data, branch acquisition and voice transcription remain future work. Physical behavior is pending.

Errata and corrections

Revision date: 10 October 2026 / authenticated chat activity

Affected original material

Original pages 10-11 and 13; screen 15 and reconnect ownership.

Analysis gap corrected

Screen 15 originally proved PC presence only. The initial analysis omitted explicit chat selection, shared runtime lifetime and event freshness. This was a buco di analisi iniziale; it is now addressed in source.

Contract and UI

CCP 0.3 adds metadata-only hooks, exact session selection and nonce-bound ACTIVITY messages. The canonical snapshot owns validity and errors. 18U adds the unavailable state. Setup re-entry preserves the selected context.

Evidence and limits

The user confirmed Connected on 10 October after real pairing. That evidence belongs to the previous firmware and CCP 0.2. New code is implemented; host checks, hook trust/autoload and physical 0.3 behavior are not established here. A response-ready event is never reported as task success.

Preservation

All 22 previous pages and earlier errata remain unchanged. The approved gradient/icon action layouts remain binding. These diagrams describe architecture, not captured device pixels.

Addendum / pairing conservato

Registro della decisione / 10 ottobre 2026 / screen 04-16, 35B, 36 e 40-42.

Primo avvio / Dispositivo gia' configurato

Senza Wi-Fi salvato apro 04-09. Con credenziali ma senza IP uso 42. Con LAN e senza pairing offro 40. Con un record valido riprendo 14-15, senza verificare Internet.

Setup / Consenso alla sostituzione

Apro 41 tenendo premuto il personaggio per 1,5 secondi. Con un pairing salvato mostro Already paired: Keep pairing, Pair again oppure Forget. Retry riprende la ricerca senza codice nuovo.

Pairing / Presenza / Attivita'

Con 13 confermo il pairing. Let's go cerca subito il PC. Su 15 confermo CCP e attendo il prompt reale. Gli hook seguono la sua chat automaticamente: ho eliminato la scelta manuale.

Options / Scelte locali

Apro Make it yours da Options e riutilizzo Settings e Skin. Torno al chiamante corretto. Tengo separati preferenze, sostituzione del PC e qualsiasi cancellazione esplicita.

Addendum / casi di recupero

Screen 14-16, 18U, 32, 35A/35B e 42 / conservo l'identita' salvata.

Internet giu', LAN funzionante

Continuo a usare il collegamento Wi-Fi/IP locale tra Cody e CCP. Tengo separata la disponibilita' dei servizi online di Codex: il PC presente sulla LAN non mi garantisce una risposta del modello.

Wi-Fi o IP locale assenti

Conservo credenziali e PC associato. All'avvio mostro 42 con Network setup o Later. Durante il recupero attendo la LAN e riprovo con l'identita' salvata. Gli errori reali del trasporto restano visibili nello stato.

PC o CCP assenti

Continuo la ricerca su 14; uso 32 per la perdita dopo un'attivita' gia' seguita. Retry riprende la ricerca senza nuovo codice. Posso comunque tenere premuto Cody per 1,5 secondi e aprire Setup.

35A / 35B e aggiornamento firmware

Con lo standby ordinario conservo percorso e pairing. Al risveglio recupero la presenza autenticata. Un flash applicativo normale preserva NVS; cancellazione, dati danneggiati o altra identita' PC sono casi distinti.

Addendum / conferma e reset

Screen 12, 13, 40 e 41 / conservo rete, skin, preferenze e log.

Due candidati, attivi conservati

Sul PC salvo il candidato DPAPI prima di PAIR; sul Cody uso ccp_pending. Tengo separati i vecchi attivi. CONFIRM oppure READY fresco provano il PC e consentono commit e rilettura sul Cody.

Chiudo con una prova del commit

Il PC promuove dopo ACTIVE o COMMITTED autenticati, mai per il solo FIND. Dopo ogni READY valido Cody ripete COMMITTED con il nonce corrente: recupero riavvii e ACK persi senza un altro codice.

Cancel / Chiudo il tentativo

Dal codice pronto scarto il candidato Cody. Conservo il vecchio link operativo; sul PC il candidato resta pending. Per sostituirlo richiedo nuovo codice e replace_pending:true esplicito. Una prova con la vecchia chiave non autorizza la cancellazione.

Forget / Solo il pairing Codex

Confermo Forget pairing con Go back / Forget e Only Codex is reset. Cancello solo i record CCP di Cody; il PC conserva il suo. Dopo l'esito reale mostro Unpaired / Pairing removed, poi Done -> Setup.

Errata and corrections

Data revisione: 10 ottobre 2026 / CODY-RETAINED-FLOW-20261010

Pagine originali 1, 2, 3, 4, 5, 6, 7, 8, 10, 11, 12, 13

Ho integrato il flow corrente nelle pagine principali, conservando quelle non coinvolte e tutti gli addenda/errata precedenti. Riferisco il percorso agli screen ID anche quando cambia la paginazione.

Screen 10-16, 32, 35B e 40-42

Options salva quattro preferenze; Already paired offre Keep pairing, Pair again e Forget. Separo Retry, Cancel e reset. Uso journal separati e COMMITTED per il commit reale. Let's go cerca subito.

Buco di analisi iniziale e responsabilita'

Avevo mescolato commissioning, recupero e attivita', senza chiedere conferma della sostituzione. Ho esplicitato queste decisioni. CCP segue il prompt autentico; ho ritirato la vecchia scelta manuale della chat.

Decisione UI ed evidenza

Conservo il linguaggio approvato: gradienti, icone, coppia orizzontale o capsula singola e pulsanti senza teletype. Con questa revisione aggiorno sorgenti e documenti; elenco separatamente le prove di dispositivo, hook e simulatore ancora da completare.

Addendum / notifiche e decisioni

Revisione 10 ottobre 2026 / screen 26, 27 e 31.

26 / Codex needs you e Open

Mostro il contesto dichiarato, il titolo e l'avviso. La richiesta ha un ticket distinto e dura 180 secondi. Aprire o chiudere una vista non allunga la scadenza e non seleziona una risposta.

27 / Choose a reply

Uso due card affiancate; con tre aggiungo quella centrata sotto. Ogni scelta ha un ID stabile e un significato proprio. Back torna a 26 e conserva la domanda, senza inviare.

27 / Review choice

La scelta apre un riepilogo con descrizione e capsula Send. Back mi riporta alle opzioni. Dopo Send tengo la scelta ferma e mostro Sending reply. Non aggiungo un quarto pulsante sotto tre card.

31 / Reply sent dopo consegna

L'ACK UDP received lascia Waiting for Codex: CCP ha registrato la scelta. Solo con delivered mostro Reply sent e Delivered to Codex; Done riprende il contesto precedente 17, 18 o 16.

Addendum / PR solo in lettura

A03 resta in vigore / screen 21-24; 25 ritirato.

21 / PR pending

Osservo soltanto il PR indicato. Conservo l'esatto head dello snapshot esplicito fornito da Codex. Non uso Stop come prova dei check e non offro merge, approve, close, rerun o comment.

22 / Checks running e Checks passed

Mostro numeri solo da un elenco completo e attuale sullo stesso head. Checks passed non ha pulsanti: attendo la fine della narrativa e tre secondi, poi torno al lavoro.

23 -> 24 / View failures

L'unica azione apre i nomi reali dei check falliti: al massimo sei, fino a 48 caratteri ASCII ciascuno. Un input non rappresentabile viene rifiutato esplicitamente; non taglio nomi e non invento totali.

24 sola lettura / 25 ritirato

Mostro tre nomi per pagina, fino a due righe ciascuno; scorro verticalmente e tengo Back laterale. Non offro View log o righe selezionabili. Log, diagnosi e correzioni restano sul PC.

Addendum / consegna e comandi

Screen 31, 32 e nuovo setup / distinguo accettazione e risultato.

received non e' delivered

Il poll restituisce scelta e answer_id. Un poll successivo con acknowledge_answer_id uguale prova la ricezione del chiamante: solo allora passo a delivered e allo screen 31.

Scadenza e consegna incerta

I 180 secondi valgono anche in received. Se ho gia' ammesso Send mostro Reply unconfirmed: puo' mancare solo l'ACK. Prima di Send uso Request expired. Nessun Retry o ACK tardivo riapre la domanda.

Riavvio esplicito / dati conservati

Scrivo 'resetta il device codice 043533477' nel messaggio corrente: nove cifre, zero compreso. E' un controllo anti-equivoco, non una password; non lo completo dai documenti. Uso il peer paired LAN, dati conservati. ACK = accepted; boot = nuova presenza.

Factory reset / primo setup

Con 'formatta cody 043533477' elimino preferenze, Wi-Fi e pairing; conservo firmware, asset e SD. ACK indica ammissione. Riavvio solo dopo cancellazione verificata; poi riparto dal setup Wi-Fi. Un errore resta visibile e non avvia il reboot.

Errata and corrections

Data revisione: 10 ottobre 2026 / CODY-NOTIFICATIONS-20261010

Pagine originali 1, 10, 11, 13

Ho aggiornato le pagine principali coinvolte, mantenendo quelle estranee al flow e gli addenda precedenti. Uso gli screen ID.

Screen 21-27 e 31-32

Ho applicato A03: PR in sola lettura e 25 ritirato. Ho rimosso View log e il vecchio elenco verticale. Ora 27 ha card e riepilogo Send; 31 richiede delivered dopo l'ACK del destinatario.

Buco di analisi iniziale

Avevo lasciato ambigui ricevuta, consegna e scadenza, oltre a illustrazioni PR superate. Li separo con ticket, received/delivered e 180 secondi. Timeout e offline non scelgono risposte.

Storico, comandi e prove

Ho separato riavvio e factory reset: il primo conserva i dati, il secondo cancella la configurazione per tornare al setup. ACK indica ammissione. Conservo storico ed errori reali; gli esiti host e fisici sono in done.md.

Addendum / boot and Wi-Fi

Revision date: 10 October 2026 / branding, 01-09 and 42.

Identity and timing

Cody AI Companion and A distraction-free sidekick appear together, above the complete floppy artwork. The original 42-frame animation retains its 3.5-second cycle; startup work can extend wall time.

Layout and next route

Title y=60; subtitle y=110; artwork (137,164), 192 x 219. After local startup, absent Wi-Fi opens Welcome 04; missing association/IP opens 42; a valid LAN without pairing opens 40; retained pairing searches its PC on 14.

Show QR, then Pair Cody

05 opens the installation QR on 06 without starting radios. Pair Cody starts Bluetooth on 07. A session QR appears only at ReadyToScan, then retires when credentials or connection are in progress. Cancel waits for confirmed cleanup.

A real local connection

09 offers Continue only with valid current Wi-Fi/IP. No connection on 42 offers Network setup or Later. CCP needs the local LAN; public Internet availability is a separate fact. Debug handoff 39 needs a fresh tap; Release continues to 09.

Addendum / pairing and connection

Revision date: 10 October 2026 / screens 12-15, 40 and 41.

Reopen choices

Hold the visible character still for 1.5 seconds to open Setup. Connect Codex and Network setup share one row; Options is centered below. Release the opening contact before selecting. Back retraces the valid previous route.

Keep, replace or forget

Already paired offers Keep pairing, Pair again and Forget. Only Pair again authorizes replacement; Forget opens a second confirmation. Pairing paused identifies an incomplete candidate. Pairing error preserves the storage cause and admits explicit removal only.

Prepare, then read

12 shows Preparing secure code / Please wait / About 30 seconds until a code exists. The estimate is not measured progress. Use only all six characters visible on the intended Cody after discovery. The backend window is five minutes; screen inactivity is three minutes from code readiness.

Confirm and connect

You're all set on 13 follows the two-sided persisted handshake. Let's go searches the retained PC immediately on 14, or reuses valid authenticated presence on 15. The earlier ten-second Idle detour is removed. READY establishes presence; genuine prompt hooks establish chat activity.

Addendum / settings and controls

Revision date: 10 October 2026 / screens 10, 11, 36 and 41.

Four compact rows

Shake to wake, Auto-rotate and Sounds each have persistent On/Off values. Orientation shows Auto while auto-rotation is enabled; manual choices are 0 or 180 when it is Off. Sounds Off stops playback while keeping microphone and wake word active.

Save before confirming

Next opens Settings: Personalization / Choose Cody's look. Continue opens Skin: Pearl Mist, Aurora Veil, Cosmic Stardust, Enchanted Mosaic and Dreamwave, saved by stable ID. Saving retains the prior value; successful write/readback confirms the change. Save failed and Retry preserve the cause and requested value; no silent repair.

Controls appear together

Two actions use rounded gradient cards side by side; three add one centered action below. Single actions use an icon-left capsule. Captions have no teletype: controls and touch become available together after the title and main body line. QR quiet zones and local circular chords remain protected.

How to read the drawings

These are static documentation schematics derived from current source geometry and approved action references, not simulator frames or physical captures. Numeric values are layout coordinates, not sensor measurements. Firmware, simulator and device validation are outside this document revision.

Errata and corrections

Revision date: 10 October 2026 / CODY-SCREENS-20261010

Affected original pages

cody-codex-connection-atlas-v1.pdf: current pages 2, 3, 4, 6, 7, 8, 12. Original screen references: branding before 01-03; Wi-Fi 04-09/42; preferences 10/36/11; Codex 12-15/40/41. Page numbers and screen IDs are distinct.

Corrections recorded

Replace the old title-free/twofold boot illustration with the current title, subtitle and 192 x 219 artwork. Replace outdated setup, code preparation, connection detour and settings descriptions with the source-based contracts above.

Historical record

All earlier addenda and errata are preserved in their existing order, along with unrelated pages. Historical boot sizes and old next-route diagrams remain dated evidence; the revised current pages and this addendum supersede them only for these topics.

How to read the drawings

These are static documentation schematics derived from current source geometry and approved action references, not simulator frames or physical captures. Numeric values are layout coordinates, not sensor measurements. Firmware, simulator and device validation are outside this document revision.