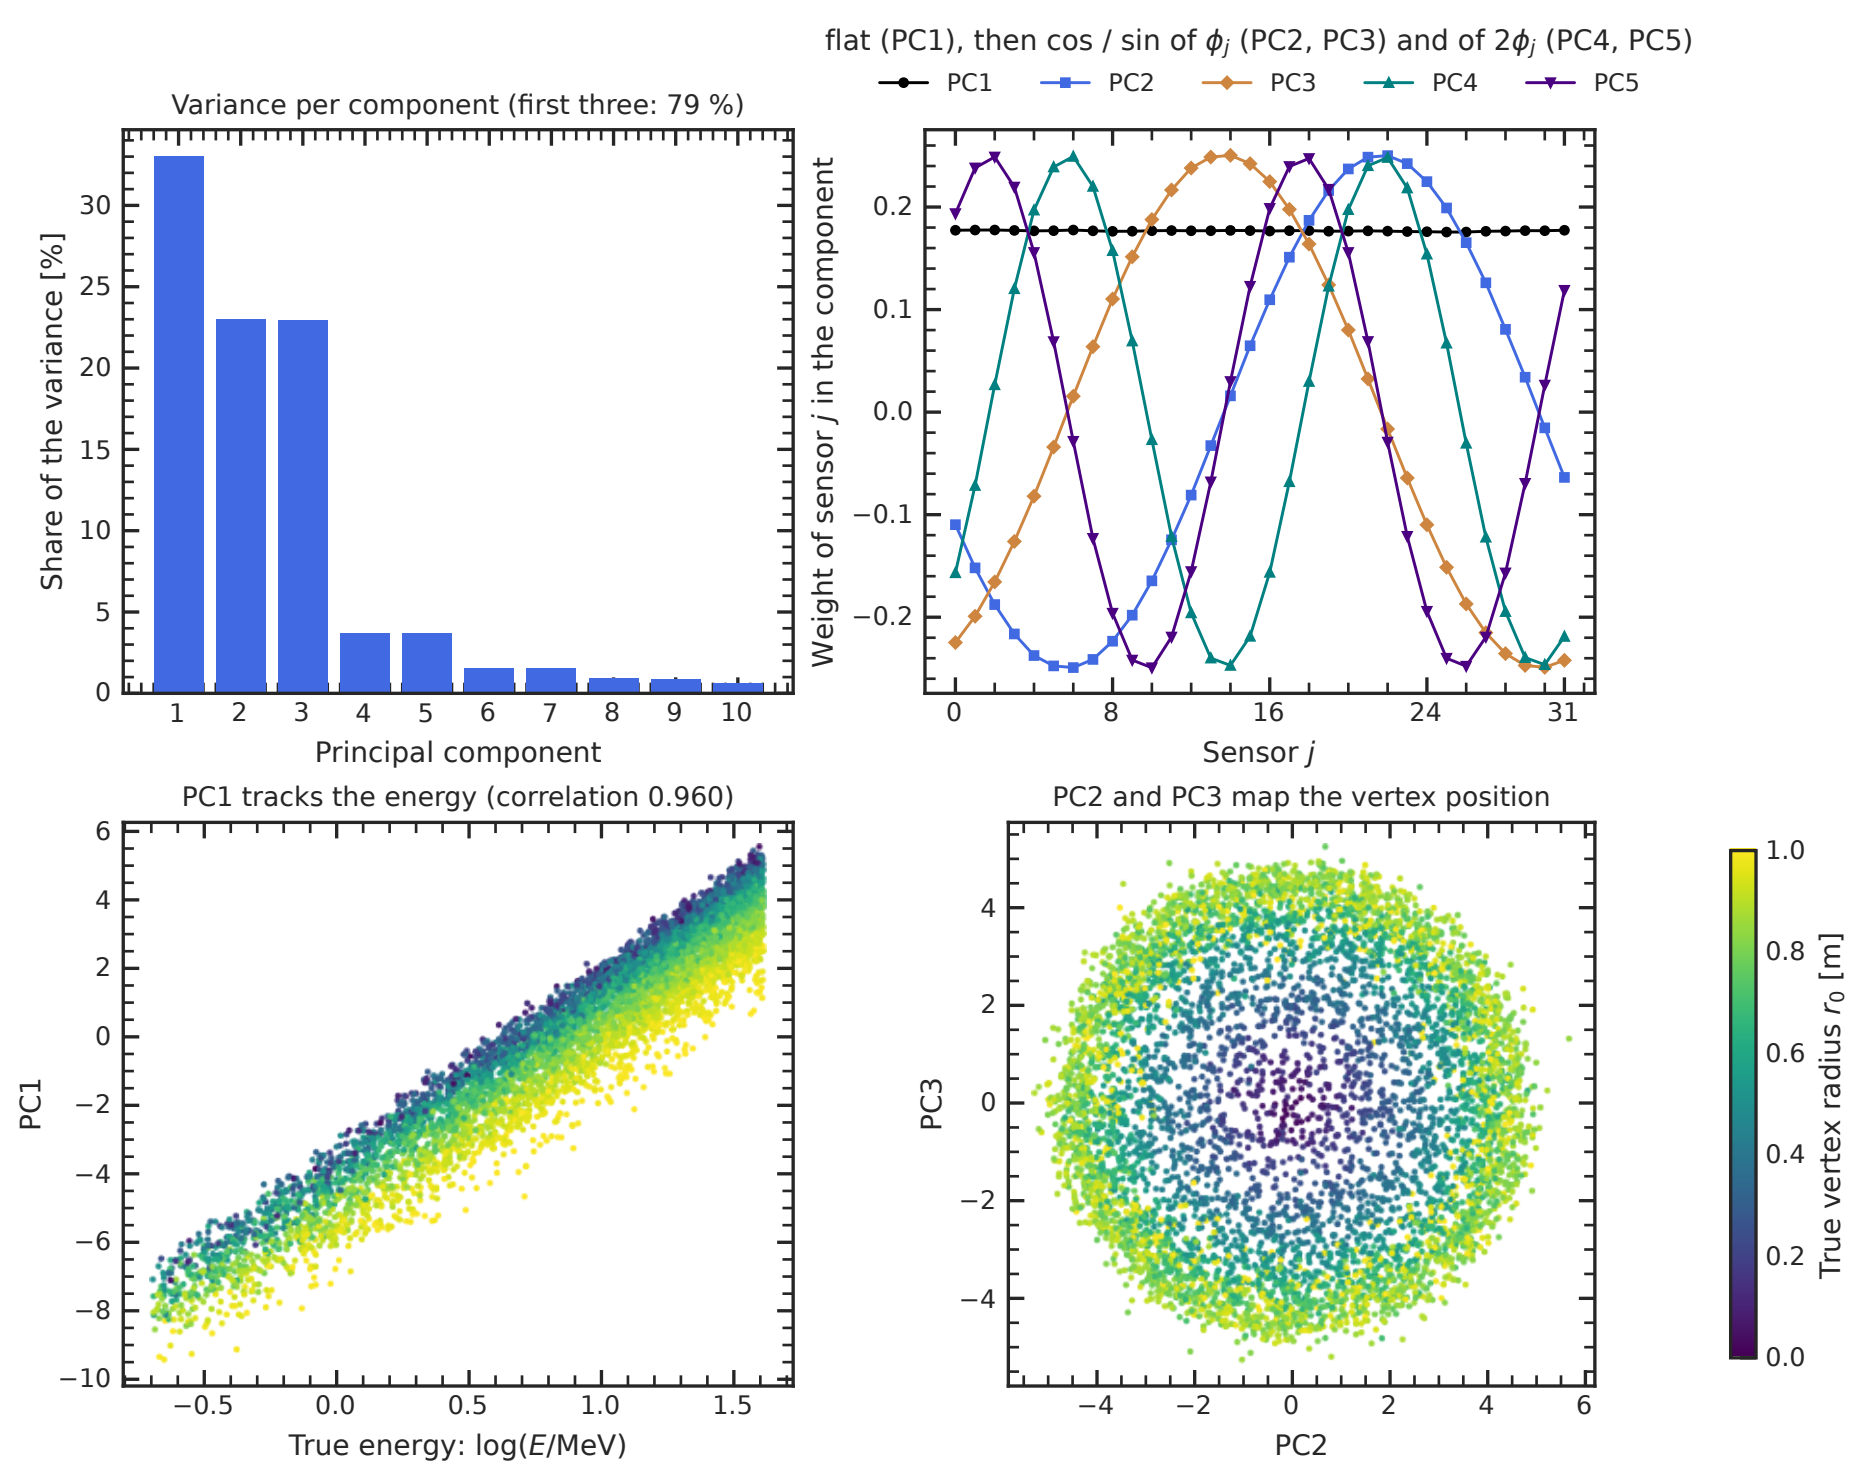

Variance per component (first three: 79 %)
Share of the variance [%]
Principal component
flat (PC1), then cos / sin of ϕ_j (PC2, PC3) and of $2\phi_j$ (PC4, PC5)
PC1
PC2
PC3
PC4
PC5
Weight of sensor j in the component
Sensor j
PC1 tracks the energy (correlation 0.960)
PC1
True energy: log(E/MeV)
PC2 and PC3 map the vertex position
PC3
PC2
True vertex radius r_0 [m]