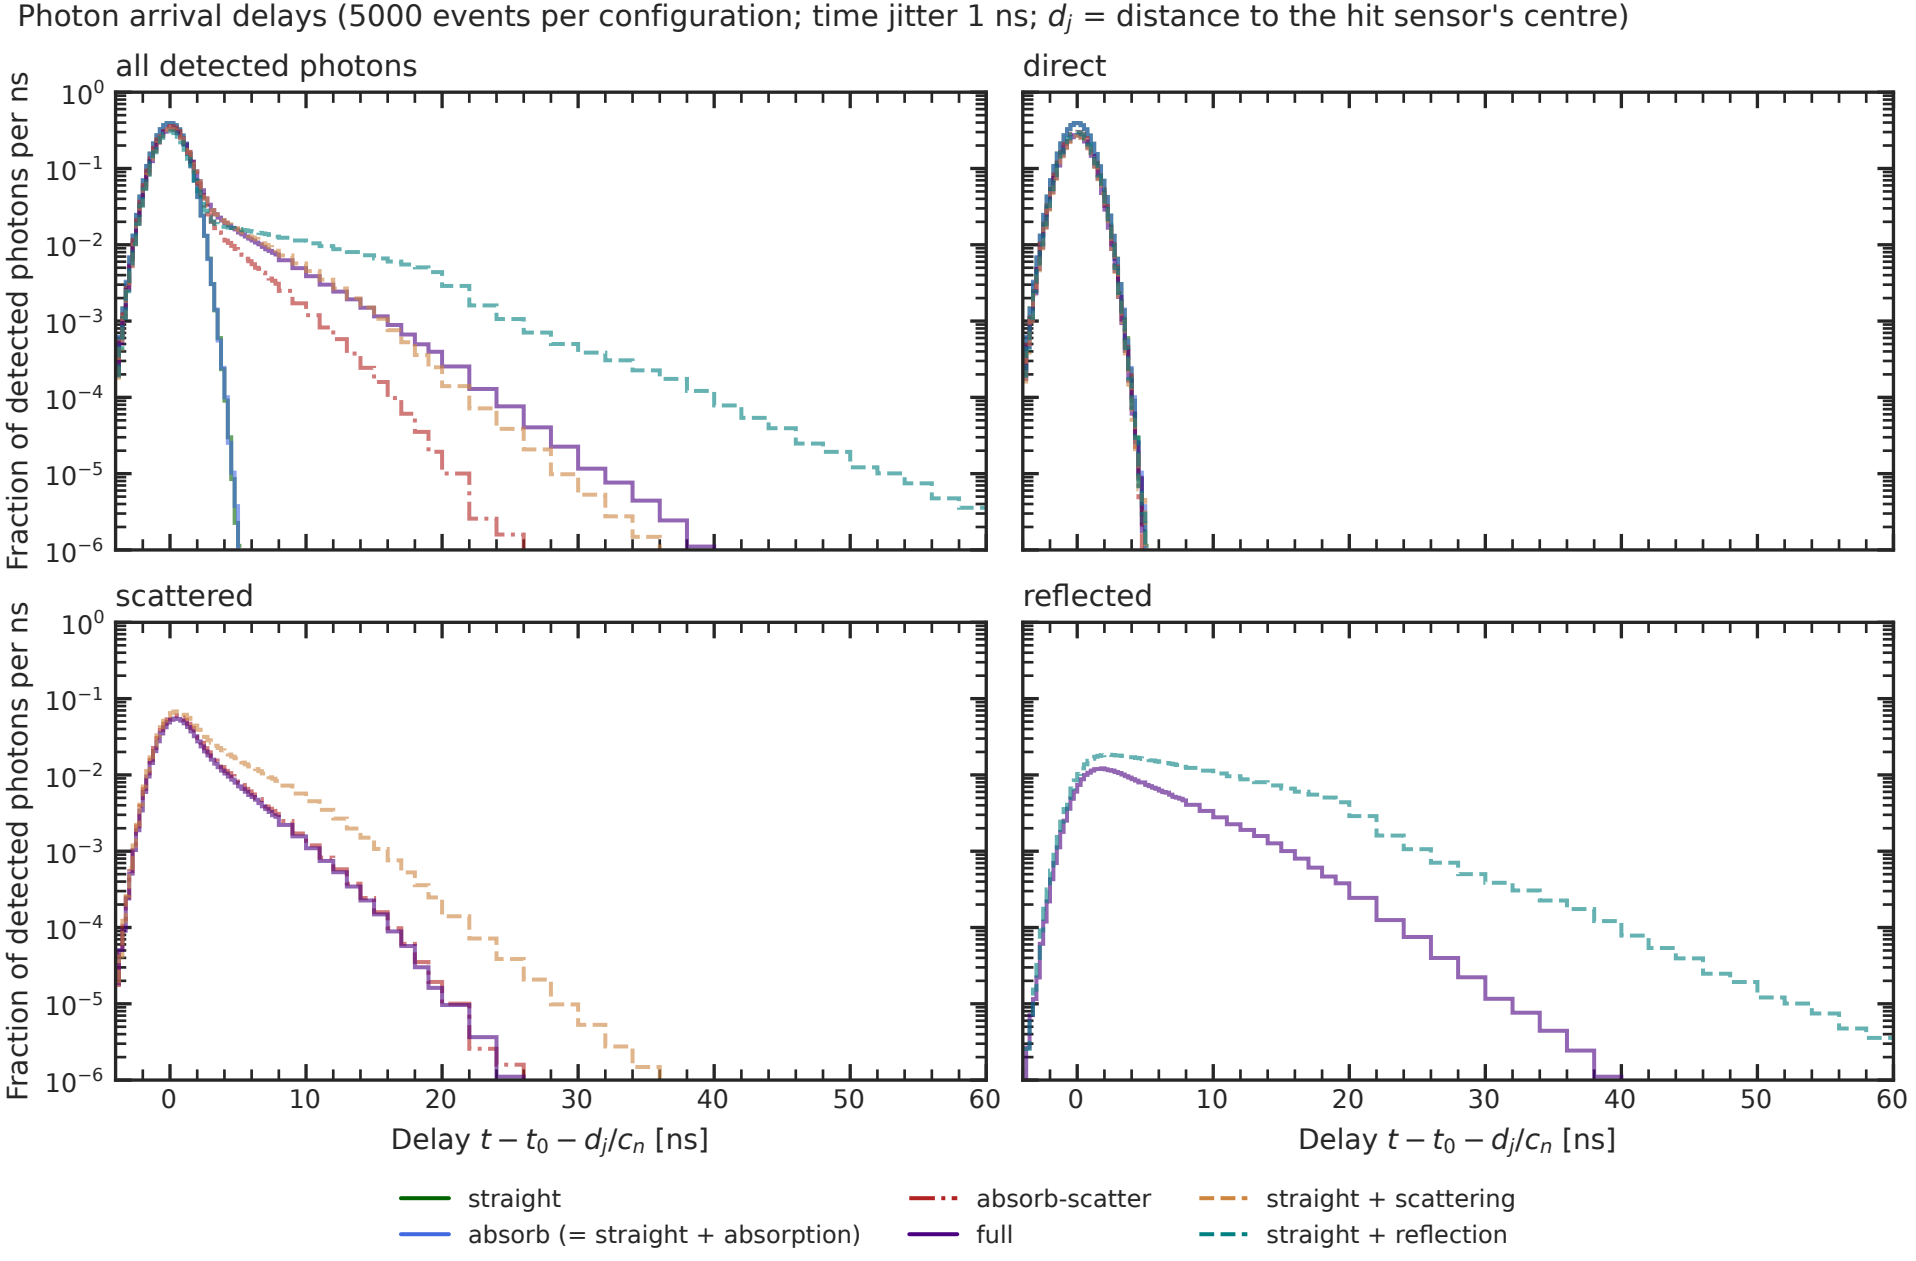
Photon arrival delays (5000 events per configuration; time jitter 1 ns; d_j = distance to the hit sensor's centre)
all detected photons
direct
scattered
reflected
Fraction of detected photons per ns
Delay $t - t_0 - d_j/c_n$ [ns]
straight
absorb (= straight + absorption)
absorb-scatter
full
straight + scattering
straight + reflection