Cody / Atlante della navigazione

Notifiche, domande e PR in sola lettura; conservo il pairing e lo storico.

Conservo il PC, poi ricevo il lavoro

Tengo distinti pairing, presenza LAN e attivita' dell'ultimo prompt reale. L'estensione EVENT porta avvisi e domande esplicite; non inventa una chat quando manca un hook. Il contesto dichiarato e' un'etichetta.

Decido soltanto dopo aver letto

Da Codex needs you apro due o tre scelte. La selezione apre un riepilogo con Send e Back. Mostro Reply sent solo dopo l'ACK del destinatario. Una domanda dura 180 secondi; la scadenza non sceglie al mio posto.

Le PR restano in sola lettura

Conservo la decisione A03: gli screen 21-24 riportano stati e nomi dei check falliti. Il 25 e' ritirato; diagnosi e azioni PR restano sul PC. Un'approvazione nativa rimanda a On your PC, senza Allow o Deny su Cody.

Come leggo questa revisione

Ho aggiornato pagine principali e limiti del flow. Conservo gli addenda precedenti e aggiungo errata datate. Distinguo il contratto nei sorgenti dalle prove host e fisiche; registro gli esiti correnti in done.md.

All'avvio leggo le scelte salvate

Screen 01-09, 14-16, 40 e 42 / per CCP mi basta la LAN.

01-03 / Avvio locale

Apro con VibeWare e poi mostro i checkpoint di Cody. Conservo gli errori reali dei servizi. Con Ready confermo che lo stadio locale e' pronto; per PC e chat aspetto le rispettive prove di connessione.

04-09 / Nessuna rete salvata

Avvio il provisioning dal telefono solo se il profilo Wi-Fi manca davvero. Con credenziali salvate ma senza IP locale apro 42 / No connection. Tratto una lettura fallita come errore, senza inventare un primo avvio.

40 / LAN pronta, pairing assente

Mi bastano associazione Wi-Fi e IP locale valido. Connect Codex? offre Yes e No. Con No torno a 16, senza avviare CCP o salvare un rifiuto. Non aggiungo un controllo separato dell'accesso a Internet.

14-15 / Pairing gia' salvato

Riutilizzo l'identita' del PC conservata e validata. Cerco automaticamente; mostro Connected solo dopo READY autenticato. Un'interruzione Wi-Fi, lo standby o un normale aggiornamento firmware non mi chiedono un altro codice.

La rete ha un percorso dedicato

Screen 04-09 e 42 / il provisioning Wi-Fi resta distinto dal pairing Codex.

04 -> 05 -> 06 -> 07

Presento Cody con Welcome. Show QR apre l'installazione dell'app; Pair Cody entra in 07, che mostra il QR reale quando e' pronto. Conservo 06-bis nei dati d'autore, senza aggiungere uno step runtime.

07 -> 09 / Aspetto una LAN reale

Attendo provisioning, associazione Wi-Fi e IP DHCP. Un SSID salvato, un link BLE o una richiesta ammessa non bastano. Con 09 confermo la rete locale senza una verifica aggiuntiva di Internet.

08 / Errore e Retry esplicito

Mantengo l'errore originale. Cancel e Back attendono la chiusura dell'operazione attiva. Con Retry riprendo il passaggio di rete pertinente; non cambio l'associazione al PC.

Inattivita' o rete salvata offline

Dopo un timeout posso tornare a Welcome e riaprire Setup. Se ho credenziali ma manca l'IP, 42 offre Network setup o Later. L'assenza temporanea della rete non cancella le credenziali.

Setup protegge il pairing esistente

Screen 41, variante di conferma 40 e screen 12.

41 / Apro Setup

Tengo il dito fermo sul personaggio visibile per 1,5 secondi. Metto Connect Codex e Network setup affiancati, Options sotto al centro. Prima di scegliere rilascio il dito. Mantengo questo ingresso anche mentre il PC e' offline.

Variante 40 / Already paired

Controllo il record prima della rete. Mostro Keep pairing e Pair again affiancati, Forget sotto. Con un candidato incompleto uso Pairing paused; con errore storage mostro Pairing error e abilito solo la cancellazione esplicita.

Keep pairing / Riprendo

Riutilizzo una presenza autenticata ancora valida; altrimenti cerco il PC salvato. Anche Retry riprende questa associazione e puo' attendere il ritorno della LAN. Una riconnessione non autorizza la sostituzione del PC.

Pair again / Sostituisco consapevolmente

Genero il codice dopo conferma esplicita e con LAN utilizzabile. Salvo prima un candidato separato. Lo promuovo solo dopo la prova che il PC ha salvato il link. Cancel scarta il candidato e conserva l'attivo.

Chi porta l'attivita', chi invia una domanda

Screen 15-20 e 26 / hook reali e richieste MCP esplicite hanno identita' separate.

26 / Codex needs you

Ricevo una domanda dal chiamante MCP esplicito; per gli avvisi mostro From Codex. Leggo testo inglese ASCII. Il contesto e' dichiarato dal chiamante, senza attribuirgli l'identita' verificata della chat o degli hook.

26 -> 27 / Apro la domanda

Con Open leggo le due o tre risposte e le rispettive descrizioni. Conservo una sola domanda aperta per dispositivo. Attivita', notifiche successive e indicatori batteria non la sostituiscono.

Approvazioni / On your PC

Un PermissionRequest puo' richiamare la mia attenzione, ma la decisione nativa resta nel computer. Non aggiungo Allow, Deny o un'autorizzazione generica ricavata da un testo incompleto.

Notifica non significa risposta

Una notifica non offre scelte e non produce REPLY. Riservo Reply sent alle risposte consegnate. Per le PR ammetto soltanto gli stati e la lista read-only previsti da A03; nessuna azione operativa.

L'attivita' non chiude una domanda

Screen 17-20, 26 e 27 / proteggo il contenuto ancora da decidere.

Domanda protetta

Una domanda aperta resta davanti agli aggiornamenti ordinari. Conservo selezione e percorso. Batteria, charging o un avviso successivo non fanno sparire una decisione che devo ancora leggere.

32 / Offline

Conservo il contenuto e cerco il PC salvato. La scadenza continua: tornare sulla LAN non rinnova i 180 secondi. Timeout, Cancel e disconnessione non scelgono un'opzione e non confermano consegna.

Scadenza e annullamento

Prima di Send mostro Request expired; dopo Send, Reply unconfirmed e Check on your PC. Uso Request cancelled o Reply rejected per gli altri esiti, con Done. Non riapro stati terminali.

35A / 35B e nuovi avvisi

Mantengo Wi-Fi durante lo standby di Cody associato. Accodo il wake per un avviso autenticato al worker power, preservando AFE e wake word. Registro a parte gli esiti del risveglio fisico.

Le pull request restano in sola lettura

Screen 21-24 / applico A03 del 4 ottobre; il 25 e' ritirato.

21 / PR pending

Osservo soltanto il PR indicato. Conservo l'esatto head dello snapshot esplicito fornito da Codex. Non uso Stop come prova dei check e non offro merge, approve, close, rerun o comment.

22 / Checks running e Checks passed

Mostro numeri solo da un elenco completo e attuale sullo stesso head. Checks passed non ha pulsanti: attendo la fine della narrativa e tre secondi, poi torno al lavoro.

23 -> 24 / View failures

L'unica azione apre i nomi reali dei check falliti: al massimo sei, fino a 48 caratteri ASCII ciascuno. Un input non rappresentabile viene rifiutato esplicitamente; non taglio nomi e non invento totali.

24 sola lettura / 25 ritirato

Mostro tre nomi per pagina, fino a due righe ciascuno; scorro verticalmente e tengo Back laterale. Non offro View log o righe selezionabili. Log, diagnosi e correzioni restano sul PC.

Leggo, scelgo e confermo

Screen 26 -> 27 -> riepilogo 27 -> 31 / aspetto l'ACK del destinatario.

26 / Codex needs you e Open

Mostro il contesto dichiarato, il titolo e l'avviso. La richiesta ha un ticket distinto e dura 180 secondi. Aprire o chiudere una vista non allunga la scadenza e non seleziona una risposta.

27 / Choose a reply

Uso due card affiancate; con tre aggiungo quella centrata sotto. Ogni scelta ha un ID stabile e un significato proprio. Back torna a 26 e conserva la domanda, senza inviare.

27 / Review choice

La scelta apre un riepilogo con descrizione e capsula Send. Back mi riporta alle opzioni. Dopo Send tengo la scelta ferma e mostro Sending reply. Non aggiungo un quarto pulsante sotto tre card.

31 / Reply sent dopo consegna

L'ACK UDP received lascia Waiting for Codex: CCP ha registrato la scelta. Solo con delivered mostro Reply sent e Delivered to Codex; Done riprende il contesto precedente 17, 18 o 16.

Il percorso voce resta futuro

Screen 28-30 / non confondo la risposta a card con registrazione o trascrizione.

27 -> 28 / Recording - futuro

Conservo il percorso pensato per push to talk. L'ingresso voce e la cattura non sono parte di questa estensione. Le card e il riepilogo esplicito coprono la decisione corrente.

28 -> 29 / Transcribing - futuro

Prevedo uno stato distinto dopo il rilascio. Cancel deve tornare alla domanda senza scegliere per me. Non dichiaro una trascrizione disponibile per il solo fatto che il microfono funziona.

30 / Review transcript - futuro

Leggo prima di Send, posso registrare di nuovo o tornare alle opzioni con la bozza conservata. Errori di cattura o trascrizione devono restare visibili, senza Reply sent falso.

31 / La stessa regola di consegna

La conferma finale richiede l'ACK del destinatario. Il trasporto attuale delle scelte non implementa automaticamente il futuro percorso voce. Tengo i due perimetri separati.

Offline, scadenza e risveglio

Screen 26/27, 32 e 35A/35B / nessuna risposta automatica.

Domanda protetta

Una domanda aperta resta davanti agli aggiornamenti ordinari. Conservo selezione e percorso. Batteria, charging o un avviso successivo non fanno sparire una decisione che devo ancora leggere.

32 / Offline

Conservo il contenuto e cerco il PC salvato. La scadenza continua: tornare sulla LAN non rinnova i 180 secondi. Timeout, Cancel e disconnessione non scelgono un'opzione e non confermano consegna.

Scadenza e annullamento


Prima di Send mostro Request expired; dopo Send, Reply unconfirmed e Check on your PC. Uso Request cancelled o Reply rejected per gli altri esiti, con Done. Non riapro stati terminali.

35A / 35B e nuovi avvisi

Mantengo Wi-Fi durante lo standby di Cody associato. Accodo il wake per un avviso autenticato al worker power, preservando AFE e wake word. Registro a parte gli esiti del risveglio fisico.

10 / Character debug

Inspect the rig and channels while keeping the same reusable character.

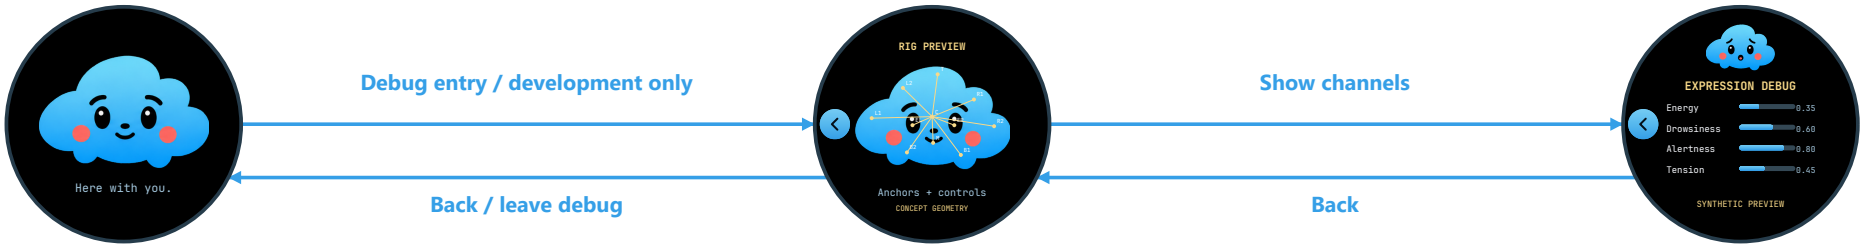

16
Idle

37
Rig view

38
Expression channels

Local events
Motion / touch / charge

Update values

Expressive values
Energy / tension / alertness

Compose channels

One composed pose
Eyes / brows / mouth / body

The lower pipeline is not screen navigation. Breathing, blinking and expression changes update the current view without changing routes.

NOTES

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

Options e ritorno al chiamante

Screen 10, 11, 36 e 41 / ogni percorso sa dove tornare.

10 / Make it yours

Da Setup apro Options. Imposto Shake to wake, Auto-rotate e Sounds su On oppure Off con righe compatte che mostrano i valori. La quarta riga e' Orientation. Sounds Off lascia microfono e wake word attivi. Next continua verso Settings, senza avviare alcun pairing.

36 -> 11 / Skin

Uso lo stesso selettore con anteprima animata e identificatori stabili salvati. Ho rinominato lo screen 11 Skin: scelgo l'aspetto di Cody, oltre il vecchio concetto di solo colore. Se il salvataggio fallisce, mantengo l'errore reale.

Torno a chi mi ha aperto

Entrando da Setup, Done torna a 41 e Back da 10 riporta a Setup. La personalizzazione non avvia pairing di rete o Codex. Nel primo avvio proseguo invece verso la decisione sul collegamento salvato.

Orientation e salvataggio reale


Scelgo 0 oppure 180 solo con Auto-rotate Off; altrimenti mostro Auto. Confermo ogni valore solo dopo scrittura e rilettura riuscite. Mantengo l'errore visibile; Retry ripropone lo stesso valore richiesto.

Network setup / revised route

A01 supplements base pages 03 and 12. Insert screen 06-bis; keep all existing IDs.

REQUESTED BY	AFFECTED BASE PAGES	PRINT ONLY THIS PAGE
Umberto Giacobbi (project owner)	**03 / 12**	**13 / keep the existing printout**

WHY App installation and device provisioning use different QR payloads. The route needs a distinct device-QR step.

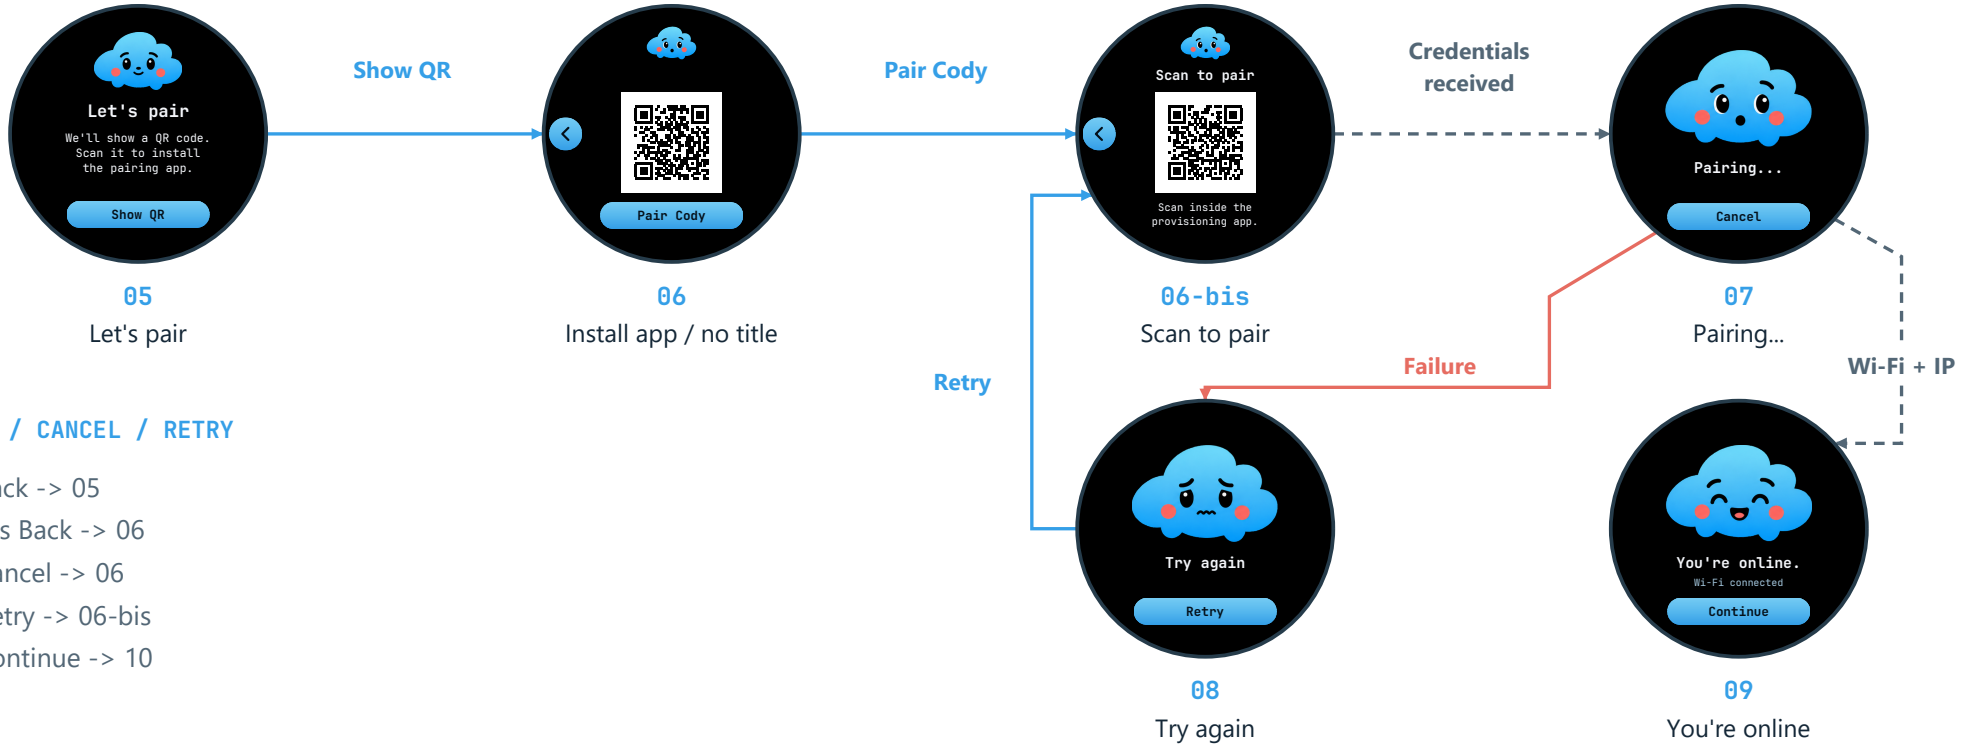

BACK / CANCEL / RETRY

06 Back -> 05
06-bis Back -> 06
07 Cancel -> 06
08 Retry -> 06-bis
09 Continue -> 10


Pair Cody starts BLE provisioning before opening 06-bis. Back, Cancel and recoverable failure close the active session before navigation; cleanup errors remain visible. Retry opens a new attempt. Credentials received advance to 07; confirmed Wi-Fi and IP advance to 09.


06: remove 'Scan to install'. QR previews remain illustrative. This is a requested design update, not firmware validation.

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

A02 / Screen 11 selection route

The same selector can be called from first setup and from future Settings.

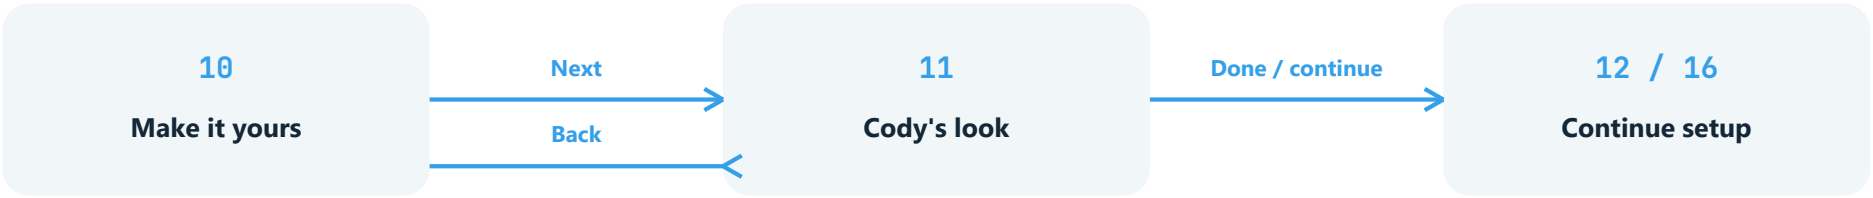

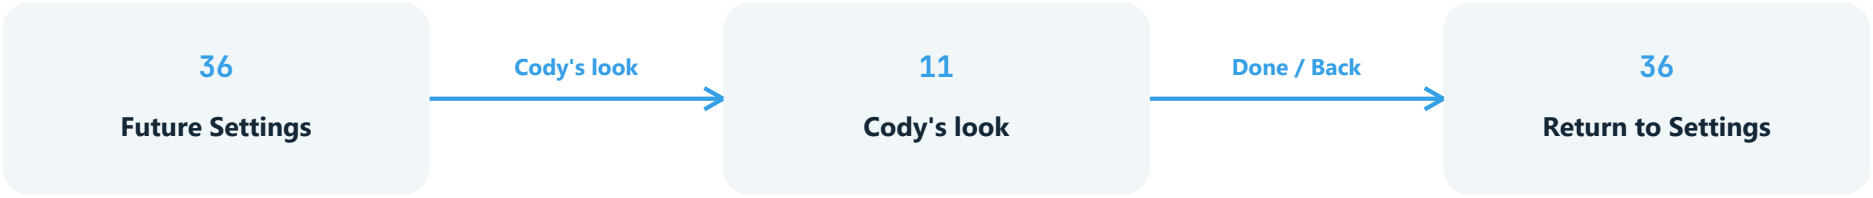

ROUTE RULE


Screen identity 11 stays stable. Only its user-facing title and content change. Selection does not create five routes: all choices remain inside one scrollable screen and preserve the caller for Back/Done. This supplements base navigation page 04.

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

A03 / Read-only pull-request flow

Cody reports verified status and failure names; PR work stays on the PC.

PRINT PAGE 15 ONLY

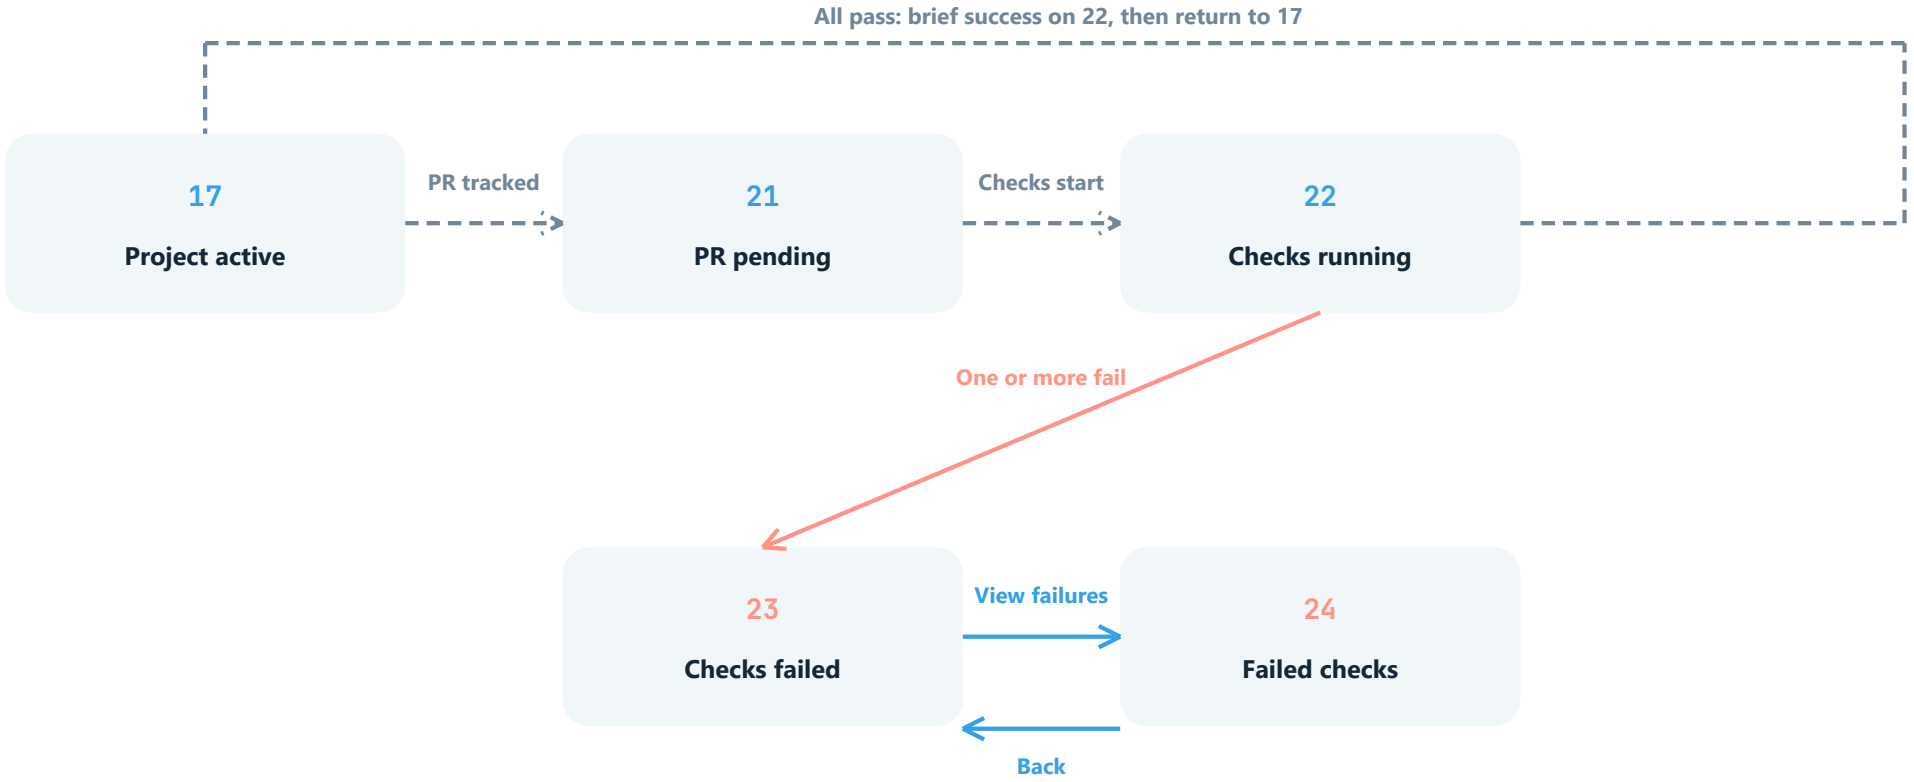


DATA RULE	Counts and conclusions belong to the exact PR head commit. If the companion cannot provide a complete, current check list, screen 22 says only 'Checks running' and does not invent progress.
25 RETIRED	No route opens raw logs on the device; detailed investigation remains on the PC.

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

A04 / Pairing-to-personalization route

Persist first boot before success UI; gate screen 12 explicitly and never invent PC connectivity.

PRINT PAGE 16 ONLY

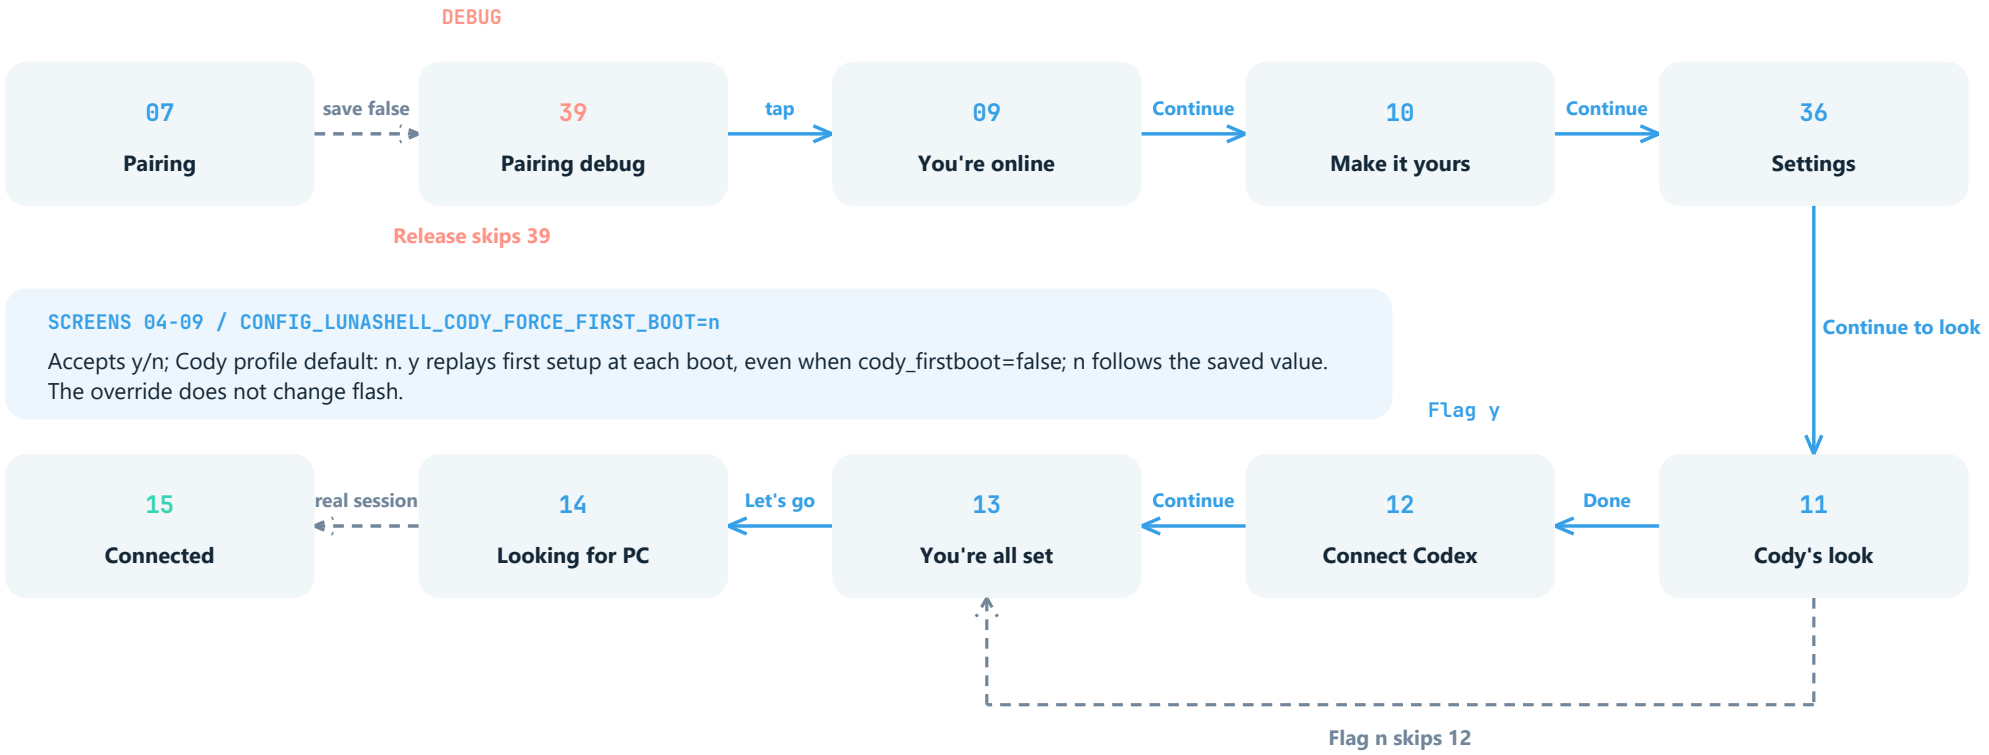

SCREENS 04-09 / CONFIG_LUNASHELL_CODY_FORCE_FIRST_BOOT=n

Accepts y/n; Cody profile default: n. y replays first setup at each boot, even when cody_firstboot=false; n follows the saved value. The override does not change flash.

ROUTE RULES

Screen 09 uses a 60-second standby override. Wake restores 09 and does not activate Continue. Screens 36 and 11 are reusable personalization routes. Screen 11 has no Back in first setup and cannot finish before an explicit row tap. Screen 15 is admitted only by a real current Codex/PC session state; screen 14 remains pending otherwise.

SCREEN 12 / CONFIG_LUNA_SHELL_CODY_ENABLE_CODEX=y

Controls Codex connection setup. Explicitly configured y and currently always enabled; n skips 12, from 11 to 13.

Umberto Giacobbi | hello@umbertogiacobbi.biz
Copyright umbertogiacobbi.biz 2026 - confidential

Idle moments without leaving Idle

A05 supplements base pages 02, 06, 10 and 11. Screen 16 retains its identity.



3.2 seconds -> return to the same Idle expression -> 40-second cooldown -> new 20-40-second wait. The automatic clock greeting may stay visible behind these accents. Onboarding Hello 04 remains a separate route.

Copyright umbertogiacobbi.biz 2026 - confidential

Interrupt promptly and protect real work

Transient gesture policy; no new settings writes and no extension of device inactivity.

Normal Idle	Allow the three gestures only while the normal Main view is running, with a resting expression and no current personality symbol or caress.
Touch, Sophia or activity	Cancel the gesture as soon as the route/model consumes the real interaction. New motion-derived stress, microphone activity or other playback also takes priority.
Settings / setup / work	Suppress scheduling outside screen 16. Never navigate away from a question, pairing attempt, working state, error, settings or Debug route to show a gesture.
Pause / Sleep / Wake	Do not admit gestures while paused or during lifecycle transitions. Active-time clocks exclude parked time; no backlog or catch-up scene is created.
Whistle admission	Only a completed visible pursed-mouth frame may request sound. Quiet hours, volume zero, disabled sounds, busy audio and cooldown suppress it; do not retry later.
Audio ownership	The audio owner publishes the actual cue identity and successful PCM level in the canonical snapshot. Cody's own whistle keeps its mouth pursed; unrelated playback interrupts.

Source implementation and the Windows visual model were updated. Firmware build, tests, simulator execution and physical appearance/acoustics remain unverified and require separate authorization.

Umberto Giacobbi | hello@umbertogiacobbi.biz

Copyright umbertogiacobbi.biz 2026 - confidential

Errata and corrections

Revision date: 05 October 2026. Previous pages and addenda remain intact.

Breathing visibility	Clarifies a visible mouth pulse under stress: 35% closing, 16-22% reopening and a 4.5% width pulse. Affects screen 16 / Idle and the Stressed expression.
Three idle scenes	Adds IS02 Yawn, IS03 Whistle and IS04 Greeting alongside IS01 Breathing. These are transient screen-16 accents, not new routes or status measurements.
Random scheduling	Replaces the fixed idle-yawn trigger with a random 20-40-second eligible wait, a 3.2-second gesture and a 40-second cooldown. Excludes immediate repeats.
Audio and interruption	Adds one original 300-ms whistle via the existing optional sound owner. Documents cancellation, quiet/volume/busy suppression and canonical playback identity.
Affected original references	Manga pages 03-04 (cue language), 14 (circular placement), 15 (handoff/motion); Navigation pages 02, 06, 10, 11-12. Screens 04, 16, 35A/35B, 36-38 retain their identities and navigation.
Preservation and evidence	Original pages 1-16, including all earlier addenda/errata, are preserved. This revision appends two design pages and this errata page. Runtime behavior and acoustics have static source review only.

Umberto Giacobbi | hello@umbertogiacobbi.biz

Copyright umbertogiacobbi.biz 2026 - confidential

A shorter boot for a paired Cody

N01 / Supersedes startup timing on pages 02 and 06; screens 01-05 and 16.



01 Sleeping / 2.0 s



02 Waking / 1.5 s



03 Ready / 2.0 s

Returning device: 03 -> 16

A validated saved first-boot false goes straight to Idle and its clock routine. Entering Idle requests one random Affection or Joy for four seconds, using the same visible-symbol sound owner. Pairing and credential keys are preserved.

Service waits are additional

The three phases take 5.5 active seconds altogether. Actual startup checkpoints gate progression; waiting for a service does not consume the next phase. Boot shows Cody without a website logo, Debug HUD or manga symbol.

First setup: 03 -> 04 -> 05

Hello 04 uses Happy and 'Hi, I'm Cody!' at (233,225,130): 70 ms per character, then one active second after the complete text reaches the panel. It proceeds to Pair 05. There is no second bitmap intro.

Boot differs from standby wake

Sleep 35A and Wake 35B retain their separate power sequencing. A 400-ms eye closure plus 300-ms hold precedes standby; the existing panel fade is 800 ms. A sleeping expression alone does not request physical standby.

Idle keeps the route and the controls

N02 / Updates pages 10-12, the 05 October idle appendix and screens 16 / 35A / 35B.

Continuous expression and breath

The stronger mouth breath composes with the selected front-facing expression. Idle accents use the same route, active clock and response controller. They never change navigation history, sensor timestamps, timeout preferences or device activity.

Eligible quiet time

Only the normal Main/Idle view schedules Yawn, Whistle and Greeting, including the automatic clock title. Setup, Debug, explicit greetings, sleeping/working/stressed overrides, paused animation and current symbol/caress presentations are excluded.

Interaction takes priority

Eye responses, caresses and tap feedback remain available through their own owners. Real microphone activity, unrelated speaker playback, authored motion stress and touch release an active gesture. Standby can occur before a gesture becomes due.

Canonical device facts

LowBattery, Charging and NoWifi consume a valid, fresh canonical snapshot. Battery hysteresis enters at 15% and exits at 20%. Stale or disproven facts invalidate their current symbol; an artistic hold never preserves a false device status.

Circle, Back and all sizes

Canvas 466 x 466, center (233,233), radius 233. The central safe square is [73,393) on both axes. Back occupies (10,203), 60 x 60, only with a previous route. Enlarged icons may overlap Cody but must avoid Back/status controls and fit the circular chord.

Visibility precedes sound

A prepared cue or pose does not prove display presentation. A newly visible retired frame admits the SFX. Hidden or blocked icons cannot emit a delayed appearance sound. Native errors remain visible in structured state and logs.

Cody Studio on Windows

N03 / Desktop appendix: synthetic preview, audio boundary and branding assets.



VibeWare / Cody Studio

Face Shape Inputs Inspect

Consolas UI / equal tab widths and padding

Fake driver; shared original sounds

The PC driver links the existing Cody C++ personality, whistle and typewriter modules. Their original PCM reaches the Windows playback backend; boot uses the generated WAVs. Tap, newly visible symbols, whistle and greeting glyphs connect to that owner. There is one playback voice, no mixer.

Synthetic is explicit

PC playback is never published into firmware snapshots. Native playback errors are retained and shown without stopping the preview. UI launch and a responding first frame have been observed; listening, complete idle cycles and physical device behavior remain unverified.

Approved logo and useful links

The existing VibeWare PNG is reused unchanged in the desktop header and window icon. These links open only on a click:

GitHub / project

Personal website

VibeWare manifesto

Where the original asset lives

Obsidian / 20_Execution / Projects / VibeWare / Branding / vibeware-logo.png. The repository copy, MIT license and provenance are in simulator/windows/assets/branding/. Desktop branding does not change the device boot artwork.

Errata and corrections

Revision date: 06 October 2026 / Earlier pages and errata remain intact.

Mouth / Manga 03-04, 15 and 05 October idle appendix

Replace the earlier 35% closing and 16-22% reopening guidance with 75% closing and 16-24% reopening. Width moves 18% toward its limits. Stressed peak opening is 0.24. Rest lip and tongue geometry now follow the revised rig.

Icons / Manga 03-04, 14; Navigation 10-12; Idle 16

Correct Main/Sleep placement to +30 px right, +40 px down and scale to 3.6x (+20% over 3x). Both fades are 400 ms. Micro remains excluded. All fourteen cues retain an enabled, original appearance sound with bounded admission.

Interaction / Idle 16 and Sleep 35A

Document moving caress recognition, Affection, varied Fear/Frustration eye responses, hysteresis and one fresh-press tap click. Single-voice playback and best-effort logging cannot block touch/rendering.

Idle / 05 October appendices; Navigation 10-12

Correct Whistle width 0.42 to authored minimum 0.5. Retain the 20-40 s eligible wait, 3.2 s gesture and 40 s cooldown. Yawn/Greeting are silent; Whistle attempts one 300-ms sound. Stress does not schedule idle gestures.

Boot / Navigation 02, 06; screens 01-05, 16, 35A/35B

Use 2.0 s Sleeping, 1.5 s Waking and 2.0 s Ready, excluding actual service waits. Paired returning devices skip setup and request random Affection/Joy in Idle. Standby wake remains a separate sequence.

Desktop / Navigation simulator appendix; Manga 15 handoff

Record the PC fake audio driver, Consolas UI, equal tabs, approved VibeWare asset and project/site/manifesto links. Synthetic PC observations are separate from firmware and physical-device evidence.

Preserved pages 01-19, including earlier errata. Firmware checkpoint de9b8b18 built/flashed on COM10; newer mouth/Whistle checkpoint f5ae5e2 has not been compiled or flashed. Two approved checks passed; four stopped/failed and have not been rerun. No physical visual/audio observation is claimed.

Canonical sources for this revision

assets/cody/cody.yaml; assets/cody/personality.yaml; CODY_rig.cpp / CODY_response.cpp; docs/architecture/cody/runtime.md, idle-scenes.md and personality-icons.md; simulator/windows/cody_simulator.py and cody_fake_audio.py. Clip durations come from the versioned personality audio manifest.

VibeWare first. Cody next.

B01 / The approved floppy-insertion animation becomes the opening brand signature.

Every cold boot begins with the VibeWare floppy. Its familiar pixel form introduces the maker before the companion comes to life.



0.00 s | 0.58 s | 1.25 s | 1.91 s | 3.00 s

A recognizable opening

The blue floppy and VW mark remain the original approved artwork. Black resolves the transparent background; exact twofold pixel scaling keeps the retro visual character crisp and centered on the circular display.

From identity to personality

The insertion motion belongs to the VibeWare introduction. Cody's existing Sleeping 01, Waking 02 and Ready 03 follow it, so the brand has its own moment before the character takes over.

VibeWare manifesto

https://umbertogiacobbi.biz/vibeware/manifesto

A shared opening signature for Cody and Luna.

The VibeWare startup sequence

B02 / VibeWare precedes screens 01-03; first-run setup and returning-device routes retain their identities.

VIBEWARE	01 / SLEEPING	02 / WAKING	03 / READY	NEXT ROUTE
3.5 s per cycle	**2.0 s**	**1.5 s**	**2.0 s**	**Existing policy**
Approved floppy	Existing Cody fade	Existing expression	Existing expression	Hello 04 or Idle 16

Nominal artwork dwell: at least 3.5 s of branding plus the existing 5.5 s character sequence. Real startup work, frame transfer and deliberate DMA parking can add wall time.

Complete the visible cycle

The 42 original frames retain their 80/90-ms timings. Cody starts each dwell after frame retirement and repeats while the real service checkpoint is pending. A successful checkpoint never truncates the current cycle or invents numeric loading progress.

Keep the right owner

Cody uses native 2D and its existing bounded DMA owner. Luna uses LVGL with the same flash-owned data. Original transparency is composited on black. No removable SD, network request or on-device GIF decoder is required.

Preserve ordinary wake

The introduction belongs to cold boot and software reset. Cody standby wake and actual deep-sleep Wake keep their existing presentation. First-boot, pairing and stored preferences are unchanged. Errors remain real and startup-critical failures stop handoff.

Implementation evidence

Approved GIF packaged; native/LVGL and Windows source integrated. Firmware build/size, host checks, simulator execution, rotations and physical fluidity are still pending explicit authorization.

Errata and corrections

Revision date: 06 October 2026 / VibeWare boot identity / Every earlier page and correction is preserved.

Affected original pages and screens

Original page 02 (Boot and entry); page 20 / N01 (shorter boot); page 22 / N03 (Studio branding); page 23 (earlier errata). Screen IDs 01-05 and 16 remain unchanged; 35A/35B wake is unaffected.

Corrections in this revision

Replace the statement that startup shows only Cody with the VibeWare introduction before screens 01-03. Retain the existing 2 / 1.5 / 2-second character phases. Replace the old public GitHub manifesto reference with the user-provided website URL. Desktop-only branding is now extended to the device boot.

Preservation and evidence

All 23 existing pages, earlier errata, bookmarks and original page content are retained. New pages B01 and B02 document the supplied artwork and implemented behavior. This final page records the revision; it does not certify firmware compilation or physical behavior.

Approved source and canonical reference

Source: Obsidian / VibeWare / press-kit / assets / boot / vibeware-floppy-insert-transparent.gif. The original is copied unchanged into the repository; generated metadata records its SHA-256, disposal-composited crop, original durations and flash pixel-data size.

https://umbertogiacobbi.biz/vibeware/manifesto

Pending validation

Build and size budgets, frame dwell under load, real errors, rotation, first setup/returning boot, standby/deep-sleep wake, Windows presentation and physical appearance remain unverified. No firmware tests, simulator launch or hardware operation accompanied this revision.

Startup: two saved decisions

Local Wi-Fi/IP first. Then the retained Codex pairing. Public Internet is not required.

1 / No saved Wi-Fi profile

A valid absent-profile observation opens 04 > 05 > 06 > 07 > 09. Debug may show 39 before 09. Continue: 10 > 36 > 11 (skin), then the Codex decision.

2 / Saved Wi-Fi; waiting for the network


42 / No connection keeps the profile while the Wi-Fi owner reconnects. Network setup reopens 04-09; Later returns to Idle. Invalid/stale data shows UNAVAILABLE.

3 / LAN ready; no saved Codex pairing

40 / Connect Codex? Yes starts the code on 12. No returns to 16 / Idle without a settings write or CCP request. The next boot may ask again.

4 / LAN ready; saved Codex pairing

Adopt the saved attempt and search on 14. Only authenticated READY enters 15. A retained identity alone never means the PC is connected.

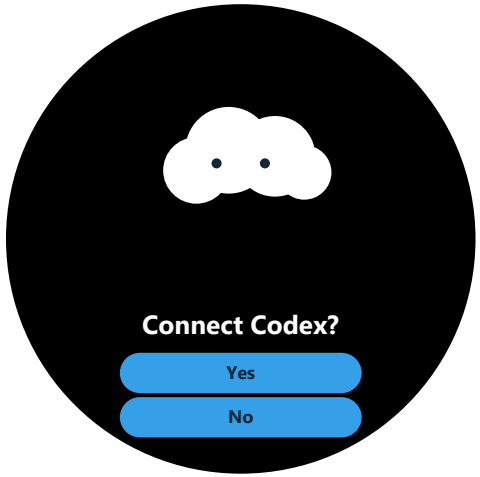

40 / Explicit Yes or No

Illustrative UI. Choice controls do not start pairing until the user acts.

Reopen setup from Cody

Hold the visible character still for 1.5 seconds. No button-based factory reset is added.

41 / Setup

Connect Codex opens a fresh display-code attempt. Network setup reopens 04-09. Left Back returns to Idle. Opening or leaving the menu erases no Wi-Fi, skin or pairing.

Keep the gesture deliberate


Available from stable Idle, PC search/connected and terminal CCP errors. Moving more than 12 px, a sample gap over 250 ms, rotation or a lifecycle interruption cancels the hold. Busy work and active provisioning are excluded; release before choosing.

PWR / existing policy

Single: standby/wake; active Debug defaults to screenshot countdown. Long release: standby. Debug double within 500 ms, or a continuous 3-second hold: restart preserving data.

BOOT / existing policy

Short: restore a dim/sleeping panel first, otherwise toggle fullscreen/status arcs. Hold 3 seconds: Debug restart; Release has no firmware reset action. Saved Wi-Fi and CCP survive restart.

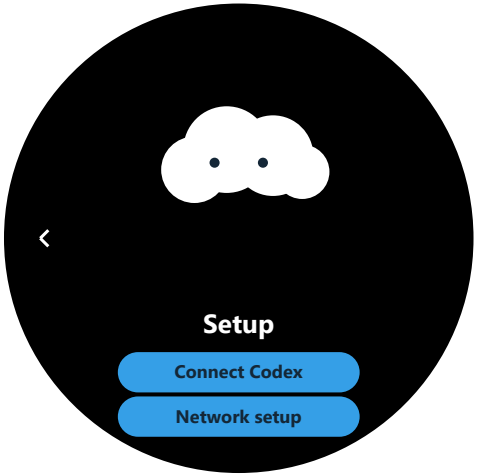

41 / Reversible setup access

Illustrative UI. A true factory erase is a separate explicitly requested operation.

Errata and corrections

Revision date: 09 October 2026 / CODY-SETUP-20261009

Original analysis gap

The initial analysis omitted startup with Wi-Fi already configured but no saved Codex pairing, and did not define a reversible user entry to setup. This was an original analysis gap (buco di analisi iniziale), now addressed in source.

Affected original pages and screen IDs

Original pages 02, 04, 16 and 25; screens 04-16, 35B, 36. Earlier errata on pages 19, 23 and 26 remain unchanged.

Corrections

Add 40 / optional Yes-No Codex choice, 41 / character-hold Setup, and 42 / reconnect wait. 09 means local Wi-Fi/IP; 11 selects a skin. No/Later performs no persistence or new CCP request. Saved pairing returns to 14 and requires authenticated READY for 15. PWR/BOOT do not clear pairing.

Preservation

All 26 previous pages, earlier corrections, bookmarks and unrelated content are retained. This dated addendum supersedes only the cited startup/setup/install statements; the original numbering stays stable.

Evidence and limits

Firmware source implementation and static integration review completed. PDF pages rendered and visually reviewed. No firmware tests, validation scans, configure/build/size, simulator execution, device pairing/input, flash or erase accompanied this revision. Runtime validation is pending.

Setup after standby

Hold Cody for 1.5 seconds to choose Network setup or Connect Codex.

04-06 / Escape the network loop


After inactivity, Welcome previously sent its first touch straight back to Let's pair. Welcome now opens 41 on a stationary tap release. A character hold also opens 41 from timeout Welcome, Let's pair or the installation QR page when no operation is busy.

35B / Wake, then hold

A finger already down during wake starts its 1.5-second hold only on a fresh acquired sample with the restored visible character. Hidden standby/wake time never counts. Movement over 12 px, report gaps over 250 ms or rotation cancel the hold. Release before choosing.

41 / Two explicit destinations

Upper Connect Codex opens 12 and its six-character CCP code using the local Wi-Fi/IP connection. Lower Network setup explicitly opens 04-09. No Internet probe is required. Active provisioning, worker admission and pending cancellation block menu access.

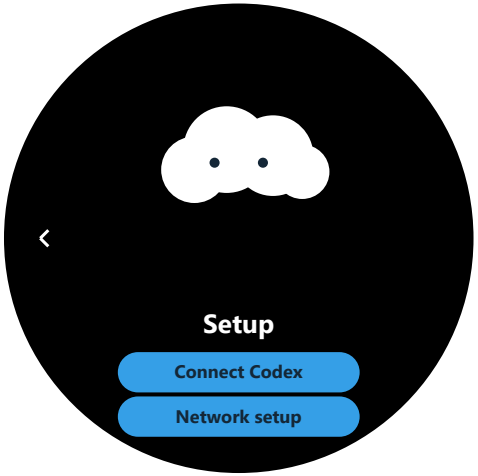

41 / Same choices after wake

Illustrative UI. Existing credentials and retained CCP pairing are preserved.

Errata and corrections

Revision date: 09 October 2026 / recovery correction

Original analysis gap

The first analysis did not reconcile the legacy Welcome timeout/touch path with reopening setup after standby. This was an original analysis gap (buco di analisi iniziale).

Affected pages and screens

Previous setup addendum: page 28. Affected screen IDs: 04, 05, 06, 12, 35B and 41. Earlier dated errata remain intact.

Corrections

Timeout Welcome tap release and stationary character holds on resting 04-06 reopen 41. A hold spanning wake starts only after visible restoration. Connect Codex goes to 12; Network setup goes to 04-09. Busy work and pending cleanup cannot be bypassed.

Evidence and limits

A user-authorized 90-second passive serial capture confirmed LAN/DHCP, Welcome inactivity return and standby. No Connect Codex press occurred in that capture; the initial wrong-selection report remains unresolved. The correction has static source review; corrected physical behavior still needs observation.


Preservation

All 29 preceding pages, prior errata and unrelated content are retained. This addendum supersedes only the cited escape/gesture behavior. Saved credentials are not erased.

Cody action language

IMPORTANT UI DECISION / approved 09 October 2026 / binding for future screens



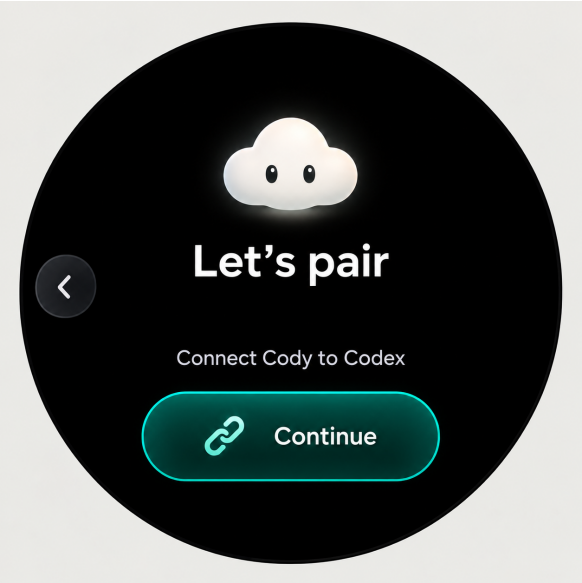

Layout rule

Two actions: rounded cards side by side. Three: the same pair plus one centered action below. One: a wide centered capsule with its icon left of the label.

Shared visual language

Dark restrained gradients, thin semantic borders, white labels and action icons. Teal: affirmative/Codex; blue: network; graphite: No/Later/Options; amber: Retry/Cancel.

Circular geometry

Keep Back separate at the left. Share rendering and touch bounds in every orientation. QR pages keep the quiet zone and use the compact single-action variant.

Options and touch continuity

Setup keeps Network setup and Connect Codex distinct. Options opens screen 10.

41 / Setup

Left card: Connect Codex. Right card: Network setup. Centered third action: Options. Options opens 10 / Make it yours, then 36 and 11 / skin. Done returns to Setup; Back retraces this local preferences path. No network or Codex association is erased or implicitly started.

40 / Connect Codex? and 42 / No connection

Yes/No and Network setup/Later are side by side, with purpose-specific icons and colors. Their existing explicit backend admission stays intact. Screen IDs 05-15 and 36 share the action styling where an action is present.

Observed freeze / original cause

An authorized 90-second reset/capture recorded Yes at 16497 ms, entry to Connect Codex at 16498 ms, then a CST9217 report with fifteen FF bytes and ACK=FF at 17112 ms (expected AB). ESP_ERR_INVALID_RESPONSE stopped the renderer. LAN/IP was ready.

Scoped runtime correction

The touch owner still rejects malformed reports and publishes the real error. After startup only, that acquisition error is optional for rendering. Discard queued gesture reports, cancel the gesture and require a real acquired release before another press. No release is invented. The same acquisition error can mean an I2C NACK; its origin is not inferred. Startup, other acquisition errors, locks and route failures remain terminal.

Evidence boundary

Native source integration and approved mockups are documented here. The underlying cause of the FF report and corrected physical touch/standby behavior remain unverified. A successful build/flash alone does not establish those outcomes.

Errata and corrections

Revision date: 09 October 2026 / important UI decision and touch correction

Important design decision

The user approved the two-column pair plus centered third action, and the wide single action with icon to the left. These are binding layouts from this revision onward. Gradients, icons and semantic colors are required across Cody screens.

Affected original material

Original pages 02, 04, 16 and 25; screens 04-16, 35B, 36. Earlier errata on pages 19, 23 and 26 remain unchanged. Also affected: screens 05-15, 35B, 36 and 40-42. Earlier stacked-blue control illustrations are superseded only in their action layout/styling.

Original analysis gaps

The initial analysis omitted Options re-entry and did not distinguish an optional malformed runtime touch report from renderer failure. This was a buco di analisi iniziale. Options now opens 10 and returns to Setup after preferences/skin.

Corrections and limits

Yes/No become horizontal and semantic. The measured invalid touch report retains its original error while rendering continues with interrupted gestures. Hardware FF root cause and physical corrected behavior remain open.

Preservation

All 31 preceding pages, earlier errata and unrelated content remain unchanged. Approved images are design references, not physical device screenshots.

Addendum / automatic context

CCP 0.4 / screens 15-20 and 32 / corrected 10 October 2026.

15 / Connected, waiting for Codex

An authenticated PC reply proves presence. Until a genuine prompt arrives, show Waiting for Codex. There is no device picker and no manual selection command in Codex.

The user prompt chooses context

Trusted UserPromptSubmit sends the exact chat and turn identities to CCP. The latest prompt-hook emission becomes the followed context for this PC's paired Cody devices. SessionStart alone does not select a chat.

Background chats stay in the background

Tool activity, completion and interrupts from another chat cannot steal the followed context. A new prompt in that other chat switches it. A tab click alone has no documented hook signal and is not claimed as focus tracking.

32 / Recover the same context

LAN reconnect restores the broker's current context. A broker restart waits for the next genuine prompt. The workspace label is display text, not identity. No transcripts, prompts or responses are retained by CCP.

Errata and corrections

Revision date: 10 October 2026 / authenticated chat activity

Affected original material

Original pages 5-6 and 8; screens 15-20, 26-27, 31-32.

Analysis gap corrected

Screen 15 originally proved PC presence only. The initial analysis omitted explicit chat selection, shared runtime lifetime and event freshness. This was a buco di analisi iniziale; it is now addressed in source.

Contract and UI

CCP 0.3 adds metadata-only hooks, exact session selection and nonce-bound ACTIVITY messages. The canonical snapshot owns validity and errors. 18U adds the unavailable state. Setup re-entry preserves the selected context.

Evidence and limits

The user confirmed Connected on 10 October after real pairing. That evidence belongs to the previous firmware and CCP 0.2. New code is implemented; host checks, hook trust/autoload and physical 0.3 behavior are not established here. A response-ready event is never reported as task success.

Preservation

All 34 previous pages and earlier errata remain unchanged. The approved gradient/icon action layouts remain binding. These diagrams describe architecture, not captured device pixels.

Addendum / current integration contract

Screen IDs 15-20, 18U and 32 / genuine hooks are required.

PC ownership

One local broker owns the paired PC identity and authenticated activity. Multiple MCP clients share it. Trusted hook metadata supplies session/turn/tool identities; prompts, replies, transcripts and tool arguments are discarded at ingestion.

Device ownership

Cody receives nonce-bound ACTIVITY alongside authenticated READY. The canonical snapshot owns validity, timestamps and real errors. UI and audio consume it; neither chooses a chat nor reads host data independently.

Limits and observation

Eight seconds without packets expires device activity; 120 seconds without an active hook marks activity unavailable. Missing input never becomes success. Hook acceptance is not evidence of displayed pixels or audible playback.

Deployment and references

CCP 0.4 removes manual select/clear tools. Install the updated plugin, review/trust its hooks and submit a real prompt. Source: learn.chatgpt.com/docs/hooks and developers.openai.com/plugins/build/plugins. Actual hook/display delivery remains to verify.

Errata and corrections

Revision date: 10 October 2026 / CODY-AUTO-CONTEXT-20261010

Main pages updated

Current flow is integrated from the cover onward, using screen IDs as the reference. Screens 10-15, 36, 40 and 41 now show Skin, real pairing and the agreed setup access. Screens 15-20, 18U and 32 describe automatic context and real activity.

Manual selection removed

The old Choose/Pick a chat prerequisite was an initial analysis gap (buco di analisi iniziale). CCP associates the latest genuine prompt automatically. Cody only presents the supplied context. Background chat events do not change it.

History retained

Earlier addenda, unrelated pages and errata remain at the end. The activity addendum itself is corrected. Historical errata mentioning explicit selection describe the previous decision and are superseded by this dated revision, not current instructions.

Evidence and limits

CCP 0.4 and the Waiting for Codex caption are source changes. New host checks, plugin hook execution and physical behavior require their own evidence. The prior successful Connected/standby capture does not verify this revision. Screen artwork is illustrative.

Addendum / pairing conservato

Registro della decisione / 10 ottobre 2026 / screen 04-16, 35B, 36 e 40-42.

Primo avvio / Dispositivo gia' configurato

Senza Wi-Fi salvato apro 04-09. Con credenziali ma senza IP uso 42. Con LAN e senza pairing offro 40. Con un record valido riprendo 14-15, senza verificare Internet.

Setup / Consenso alla sostituzione

Apro 41 tenendo premuto il personaggio per 1,5 secondi. Con un pairing salvato mostro Already paired: Keep pairing, Pair again oppure Forget. Retry riprende la ricerca senza codice nuovo.

Pairing / Presenza / Attivita'

Con 13 confermo il pairing. Let's go cerca subito il PC. Su 15 confermo CCP e attendo il prompt reale. Gli hook seguono la sua chat automaticamente: ho eliminato la scelta manuale.

Options / Scelte locali

Apro Make it yours da Options e riutilizzo Settings e Skin. Torno al chiamante corretto. Tengo separati preferenze, sostituzione del PC e qualsiasi cancellazione esplicita.

Addendum / casi di recupero

Screen 14-16, 18U, 32, 35A/35B e 42 / conservo l'identita' salvata.

Internet giu', LAN funzionante

Continuo a usare il collegamento Wi-Fi/IP locale tra Cody e CCP. Tengo separata la disponibilita' dei servizi online di Codex: il PC presente sulla LAN non mi garantisce una risposta del modello.

Wi-Fi o IP locale assenti

Conservo credenziali e PC associato. All'avvio mostro 42 con Network setup o Later. Durante il recupero attendo la LAN e riprovo con l'identita' salvata. Gli errori reali del trasporto restano visibili nello stato.

PC o CCP assenti

Continuo la ricerca su 14; uso 32 per la perdita dopo un'attivita' gia' seguita. Retry riprende la ricerca senza nuovo codice. Posso comunque tenere premuto Cody per 1,5 secondi e aprire Setup.

35A / 35B e aggiornamento firmware

Con lo standby ordinario conservo percorso e pairing. Al risveglio recupero la presenza autenticata. Un flash applicativo normale preserva NVS; cancellazione, dati danneggiati o altra identita' PC sono casi distinti.

Addendum / conferma e reset

Screen 12, 13, 40 e 41 / conservo rete, skin, preferenze e log.

Due candidati, attivi conservati

Sul PC salvo il candidato DPAPI prima di PAIR; sul Cody uso ccp_pending. Tengo separati i vecchi attivi. CONFIRM oppure READY fresco provano il PC e consentono commit e rilettura sul Cody.

Chiudo con una prova del commit

Il PC promuove dopo ACTIVE o COMMITTED autenticati, mai per il solo FIND. Dopo ogni READY valido Cody ripete COMMITTED con il nonce corrente: recupero riavvii e ACK persi senza un altro codice.

Cancel / Chiudo il tentativo

Dal codice pronto scarto il candidato Cody. Conservo il vecchio link operativo; sul PC il candidato resta pending. Per sostituirlo richiedo nuovo codice e replace_pending:true esplicito. Una prova con la vecchia chiave non autorizza la cancellazione.

Forget / Solo il pairing Codex

Confermo Forget pairing con Go back / Forget e Only Codex is reset. Cancello solo i record CCP di Cody; il PC conserva il suo. Dopo l'esito reale mostro Unpaired / Pairing removed, poi Done -> Setup.

Errata and corrections

Data revisione: 10 ottobre 2026 / CODY-RETAINED-FLOW-20261010

Pagine originali 1, 2, 3, 4, 5, 6, 10, 12

Ho integrato il flow corrente nelle pagine principali, conservando quelle non coinvolte e tutti gli addenda/errata precedenti. Riferisco il percorso agli screen ID anche quando cambia la paginazione.

Screen 10-16, 32, 35B e 40-42

Options salva quattro preferenze; Already paired offre Keep pairing, Pair again e Forget. Separo Retry, Cancel e reset. Uso journal separati e COMMITTED per il commit reale. Let's go cerca subito.

Buco di analisi iniziale e responsabilita'

Avevo mescolato commissioning, recupero e attivita', senza chiedere conferma della sostituzione. Ho esplicitato queste decisioni. CCP segue il prompt autentico; ho ritirato la vecchia scelta manuale della chat.

Decisione UI ed evidenza

Conservo il linguaggio approvato: gradienti, icone, coppia orizzontale o capsula singola e pulsanti senza teletype. Con questa revisione aggiorno sorgenti e documenti; elenco separatamente le prove di dispositivo, hook e simulatore ancora da completare.

Addendum / notifiche e decisioni

Revisione 10 ottobre 2026 / screen 26, 27 e 31.

26 / Codex needs you e Open

Mostro il contesto dichiarato, il titolo e l'avviso. La richiesta ha un ticket distinto e dura 180 secondi. Aprire o chiudere una vista non allunga la scadenza e non seleziona una risposta.

27 / Choose a reply

Uso due card affiancate; con tre aggiungo quella centrata sotto. Ogni scelta ha un ID stabile e un significato proprio. Back torna a 26 e conserva la domanda, senza inviare.

27 / Review choice

La scelta apre un riepilogo con descrizione e capsula Send. Back mi riporta alle opzioni. Dopo Send tengo la scelta ferma e mostro Sending reply. Non aggiungo un quarto pulsante sotto tre card.

31 / Reply sent dopo consegna

L'ACK UDP received lascia Waiting for Codex: CCP ha registrato la scelta. Solo con delivered mostro Reply sent e Delivered to Codex; Done riprende il contesto precedente 17, 18 o 16.

Addendum / PR solo in lettura

A03 resta in vigore / screen 21-24; 25 ritirato.

21 / PR pending

Osservo soltanto il PR indicato. Conservo l'esatto head dello snapshot esplicito fornito da Codex. Non uso Stop come prova dei check e non offro merge, approve, close, rerun o comment.

22 / Checks running e Checks passed

Mostro numeri solo da un elenco completo e attuale sullo stesso head. Checks passed non ha pulsanti: attendo la fine della narrativa e tre secondi, poi torno al lavoro.

23 -> 24 / View failures

L'unica azione apre i nomi reali dei check falliti: al massimo sei, fino a 48 caratteri ASCII ciascuno. Un input non rappresentabile viene rifiutato esplicitamente; non taglio nomi e non invento totali.

24 sola lettura / 25 ritirato

Mostro tre nomi per pagina, fino a due righe ciascuno; scorro verticalmente e tengo Back laterale. Non offro View log o righe selezionabili. Log, diagnosi e correzioni restano sul PC.

Addendum / consegna e comandi

Screen 31, 32 e nuovo setup / distinguo accettazione e risultato.

received non e' delivered

Il poll restituisce scelta e answer_id. Un poll successivo con acknowledge_answer_id uguale prova la ricezione del chiamante: solo allora passo a delivered e allo screen 31.

Scadenza e consegna incerta

I 180 secondi valgono anche in received. Se ho gia' ammesso Send mostro Reply unconfirmed: puo' mancare solo l'ACK. Prima di Send uso Request expired. Nessun Retry o ACK tardivo riapre la domanda.

Riavvio esplicito / dati conservati

Scrivo 'resetta il device codice 043533477' nel messaggio corrente: nove cifre, zero compreso. E' un controllo anti-equivoco, non una password; non lo completo dai documenti. Uso il peer paired LAN, dati conservati. ACK = accepted; boot = nuova presenza.

Factory reset / primo setup

Con 'formatta cody 043533477' elimino preferenze, Wi-Fi e pairing; conservo firmware, asset e SD. ACK indica ammissione. Riavvio solo dopo cancellazione verificata; poi riparto dal setup Wi-Fi. Un errore resta visibile e non avvia il reboot.

Errata and corrections

Data revisione: 10 ottobre 2026 / CODY-NOTIFICATIONS-20261010

Pagine originali 1, 5, 6, 7, 8, 9, 10

Ho aggiornato le pagine principali coinvolte, mantenendo quelle estranee al flow e gli addenda precedenti. Uso gli screen ID.

Screen 21-27 e 31-32

Ho applicato A03: PR in sola lettura e 25 ritirato. Ho rimosso View log e il vecchio elenco verticale. Ora 27 ha card e riepilogo Send; 31 richiede delivered dopo l'ACK del destinatario.

Buco di analisi iniziale

Avevo lasciato ambigui ricevuta, consegna e scadenza, oltre a illustrazioni PR superate. Li separo con ticket, received/delivered e 180 secondi. Timeout e offline non scelgono risposte.

Storico, comandi e prove

Ho separato riavvio e factory reset: il primo conserva i dati, il secondo cancella la configurazione per tornare al setup. ACK indica ammissione. Conservo storico ed errori reali; gli esiti host e fisici sono in done.md.