CLICKABLE ROUTE MAP

From power-on to every route family

Click a node or a cross-page arrow. Page numbers also work as references on paper.

POWER-ON AND CONNECTION

Power-on / recovery p. 02 → Wi-Fi setup p. 03 → Pair Codex / find PC p. 04 → Dashboard p. 06

With working saved Wi-Fi, discovery can start directly. Startup, pairing and connection details are on pages 02-07.

FROM DASHBOARD

↓ BOOT
Options p. 10

↓ Arrows or shake
Statistics / About p. 08

↓ Swipe right
Events / Current turn p. 18

↓ Double tap
Start dictation p. 15

FOLLOW THE ROUTE OR LOOK UP AN ACTION

→ Dictation / Send and wait p. 16
→ Dictation / Return or error p. 17
→ Buttons and gestures p. 14
→ Saved PC / Manage pairing p. 05
→ Wi-Fi, Internet and Codex p. 07
→ Questions / Open and review p. 19
→ CCP hooks and requests p. 21
→ About and diagnostics p. 09
→ Original screen IDs p. 30

Screen key Studio frames use synthetic data. Firmware illustrations show source-based routes with example values.

REVIEW NOTES

01 Start here


02 Flow to simplify

03 Screens to keep

START AND RECOVER

From power-on to the first route

Cold boot or Restart plays the VibeWare animation, then the saved network and PC link determine the next screen.

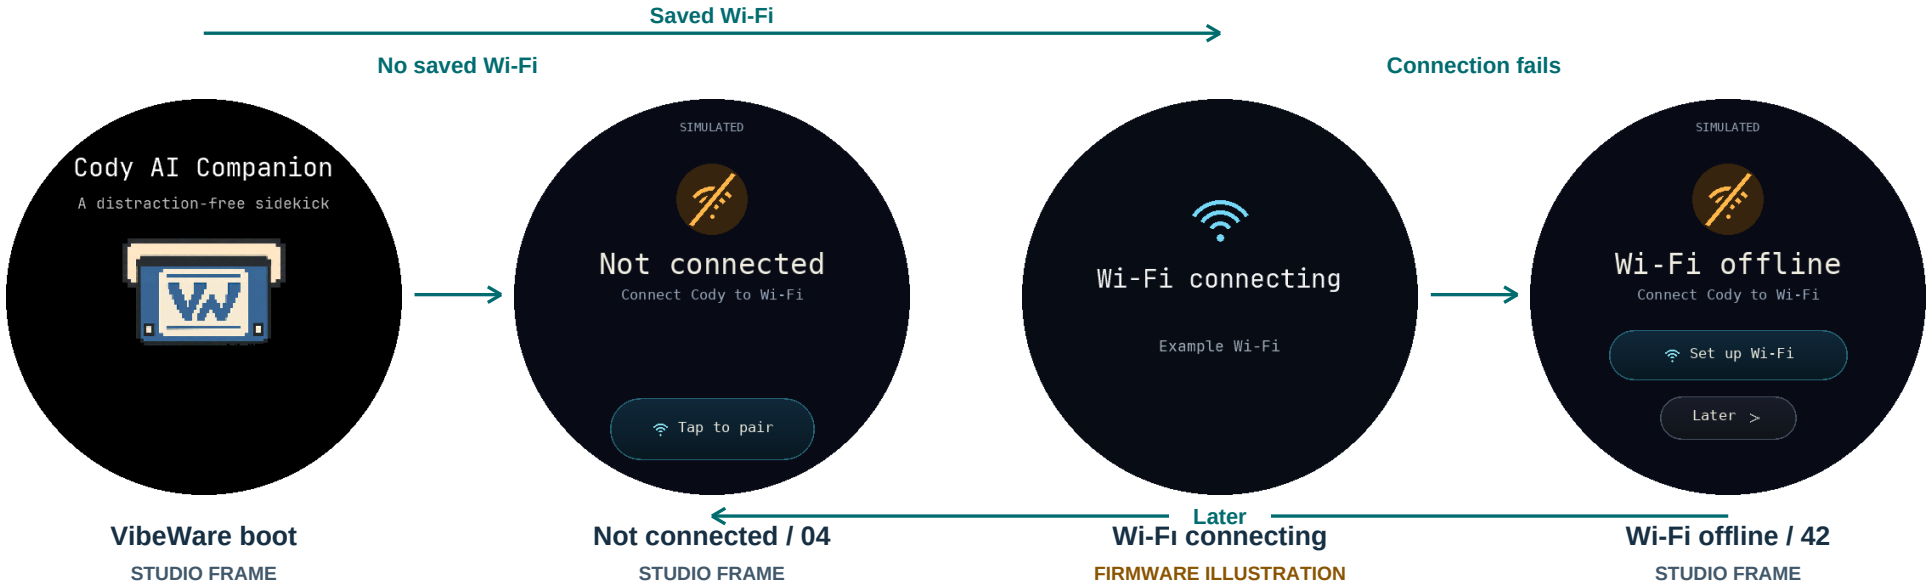

No saved network -> Not connected. Tap to pair opens Wi-Fi setup.
Saved network -> Wi-Fi connecting. After failure, Later from Wi-Fi offline opens Not connected.

→ Tap to pair / Set up Wi-Fi p. 03

→ Wi-Fi ready / Pair or find PC p. 04

→ Later / Not connected p. 02

→ Power and wake p. 14

REVIEW NOTES

01 First screen to keep

02 Offline entry to keep

03 Startup message to change

NETWORK SETUP


Join Wi-Fi from your phone

Start here from Not connected, Wi-Fi offline or the Wi-Fi icon in Connections.

App download

Show pairing QR

BLE setup

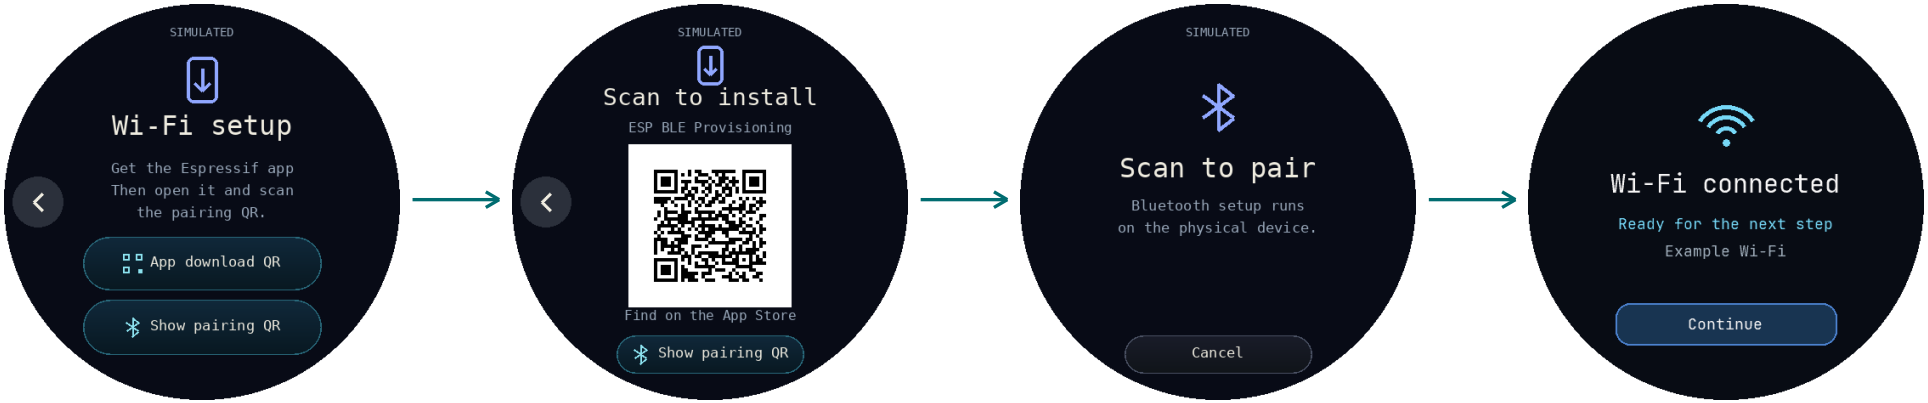

Wi-Fi setup / 05
STUDIO FRAME

App download QR / 06
STUDIO FRAME

Scan to pair / 07
STUDIO FRAME

Wi-Fi result / 09
FIRMWARE ILLUSTRATION

Show pairing QR also goes straight from Wi-Fi setup to Scan to pair. The session QR appears when BLE is ready.
Continue after Wi-Fi is ready. On failure, the available recovery route depends on the result.

→ Continue / PC pairing p. 04

→ Retry / Startup and recovery p. 02

→ Back / Connections p. 04

REVIEW NOTES

01 QR to keep

02 Retry destination

03 Phone instructions

PC CONNECTION

Pair Codex and wait for presence

Wi-Fi and CCP pairing are separate. From Options, Connections gives you distinct Codex and Wi-Fi entry points.

Codex / unpaired

Saved pairing

PC presence



Connections
STUDIO FRAME

Pair Codex / 12
STUDIO FRAME

Waiting for PC / 14
FIRMWARE ILLUSTRATION

Device / Codex connected
STUDIO FRAME

A new code is shown only when ready. A confirmed pairing is saved before normal discovery.
Existing pairing can lead to Saved PC. Later leaves the wait while retaining the saved pairing.

→ Saved PC actions p. 05

→ Wi-Fi icon / Join network p. 03

→ Later / Local dashboard p. 06

→ Back / Options p. 10

REVIEW NOTES

01 Pairing step to keep

02 What Later should do

03 What a linked PC should show

PC MANAGEMENT

Keep, replace or forget the saved PC

Open BOOT, Options, Connections, then Codex when an existing pairing is available.

Forget



Saved PC
FIRMWARE ILLUSTRATION

Forget pairing
FIRMWARE ILLUSTRATION

Pair Codex / 12
STUDIO FRAME

Keep reuses the saved link or resumes discovery. Re-pair explicitly authorizes replacement and needs Wi-Fi. Forget requires confirmation. Go back preserves pairing. A confirmed forget clears only the CCP link.

→ Keep / Waiting for PC p. 04

→ Re-pair / New code p. 04

→ Back / Connections p. 04

→ Local dashboard p. 06

REVIEW NOTES

01 Default saved-PC action

02 Confirmation wording

03 Return after forgetting

DASHBOARD

Where the device lands

With the Events feed available, Events is the initial dashboard. Device is the fallback when feed and turn are unavailable.



No Wi-Fi / IP
STUDIO FRAME



Wi-Fi / no PC
STUDIO FRAME



PC linked / Codex closed
STUDIO FRAME



Codex connected
STUDIO FRAME

These are separate observations, not steps in a sequence. Internet reachability is independent of these four frames.
From Device and statistics, swipe right for Events when available. BOOT opens Options. Tap restores the arrows.

→ Swipe right / Events p. 18
→ Arrows / Statistics p. 08
→ BOOT / Options p. 10
→ Double tap / Dictation p. 15
→ Connection matrix p. 07

REVIEW NOTES

01 Preferred landing screen

02 Status to keep prominent

03 How to reach Events

CONNECTIVITY

What works in each connection state

Wi-Fi/IP, Internet access, paired PC and Codex presence are independent.

CONDITION	AVAILABLE UI AND BEHAVIOR
No saved Wi-Fi / no IP	Local controls and provisioning. Saved statistics only if a prior valid record exists.
Wi-Fi and LAN, no Internet, PC absent	Timer, settings and available saved statistics. The PC link is required for remote events.
Wi-Fi and LAN, no Internet, CCP current	Local pairing and protocol traffic can work. Codex cloud work needs its own service access.
Internet, PC missing or Codex closed	Internet alone does not supply chat activity. A linked broker can show PC linked.
Internet, CCP and Codex current	Fresh Codex observations and admitted events. Missing or stale fields retain their own status.

Saved countdown needs a valid clock and reset instant. Expired windows need a fresh observation.
Dictation requires a voice-enabled build, Dictation On, a current paired LAN link and an eligible dashboard.

→ Dashboard states p. 06

→ Recover Wi-Fi p. 03

→ Pair or find PC p. 04

REVIEW NOTES

01 Keep available offline

02 Where to show saved data

03 What requires live Codex

STATISTICS

Read the active chat and available statistics

Use arrows, Options > Codex stats, or shake from the dashboard. A page without data is skipped.

Arrows

Title scrolls



Device / followed chat
STUDIO FRAME

Context / title start
STUDIO FRAME

Context / title end
STUDIO FRAME

Codex account
FIRMWARE ILLUSTRATION

Order: Device, Reset, Context, Limits, Today, Last 7 days, Token history, Credits, Codex account, About.
The active chat title belongs to Context and Current turn. Account metrics are account-wide.

→ Swipe right / Events p. 18
→ Arrows / About p. 09
→ Account identity p. 22
→ Double tap / Dictation p. 15
→ BOOT / Options p. 10

REVIEW NOTES

01 Default statistics page

02 Title speed

03 Statistics to hide

DEVICE INFORMATION

About and diagnostics

About follows its visibility setting. Once inside, the lateral arrows move through its child pages.

Next



System

STUDIO FRAME

Next



Memory

STUDIO FRAME

Next



Firmware

STUDIO FRAME



Project QR

STUDIO FRAME

Back from Project QR returns to Firmware. Back from System returns to the previous eligible widget.
Authenticated CCP diagnostics opens its own display. OK or the Normal request restores normal navigation.

→ Back from System / Statistics p. 08

→ Dashboard p. 06

→ BOOT / Options p. 10

→ CCP request handling p. 21

REVIEW NOTES

01 Information to keep

02 Back from System

03 Diagnostics access

OPTIONS

What BOOT opens and where Home returns

The three Options pages are Tools, Preferences and Device. Their lateral arrows change the menu page.

Next



Tools

STUDIO FRAME

Next



Preferences

STUDIO FRAME



Device

STUDIO FRAME



Visible screens

STUDIO FRAME

Home restores the dashboard. Codex stats opens the first enabled statistics page with data, or Device.
Visible screens edits saved preferences. New dictation is suppressed here and in child routes.

→ Home / Dashboard p. 06

→ Connections p. 04

→ Codex stats p. 08

→ Timer p. 12

→ Display / Behavior p. 11

→ Device actions p. 13

REVIEW NOTES

01 First Options page

02 Home destination

03 Rows to move

PREFERENCES

Display, behavior and idle animation

Back returns to the calling Options page. More options from Behavior opens More behavior.

More options

Enable + idle



Display

STUDIO FRAME




Behavior

STUDIO FRAME



More behavior

STUDIO FRAME

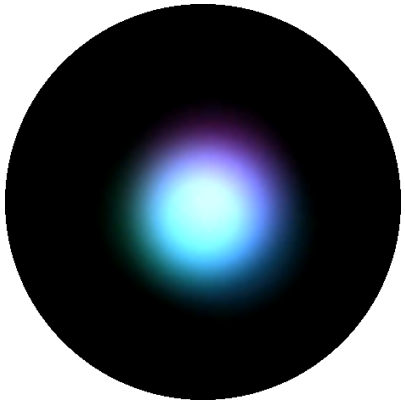

Idle screensaver

STUDIO FRAME

Display contains brightness and orientation. Behavior includes Shake to wake, Sounds and build-dependent Dictation.
The optional Synth Voice submenu belongs to More behavior on supported builds. A touch dismisses the idle globe.

→ Back / Preferences p. 10

→ Wake and rotation p. 14

→ Eligible dictation p. 15

→ Dismiss saver / Dashboard p. 06

REVIEW NOTES

01 Display controls to keep

02 Behavior rows to regroup

03 Screensaver default

LOCAL TIMER

Set a timer, leave it running and return

Options > Timer opens the local timer. It works while the PC is unavailable.

Start

Time expires



Timer setup
STUDIO FRAME

Timer running
STUDIO FRAME

Timer finished
STUDIO FRAME

Back exits the timer view while the countdown continues. Reopen Timer to cancel it.
At expiry Cody can wake from software standby. OK clears the finished timer.

→ Back / Options p. 10

→ Standby and wake p. 14

→ Home / Dashboard p. 06

REVIEW NOTES

01 Timer entry to keep

02 Back while running

03 Finished action

DEVICE ACTIONS

Restart, reset and Quick guide

Options > Device contains Restart device, Factory reset and Quick guide.



Options / Device

STUDIO FRAME



Restart confirmation

STUDIO FRAME



Factory reset confirmation

STUDIO FRAME



Quick guide / offline

STUDIO FRAME

Restart keeps Wi-Fi, pairing and settings. Confirmed factory reset clears the saved setup and restarts into first setup.
Cancel returns to the Device menu. On the last Quick guide page, OK returns to that menu.

→ Cancel / Options p. 10

→ Restart or reset / Boot p. 02

→ Quick guide / Gestures p. 14

→ Offline capability p. 07

REVIEW NOTES

01 Confirmations to keep

02 Guide entry

03 Recovery after restart

INPUT AND POWER

What each button and gesture does

Tap restores arrows. Shake changes dashboard statistics. A double tap has its own admission rules.

Auto-rotate



Buttons guide
STUDIO FRAME

Touch guide
STUDIO FRAME

Device / 0 degrees
STUDIO FRAME

Device / 180 degrees
STUDIO FRAME

Short BOOT opens Options while awake. Short PWR toggles standby and restores the retained route on wake. Hold PWR 3 s to request power off.
Shake on the dashboard opens the first eligible statistics page. Optional Shake to wake and Auto-rotate follow their saved settings.

→ BOOT / Options p. 10
→ Shake / Statistics p. 08
→ Double tap / Start dictation p. 15
→ After shutdown / Power-on p. 02
→ Orientation settings p. 11

REVIEW NOTES

01 Gestures to keep

02 Gestures to restrict


03 Guide wording

DICTATION 1 OF 3

Double tap starts here

Use open space on an eligible statistics screen, or Record voice on Device when that action is available.

Double tap → Chat confirmed → 3 s + PC ready

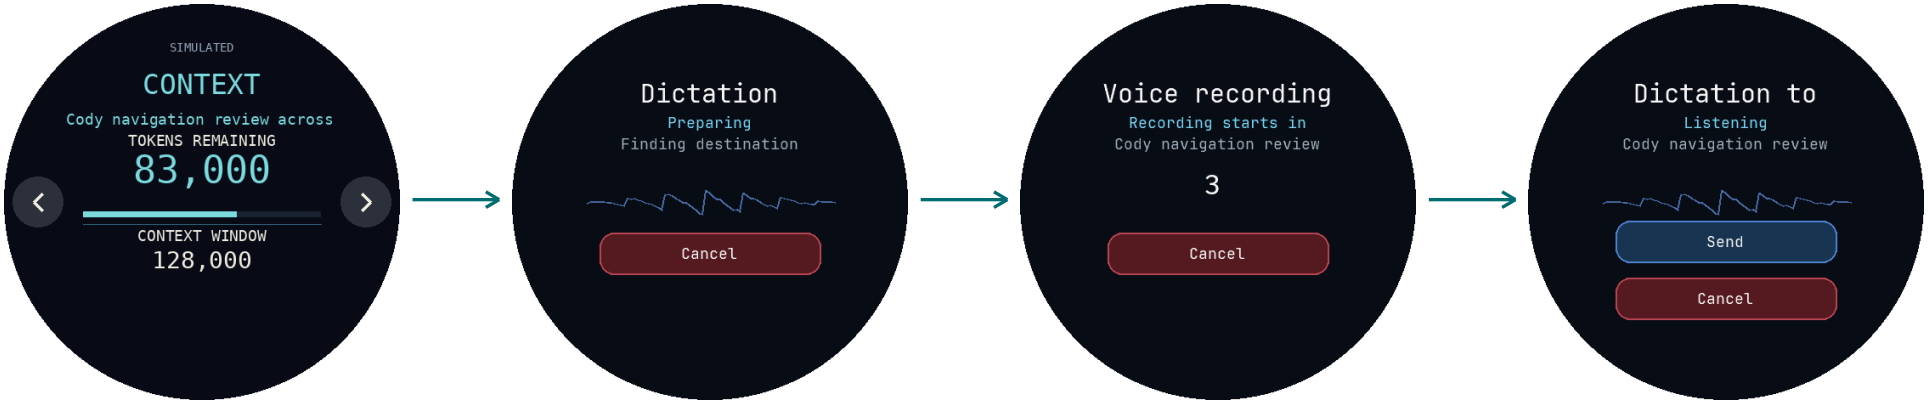

Example origin / Context
STUDIO FRAME

Preparing
FIRMWARE ILLUSTRATION

Recording starts in / 3
FIRMWARE ILLUSTRATION

Listening
FIRMWARE ILLUSTRATION

Requires the voice build, Dictation On, an eligible awake dashboard and a current paired LAN link.
Waiting for PC can appear after countdown. In Options or a child route, a double tap leaves that screen in place.

→ From dashboard p. 06
→ From statistics p. 08
→ Waiting / Sending p. 16
→ Cancel or error / Return p. 17
→ Options / No dictation p. 10

REVIEW NOTES

01 Where double tap should work


02 Countdown to keep

03 How to show the destination

DICTATION 2 OF 3

From recording to Codex admission

Listening can start after Waiting for PC. Send starts a separate three-second countdown once audio is available.

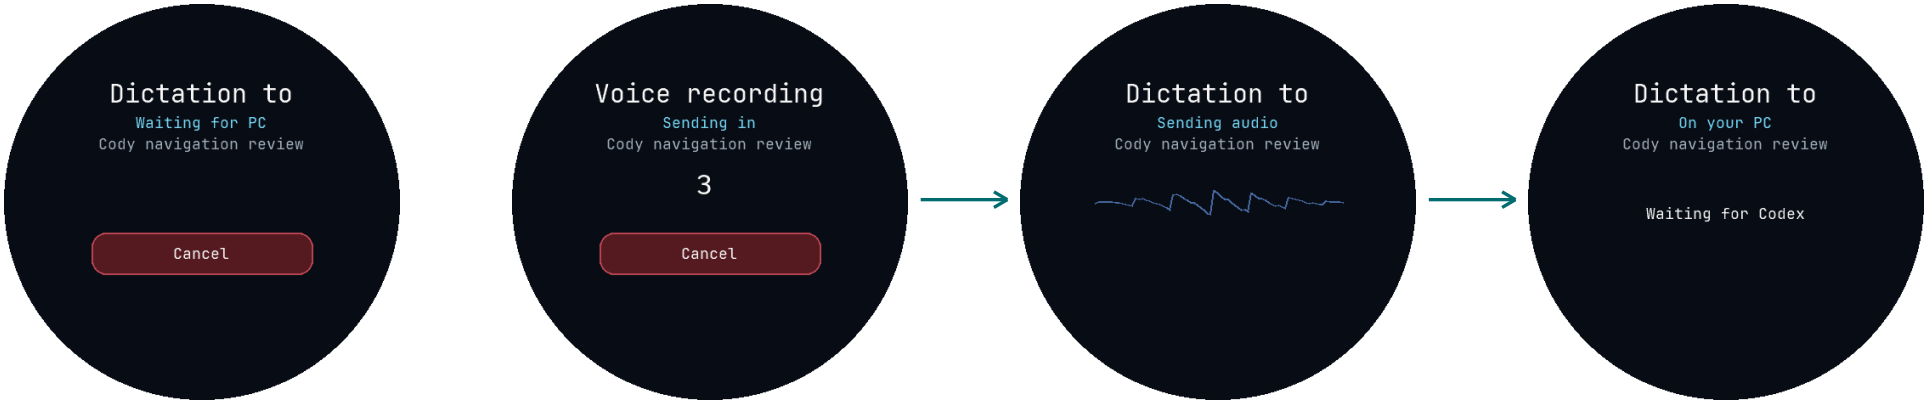

Waiting for PC
FIRMWARE ILLUSTRATION

Sending in / 3
FIRMWARE ILLUSTRATION

Sending audio
FIRMWARE ILLUSTRATION

On your PC
FIRMWARE ILLUSTRATION

Observed silence or the recording limit can also start the send countdown. Cancel is available before the transfer commits.
On your PC means the PC received audio. Sent to Codex appears after native admission.

→ PC ready / Listening p. 15

→ Codex admission / Sent p. 17

→ Cancel / Discarded p. 17

→ Link or destination error p. 17

REVIEW NOTES

01 When to start sending

02 Cancel timing

03 PC acknowledgement wording

DICTATION 3 OF 3

Where you return after dictation

The voice overlay preserves the originating dashboard page. The normal terminal dwell is about three seconds.



Sent to Codex

FIRMWARE ILLUSTRATION



Discarded

FIRMWARE ILLUSTRATION



Delivery unconfirmed

FIRMWARE ILLUSTRATION



Example / Chat unavailable

FIRMWARE ILLUSTRATION

Context -> dictation -> Context. Device -> dictation -> Device. The return follows the current dashboard if availability changed.
A queued BOOT opens Options after voice ends. Check Codex on the PC when delivery is unconfirmed or the destination fails.

→ Example return / Context p. 08

→ Example return / Device p. 06

→ Queued BOOT / Options p. 10

→ Start dictation again p. 15

REVIEW NOTES

01 Return screen to keep

02 Result dwell

03 Error message to keep

EVENTS AND CURRENT TURN

Open a queued event or inspect a turn

Events lists open questions and ready replies. Current turn follows observed activity in the chat selected by the latest prompt.

Swipe left



Events / two items
FIRMWARE ILLUSTRATION

Current turn / Editing
FIRMWARE ILLUSTRATION

Reply ready / detail
FIRMWARE ILLUSTRATION

Swipe vertically to move through Events. Tap a question to open it or a ready reply to read it.
Back from Current turn goes to Events. OK on a ready reply returns to Events after confirmed dismissal.

→ Tap question / Choices p. 19
→ Back / Events p. 18
→ Swipe right / Statistics p. 08
→ Unavailable / Device p. 06
→ Hook sources p. 21

REVIEW NOTES

01 Events default

02 Gesture to Current turn

03 Unread reply behavior

CODEX REQUESTS


Open a question, choose and review

An explicit CCP question can arrive as an alert or be opened from Events. The source question stays pending through review.

Multiple items

Tap question

Tap a choice

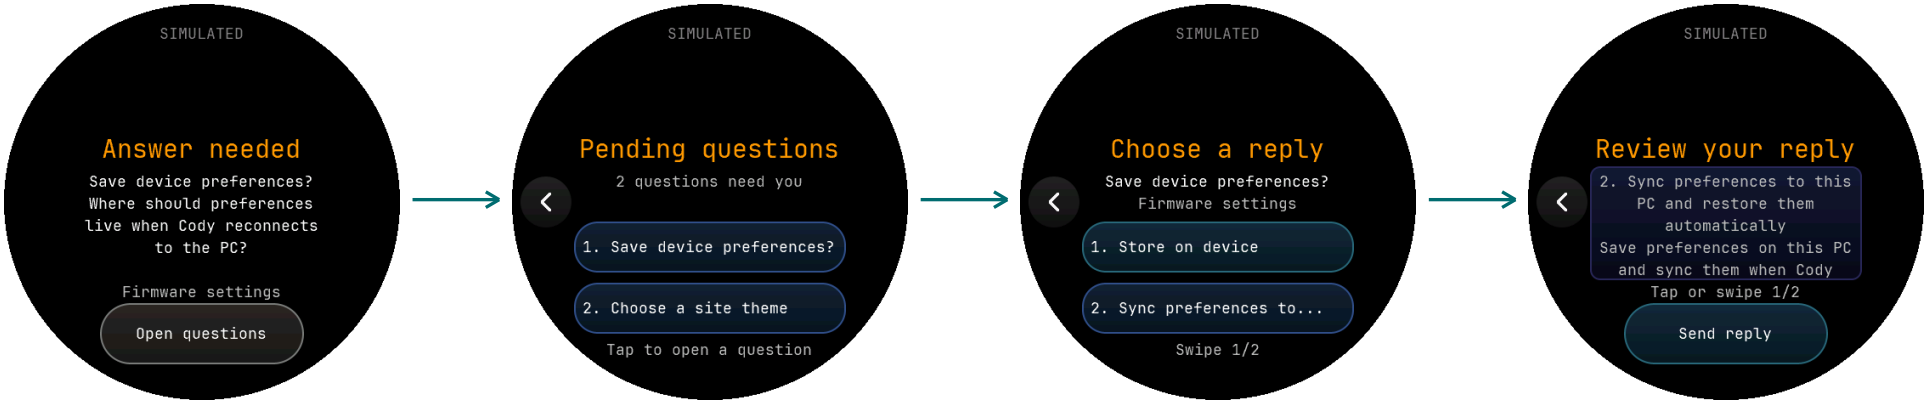

Question notice / 26
STUDIO FRAME

Pending questions
STUDIO FRAME

Numbered choices / 27
STUDIO FRAME

Read full detail
STUDIO FRAME

With one question, Open can go straight to choices. Back from review returns to choices.
Back from choices leaves the question retained. The separate Send action admits the selected reply.

→ From Events p. 18

→ Send / Delivery p. 20

→ Hooks and explicit requests p. 21

REVIEW NOTES

01 When to show the queue

02 Review action

03 Where Back should lead

DELIVERY AND APPROVALS

See the outcome and return


A broker receipt and a recipient acknowledgement are distinct. Native approvals stay on the PC.

Recipient ACK



Awaiting delivery

STUDIO FRAME

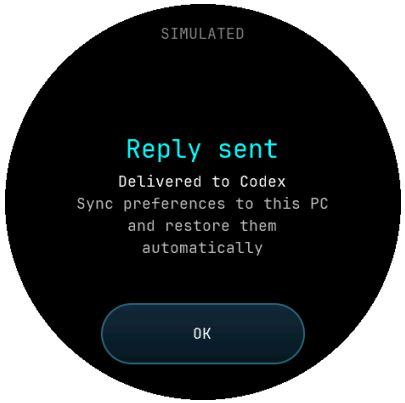

Reply sent / 31

STUDIO FRAME



Approval on your PC

STUDIO FRAME

An authenticated recipient acknowledgement permits Reply sent. OK restores the retained context. Expired, cancelled, rejected and offline outcomes stay explicit. Continue on your PC is advisory.

→ Before Send / Question review p. 19

→ After OK / Events p. 18

→ Retained dashboard p. 06

→ Approval and hook routing p. 21

REVIEW NOTES

01 Outcomes to distinguish

02 OK destination

03 Approval wording

EVENT SOURCES

Codex hooks and device requests

CCP subscribes to ten Codex hooks. Explicit MCP requests and presence take separate paths.

HOOK OR ENTRY	CCP INTERCEPTS	DEVICE HANDLING
SessionStart	Yes / session metadata	Registers the session; opening a chat does not select it on Cody.
UserPromptSubmit	Yes / chat + turn	Selects the followed chat, clears stale approval, begins active status.
PreToolUse / PostToolUse	Yes / tool + turn	Current snapshot. A short tool call can finish between two device polls.
PermissionRequest	Yes / followed chat	Transient Approval needed once per turn and device. Decide on the PC.
Stop	Yes / once per turn	Queues Reply ready for the current or a background chat on a current LAN peer.
Interrupt / SessionEnd	Yes / lifecycle	Interrupt retires the turn; session end is distinct from closing the app.
PreCompact / PostCompact	Yes / auto or manual	Shows compaction for the current turn; completion does not refresh token counts.
PreModelRequest / PostModelRequest	No	Codex exposes model-attempt hooks; CCP defines no device response.
SubagentStart / SubagentStop	No	Codex exposes subagent lifecycle hooks; CCP defines no dedicated device response.
CCP semantic question / notice	Explicit MCP request	Question or reply-ready joins Events. Ordinary notices are transient.
Codex presence / PR checks	MCP lease / explicit notice	Presence is independent of hooks. PR data is read-only and evidence-bound.

Cody polls activity every 2 seconds. Native notices require an authenticated LAN peer.

Sources: Codex hooks reference, CCP hooks.json, ccp_activity.py and ccp_server.py.

→ Event queue / Current turn p. 18

→ Question / Review p. 19

→ Delivery / Approvals p. 20

REVIEW NOTES

01 Keep as a status

02 Show as an event

03 Require an action

ACCOUNT AND REVIEW

Know which identity a screen describes

The name of the PC, the current Codex chat, and the signed-in account are separate concepts.

CURRENT CHAT

Context and Current turn identify the followed chat. Long titles scroll within the heading.

CODEX ACCOUNT

The account screen shows the ChatGPT plan and available metrics. CCP carries no signed-in display name.

STABLE ACCOUNT SOURCE

The stable Codex account read can provide an email. The session display-name API is experimental.

SAVED PC

The saved-PC route displays the configured Wi-Fi identity separately. Its current projection has no PC name.

GESTURE IDEAS TO REVIEW

Tap the chat title to replay scrolling. Consider swiping left on empty statistics space for the next page.

→ Chat title / Context p. 08

→ Saved PC p. 05

→ Gesture reference p. 14

REVIEW NOTES

01 Account identity to show

02 Chat title behavior

03 Gesture to try

Start from the saved state

VibeWare appears on cold boot/software reset. The device-first route then uses actual network and pairing state.

No saved Wi-Fi

Not connected > Tap to pair > Wi-Fi setup. App download QR opens the installation page; Show pairing QR starts the Bluetooth session. Scan inside the Espressif provisioning app.

Saved Wi-Fi

Connecting to Wi-Fi waits for valid association/IP. Recovery offers Set up Wi-Fi or Later. Later preserves saved credentials and permits background recovery.

Wi-Fi ready

Without a retained association, prepare the Codex pairing code. With a valid saved record, search for that PC until current authentication arrives. Internet availability is a separate condition.

Errors stay explicit

Storage, service and cleanup failures retain the original cause. Retry is not consent to replace a PC. A missing observation does not become Connected or a fabricated numeric value.

Sources: docs/cody/navigation.md, layout.md, runtime.md; plugins/cody-codex-plugin/README.md and protocol/CCP1.md.

Read the current dashboard

Left/right arrows cycle enabled pages. Device always remains available.

Carousel order

Device > Codex reset > Context > Codex limits > Today > Last 7 days > Token history > Credits > Codex account > About.

Navigation and visibility

Shake returns to the first enabled statistics page, Codex reset by default. If all statistics are hidden, Device is the fallback. Arrows fade after ten seconds; reveal them before starting a new touch.

Current and saved data

Measured counters keep their source date/time. Saved offline observations are labeled with their UTC update times. Missing daily counts remain gaps. No extrapolation, backfill or invented zeros.

About

System shows measured CPU/uptime; Memory shows allocatable RAM/PSRAM used, free and largest free block; Firmware shows version/build context. The project QR follows these child pages and is not a carousel item.

Sources: docs/cody/navigation.md, layout.md, runtime.md; plugins/cody-codex-plugin/README.md and protocol/CCP1.md.

BOOT opens Options

Three menu pages. Home restores the dashboard. Codex stats opens a page with data.

Page 1

Connections, Codex stats, Timer. Connections opens Connect Codex and Set up Wi-Fi. Timer runs for 1-120 minutes with Bell or Chime; Back leaves it running.

Page 2

Visible screens, Display, Behavior. Display owns brightness/rotation/orientation. Behavior owns Sounds, shake-to-wake and profile-dependent Dictation; More behavior contains the optional screensaver.

Page 3

Restart device, Factory reset, Quick guide. Restart retains configuration. Factory reset requires confirmation and verified settings deletion. Quick guide has three pages and returns to Options.

Saving and returning

Visibility/settings apply only after confirmed storage; failure retains the prior policy. Back and Go home preserve the correct caller. An opening touch cannot also select the newly shown control.

Sources: docs/cody/navigation.md, layout.md, runtime.md; plugins/cody-codex-plugin/README.md and protocol/CCP1.md.

Pair once, prove current presence again

Local workflow / original screens 12-15, 40-42. IP addresses and names are not credentials.

Start deliberately

BOOT > Options > Connections > Connect Codex. Keep link resumes the remembered PC. Pair again explicitly permits replacement. Forget opens a separate confirmation.

Read the intended display

Use all six characters from the device's current code after discovery. Code preparation is not measured progress. The pairing window is five minutes; no code is logged or broadcast in plaintext.

Persist both sides

PC and Cody stage separate candidates while retaining active records. Confirmed persistence and authenticated ACTIVE/COMMITTED complete association. A pending record alone is not success.

Recover real state

Ordinary LAN loss or an IP change resumes the saved association. Cancel preserves the old operational link. A local Forget does not revoke the independent PC record. Storage failure requires explicit repair.

Sources: docs/cody/navigation.md, layout.md, runtime.md; plugins/cody-codex-plugin/README.md and protocol/CCP1.md.

A notification is an event; an answer needs delivery

Semantic content carries stable identity, freshness and the actual outcome.

Activity

Follow the latest authorized prompt with exact chat/turn identity. Tools and completions in another chat cannot take over. A response-ready event does not prove task success or passed checks.

Questions

26 opens a question; 27 shows numbered rows, at most two visible. Read the full label/detail before Send. Selecting, scrolling or going Back does not answer.

Acknowledgements

PC receipt and recipient delivery are different. Only the recipient's authenticated acknowledgement permits 31 / Reply sent. The deadline includes delivery; timeout never chooses a reply.

Data discipline

Keep bounded printable ASCII, immutable request identities, original timestamps and explicit unavailable/error state. Native Codex approvals stay on the PC. A remote notification cannot authorize a privileged action.

Sources: docs/cody/navigation.md, layout.md, runtime.md; plugins/cody-codex-plugin/README.md and protocol/CCP1.md.

Local behavior and optional services

The current source defines behavior; physical verification remains separate.

Power and wake

PWR toggles software standby. Authenticated questions and Reply ready can wake software standby while the LAN link is retained. A running Timer can wake at expiry. The route remains owned by its model.

Battery

Awake notices use observed 50%, 20%, 10% and 5% thresholds. An observed 0% requests USB. If hardware cuts power earlier, no unobserved 0% message is invented.

Screensaver and sound

Screensaver is off by default; when enabled it uses the idle dashboard without resetting standby timers. A dismissing touch cannot activate hidden content. Sounds and quiet hours govern optional cues.

Voice profile

The default build has no microphone acquisition. Voice-enabled firmware can admit Record voice/double tap with Dictation on and a current paired LAN link. A device recording does not prove recipient transcription.

Sources: docs/cody/navigation.md, layout.md, runtime.md; plugins/cody-codex-plugin/README.md and protocol/CCP1.md.

Cloud connection is a separate development step

The current firmware remains a local paired companion.

Private service

The relay is under implementation with separate owner, device and client identities. Grants bind a particular client to an owned device; IDs and device names are not permissions.

Device work remains

Cloud enrollment, physical confirmation, protected device credentials and outbound HTTPS polling must be integrated into firmware before this journey can appear on Cody.

Local route remains explicit

The six-character Connect Codex procedure describes local CCP pairing. It is not a cloud enrollment code and must not be repurposed as a global API key.

No live claim

No Azure deployment, Dot integration, firmware cloud connection or physical behavior is established by this edition. Original screen IDs remain unchanged; no cloud route ID is fabricated.

Sources: docs/cody/navigation.md, layout.md, runtime.md; plugins/cody-codex-plugin/README.md and protocol/CCP1.md.

Original screen IDs remain stable

Identity reference / current labels and availability follow the source owners, not these original document names.

01-03	**Character boot**	Studio/design; current device-first boot uses VibeWare then saved state.
04-09 / 06-bis	**Network setup**	Installation QR, active provisioning QR, failure and valid Wi-Fi/IP.
10 / 36 / 11	**Options / Settings / Skin**	Device-first Options are current; Skin remains character design scope.
12-15	**Code / saved / searching / connected**	Local CCP pairing and current authentication are distinct states.
16 / 17 / 18 / 18U	**Idle / project / work / unavailable**	Character Idle is design scope; activity needs exact source identity/freshness.
19 / 20A / 20B	**Reply ready / paused / chat ended**	A reply is not proof of success; no background event steals context.
21-24 / 25	**PR observations / retired log route**	Read-only status; exact head and complete check list; 25 remains retired.
26 / 27	**Notice / question / review**	Numbered choices, complete detail review, then explicit Send.
28 / 29 / 30	**Voice capture / transport / review**	Voice is profile-dependent; original transcript review 30 remains a future mode.
31 / 32	**Reply delivered / connection lost**	Recipient acknowledgement and actual link state; never infer success.
33 / 34	**Battery / charging notices**	Use current measured thresholds and health; no synthetic battery facts.
35A / 35B	**Sleep / Wake**	Power owner retains route; an artistic pose alone is not standby.
37 / 38 / 39	**Rig / diagnostics / provisioning debug**	Rig is Studio; diagnostic entry shares Debug/Release, with no facial-channel UI.
40 / 41 / 42	**Connection decision / Setup / recovery**	Original route identities retained; BOOT Options is the current user entry.

C01-C14 (cues) and IS01-IS04 (idle scenes) are document labels, not new routes. No cloud screen IDs are assigned before firmware integration.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
03 October 2026 **ADDENDUM**	**A01 / Installation and device QR are different** Affected: Navigation originals 03, 12-13; Planning originals 04 and 23; screens 05-09 and original 06-bis. An installation QR opens the provisioning app listing. A separate session QR belongs to the active provisioning attempt. Credentials and Wi-Fi/IP are distinct states. Cancel and failure wait for actual cleanup; retry starts a new attempt. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.
04 October 2026 **ADDENDUM**	**A02-A04 / Stable routes, read-only PRs and real pairing** Affected: Navigation originals 14-16; Planning originals 24-26; screens 04-16, 21-25, 36 and 39. The Studio skin selector keeps screen 11 and its caller across first setup and Settings. PR screens 21-24 are read-only; 25 is retired. Counts require a complete current check list for the exact head. First-boot persistence and pairing success require actual owner results; Connected cannot be inferred from a route change. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.
05 October 2026 **ERRATA**	**Idle presentation is a design scope** Affected: Navigation original 19; Manga originals 03-04, 14-18; screens 04, 16, 35A/35B, 36-38. Original Idle 16 gained IS01-IS04 artistic scenes with a 20-40-second eligible wait, 3.2-second gesture and 40-second cooldown. The 35% closing, 16-22% reopening and 4.5% width pulse were subsequently corrected. These labels describe character design, not device measurements or current dashboard routes. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
06 October 2026 **ERRATA**	**Character values and VibeWare introduction** Affected: Navigation originals 23 and 26; Manga originals 19-27; screens 01-05, 16, 35A/35B. The retained character correction used 75% mouth closing, 16-24% reopening and 18% width motion; Stressed peak opening 0.24; cue offset +30/+40 px, 3.6x scale and 400-ms fades; Whistle width 0.5 replacing 0.42. The owner-supplied VibeWare floppy precedes content on cold boot/software reset. Former character boot phases and twofold artwork geometry are superseded by current device-first behavior. Evidence / limits: Windows rig illustrations and source review; no physical visual/audio observation was established. Build/check chronology is omitted.
09 October 2026 **ERRATA**	**Saved state and reversible setup** Affected: Navigation originals 02, 04, 16, 25, 28-29; Planning originals 27-29; screens 04-16, 35B, 36, 40-42. The original analysis omitted a configured network without a Codex association and a reversible setup entry. Screens 40, 41 and 42 identified those distinct routes. Saved pairing, network recovery and replacement consent remain separate. The current device-first entry is BOOT > Options > Connections, replacing the character-hold instruction. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
09 October 2026 **ERRATA**	**Standby recovery and malformed touch evidence** Affected: Navigation originals 28, 31-34; Planning originals 30-34; Service 14-18 / Connection 18-22; screens 04-06, 12, 35B, 41. A 90-second passive capture observed LAN/DHCP, Welcome inactivity return and standby, but no Connect Codex press. A separate capture recorded Yes at 16497 ms, Connect Codex at 16498 ms, then fifteen FF report bytes and ACK=FF at 17112 ms; expected ACK was AB. ESP_ERR_INVALID_RESPONSE stopped rendering. The correction separates an optional runtime acquisition error from rendering, interrupts gestures and requires a real release. Evidence / limits: These are retained measured failures. The FF hardware cause and corrected physical behavior were not established by those captures.
09 October 2026 **ERRATA**	**Action layout and touch admission** Affected: Navigation/Planning original 34; screens 05-15, 26-27, 35B, 36, 40-42; selected-multi-action.png and selected-single-action.png. The approved design uses two side-by-side rounded gradient cards, a centered third action, or one wide capsule. Earlier stacked-blue examples were superseded. Current captions are text-only; the older icon-left prescription is no longer the action contract. Question choices now use numbered single-line rows with full review before Send. Evidence / limits: Approved design references are not device captures.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
10 October 2026 **ERRATA**	**Automatic chat context and freshness** Affected: Navigation originals 35-38; Planning originals 35-38; screens 15-20, 18U, 26-27, 31-32. CCP follows the latest authorized UserPromptSubmit with exact chat/turn identity. Manual Choose/Pick a chat is removed. Background events cannot select context; a tab click is not a documented focus event. Pairing, authenticated presence, app presence and real work remain distinct. Eight seconds without packets expires device state; active work becomes unavailable after 120 seconds without another hook. Evidence / limits: The owner confirmed Connected on 10 October for the preceding pairing implementation. That observation does not prove later hooks or presentation.
10 October 2026 **ERRATA**	**Retain, replace, cancel and forget** Affected: Navigation/Planning originals 39-42, 48; screens 12-16, 32, 35B, 40-42. Separate pending and active records on both peers. Persist before confirmation and promote only after authenticated ACTIVE/COMMITTED. Cancel preserves the old operational link; a pending PC candidate requires a new visible code and explicit replacement. Forget removes Cody's CCP records, not the independent PC record. Temporary disconnection does not authorize re-pairing. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
10 October 2026 **ERRATA**	**Reply delivery and command outcomes** Affected: Navigation/Planning originals 43-46; Service 25-28 / Connection 29-32; screens 21-27, 31-32. Receipt is not recipient delivery. An immutable question ticket expires after 180 seconds including delivery acknowledgement. Timeout, offline, Back and Cancel never select an answer. Reply sent requires recipient acknowledgement. Restart retains settings; factory reset requires explicit confirmation and verified deletion. A command ACK proves admission, not reboot completion. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.
10 October 2026 **ERRATA**	**Boot artwork and current controls** Affected: Navigation/Planning originals 47-50; Manga original 02 and 28-31; screens 01-15, 36, 39-42. The complete 42-frame VibeWare artwork retains its authored 3.5-second dwell. The 10 October correction replaced the earlier title-free/twofold composition with a title, subtitle and 192 x 219 artwork at (137,164). It also removed the connection detour, clarified the five-minute pairing window and required successful settings write/readback. Current device-first routes are now integrated in the main body. Evidence / limits: Coordinates are source layout values. Schematics are neither simulator frames nor device captures.
11 October 2026 **ERRATA**	**English throughout** Affected: Navigation originals 01, 05-10, 29, 31, 34, 36, 38-46 and 53; Planning originals 01-02, 09-14, 16, 21-22, 39-46 and 53; Service 33 / Connection 37. Translate headings, diagrams, captions, prose and footers into English while preserving original correction dates, screen IDs, technical values and evidence limits. Evidence / limits: Document language and layout review only.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
12 October 2026 **CHANGE**	**Navigation within the documents** Affected: All atlas pages; Manga prior final register. Coordinated document identity, navigable contents and bookmarks retain original screen references when pagination changes. The quickstart keeps its own four instructional A5 pages. Evidence / limits: Document authoring only.
09 November 2026 **ERRATA**	**Current device and private cloud boundaries** Affected: Current Navigation/Planning bodies; former Navigation pages 03-19 and Planning pages 03-27; map and A5 instructions. Replace character-led current routes with the device-first dashboard, BOOT Options, current carousel order, Timer, Quick guide and explicit reset screens. Preserve character artwork as Studio/design material. Consolidate corrections into this register and remove accumulated build/code history. The private cloud service is under implementation; cloud firmware and Dot integration are pending. Evidence / limits: Read-only source review and PDF authoring. No firmware build, test, simulator, device operation or cloud deployment accompanies this edition.

Review edition change

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
10 November 2026 **CHANGE**	**Decision pages from current Cody Studio** Affected: Previous atlas pages 3-10 and original screens 04-15, 26-32, 40-42. Added uniform current Studio frames, connection cases, gesture references and the Codex hook and request matrix. Evidence / limits: Offline synthetic Studio renders and source review. Hardware and actual network outcomes require separate evidence.

CHANGE REGISTER

Clickable route edition

Original screen IDs, reference descriptions, corrections and security evidence are retained in this atlas.

DATE / TYPE

10 November 2026 / Change

DESCRIPTION

Added a clickable route map and linked screen flows from startup through local and Codex routes.

VOICE EVIDENCE

Dictation frames use current firmware captions, geometry and glyphs with illustrative audio and destination.

ORIGINAL IDs

Routes 04-15, 26-32 and 42 remain identified. Previous Studio frames were extracted at native size.

→ Previous review change p. 37

→ Corrections register p. 31

→ Security p. 39

REVIEW NOTES

01 Map change

02 Evidence to collect

03 Flow to revisit

Security

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
10 October 2026 **SECURITY**	**Fresh proof before presence or current data** Affected: CCP FIND / READY / COMMITTED; original screens 12-15, 18U, 26-27, 31-32. FIND alone cannot establish presence, redirect notifications or release current data. READY binds a fresh challenge to the observed device endpoint; COMMITTED proves the matching response. Distinct active/pending records, strict field bounds, nonces and one-use challenges preserve explicit admission. Firmware/plugin changes must agree; no legacy handshake fallback is claimed. Evidence / limits: Source-based correction; neither runtime adversarial behavior nor physical recovery is certified.
10 October 2026 **SECURITY**	**Bound work and keep residual risks explicit** Affected: Firmware UDP owner; PC discovery/pairing; ACTIVITY / TECH / EVENT; optional HTTP. Global/per-source ingress budgets and bounded receive slices precede expensive work. Discovery and pairing have finite packet/offer/work budgets. Broker network diagnostics are bounded; startup-only runtime.log retention remains separate. Six-character CCP transcripts permit offline guessing, and ordinary HMAC payloads are readable. Standard PAKE/high-entropy QR and authenticated encryption remain deferred. Optional plaintext device HTTP is a separate review scope. Evidence / limits: HMAC authenticates but does not provide confidentiality. No compromised-PC protection or production-security certification is claimed.

Security

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
07 November 2026 SECURITY	**Account projections stay bounded and authenticated** Affected: CCP ALLOWANCECAP / ALLOWANCE / ACCOUNT and later bounded account projection; Planning original 24; Communication core 03 and 09. The current endpoint, nonce and authenticated association bind account projections. Credentials, account identity email and message contents stay on the host. Source age, unavailable samples and separate account generations prevent stale or mixed-account graphs being shown as current. Evidence / limits: Source ownership only; this document does not establish live account login or end-to-end device delivery.