

Master's programme in Computer, Communication and Information Sciences

Kubernetes inter-Pod container isolation

Aarni Halinen

© 2023

This work is licensed under a Creative Commons "Attribution-NonCommercial-ShareAlike 4.0 International" license.





Author Aarni Halinen

Title Kubernetes inter-Pod container isolation

Degree programme Computer, Communication and Information Sciences

Major Computer Science

Supervisor Prof. Mario Di Francesco

Advisors M.Sc. (Tech.) José Luis Martin Navarro, M.Sc. (Tech.) Jacopo Bufalino

Date 1 June 2023

Number of pages 60+10

Language English

Abstract

The abstract is a short description of the essential contents of the thesis: what was studied and how and what were the main findings. For a Finnish thesis, the abstract should be written in both Finnish and English; for a Swedish thesis, the abstract should be written in both Swedish and English. The abstracts for English theses written by Finnish or Swedish speakers should be written in English and either in Finnish or in Swedish, depending on the student's language of basic education. Students educated in languages other than Finnish or Swedish write the abstract only in English. Students may include a second or third abstract in their native language, if they wish. The abstract text of this thesis is written on the readable abstract page and in the pdf file's metadata via the thesisabstract macro (see the comment in the TeX file). Write in this the text that goes into the metadata. The metadata cannot contain special characters, linebreak or paragraph break characters, so these must not be used here. If your abstract does not contain special characters and does not require paragraphs, you may take advantage of the abstracttext macro (see the comment in the TeX file below). Otherwise, the metadata abstract text must be identical to the text on the abstract page.

Keywords Kubernetes, Container, Docker, Security



Tekijä Aarni Halinen

Työn nimi Opinnäyteen otsikko

Koulutusohjelma Computer, Communication and Information Sciences

Pääaine Computer Science

Työn valvoja Prof. Mario Di Francesco

Työn ohjaajat DI José Luis Martin Navarro, DI Jacopo Bufalino

Päivämäärä 1.6.2023

Sivumäärä 60+10

Kieli englanti

Tiivistelmä

Tiivistelmä on lyhyt kuvaus työn keskeisestä sisällöstä: mitä tutkittiin ja miten sekä mitkä olivat tärkeimmät tulokset. Suomenkielisen opinnäytteen tiivistelmä kirjoitetaan suomeksi ja englanniksi ja ruotsinkielisen vastaavasti ruotsiksi ja englanniksi. Suomen- tai ruotsinkielisten opiskelijoiden, joiden opinnäytteen kieli on englanti, tulee kirjoittaa tiivistelmänsä englanniksi ja koulusivistyskielellään. Muiden kuin koulusivistyskieleltään suomen- tai ruotsinkielisten tulee kirjoittaa tiivistelmänsä vain englanniksi. Opiskelija voi halutessaan lisätä opinnäytteeseensä toisen tai kolmannen tiivistelmän omalla äidinkielellään. Tämän opinnäytteen tiivistelmäteksti kirjoitetaan opinnäytteen luettavan osan lomakkeen lisäksi myös pdf-tiedoston metadataan. Kirjoita tähän metadataan kirjoitettavaa teksti. Metadatatekstissa ei saa olla erikoismerkkejä, rivinvaiho- tai kappaleenjakomerkkiä, joten näitä merkkeja ei saa käyttää tässä. Jos tiivistelmäsi ei sisällä erikoimerkkejä eikä kaipaa kappaleenjakoa, voit hyödynttää makroa abstracttext luodessasi lomakkeen tiivistelmää (katso kommentti tässä TeXtiedostossa alla). Metadatatiivistelmatekstin on muuten oltava sama kuin lomakkeessa oleva teksti.

Avainsanat Vastus, resistanssi, lämpötila

Preface

I want to thank Professor Pirjo Professor and my instructors Dr Alan Advisor and Ms Elsa Expert for their guidance.

I also want to thank my partner for keeping me sane and alive.

Otaniemi, 9 February 2023

Aarni O. Halinen

Contents

Al	ostrac	et e	3
Al	ostrac	et (in Finnish)	4
Pr	eface		5
Co	onten	ts	6
Al	brev	iations	8
1	Intr	roduction	9
	1.1	Problem Statement	9
	1.2	Thesis outline	10
2	Bac	kground	11
	2.1	Zero trust architecture	11
	2.2	Containerization and Docker	12
		2.2.1 Linux containers	12
		2.2.2 Docker	13
	2.3	Kubernetes	14
		2.3.1 Kubernetes objects	15
		2.3.2 Kubernetes components	16
		2.3.3 Admission controllers	18
		2.3.4 Sidecar pattern in Kubernetes	18
	2.4	Kubernetes network model	20
		2.4.1 Container Network Interface	20
		2.4.2 Calico	23
		2.4.3 Cilium	23
		2.4.4 Multus	24
		2.4.5 Extended Berkeley Packet Filter	25
3	The	threat model	27
	3.1	Existing models	27
	3.2	Attacker model	27
4	Solu	ntion requirements	32
	4.1	Security requirements	32
	4.2	Environment	32
5	Har	dening Pod security	33
	5.1	Restricted Pod Security Standard	33
	5.2	Enforcing other best practices	35
		5.2.1 Manual service account mounting	35
		5.2.2 Enforcing the fields	37

6	Netv	vork Isolation	39		
	6.1	Applying firewall rules inside Pod network namespace	39		
		6.1.1 IPTables	40		
		6.1.2 Deployment	43		
	6.2	Own network namespace for sidecar	44		
		6.2.1 Creating isolated network for sidecar traffic	45		
		6.2.2 Co-scheduling the containers	48		
7	Solu	tion Evaluation	49		
	7.1	Security Evaluation	50		
		7.1.1 Experiment 1: sidecars cannot access main application	50		
		7.1.2 Experiment 2: only main application can access StatsD sidecar	51		
		7.1.3 Experiment 3: Access to other Pods is blocked	51		
	7.2	Qualitative assessment	51		
8	Disc	ussion & conclusion	53		
	8.1	Future considerations	53		
	8.2	Future of sidecars and service mesh	53		
	8.3	Conclusion	54		
Re	feren	ces	55		
A	Doc	kerfile for penetration testing	61		
В	Exa	mple webserver deployed with StatsD sidecar	62		
C	C Dockerfile for penetration testing				
D	Web	server and StatsD deployed with Multus networking	65		

Abbreviations

API Application Programming Interface

BGP Border Gateway Protocol

BPF, cBPF (classic) Berkeley Packet Filter

cgroups Control groups

CLI Command-line interface

CNCF Cloud Native Computing Foundation

CNI Container Network Interface CRD Custom Resource Definition DAC Discretionary Access Control

DoS Denial of Service

eBPF Extended Berkeley Packet Filter gRPC Google Remote Procedure Call HTTP Hypertext Transfer Protocol IPAM IP Address Management IPC Inter-process communication

K8s Kubernetes

LXC Linux Containers

MAC Mandatory Access Control
mTLS Mutual Transport Layer Security
NAT Network Address Translation
NIC Network Interface Controller

OOM Out-of-memory OpenVZ Open Virtuozzo OS Operating System

OSI Open Systems Interconnection

PID Process ID

RCE Remote code execution
SELinux Security-Enhanced Linux
Secomp Secure computing mode

TC Traffic Control

VXLAN Virtual Extensible LAN XDP eXpress Data Path ZTA Zero Trust Architecture

1 Introduction

During the last decade, the IT industry has moved away from monolithic software applications and towards microservices. The microservice architecture divides an application into a set of smaller, independent services that each handle a part of the business logic [46]. Each service runs its own process, and the application data is sent between components using lightweight communication protocols such as the Hypertext Transfer Protocol (HTTP) and Google Remote Procedure Call (gRPC). This approach increases software agility, as each service becomes an independent unit of development, deployment, operations, versioning, and scaling [60]. This modularity is often associated with benefits such as faster delivery and better scalability.

The increasing use of containers has been a driving force behind the shift to microservices. Containers are a lightweight virtualization technique where an application and all its dependencies are bundled into a single deployable unit running on the host machine kernel [22]. In a container-based microservice architecture, each service is bundled in its own container and deployed independently from the other services. Popular container runtimes include *Docker*, *containerd*, and *CRI-O*.

For more complex systems with multiple containers, scaling needs, and fault tolerance, a container orchestrator can be used. Container orchestration tools automate the deployment, management, scaling, and networking of container workloads and handle tasks such as resource allocation and health monitoring. The container orchestrators operate on top of a group of host machines, called a cluster, which serves as a resource pool for all container workloads. Kubernetes is the most widely used orchestrator tool.

Similarly to how design patterns emerged from the birth of object-oriented software systems, the modularity of containers and microservices has allowed the development of distributed system design patterns [23]. The most common of these patterns is the sidecar pattern, in which peripheral tasks like logging and observability are split away as their own containers from the main application container. The pattern allows easier installation of these nonfunctional features, while also keeping them away from the main container's source code. Basically, the sidecar pattern is an extension of the modularity of the microservices architecture inside the microservice itself. The benefits of sidecar pattern are similar to microservices, allowing better resource allocation, re-use of components in other services and provide a failure containment boundary, for example. In Kubernetes, the basic unit of deployment is called a Pod, which may include one or more co-scheduled containers. The Pod is analogous to a microservice, while it contains one main container and all its sidecars bundled into one deployable unit.

1.1 Problem Statement

Although the sidecar pattern makes it easier to add peripheral tasks to applications, it opens up questions about application security. Quite often, developers rely on containers created by third parties for sidecar tasks. The source code of these sidecar containers is not always available and finding vulnerabilities therein is not a trivial

task. Furthermore, malicious actors can use supply chain attacks and typo-squatting to trick victims into installing malicious sidecars to their clusters. Once malicious attackers gain access to the sidecar, any misconfigurations or permissive security mechanisms put the whole cluster at risk. Furthermore, Kubernetes is not secure by default; on a fresh installation, most of the included security mechanisms are in permissive settings or outright disabled.

Kubernetes offers limited security features at the container level. Although containers have their own distinct security context definitions, all security-related policies and features are defined for Pods or Namespaces. This means that sidecars, even if not required, inherit any capability and privileges from the main application. Thus, any privileged workload, even in another container in the Pod, risks privilege escalation from the sidecar. Additionally, Kubernetes' firewalling solution, Network Policies, is applied to the entire Pod instead of individual containers. This means that there are no built-in mechanisms in Kubernetes for protecting and isolating containers running in the same Pod from one another, which goes against the principle of least privilege. Consequently, any exploitable security issue in a sidecar container could allow the attacker to move laterally to other containers in the Pod and to escalate privileges. This makes the sidecar an ideal starting point for attacks.

Zero trust architecture and the principle of least privilege are common security paradigms for limiting lateral movement and further escalation in a system if any component within has been compromised. In both paradigms, the capabilities of an individual component are limited to only those that are required for the component to function. The capabilities, such as network access and any container privileges, are explicitly given to the component that requires them, while everything else is denied.

If these paradigms are successfully applied to sidecars, sidecars could only use operations and network access required, while anything else would be blocked. However, since Kubernetes provides limited security on container-level, we need to find some other ways to implement these paradigms inside the Pods. This thesis proposes a solution for restricting the capabilities of sidecar while minimally affecting the main container, thus improving the security by extending the paradigms within the Pod.

1.2 Thesis outline

The following Chapter 2 gives background about containers and Kubernetes, and discusses about Kubernetes networking and container network interface plugins. Chapter 3 analyzes security threats in a Kubernetes cluster with sidecars based on existing threat models and also demonstrates potential attack scenarios. Chapter 4 defines the requirements of the solution and introduces the development environment used for the solutions. Chapters 5 and 6 propose solutions to mitigate security threats by hardening Pods and setting up network isolation, respectively. Chapter 7 evaluates the pros and cons of the solutions. Finally, Chapter 8 discusses future research and concludes the thesis.

2 Background

2.1 Zero trust architecture

Conventional network security has historically focused on perimeter defense [61]. Subjects like workload resources and users inside the perimeter are often assumed to be trusted and implicitly given access inside the network, while any request originating outside the network is subject to more scrutiny. Although the systems seem initially secure, the modern IT landscape with cloud-based systems, third-party components, remote workers, etc. increases the attack surface of threat actors. Once any subject inside the perimeter is compromised, the attackers can gain access to all the resources that the subject is authorized to access and move laterally within the perimeter, escalating the attack on other resources.

Zero trust architecture (ZTA) is a security paradigm that focuses on data and resource protection and on the premise that trust must always be explicitly granted and continuously evaluated [61, 71]. In contrast to a single perimeter defense, the focus in ZTA is to create fine-grained access rules around each of the resources while at the same time enforcing rules that deny other access, which is not explicitly allowed. Following the principle of least privilege, the access rules are made as granular as possible so that the number of trusted subjects equals the actual number of subjects that require the access. This achieves a multi-layered security boundaries, where the breach of one component through the most outward perimeter does not compromise the whole system. Instead of having permission to access all resources within the perimeter, malicious actors could only laterally move to the resources that the compromised component required to function. Any other component is still protected by its own perimeter, which would require another successful attack to be breached. Thus, the compromised component is of limited usefulness to the attacker instead of serving as a general attack vector against the system.

Zero-trust networking is based on the concept that the network, even if it is internal and behind a firewall, should never be trusted. Instead of authenticating and authorizing only at the boundary, trust is verified at each component of the network. This implies that each service should communicate securely in the network using protocols such as Mutual TLS (mTLS), and rely on more precise identifiers than just IP addresses. Furthermore, access to a resource should be as limited as possible, and the policy can be further refined to restrict access based on, for example, HTTP routes on L7. The ultimate aim in all cases is to achieve a policy of least privilege.

The complexity of managing the trust boundary in each component can be overwhelming. Fortunately, Kubernetes can be extended with Service meshes such as *Istio*. Service meshes provide a dedicated infrastructure layer in the application that allows the addition of features such as observability, traffic management, and security without having to modify the application code [36]. Istio consists of two components: the data plane, which is composed of Envoy proxies that are deployed along with each service in the cluster, and the control plane. The proxies intercept all network traffic of the parent service and implement all the features such as mTLS and traffic management, while also sending logs and other telemetry data to the control plane.

When the istio-injection=enabled label is applied to a Namespace, any new Pods created in that Namespace will have a sidecar automatically injected into them.

2.2 Containerization and Docker

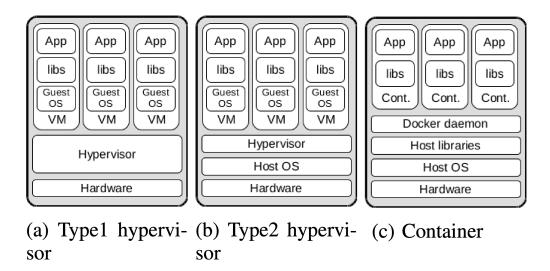


Figure 1: Virtualization models [25]

Figure 1 illustrates common virtualization models. While traditional virtualization techniques virtualize workloads on top of a hypervisor that shares hardware resources between virtual machines, containerization is a technique where virtualization occurs at the operating system level [65]. Processes executing in containers run on the kernel of the host machine. However, each container is isolated to its own network, process namespace, and so on; two containers on the same host OS do not know that they share resources. Furthermore, containers are similarly isolated from accessing host OS resources.

BSD jails and *chroot* can be considered early forms of containerization technology, so the idea of containers is not new [25]. Recent Linux container solutions rely on two main implementations: Linux Containers (LXC) -based solution that relies on kernel features such as control groups (cgroups) and namespaces, and a custom kernel and Linux distribution called Open Virtuozzo (OpenVZ). Docker [44] is a hugely popular LXC-based container runtime and provides an easy-to-use API and tooling for creating and managing containers. Docker also provides containerization for other OSes as well. However, in this thesis we focus only on the Linux implementation.

2.2.1 Linux containers

The Linux containers technology implements container isolation and containment using a Linux kernel feature called namespaces [63]. Namespaces [41] are a construct that wraps a global system resource in an abstraction that makes it appear to the

processes in the namespace that they have their own isolated instance of the global resource. There are a total of eight namespaces: i) *Cgroup* which is used for resource management, ii) *Inter-process communication* (IPC) that isolates POSIX message queues, etc., iii) *Network* which isolates network devices, stack ports, etc., iv) *Mount* for file system isolation, v) *Process ID* (PID), vi) *Time*, vii) *User* for isolating user and group identifiers, and viii) *UTS* which isolates hostnames and NIS domain names. For example, the *network* namespace provides each container with its own loopback device, and even iptables rules. In another example, *mount* namespace ensures that container has no visibility or access to the host's or other container's file system. Compared to other namespaces that concern the isolation of kernel data, *cgroups* focuses on limiting available system resources per namespace [63]. Each namespace can be configured with its own limits on CPU and memory usage and available devices. Using Docker as an example, setting -cpu, -memory and -devices options will limit available resources for the container.

Since all containers and the host machine run on the same kernel, any container that manages to breakout from isolation may compromise other containers, the host, and the whole kernel. To combat this container breakout, several security mechanisms are adopted from the Linux kernel to restrict the capabilities of containers [63]. The mechanisms include Discretionary Access Control (DAC) mechanisms like Capability [39] and Secure computing mode (Seccomp) [42], and Mandatory Access Control (MAC) mechanisms such as Security-Enhanced Linux (SELinux) and AppArmor [1]. With Capability, the superuser (i.e. the root user) privilege is divided into distinct units, each of which represents a permission to process some specific kernel resources. The feature turns the binary "root/non-root" security mechanism into a fine-grained access control system, which makes it easier to follow the principle of least privilege. For example, processes like web servers that simply need to bind on a Internet domain privileged port (numbers below 1024) do not need to run as root; they can be granted with CAP_NET_BIND_SERVICE capability instead [45]. The Seccomp mechanism constrains which system calls a process can invoke. The available system calls are defined for a container through the Seccomp profile which is defined as a JSON file. The default Docker Seccomp profile [43] includes more than 300 system calls. SELinux is integrated into CentOS/RHEL/Fedora distributions and utilizes a label-based enforcement model, while AppArmor is available in Debian and Ubuntu distros and adopts a path-based enforcement model [63].

2.2.2 Docker

Docker is an open-source container technology written in Go and launched in 2013 [3]. The platform consists of the Docker Engine, a container runtime and packaging tool, and Docker image registries such as the Docker Hub public image repository and the Docker desktop application [2]. The engine functions as a client-server RESTful HTTP API application, with the Docker daemon acting as a server, managing and executing all the containers. As illustrated in Figure 2, the daemon serves as a high-level container runtime and uses *runC* and *containerd* to actually create and run the containers in a system.



Figure 2: Docker architecture [27]

The Docker client is a command-line tool that provides user interface to command the daemon, and thus containers. By exposing the API outside the host machine, the architecture enables remote control of the daemon with the client. Remote communication with the API should be carried out over TLS for security reasons.

Docker image is a read-only template with instructions for creating a Docker container [2]. Images are often based on another image, such as OS images ubuntu and alpine, with some additional customizations, such as the installation of web server binaries. Customizations are added to the image as a series of data layers so that each new command creates a new layer. This process makes image distribution more efficient since only the changes between layers must be distributed [22]. Layering is achieved with a special file system inspired by UnionFS that allows files and directories in different file systems to be combined into a single consistent file system.

Docker users can share their custom images publicly or privately in Docker Hub, or even host their own image registry platform. Most cloud providers also offer container registry services, so even proprietary software can be published in a private registry and used by other cloud services, like Kubernetes clusters. Whenever the image is not found locally, the client automatically attempts to search and pull the image from the connected registries.

2.3 Kubernetes

While container runtimes are used to create and destroy containers, container orchestrators are used as a system to automate the deployment, scaling, and management of containerized applications. Kubernetes (K8s) [10] is an open-source container orchestrator released in 2014. It is hosted by the Cloud Native Computing Foundation (CNCF), but its roots are at Google, where it was developed as an alternative to Google's proprietary Borg and Omega orchestrators [24]. A Kubernetes cluster con-

sists of a set of servers, called Nodes, on which application containers are scheduled by the system. This automation provides resilience and efficient resource utilization for workloads in the cluster: if a container or Node fails, the system attempts to restart and reschedule containers to maintain the desired cluster state.

2.3.1 Kubernetes objects

Pods are the basic atomic scheduling unit in Kubernetes. Pods consist of one or more tightly-coupled containers with shared storage volume and networking [16]. Containers in a Pod are always co-located and co-scheduled and run in a shared context, i.e. a set of Linux namespaces. The network, UTS and IPC namespaces are shared by default, and the process namespace can be shared with v1.PodSpec.shareProcessNamespace. The common network namespace means that containers in a Pod can communicate with each other via localhost, have a common IP address, and cannot reuse the same port numbers. In addition to the normal application container, Pods can include special initContainers that are run only on Pod startup. These Pods are used to modify the Pod context before the actual workload starts. Multiple initContainers are run sequentially, and a failing container blocks the execution of the following initialization and normal workloads.

If a Pod fails, a replacement Pod is not automatically created. Quite often, developers want to have more control over the compute resources and specify a target state for them. This includes replication, scaling, and distribution among various nodes. To meet these needs, Kubernetes provides additional resources.

Instead of directly creating Pods, **Deployment** workload resources can be used to create Pods in a cluster [16]. With Deployments, the user describes the desired state in a declarative manner. The Kubernetes control loop then creates **ReplicaSet** based on the Deployment resource, which in turn guarantees the availability of the desired number of Pods [8]. **DaemonSet** on the other hand is a workload resource that ensures that all or some Nodes run a copy of a Pod. Typical use cases for daemons are running Node monitoring and logging, and network plugins, which are discussed in depth in the Chapter 2.4.1.

All Pods across the cluster share the same subnet and can access each other via IP address. However, connecting to a Pod with IP address is suboptimal, since Pods are ephemeral. A dead Pod, even if controlled by a ReplicaSet, is not guaranteed to receive the same IP address on restart. Additionally, each replica in a horizontally scaled system has its own IP address. This leads to a problem: how do the clients using the system find and keep track of the IP addresses used by the workload? The **Service** abstraction solves the problem.

Services are an object for exposing groups of Pods over a network [18]. The object defines a set of endpoints, that is, the targeted Pods, along with a policy about how to make the Pods accessible. The targeted Pods are determined with a selector field in the object specification. Meanwhile, the type field determines how the Service is exposed. There are four different ServiceTypes: i) the default ClusterIP which exposes the Service inside the cluster with its own IP address, ii) NodePort which exposes the service in each Node's IP address on static port (by default within a

range of 30000-32767), iii) LoadBalancer which exposes the Service externally using cloud provider's load balancer, and iv) ExternalName which is used to map Service to DNS name instead of a group of Pods. The field is designed as a nested functionality; each ServiceType level adds up to the previous one.

Namespaces allow logical grouping of resources under a single name. New Kubernetes cluster starts with four namespaces: default, kube-node-lease, kube-public and kube-system. Namespaced objects like Deployments, Services and Pods are always deployed under a namespace which is default if not explicitly defined. kube-system is the namespace for all objects created by the Kubernetes system which is discussed in more detail in the next Chapter 2.3.2. Namespaces also provide a scope for naming; names of resources must be unique within a namespace, but not across namespaces. Namespaces are also used to enforce resource quotas, access control, and isolation for cluster users, for example, in multitenancy setups. Pod Security Standards [15], which are used by the Pod Security admission controller, are also defined at the namespace level. Admission controllers are discussed in Chapter 2.3.3.

Custom Resource Definitions (CRD) are used to define new resources that are not available in a default Kubernetes installation [7]. Once a custom resource is installed, users can create and access custom resource objects with kubectl, similarly to any other built-in resource. On their own, custom resources can only be used to store and retrieve structured data. When combined with a custom controller, custom resources can be used to add new functionality to the cluster. In Kubernetes, controllers are a construct that watch the current state of the cluster and keep track of the desired state. If the states differ, the controller makes or requests changes so that the cluster state moves closer to the desired one. Specifically, the controllers are implemented as Operators following the *operator-pattern* [13]. The Operators are clients of the Kubernetes API that implement the control loop on a Custom Resource. They are often deployed as Deployments, and behave similarly to any other container workload in the cluster.

2.3.2 Kubernetes components

Figure 3 describes the Kubernetes cluster with a control plane and three worker nodes. The control plane consists of components that control, monitor, and store the state of the cluster; essentially, these are the components that are needed for the complete and working Kubernetes cluster [11]. The control plane components can run on any worker node. However, clusters often have a specialized master node for control plane components, which does not run any other containers. For fault tolerance and high availability, control plane components should run on multiple Nodes in production environments. The control plane consists of these main components:

API server is a front-end component of the control plane. It is an HTTP server that is used to send commands to the cluster. The server handles authentication and validation of the commands. For valid commands, the server then forwards these to other control plane components that then modify the cluster state. The easiest way to send commands to the server is by using the kubectl command-line interface

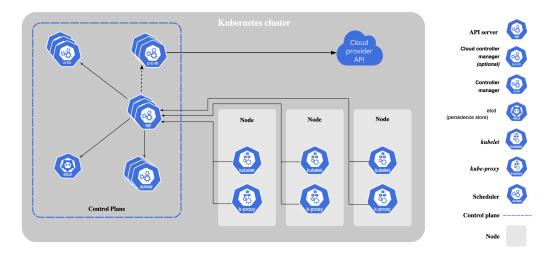


Figure 3: Kubernetes cluster architecture [11]

(CLI), which actively sends the commands as HTTP under the hood. The main implementation of the server is kube-apiserver. The server can be horizontally scaled by running several instances on multiple Nodes and load-balancing traffic between the instances.

Etcd [4] is a highly consistent, distributed key-value store. It is the stateful component of the control plane: all of the cluster data is stored in etcd. Thus, the stability of the component is critical for the whole cluster. To tolerate failures, etcd implements a leader-based architecture. Multiple etcd clients automatically elect a leader instance as the source of truth. Other instances periodically update their state from the leader instance, so that the state stays eventually consistent across all instances. On leader failure, the other instances automatically elect a new leader to keep the system functioning.

Scheduler watches for newly created Pods that have no assigned worker node, and selects one of the active Nodes for them to run on [11]. Scheduling takes into account resource availability on Nodes, Pod resource requirements, object specification affinity rules and hardware, software, and policy constraints, among others.

Controller manager is a control plane component that runs all the controller loop processes [11]. Controller loops, like the Deployment controller, continuously watch the current and desired cluster state. When the states differ, they send commands via the API server so that the cluster moves towards the desired state. All the built-in controllers are compiled into a single binary, even though the controllers are logically different processes.

Each Node also has components that are essential for Kubernetes to work properly. **Kubelet** is an agent that ensures that containers are running in a Pod [11]. It receives a set of Pod specification from the API server and ensures that containers are running on the Node, follow the Pod specifications and are healthy. Kubelet only manages containers created by Kubernetes. **Kube-proxy** maintains network rules on Nodes. Part of the Serivce objects' networking is implemented by **kube-proxy**; the proxy writes iptables rules that route traffic [31].

2.3.3 Admission controllers

Admission controllers are a feature of the Kubernetes API server, used to validate and modify requests made to the server [5]. The controllers execute before the request is executed but after it is authenticated and authorized by the server. Several important features of Kubernetes are implemented with admission controllers, and these should be enabled on a properly configured API server. In addition to the built-in controllers, Kubernetes provides MutatingAdmissionWebhook and ValidatingAdmissionWebhook controllers for building own admission logic.

Admission controllers can be validating, mutating, or both [5]. Mutating controllers may modify related objects to the requests they admit, while validating controllers either approve or reject the request. The control process first executes the mutating controllers so that no mutations occur after the validation. If a controller in either phase rejects the request, the request is not processed further, and error is returned to the end-user.

One notable Admission controller is the PodSecurity controller. The controller validates the Pods before they are admitted, making sure that the requested Pod security context and other restrictions are permitted in the namespace to which the Pod is assigned [5]. The controller is enabled by default, and can be taken into use just by configuring Pod Security Admission labels for Namespace objects.

The labels use pod-security.kubernetes.io/<MODE>: <LEVEL> format, where MODE defines the action to be taken when the security level is violated and LEVEL is a predefined level of the Pod Security Standard. The three available levels are privileged, baseline and restricted [15].

The available actions are i) enforce, which will reject the Pod on violation, ii) audit, which triggers an event about the violation in the audit log, and iii) warn, which triggers user-facing warning about the violation [14]. A namespace can configure any or all three of the available modes and even set a different level for the modes. For example, it is possible to warn the user about violation of security policies without blocking the request by setting the warn mode more restrictive than enforce.

2.3.4 Sidecar pattern in Kubernetes

As mentioned before, Pods are the basic scheduling abstraction in Kubernetes and they support management and co-scheduling of multiple containers as an atomic unit. This co-scheduling and management of multiple symbiotic containers as a single unit enables multi-container application design patterns to emerge [23]. The sidecar pattern is the most common of these design patterns. As an example of this pattern, the main application container can be a simple web server paired with a container that collects server logs from a file and streams them to a centralized log management system. Listing 1 shows how the can be shared to the sidecar with file mounts. Another example of this pattern is the Istio service mesh [36] and its Envoy proxy sidecar, which routes all traffic through the Istio control plane for management, observability, and security operations.

apiVersion: apps/v1

```
2 kind: Deployment
 metadata:
    name: nginx-logs
    replicas: 1
    selector:
      matchLabels:
        app: nginx-logs
9
    template:
      metadata:
        labels:
          app: nginx-logs
13
      spec:
14
        containers:
          - name: main-application
             image: nginx
             volumeMounts:
18
               - name: shared-logs
19
                 mountPath: /var/log/nginx
20
          - name: sidecar-container
             image: busybox
             command: ["sh","-c","while true; do cat /var/
    log/nginx/access.log; sleep 30; done"]
             volumeMounts:
               - name: shared-logs
25
                 mountPath: /var/log/nginx
        volumes:
          - name: shared-logs
             emptyDir: {}
```

Listing 1: Nginx web server with a sidecar that periodically reads the logs

In the pattern, peripheral tasks such as logging, configuration, and observability are isolated from the main application into helper containers. These containers, sidecars, are tightly-coupled to the parent application container and should share the lifecycle of the parent. Although sidecar functionality could be built into the main container, there are benefits in using separate containers [23]. The isolation allows tweaking of containers' cgroups so that CPU cycles can be prioritized for the main container. The isolation also provides a failure containment boundary between the main and sidecar processes. Since the container is also the unit of deployment, sidecar containers could be developed, tested, and deployed independently of each other. Sidecar containers can also be developed with different tools and dependencies and in a way that they can be reused with other application containers. From the testing point of view, the componentized system might improve testing if the smaller units can be tested independently. However, on the downside, the combination of all container version combinations that might be seen in a production environment also increases.

2.4 Kubernetes network model

A fundamental part of a Kubernetes cluster is how nodes and resources are networked together. Specifically, the networking model needs to address four different types of networking problems: i) intra-Pod (that is, container-to-container within the same Pod) communication, ii) inter-Pod communication between Pods, iii) Service-to-Pod communication and iv) communication from external sources to Services [6]. The model also requires that each Pod is IP addressable and can communicate with other Pods without network address translation (NAT), even when Pods are scheduled on different hosts [69]. All agents on a host should also be able to communicate with Pods on the same host. Kubernetes does not provide a built-in solution for this model, instead it entrusts the implementation to Container Network Interface (CNI) plugins. This allows different vendors and operators to use varying networking mechanisms in Kubernetes.

2.4.1 Container Network Interface

The Container Network Interface [19] is a networking specification, which has become the de-facto industry standard for container networking and is backed by CNCF [69]. The specification was first developed for the container runtime rkt [58], but it is now supported by almost all major container runtimes and orchestrators. As many runtimes seek to solve the same problem of making the network layer pluggable, the CNI was developed as a common API to promote interchangeability. Most container orchestrators have adopted the specification as their networking solution. The biggest outlier is Docker Swarm, which instead implements its own proprietary approach to container networking.

The CNI specification has five distinct definitions: i) a format for network configuration, ii) an execution protocol between the container runtimes and the plugin binary, iii) a procedure for the runtime to interpret the configuration and execute the plugins, iv) a procedure for delegating functionality between the plugins, and v) data types for the plugins to return their results to the runtime [19]. The network configuration is defined as a JSON file, and it includes a list of plugins and their configuration. The container runtime interprets the configuration file at the plugin execution time and transforms it into a form to be passed to the plugins. The execution protocol defines a set of operations (ADD, DEL, CHECK, VERSION) for adding and removing containers from the network. The operation command, similarly to other protocol parameters, is passed to the plugins via the OS environment variables. The configuration file is supplied to the plugin via stdin. On successful execution, the plugin returns the result via stdout with a return code of 0. On errors, the plugin returns a specific JSON structure error message to stderr and a non-zero return code. When runtime mutates a container network, it results in a series of ADD, DELETE, or CHECK executions. These are then executed in the same order as defined in the plugins list, or reversed order for DELETE executions. Each plugin then returns either Success or Error JSON object. The execution of a series of operations ends when it encounters the first error response, or when all the operations have been performed.

The CNI plugin must provide at least connectivity and reachability for the containers [57]. For connectivity, each Pod must have a network interface controller (NIC) for communication outside its networking namespace. The NIC must have an IP address that is reachable from the host Node, so that cluster processes like Kubelet health and readiness checks can reach the Pod.

Reachability means that all Pods can be reached from other Nodes directly without NAT. Thus, each Pod should receive a unique IP address from an IP pool range designated for the Pods. When a cluster is installed, the administrator assigns a CIDR for the whole cluster. Then the kube-controller-manager can be configured to assign each node its own CIDR range, defined in the Node's spec.podCIDR field. The IP addresses are assigned to the Pods by an IP address management (IPAM) plugin. IPAM plugins are *delegated plugins* of the CNI, which means that the CNI plugin is responsible for invoking the IPAM plugin when needed. Thus, many CNI plugins are installed with their own IPAM plugins for convenience. Quite often IPAM plugins assign Pods with IP address from the Node's podCIDR, but sophisticated IPAMs like those of Calico and Cilium use Custom Resources for more configurable IP pools. The end-to-end reachability between different Node PodCIDRs is established by encapsulating in the overlay network, for example, with Virtual Extensible LAN (VXLAN), or orchestrating on the underlay network, e.g. with Border Gateway Protocol (BGP).

Since Kubernetes does not provide networking between Pods, it has no capabilities to enforce network isolation between workloads. Thus, another key feature of some CNI plugins is the enforcement of network traffic rules. For this purpose, Kubernetes provides a common built-in resource called NetworkPolicy for the CNI plugins to consume. The Listing 2 is an example of network policies for a web application front-end. The first policy functions as a default rule that denies all implicit egress and ingress traffic. The second policy allows traffic to the default HTTP port, and the third policy allows the front-end application to send traffic to any Pod in the *backend* namespace.

```
name: webapp-ingress
    namespace: frontend
 spec:
    podSelector:
18
      matchLabels:
19
         app: webapp
20
    policyTypes:
      - Ingress
    ingress:
      - ports:
24
           - protocol: TCP
25
              port: 80
26
27
  apiVersion: networking.k8s.io/v1
  kind: NetworkPolicy
  metadata:
    name: webapp-egress
    namespace: frontend
 spec:
33
    podSelector:
34
      matchLabels:
35
         app: webapp
    policyTypes:
      - Egress
38
    egress:
39
      - to:
40
             namespaceSelector:
41
                matchExpressions:
                   - key: namespace
                     operator: In
                     values: ["backend"]
45
```

Listing 2: Example NetworkPolicies for a frontend web application

The NetworkPolicy specification consists of a podSelector that specifies Pods that are subject to the policy and policyTypes to specify the Ingress and Egress rules for traffic [21] to the target Pod. Each rule includes to or from field for selecting Pod, Namespace or IP address block in CIDR notation on the other side of the connection, and ports field for explicitly specifying which ports and protocols are part of the rule. The policies are additive; when multiple rules are defined for a Pod, traffic is restricted to what is allowed by the union of the policies. Many CNI plugins also introduce Custom Resource Definitions for their own, more granular, network policy rules.

Although all CNI plugins meet the above specification, they may differ in architecture significantly. The plugins can be classified based on which OSI model network layers they operate on, which Linux kernel features they use for packet filtering and which encapsulation and routing model they support for inter-host and intra-host

communication between Pods. In this thesis, we focus on three different CNI plugins: Calico, Cilium, and Multus.

2.4.2 Calico

Calico [73] is an open-source CNI plugin with modular architecture that supports a wide range of deployment options. Each Pod created in the Calico network receives one end of a virtual ethernet device link as its default eth0 network interface, while the other end is left dangling on the host Node [55]. The Pod end of the link receives an IP address from Pod CIDR, but the Node end does not. Instead, a proxy_arp flag is set on the host side of the interface, while containers have a route to link-local address 169.254.1.1, thus making the host behave like a gateway router. For routing packets between Nodes, Calico creates a VXLAN overlay network. Optionally, Calico supports IP-in-IP overlay or non-overlay network with BGP protocol.

On each Node, a calico-node daemon setups CNI plugin, IPAM, and possible eBPF programs. The daemon subscribes to Kubernetes API for Pod events and manages both container and host networking namespaces. Calico also deploys a single-container calico-kube-controllers Pod into the Kubernetes control plane. The container executes a binary that consists of controller loops for Namespace, NetworkPolicy, Node, Pod, and ServiceAccount Kubernetes objects. The Calico project also introduces its own CLI tool, called calicoctl [75], to manage Calico's custom resources. The tool provides extra validation for the resources which is not possible with kubectl.

Calico supports Kubernetes NetworkPolicies as well as its own namespaced projectcalico.org/v3.NetworkPolicy Custom Resource Definition. Both of the policies work on OSI layers L3 (identity, e.g. IP address) and L4 (ports). Compared to the built-in policy, the Calico policy includes features such as policy ordering, log action in rules, and more flexible matching criteria (e.g., mathcing on ServiceAccounts) [74]. The policy can also match other Calico CRDs such as **HostEndpoints** and **NetworkSets**, which allows implementing rules on host interfaces and non-Kubernetes resources. If Calico is installed along the Istio service mesh, the Calico Network Policy can enforce L7 (e.g. HTTP methods and URL paths) policies on the Envoy proxy. For policies that are not tied to a Kubernetes namespace, Calico provides a GlobalNetworkPolicy CRD.

2.4.3 Cilium

Cilium [28] is one of the most advanced and powerful CNI plugins for Kubernetes. Similarly to Calico, it creates a virtual ethernet device for each Pod and sets one side of the link into the Pod's network namespace [56] as the default interface. Cilium then attaches extended Berkeley Packet Filter (eBPF) programs to ingress traffic control (tc) hooks of these virtual ethernet devices to intercept all incoming packets from the Pod. The packets are intercepted and processed before the network stack, and thus iptables, reducing latency 20%-30% and even doubling the throughput of packets in some scenarios [21]. The network between Pods running on different hosts is

handled by default with VXLAN overlay, but there is support for Geneve interfaces and native-routing with the BGP protocol as well [28].

The Cilium system consists of an agent (cilium-agent) daemon running on each Node, one or more operator (cilium-operator) Pods and a CLI client (cilium) [29]. The agent daemons subscribe to events from the Kubernetes API and manage containers' networking and eBPF programs. The CLI tool, which is installed on each agent, interacts with the REST API of the agent and allows one to inspect the state and status of the local agent. The tool should not be confused with the Cilium management CLI tool, also incidentally named cilium, which is typically installed remote from the cluster. The operator is responsible for all management operations that should be handled once for the entire cluster, rather than once for each Node. This includes, for example, the registration of CRDs.

Although default Kubernetes NetworkPolicies provides security on OSI layers L3 and L4, Cilium provides CRDs that also support L7 policies [30]. If L7 policies exist, traffic is directed to Envoy instance bundled into the agent Pod which filters traffic. Unlike on layers 3 and 4, policy violation does not result in dropped packet but an application protocol specific denied message. For example, HTTP traffic is denied with HTTP 403 Forbidden and DNS requests with DNS REFUSED. Cilium provides CiliumNetworkPolicy CRD that supports all L3, L4, and L7 policies. Cilium also provides CiliumClusterwideNetworkPolicy custom resource which is used to apply network rules to all namespaces in the cluster or even to nodes when using nodeSelector.

As even more advanced features, Cilium also includes native kube-proxy replacement, encryption for Cilium-managed traffic, and Service Mesh, among others. By default, kube-proxy uses iptables to route the Service traffic [31]. With kubeProxyReplacement installation option, Cilium implements Service load-balancing as XDP and TC programs on the Node network stack. For encryption, Cilium supports IPsec and WireGuard implementations [33]. The service mesh performs a variety of features directly in eBPF, thus functioning without sidecar containers or proxying requests through the agent Pod's Envoy [48]. Since all features are not available as eBPF programs or on all kernel versions, Cilium automatically probes the underlying kernel and automatically reverts to the Envoy proxy when needed. For capabilities beyond the built-in mesh, Cilium also provides integration with Istio.

2.4.4 Multus

Traditionally, CNI plugins provide only a single network interface for a Pod, apart from the loopback device. Multus [53] is a CNI plugin that allows the attachment of multiple network interfaces for a Pod. It does not provide any connectivity or reachability for containers like other plugins. Instead, it is installed as the first plugin in the CNI plugin chain. When executed, the plugin delegates the creation of the interface to other installed plugins. Since Multus does not provide any networking and thus does not independently, it is often called *meta plugin* to distinguish it from common CNI plugins like the previous Calico and Cilium.

Multus system includes a binary, a CNI configuration file, and a namespaced

NetworkAttachmentDefinition CRD that is used to define network interfaces used in Pods. The binary and the configuration file are often installed on cluster nodes via a DaemonSet. The daemon consists of an *initContainer* that copies the binary into the /opt/cni/bin directory, and a daemon container that configures the configuration file and optionally spawns an HTTP server for additional features such as metrics [53]. The configuration file satisfies the CNI specification with few additional attributes of which the combination of clusterNetwork and defaultNetworks or delegates are imperative for the CNI plugin to function [54]. The clusterNetwork specifies the main network of the cluster, which implements the eth0 interface and the Pod IP address. The defaultNetworks is an optional array of networks that should be added for any Pods by default. The values can be names of the NetworkAttachmentDefinition objects or paths to the CNI plugin's JSON configuration files. Optionally, the delegates attribute can be used; it supports similar format of values. In this scenario, the first element of the array functions as clusterNetwork and the rest are inferred as defaultNetworks.

Attaching additional interfaces to workloads is most often configured by adding a special annotations field k8s.v1.cni.cncf.io/networks to workload resource definitions. In the simplest configuration, the field takes a comma separated list of the NetworkAttachmentDefinition names as input. The network interface identifiers can be modified by providing the attachment input in name@interface-identifier format. Otherwise, Multus names the interfaces net0, net1 and so on. If extra configuration for the networks is needed, the annotation also supports the JSON array format.

2.4.5 Extended Berkeley Packet Filter

Berkeley Packet Filter (BPF, or nowadays often cBPF) was originally developed in the early 1990s as a high-performance tool for user-space packet capture [64]. BPF works by deploying the filtering part of the application, packet filter, in the kernel-space as an agent. The packet filter is provided with a program (often denoted as BPF program) consisting of BPF instructions, which works as a set of rules for selecting which packets are of interest in the user-space application and should be copied from kernel-space to user-space. The instructions are executed in a register-based pseudo machine. Since network monitors are often interested only in subset of network traffic, this limits the number of expensive copy operations across the kernel/user-space protection boundary only to packets that are of interest in the user-space application. A notable use-case for BPF is *libpcap* library, which is used by a network monitoring tool called tcpdump.

Later in the 2010s the Linux community realized that BPF and it's ability to instrument the kernel could benefit other areas than packet filtering as well [76]. This reworked version of BPF was first merged into the Linux kernel in 2014 and is publicly called the extended Berkeley Packet Filter (eBPF) to distinguish it from the original cBPF. The kernel development community continues to call the newer version BPF, but instead of the original acronym consider it a name of a technology. Similarly to the kernel community, the term BPF always refers to the eBPF in this thesis.

The eBPF programs are compiled to bytecode and loaded into the kernel with bpf() system call [66]. Most often, programs are written in restricted C and compiled with the LLVM Clang compiler to bytecode. It is also possible to use the eBPF assembly instructions and bpf_asm utility for converting instructions to bytecode. eBPF programs follow an event-driven architecture: a loaded eBPF program is hooked to a particular type of event and each occurrence of the event triggers the program execution.

There are two different network event interfaces in eBPF: eXpress Data Path (XDP) and Traffic Control (TC) [66]. XDP programs are attached to an NIC and can handle only incoming packets [59]. The programs are called directly by the NIC driver if it has XDP support, thus executing before packets enter the network stack. This skips expensive packet parsing and memory allocation operations and allows XDP programs to run at very high throughput. Thus, even the main network buffer *skbuff* is not populated. Some SmartNICs even support offloading the program to the NIC's own processor from the host CPU, further improving the performance of the host machine [32]. If the driver does not support XDP, generic XDP is used and the programs run after the packet has been parsed by the network stack.

XDP programs can read and modify the contents of packets [76]. Since the packets are not parsed into the network stack, the programs have to work with raw packets and implement their own parsing functionality. The program's return value determines how the packet should be processed further. With XDP_DROP and XDP_PASS return values, the packet can be dropped or passed further to the networking stack, respectively. The packet can also be bounced back to the same NIC on which it arrived with XDP_TX, usually after modifying the contents of the packet. XDP_REDIRECT is used for redirecting the packet to a different NIC, CPU or even to another socket.

TC programs are executed when both incoming and outgoing packets reach the kernel traffic control function within the Linux network stack [76]. The ingress hook runs after the packet is parsed to *skbuff* but before most of the network stack. On egress the stack is traversed in reverse; thus, the hook executes after most of the network stack. TC programs can read and write directly to a packet in memory. Similarly to XDP programs, the return value of the program determines the further processing of the packet. The packet can be passed further in the stack with TC_ACT_OK, dropped with TC_ACT_SHOT, or the modified packet can be redirected back to the start of the classification with TC_ACT_RECLASSIFY, among others.

3 The threat model

This chapter analyzes threats in the Kubernetes cluster from the perspective of sidecars. The chapter first discusses existing Kubernetes threat models, which are then used to identify possible attack vectors and readily available mitigations. Finally, the chapter discusses the attack model and demonstrates attacker capabilities with example attack scenarios.

3.1 Existing models

A security threat is any possible event in a system that could lead to a potential loss of confidentiality and integrity of an asset in the system. Threat modeling is a structured approach to identify and prioritize potential threats to a system. This includes profiles of potential attackers and their goals and methods, as well as potential mitigations [72].

For Kubernetes clusters, there exists an extensive *Threat Matrix for Kubernetes* created by Microsoft [67]. The matrix is adapted from *MITRE adversarial tactics*, *techniques*, *and common knowledge (ATT&CK)* Framework's container matrix [26] and is a de-facto industry standard for describing threats. The matrix, illustrated in Figure 4, describes common techniques used by attackers in chronological stages, from initial access to impact [68]. A defense-in-depth strategy is achieved by addressing threats at all stages of attack.

Initial Access	Execution	Persistence	Privilege Escalation	Defense Evasion	Credential Access	Discovery	Lateral Movement	Collection	Impact
Using Cloud credentials	Exec into container	Backdoor container	Privileged container	Clear container logs	List K8S secrets	Access the K8S API server	Access cloud resources	Images from a private registry	Data Destruction
Compromised images in registry		Writable hostPath mount	Cluster-admin binding	Delete K8S events	Mount service principal	Access Kubelet API	Container service account		Resource Hijacking
Kubeconfig file	New container	Kubernetes CronJob	hostPath mount	Pod / container name similarity	Access container service account	Network mapping	Cluster internal networking		Denial of service
Application vulnerability	Application exploit (RCE)	Malicious admission controller	Access cloud resources	Connect from Proxy server	Applications credentials in configuration files	Instance Metadata API	Applications credentials in configuration files		
Exposed sensitive interfaces	SSH server running inside container				Access managed identity credential		Writable volume mounts on the host		
	Sidecar injection				Malicious admission controller		CoreDNS poisoning		
							ARP poisoning and IP spoofing		

Figure 4: Kubernetes threat matrix. The attack techniques addressed are highlighted in green.

3.2 Attacker model

The adversary in this model is a compromised sidecar container in the cluster. Since sidecar containers do not technically differ from main containers, they are compromised

in a similar fashion. For example, the cluster could run a container with security vulnerability, or the admins could have been tricked to install a malicious sidecar to the cluster. Thus, the model assumes that the first stage is already breached. The model also assumes that the adversary has execution capabilities in the sidecar container, specifically a shell access to the sidecar container in the examples. This type of security breach can occur if the application has a remote code execution (RCE) vulnerability that the attacker can exploit to run a reverse shell script inside the application. As another example, the attacker could acquire valid credentials to an application running a Secure Shell (SSH) server through brute-force or phishing attacks. The goal of the model is to prevent the attacker from escalating the attack from the initial breach. Tables 1 and 2 list the identified threats, with threats related to networking divided into the latter.

Table 1: Kubernetes sidecar threats

Threat	Description	Mitigation
	-	Use restricted Pod
Privileged containers	If containers are given	
	privileges, malicious	Security Admission to
	actor can breakout	enforce security rules.
	from the container	PSAs are defined for
	and escalate the	namespaces, so isolate
	attack on cluster.	privileged containers into
		their own namespaces
		to follow the principle
		of least privilege.
Writing to the	If allowed, malicious	Do not allow unnec-
host file system	actor can try to	essary mounts. Use
-	tamper with the	readOnlyRootFilesystem
	application or write	true whenever possible.
	executables to a disk.	·
Permissive RBAC	Containers in a	Disable automatic
on service accounts	Pod share service	mounting of service
	accounts ¹ . By default,	accounts ² and explicitly
	Pods automatically	mount them to con-
	mount the service	tainers when needed.
	account to all containers.	Adhere to the princi-
	account to an contamero.	ple of least privilege.
There are no resource	If not set, a single con-	Set resource lim-
limits for containers		its to containers ³ .
minus for containers	tainer can hog system	ns to containers.
	resources, causing	
	denial of service (DoS).	

¹spec.serviceAccountName is a Pod-level field

²Set automountServiceAccountToken: false

³Use spec.containers[*].resources

Table 2: Networking threats for sidecars

Threat	Description	Mitigation
The Pod has network ac-	By default, all traffic	Use NetworkPolicies as
cess to the control plane	inside the clus-	a firewall. Deny by de-
	ter is allowed.	fault and explicitly allow
		traffic only if needed.
Sidecar can use the	NetworkPolicies affect	No built-in so-
main container's	the NIC of the Pod	lution available!
NetworkPolicy to ac-	network, which is	
cess kube-system	shared by sidecars.	
or other Pods		
Sidecar has net-	Main container	There is no built-in
work access to the	is accessible via	solution available!
main container	loopback device, which	
	cannot be protected	
	with NetworkPolicy.	
Sidecar sniffs the	Pod-to-Pod traffic in	CNIs and service
main application traffic	cluster is unencrypted	meshes may provide
	by default. A privileged	encryption to inter-Pod
	sidecar can sniff	traffic with, for example,
	and hijack traffic.	IPSec, Wireguard and
		mutual TLS. These are
		often implemented with
		sidecars, which is not
		feasible in this scenario.
		For intra-Pod traffic
		containers would need
		to implement this as
		part of the containers.

One of the worst-case scenarios is that the attacker has access to a privileged sidecar container. A privileged container has all the capabilities of the host machine, so basically a root user inside a privileged container means that the attacker has root privileges on the host Node. Furthermore, the container lacks restrictions from Seccomp, AppArmor and Linux capabilities. The Listing 3 describes a Deployment with a privileged container with extremely insecure specification.

```
apiVersion: apps/v1
kind: Deployment
metadata:
name: privileged
namespace: insecure—ns
spec:
replicas: 1
selector:
```

```
matchLabels:
        app: privileged
    template:
      metadata:
        labels:
13
          app: privileged
14
      spec:
        hostPID: true # vector: nsenter works now for
    namespaces running outside the container
        hostNetwork: true # vector: sniff traffic with
17
    tcpdump, try to bypass NetworkPolicies
        hostIPC: true # vector: look for shared resources
18
    in /dev/shm and ipcs
        nodeName: k8s-control-plane-node # deploy workload
     on a control plane Node
        containers:
          - name: sidecar-container
21
            image: malicious-sidecar
            command: ["/bin/sleep", "3650d"]
23
            securityContext:
24
               privileged: true
            volumeMounts:
               - name: host-root
                 mountPath: /host-root
        volumes:
29
          - name: host-root # vector: mount the host
30
    filesystem
            hostPath:
               path: /
```

Listing 3: Privileged container

The three first fields in the spec remove namespace isolations from the container and use the corresponding Node namespaces instead. With a privileged container and hostPID: true, the attacker can enter Node's namespace with nsenter (easy target PID is the **init** system running as 1), and execute commands on the host. The attacker can also see and enter other container's and processes running on the same Node. In a non-privileged container, the hostPID still allows Denial of Service (DoS) attacks by killing the processes on the Node.

Since the container mounts the host filesystem to a volume in /host-root, the attacker in a privileged container can trivially use chroot to execute commands as root user in the host Node context. Even without the explicit hostPath mount, the host machine's /dev is accessible from the privileged container, which means that the container can see the disk that contains hosts's filesystem and mount the disk. The attacker can use this technique to find any credentials stored on the host machine and escalate the attack. Important credentials include for example kubeconfig files that

store access tokens to the Kubernetes API server, ServiceAccount tokens that may have been mounted on any Pod on the host, SSH keys and hashed user passwords in /etc/shadows.

The biggest risks considering a non-privileged container with all the isolations intact relate to lateral movement and discovring of secrets. Kubernetes automatically mounts each container in a Pod with Service Account token, which can be used to attack the control plane if it is over-permissive. Since the cluster has no NetworkPolicies in place by default, any misconfigured control plane component, like Kubelet or API server with anonymous—auth set to true, could be exploited. In addition, the attacker can try to be breach or DoS any control plane component or workload in the cluster, or other connected services like those in a cloud hosted system. Furthermore, any unpatched vulnerability in the underlying kernel, container engine or Kubernetes can exploited.

The *malicious-sidecar* image is a simple, custom-made container image that includes some basic tools for penetration testing. The image also installs kubectl and sets environment variables so that the CLI tool works out-of-the-box with the default minikube installation. Its Dockerfile can be found in Appendix A. If the container has public internet access, the attacker could use a tool such as Docker Enumeration, Escalation of Privileges and Container Escapes (DEEPCE) [70] to enumerate attack options even further.

4 Solution requirements

This chapter defines the security requirements of the solutions that are discussed in the following chapters. The chapter also introduces the development environment, which is used for testing and implementing the solutions.

4.1 Security requirements

Threat modeling identified two main categories of issues: permissive workload configurations and networking related issues. Essentially, all the threats are caused by sidecars not respecting the principle of least privilege; the sidecar inherits execution and networking privileges from the main application container. Based on the model, the solution should provide answers to these main questions:

- 1. How to ensure and enforce that no workloads that conflict with the principle of least privilege are deployed to the cluster?
- 2. How to enforce Zero Trust network that allows traffic filtering on container-level and limits communication on both loopback and Pod network interface device?

As for the first question, existing mitigations were already found while threat modeling. A solution in which all mitigations are applied is introduced in Chapter 5. For the second question on building the Zero Trust network, the Pod must be firewalled for both inter-Pod communications on the Pod network NIC and intra-Pod communications on the loopback NIC. However, Kubernetes does not provide any built-in solution for creating these firewalls. Few possible solutions for building the Zero Trust network inside the Pod are given in the Chapter 6.

4.2 Environment

The solution is tested and developed on a Minikube cluster running on a local machine and using Docker as the driver for Nodes. The cluster consists of two Nodes, the purpose of which is to deploy control plane components separately from worker ones. Furthermore, the setup also allows testing of network between components hosted on different Nodes. The complete setup is hosted on Github (https://github.com/Arskah/k8s-sidecar-security). Both Calico and Cilium are used as CNI plugins, since the selection of CNI plugin has minor implications on the actual networking solution. The implications are discussed in detail in Chapter 6.

A simple Node.js webserver with StatsD sidecar is used as the application workload. The source code can be found in Appendix B. The webserver serves "Hello world" on port 8888 and writes response times to the StatsD sidecar via the loopback device on port 8125, which is the default for StatsD.

For penetration testing purposes, another sidecar is introduced with common networking and Kubernetes command line tools. When deployed instead of the StatsD client, this sidecar can be used to simulate situations where the attacker has managed to get access to the shell inside the sidecar. The Dockerfile for the image can be found in Appendix A.

5 Hardening Pod security

This chapter provides a solution for hardening Pods against privilege escalation attacks. The solution enforces that deployed resources follow Kubernetes best security practices. Most of the practices are enforced by the built-in Pod Security Admission controller. However, this chapter also introduces extra security measures that fix a few oversights regarding sidecar containers in the controller.

5.1 Restricted Pod Security Standard

Since version 1.25, Kubernetes has shipped with the Pod Security Admission controller as a stable feature. The controller, as discussed in Chapter 2.3.3, provides three different Pod Security Standards that can be used to warn and enforce against insecure Pod configurations. The restricted Pod Security Standard is the strictest of the standards and aims at the best Pod hardening practices [15], so it will be the most optimal for our solution. The Security Standard can be easily enforced by adding pod-security.kubernetes.io/enforce: restricted as a label on a Kubernetes namespace resource, as shown in Listing 4.

```
apiVersion: v1
kind: Namespace
metadata:
name: foo
labels:
name: foo
pod-security.kubernetes.io/enforce: restricted
pod-security.kubernetes.io/audit: restricted
pod-security.kubernetes.io/warn: restricted
pod-security.kubernetes.io/enforce-version: latest
pod-security.kubernetes.io/audit-version: latest
pod-security.kubernetes.io/warn-version: latest
```

Listing 4: Namespace resource with restricted Security Standard

Table 3 illustrates the fields that the restricted security standard affects. From the table, it can be noted that the standard already blocks 2 out of the 4 identified threats: the deployment of privileged containers and host directory mounts. However, it should be noted that the standard restricts the networking solution discussed in the following chapter. Since the security standard only allows for the NET_BIND_SERVICE capability, any Pod attempting to modify the network stack will not work. Therefore, the network modifications must be implemented outside the Pod's context, which is discussed in greater detail in Section 6.1.2.

 Table 3: Pod fields enforced by restricted Security Standard

Field name	Usage	Allowed values
hostPID, hostIPC,	Controls whether container	false
hostNetwork	uses host's PID, IPC and	
	network namespace.	
privileged	Controls whether Pod can	false
	run privileged containers.	
capabilities.add / drop	Defines Linux capabilities	Add NET_BIND_SERVICE
	for the container.	allowed, drop ALL required
volumes[*]	All volume types are	configMap, csi,
	not allowed. For ex-	downwardAPI,
	ample, hostPath, that	emptyDir, ephemeral,
	maps host directo-	persistentVolumeClaim,
	ries, are not allowed.	projected, secret
hostPort	Expose container via	undefined
	host's network port.	
AppArmor annotation ¹	Sets the AppArmor profile	runtime/default, localhost/*
	used by containers. On	
	supported hosts, the	
	runtime/default AppArmor	
	profile is applied by default.	
seLinuxOptions	Sets the SELinux	Set if supported
	context of the container.	by environment.
procMount	The default /proc masks	Default
	are set up to reduce	
	attack surface, and	
	should be required.	
seccompProfile.type	Sets the seccomp	RuntimeDefault
	profile used to sand-	or Localhost
	box containers.	
sysctls[*].name	Sysctls can disable	kernel.shm_rmid_forced,
	security mechanisms or	<pre>net.ipv4.ip_local_port_range,</pre>
	affect all containers on	<pre>net.ipv4.ip_unprivileged_port_start</pre>
	a host, and should be	<pre>net.ipv4.tcp_syncookies,</pre>
	disallowed except for an	net.ipv4.ping_group_range
	allowed "safe" subset.	
allowPrivilegeEscalation	Controls whether the	false
	process can gain more	
	privileges than the parent ²	
runAsNonRoot	Controls whether container	true
	can run as root user.	
runAsUser, runAsGroup	Controls the user and	Set both to non-zero
ran tooser, ran toaroap	Controls the aser and	
·	group used by container.	to run as non-root.
windowsOptions.hostProcess	group used by container.	to run as non-root.

¹container.apparmor.security.beta.kubernetes.io/*
²Controls the no_new_privs flag

5.2 Enforcing other best practices

The restricted Security Standard hardens the Pod against most of the identified security threats. However, it still does not enforce specific resource limits and allows automatic mounting of Service Accounts for the Pod containers.

Adding resource limits to containers is straightforward: just add values to both resources.limits.cpu and resources.limits.memory fields for all of the containers, similarly to Listing 6. The CPU usage is measured in CPU units and can also be expressed in millicpus, ie. both "1000m" and integer value of 1 are equivalent to 1 physical or virtual core [17]. For memory, the base unit is bytes, but it also supports quantity suffixes such as "M", "Mi", and "Gi" for megabytes, mebibytes, and gigibytes, respectively. The resource limits are registered to container's cgroup by the Kubelet. The limits are hard, which means that if a container exceeds its CPU limit, the execution is blocked until more CPU capacity is available. Exceeding the memory limit causes termination with an out-of-memory (OOM) error.

5.2.1 Manual service account mounting

By default, the Service Account tokens are mounted in the /var/run/secrets/kubernetes.io/service directory in every container. This feature can be disabled by setting automountServiceAccountToken: false, but then any container that actually uses the Service Account must receive the token in some other way. Since volume mounts are defined per container and service account tokens can be created manually with Secrets, the issue can be circumvented by manually mounting the token to containers that use it.

```
apiVersion: rbac.authorization.k8s.io/v1
2 kind: Role
3 metadata:
   namespace: foo
   name: foo-service-account-role
   apiGroups: [""] # "" indicates the core API group
   resources: ["pods"]
   verbs: ["get", "watch", "list"]
   apiGroups: [""] # "" indicates the core API group
   resources: ["pods"]
   verbs: ["get", "watch", "list"]
13 ---
apiVersion: v1
15 kind: ServiceAccount
 metadata:
   name: foo-service-account
   namespace: foo
20 kind: RoleBinding
apiVersion: rbac.authorization.k8s.io/v1
```

```
22 metadata:
   name: foo-service-account-rolebinding
    namespace: secure-ns
 subjects:
 – kind: ServiceAccount
    name: foo-service-account
    apiGroup: ""
29 roleRef:
    kind: Role
    name: foo-service-account-role
31
    apiGroup: ""
33 ---
apiVersion: v1
35 kind: Secret
metadata:
    name: foo-service-account-token
    namespace: foo
    annotations:
39
      kubernetes.io/service-account.name: foo-service-
40
     account
type: kubernetes.io/service-account-token
```

Listing 5: ServiceAccount with permissions for fetching Pod resources

Listing 5 shows how to create a Service Account token with the permission to read the status of Pods in the cluster. While Role, RoleBinding, and ServiceAccount resources are used to create and define RBAC rules for the Service Account, the Secret resource creates a similar authorization token as Pod with auto-mounting of service account tokens would create and mount on the containers. When the token created by the Secret resource is mounted to the same path as the automatic mounting, as in Listing 6, the token is only mounted to the container that needs it. With this approach, the account tokens are only mounted into containers that actually need them, and the tokens cannot be used for privilege escalation from other containers of the Pod.

```
apiVersion: apps/v1
kind: Deployment
spec:
replicas: 1
selector:
matchLabels:
app: app
template:
spec:
automountServiceAccountToken: false
containers:
name: main
image: main—image
```

```
resources:
               limits:
                 cpu: "2"
                 memory: 1024Mi
             volumeMounts:
18
               - name: service-account
19
                 mountPath: /var/run/secrets/kubernetes.io/
20
     serviceaccount
           - name: sidecar-container
             image: sidecar-image
             resources:
23
               limits:
24
                 cpu: "1"
25
                 memory: 512Mi
        volumes:
           - name: service—account
             secret:
               secretName: foo-service-account-token
30
```

Listing 6: Two container Pod with resource limits and manually mounted ServiceAccount

5.2.2 Enforcing the fields

Kubernetes' Admission controller is the go-to tool for preventing undesired configurations from entering the cluster. Unfortunately, the existing built-in hooks do not provide the option to enforce resource limits or manual Service Account mounting. As there is no existing community solution, a custom-made ValidatingAdmissionWebhook should be created.

The Github development setup includes an example admission controller based on Slack's *simple-kubernetes-webhook* [62]. A template is supplemented with a custom validation function, *resource-validator*, which is shown in Listing 7. When a Pod specification with no resource.limits definition is validated, the if-statement on line 20 triggers, causing the validation to fail. The function can be trivially extended to allow CPU and memory values only in a given range.

```
package validation

import (
   "github.com/sirupsen/logrus"
   corev1 "k8s.io/api/core/v1"

)

type resourceValidator struct {
   Logger logrus.FieldLogger
}

var _ podValidator = (*resourceValidator)(nil)
```

```
14 func (n resource Validator) Name() string {
    return "resource_validator"
15
16
  func EveryContainerHasResources(arr *[]corev1.Container) bool {
18
    for _, container := range *arr {
19
      if container. Resources. Limits == nil {
20
        return false
23
24
    return true
25
26
  func (n resource Validator) Validate (pod *corev1.Pod) (validation,
27
     error) {
    if (!EveryContainerHasResources(&pod.Spec.Containers)) {
      v := validation {
29
        Valid:
                false,
30
        Reason: "all pod container do not have resources defined",
      return v, nil
33
34
35
    return validation { Valid: true, Reason: "resources defined" }, nil
36
37 }
```

Listing 7: Go function for validating that resource limits are used

The validator for automatic mounting of Service Accounts could be implemented similarly. Instead of verifying resource limits, the function should verify that PodSpec.AutomountServiceAccountToken is set to false.

Custom Admission controller webhooks require a Deployment and a Service resource, as well as TLS certificates stored as a Secret resource. These resources are well-documented in the *simple-kubernetes-webhook* example. The example also provides a shell script for minting TLS certificates. However, in production environments, the TLS certificates should be generated by a specialized certificate manager workload installed in the cluster. Because of the effort needed for including production-ready webhooks to the demonstration setup, these are left as an exercise for the reader.

6 Network Isolation

Implementing a zero trust network architecture in Kubernetes cluster is not trivial, since building network isolation between containers in the same Pod is not possible with common CNI plugins and Network Policies. The root cause for this is that the lowest level of networking abstraction in Kubernetes is the Pod, and that by definition, all containers in a Pod share network namespace. Thus, all traffic outside the Pod, from any of the containers, passes through the same eth0 NIC and shares a common source IP address. Since NetworkPolicies operate on L3/L4, they cannot distinguish whether traffic originates from the sidecar or from the main container. Although ingress traffic can be easily identified with the destination port number, the source port for egress traffic depends on the TCP implementation. As a result, NetworkPolicies cannot be used to manage egress traffic from sidecar independently of the main container. For intra-Pod communication, traffic passes through the loopback device, which is created by a *loopback* plugin [12]. The plugin is not managed by the CNI plugin installed on the Nodes; instead Kubernetes requires that the underlying container runtime provides the implementation. Most runtimes implement the reference CNI plugin [20], but, for example, CRI-O implements its own. Due to this, the plugin does not install with a controller that would enforce NetworkPolicies on the loopback device. Furthermore, since all intra-Pod traffic has source and destination IP addresses of 127.0.0.1, the packets do not have clear identifiers that could be used for traffic filtering. This chapter introduces two general approaches to solving the issue.

The first solution enforces firewall rules inside the application Pod's network namespace, while the second approach creates network namespaces for each container by deploying them to their own Pods. While deploying containers in their own Pods is an obvious option for creating the isolation, the approach breaks the tight integration of sidecar containers to the application container. Most importantly, sidecars will have their own independent lifecycle and scheduling, and communication via the loopback device will be broken. In the scope of this thesis, we consider sidecars to be scheduled along the application container and be accessible via 127.0.0.1. Thus, re-introducing these characteristics to the containers is also part of the solution.

6.1 Applying firewall rules inside Pod network namespace

Figure 5 illustrates the network architecture with all required network rule enforcement points. The solution needs to enforce network rules in four scenarios: i) external components and Pod's eth0, ii) main container and lo, iii) sidecar container and lo, and sidecar container and eth0. The ingress and egress rules in the first scenario are more easily enforced with NetworkPolicies, as shown in Listing 8. The policies allow cluster and external traffic to the main application port 8888, while denying all other traffic into and out of the Pod.

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
```



Figure 5: Single network namespace architecture

```
name: deny-all
    namespace: app
6 spec:
    podSelector: {}
    policyTypes:
      - Ingress
      - Egress
10
11 ---
apiVersion: networking.k8s.io/v1
 kind: NetworkPolicy
14 metadata:
    name: web-allow-external
    namespace: app
16
17 spec:
    podSelector:
18
      matchLabels:
19
        app: node-app
20
    ingress:
    - ports:
      - port: 8888
```

Listing 8: Network Policy handling traffic between Pod and external components

The other scenarios cannot be enforced with NetworkPolicies, since the rules depend on individual containers instead of Pods. The rules need to be applied inside the Pod's network namespace with tools such as IPTables.

6.1.1 IPTables

Usually, IPTables rules are applied to packets by their IP addresses and ports. However, modern versions of IPTables ship with an owner module, which supports rules based on process's name and user, group, process and session identifiers [40]. For example, iptables -A OUTPUT -m owner -uid-owner 1000 -j REJECT would reject all egress packets from containers with the user id. While the session identifier is assigned at runtime by the kernel, containers' user and group ids can be overridden with Pod definition's runAsUser and runAsGroup fields, respectively. Thus, any ingress or egress traffic of a container with unique user identifier can be filtered with IPTables.

Listing 9 shows IPTables rules that can enforce network rules in other scenarios. As ingress rules, the main application port is opened on all network devices, while the sidecar port is only allowed on the loopback device. For egress traffic, the main application is given access to both containers' ports, while the sidecar can only access its own port. All other traffic is rejected by default.

```
#!/bin/bash
2 APP_UID=1000
3 APP PORT=8888
4 SIDECAR_UID=2000
5 SIDECAR_PORT=8125
7 # Ingress rules
 iptables — A INPUT — m conntrack — ctstate ESTABLISHED, RELATED – j
     ACCEPT
9 iptables — A INPUT — p tcp — dport $APP_PORT — j ACCEPT
10 iptables -A INPUT -p udp -dport $SIDECAR_PORT -j ACCEPT
iptables —A INPUT —j DROP
13 # Egress rules
14 iptables — A OUTPUT — m conntrack — ctstate RELATED, ESTABLISHED — j
     ACCEPT
16 ## Main app rules
<u>iptables</u> —A OUTPUT —o lo —m owner —uid—owner $APP_UID —p tcp —
     dport $APP_PORT -j ACCEPT
iptables —A OUTPUT —o lo —m owner —uid—owner $APP_UID —p udp —
     dport SIDECAR_PORT - j ACCEPT
20 ## Sidecar rules
  iptables -A OUTPUT -o lo -m owner -uid-owner $SIDECAR_UID -p udp
     —dport $SIDECAR_PORT —j ACCEPT
23 iptables —A OUTPUT — j REJECT
```

Listing 9: IPTables rules for the Pod

The approach is similar to how Istio redirects all Pod traffic through the Envoy sidecar and the service mesh. Istio adds IPTables rules that reroute all traffic, except those that originate from user id 1337, to the Envoy proxy [35]. The user id itself is reserved for the proxy, and it is used to avoid re-routing the proxy traffic, which would cause an infinite loop.

eBPF programs were also considered as an option for IPTables. Since XDP programs support only ingress rules, they are not a valid option for solving the

problem. However, a TC program that could distinguish sidecar container traffic from others could be a possible option. TC programs manipulate packets by modifying struct __sk_buff in the user space. The complete C structure is listed as Listing 10.

```
/* user accessible mirror of in-kernel sk buff.
  * new fields can only be added to the end of this structure
  */
_{4} struct \_\_sk\_buff {
   __u32 len;
    __u32 pkt_type;
    __u32 mark;
    __u32 queue_mapping;
    __u32 protocol;
9
    __u32 vlan_present;
10
    __u32 vlan_tci;
11
    __u32 vlan_proto;
12
    __u32 priority;
13
    __u32 ingress_ifindex;
14
    __u32 ifindex;
15
    __u32 tc_index;
16
    __u32 cb[5];
17
    __u32 hash;
18
    __u32 tc_classid;
19
    __u32 data;
20
    __u32 data_end;
21
    __u32 napi_id;
22
23
   /* Accessed by BPF_PROG_TYPE_sk_skb types from here to ... */
24
    __u32 family;
25
    __u32 remote_ip4;
26
                          /* Stored in network byte order */
    __u32 local_ip4;
                          /* Stored in network byte order */
27
    __u32 remote_ip6[4]; /* Stored in network byte order */
28
    __u32 local_ip6[4]; /* Stored in network byte order */
29
    __u32 remote_port; /* Stored in network byte order */
30
                         /* stored in host byte order */
    __u32 local_port;
31
    /* ... here. */
32
33
    __u32 data_meta;
34
    __bpf_md_ptr(struct bpf_flow_keys *, flow_keys);
35
    __u64 tstamp;
36
    __u32 wire_len;
37
    __u32 gso_segs;
38
    __bpf_md_ptr(struct bpf_sock *, sk);
39
    __u32 gso_size;
40
    __u8 tstamp_type;
41
    __u32 :24;
                /* Padding, future use. */
42
    __u64 hwtstamp;
43
44 };
```

Listing 10: skbuff struct in Linux v6.3 [38]

As can be seen in the example, the structure has no identifiers that are unique for each container. A notable attribute in the structure is the mark field, which can be used as an identifier for the packet in the kernel. It does not propagate with the packet, which means

that marking can only be used for traffic filtering before the packet leaves the network stack. If combined with iptables rule that uniquely marks the packets egressing from the sidecar, for example by setting the mark as 2 iptables -t mangle -A PREROUTING -m owner -uid-owner 1000 -j MARK -set-mark 2, a TC eBPF program could be used for filtering traffic. However, using eBPF brings an extra layer of complexity in comparison to simply using IPtables for traffic filtering. Furthermore, eBPF programs do not provide any performance gains for egressing traffic, since the TC hooks execute after the packet has been processed by IPTables.

6.1.2 Deployment

The commands for creating the IPTables rules could be applied to the Pod with an initContainer or postStart lifecycle handler. However, the commands require root user permissions with NET_ADMIN and NET_RAW capabilities and would require changing Pod's security admission level to privileged. Thus, it is more optimal to apply the rules outside the Pod context and Namespace; for example, by using a controller in operator pattern. The same capabilities are paramount to any CNI plugin controllers that enforce Network Policies using IPTables or eBPF.

For demonstration purposes, a custom container is used installed with IPTables and crictl CLI. The container uses crictl to find the PID of a container in the Pod and uses nsenter to apply the IPTables rules inside the container's network namespace. The Dockerfile is found in Appendix C, and the DaemonSet is shown in the following Listing 11.

```
apiVersion: apps/v1
 kind: DaemonSet
 metadata:
    name: iptables—injector
    labels:
      app: iptables - injector
 spec:
    selector:
      matchLabels:
        name: iptables-injector
10
    template:
      metadata:
        labels:
13
          name: iptables—injector
      spec:
15
        hostPID: true
16
        containers:
           - name: iptables-injector
18
             image: iptables-injector
             imagePullPolicy: Never
             command: ["/bin/sh"]
             # args: ["./iptables.sh"]
```

```
args: ["./iptables-file.sh"]
             securityContext:
               allowPrivilegeEscalation: true
25
               readOnlyRootFilesystem: false
26
               runAsUser: 0
               runAsGroup: 0
28
               runAsNonRoot: false
               seccompProfile:
                  type: RuntimeDefault
               capabilities:
                 add:
33
                  - NET ADMIN
34
                  - NET RAW
35
                  drop:
                    - ALL
               privileged: true
             terminationMessagePath: /dev/termination-log
             terminationMessagePolicy: File
40
             volumeMounts:
41
             - name: containerd-socket
42
               mountPath: /var/run
               readOnly: false
        volumes:

    name: containerd—socket

           hostPath:
47
             path: /var/run
48
```

Listing 11: DaemonSet for a container injecting IPTables rules inside Pods

The script is not a valid controller, as it does not implement a control loop that reacts to Pod creation. Instead, it only works when it is executed after the Pod has been created. Therefore, it is only useful for demonstrating the concept and should not be used for purposes other than testing. Additionally, DaemonSet requires extensive privileges: the crictl that is used to find the PID must be run on a privileged Pod, and the nsenter command needs access to the host PID namespace.

6.2 Own network namespace for sidecar

Figure 6 illustrates the network architecture for the solution in which containers are deployed in different Pods. The idea behind this approach is to use Network Policies for filtering traffic between the containers. Since containers are not technically sidecars anymore, the solution must recreate communication via the localhost address.

Although it is possible to use the default network created by the CNI plugin for sidecar traffic, the proposed solution creates a new isolated network for traffic with Multus. The isolation allows the use of separate IP address pool, which comes in handy when re-creating the communication via localhost.



Figure 6: Multiple network namespaces architecture

6.2.1 Creating isolated network for sidecar traffic

It is completely possible to use the default Pod network created by the CNI plugin for traffic between sidecars. With this setup, the network rules are simply Network Policies on top of the policy that implicitly denies all other traffic.

It is also possible to build new network interfaces for sidecar traffic with Multus.

```
apiVersion: k8s.cni.cncf.io/v1
2 kind: NetworkAttachmentDefinition
 metadata:
   name: localhost-replacement
   namespace: app
6 spec:
    config: '{
        "cniVersion": "0.3.1",
        "name": "localhost-replacement",
        "capabilities": { "ips": true },
10
        "type": "macvlan",
        "master": "eth0",
        "mode": "bridge",
        "ipam": {
          "type": "static"
16
```

Listing 12: NetworkAttachmentDefinition for creating MacVLAN bridge between the Pods

The setup requires creating NetworkAttachmentDefinition CRD for the network. Each Pod that should be part of the network needs a k8s.v1.cni.cncf.io/networks

annotation, as seen in Listing 13.

```
apiVersion: apps/v1
2 kind: Deployment
3 metadata:
    name: node-app
    namespace: app
6 spec:
    replicas: 1
    selector:
      matchLabels:
        app: node-app
10
    template:
      metadata:
        labels:
           app: node-app
        annotations:
15
           k8s.v1.cni.cncf.io/networks: '[{
16
               "name": "localhost-replacement",
17
               "interface": "br0",
               "ips": [ "192.168.1.201/24" ]
             }]'
      spec:
21
        containers:
           - name: node-app
23
             image: node-app
24
26 apiVersion: apps/v1
27 kind: Deployment
 metadata:
    name: node-app-statsd
    namespace: app
30
 spec:
31
    replicas: 1
    selector:
33
      matchLabels:
        app: node-app-statsd
35
    template:
36
      metadata:
37
         labels:
38
           app: node-app-statsd
        annotations:
           k8s.v1.cni.cncf.io/networks: '[{
               "name": "localhost-replacement",
42
               "interface": "br0",
43
```

Listing 13: Deployment with Pod connected to the bridge

The common NetworkPolicies are not applied to the Multus network. However, the Multus developers have introduced another CRD, MultiNetworkPolicy [49], which mimics NetworkPolicies but only works for networks created by Multus. The resource is identical to NetworkPolicies, as seen in the Listing 14.

```
apiVersion: k8s.cni.cncf.io/v1beta1
2 kind: MultiNetworkPolicy
3 metadata:
   name: deny-all-br0
    namespace: app
    annotations:
      k8s.v1.cni.cncf.io/policy-for: localhost-replacement
 spec:
    podSelector: {}
    policyTypes:
      - Ingress
      - Egress
apiVersion: k8s.cni.cncf.io/v1beta1
15 kind: MultiNetworkPolicy
metadata:
    name: allow-statsd
    namespace: app
18
    annotations:
19
      k8s.v1.cni.cncf.io/policy-for: localhost-replacement
 spec:
21
    podSelector:
      matchLabels:
23
        app: node-app-statsd
24
    ingress:
25
      - from:
26
          - podSelector:
               matchLabels:
                 app: node-app
        ports:
30
          - protocol: TCP
31
             port: 8125
32
```

Listing 14: Zero trust MultiNetworkPolicies for br0 network interface

However, the Multus CNI does not enforce the MultiNetworkPolicy rules in any way. The implementation is left for other DaemonSets such as multi-networkpolicy-iptables [50] and multi-networkpolicy-tc [51], both of which are created by the Multus team. As the names suggest, the DaemonSets implement the enforcement with IPTables and eBPF TC programs, respectively. The multi-networkpolicy-iptables is used for the solution, since iptables implements all other network rules for the cluster.

With these configurations and dependencies, the containers should have a new network and reach each other via the bridge interface. As the next step, the solution must find a way to redirect traffic destined for the localhost to the new network. The script in Listing 15 shows how to redirect all egressing traffic with IPTables from the source of 127.0.0.1:8125 to another network interface with an external IP address, like 192.168.1.202:8125. By default, the re-routing of local traffic outside the local machine is denied by the kernel. To overrule this default behavior, the script sets a kernel flag with net.ipv4.conf. all . route_localnet =1.

Listing 15: Script for mapping localhost to br0 interface

The demo solution on Github uses the same *iptables-injector* daemon container introduced in 6.1.2 for running the above script in container namespaces.

6.2.2 Co-scheduling the containers

The configuration described above does not replicate the behavior of traditional sidecars. The sidecar is specified in a separate Deployment resource, meaning it has a distinct lifecycle from the main container.

MutatingAdmissionWebhooks can be used to modify the Pod *CREATE* and *DELETE* actions so that the sidecar Pod is created and deleted in tandem with the main container. However, MutatingAdmissionWebhooks are designed only to operate on the resource sent to them. Kubernetes documentation states that any webhook that makes out-of-band changes or has any other side effects should be accompanied by a controller that periodically determines the actual state of the cluster [9].

A custom controller watching for a specific sidecar annotation could also implement co-scheduling; however, the controller must somehow keep track of which Pod the sidecars are assigned to in order to manage the clean-up process when the Pod is deleted. Because of the complexity and the amount of work required to implement co-scheduling, this feature has been left out of the solution and is something to consider in the future.

7 Solution Evaluation

This chapter demonstrates with experiments that the solutions presented in Chapters 5 and 6 effectively isolate containers within the same Pod from one another. The evaluation not only verifies that the solutions meet the requirements, but also examines their potential and any weaknesses that can be improved.

The experiments in the first section involve assessing security admission by deploying privileged Pods to the cluster, as well as enforcing network isolation by generating intra-Pod and inter-Pod HTTP traffic with client tools such as cURL, wget, kubectl and netcat. The *malicious-sidecar* container (outlined in Appendix A) is added to the application containers as an extra sidecar and serves as an entry point for attacks in the experiments. The container has all the necessary tools installed.

```
Deployment configs...
 spec:
    containers:
      # other application containers...

    name: attacker

        image: malicious-sidecar
        command: ["/bin/sleep", "3650d"]
        imagePullPolicy: Never
        securityContext:
10
          allowPrivilegeEscalation: false
          readOnlyRootFilesystem: true
          runAsUser: 2001
          runAsGroup: 2001
          runAsNonRoot: true
          seccompProfile:
16
            type: RuntimeDefault
          capabilities:
            drop:
19
               - ALL
        resources:
          limits:
            cpu: "1"
            memory: 256Mi
```

Listing 16: Configuration of the third, malicious container added to the deployments

Both network isolation solutions should only permit UDP traffic from the webserver container to the StatsD client. Any other successful request is deemed a failure in isolation. The second section examines the qualitative characteristics of the solutions, such as any observed limitations in security or usability when the solutions are used in production environments.

7.1 Security Evaluation

The experiments in this section verify that network isolation works correctly in solutions. As a prerequisite for the experiments, the built-in Pod Security Admission rules should be enabled for the environments. To verify this, the first step in the evaluation is to deploy a Pod that is overly permissive into the cluster. The Deployment used to test this is shown in Listing 3. The definition namespace metadata fields were altered to match the namespace being tested, for example, app in our case.

When trying to deploy the Pod to the test cluster, a warning (illustrated in Listing 17) is displayed, which prevents deployment. This shows that Pod Security Admissions is functioning properly in the test environment, confirming the prerequisite, and allowing the evaluation to progress to testing network isolation.

```
Warning: would violate PodSecurity "restricted:v1.26":

privileged (container "sidecar-container" must not set
    securityContext.privileged=true),

allowPrivilegeEscalation != false (containers "main-application", "
    sidecar-container" must set securityContext.
    allowPrivilegeEscalation=false),

unrestricted capabilities (containers "main-application", "sidecar-
    container" must set securityContext.capabilities.drop=["ALL"]),

restricted volume types (volume "host-root" uses restricted volume
    type "hostPath"),

runAsNonRoot != true (pod or containers "main-application", "
    sidecar-container" must set securityContext.runAsNonRoot=true),

seccompProfile (pod or containers "main-application", "sidecar-
    container" must set securityContext.seccompProfile.type to "
    RuntimeDefault" or "Localhost")
```

Listing 17: Warnings printed to terminal by Pod Security Admission

Experiments were conducted for both proposed solutions. The first solution, which uses a single network namespace, was tested with both Docker and containerd runtimes. However, since multi-network-policy-iptables does not work with Docker, the Multus solution was only evaluated with containerd runtime.

7.1.1 Experiment 1: sidecars cannot access main application

The first experiment tests the main application's network isolation from sidecar threats. As none of the sidecars in the system requires access to the main application container, isolation should block all requests from the sidecar containers. This can be tested by sending an HTTP request from the attacking or StatsD sidecar to localhost:8888 with cURL. If isolation is successful, the request will be rejected. This can be observed in the IPTables packet filter counters, which can be seen by using the iptables -xvn -L command.

The first solution successfully rejected packets when it was used with Docker runtime. However, when it was used with containerd, the packets were not rejected, even though the IPTables packet filter counters increased. This suggests that there is a discrepancy in how the CRIs implement the loopback CNI, and that containerd's implementation might be optimized to bypass certain elements of the network stack.

The second solution also rejected the packets as expected. Since it also implements the policies with IPTables, and containerd was used, this further implies that the unexpected result with the other solution is caused by how containerd implements the loopback CNI.

7.1.2 Experiment 2: only main application can access StatsD sidecar

The second experiment verifies that only the main application is able to send packets to the StatsD sidecar and that any other traffic directed there is blocked. To test packet filtering rules, UDP packets are sent from malicious sidecar to localhost: 8125 with netcat (nc -u localhost 8125).

The IPTables rules in the first solution reject the packets due to the fact that the malicious-sidecar is deployed with a different user ID than the main application. Similarly, the IPTables rules generated from MultiNetworkPolicies in the second solution filter the unwanted packets.

7.1.3 Experiment 3: Access to other Pods is blocked

The third experiment verifies that neither of the network solutions interferes with NetworkPolicies applied outside the Pod network. The experiment environment uses a basic NetworkPolicy that blocks all outbound traffic and only allows inbound traffic to the main application. Policies can be tested by trying to access, for example, google.com or the Kubernetes API server from any container in the Pod. From outside the Pod, only the main application port should be reachable.

The two solutions both work as anticipated and do not conflict with CNI's Network Policies.

Experiment	Solution 1, Docker	Solution 1, containerd	Solution 2, containerd
Isolated main	OK	Not OK!	OK
Isolated sidecar	OK	Not OK!	OK
Isolated Pod	OK	OK	OK

Table 4: Experiment results

7.2 Qualitative assessment

The above experiments verify that the proposed solutions can be used to implement the desired network isolation. However, the solutions have a number of limitations and should only serve as a proof of concept. These limitations should be mitigated before using the solutions in production environments.

The biggest limitation is that the solutions only function on specific container runtimes. Since the first solution has only been proven to function on the Docker runtime, it logically limits the potential places where it can be used. The limitation also raises the question whether container runtimes should implement network isolation

of sidecars. Since the runtimes are responsible for creating the loopback device and they appear to have varying implementations of it, it may be impossible to create a tool at the orchestrator level that is not dependent on the runtime. Additionally, the documentation of multi-network-policy-iptables used in the second solution explicitly states that it only functions with containerd and CRI-O as runtimes and is not yet released as a stable version.

From a security point of view, the primary drawbacks are associated with the IPTables policies and the injector daemon. The first solution relies on distinguishing containers based on process user identifiers, which means that the system is only secure if the adversary cannot deploy containers with specific user IDs. The current implementation does allow the adversary to deploy a container with arbitrary user identifier, which means that an adversary with permissions to create containers can bypass isolation. Therefore, an admission controller is necessary to limit the allowed identifiers in production.

The injector daemon has the privileges to manage policies, so it should be regarded a vital part of the cluster infrastructure, similar to CNI operators. The current container has root privileges and access to the Node's container runtime socket, which could be exploited to compromise the entire Node. To prevent this, the daemon's privileges should be reduced to the bare minimum. CNI plugins with operators could be used as a model for this enhancement. Furthermore, since the deamon does not function as a controller, the daemon needs to execute after application Pods are created to inject the IPTables rules. As such, the solutions cannot handle normal container lifecycle events.

In conclusion, the solutions are intricate and need to be further enhanced before they can be employed in the production environment. The ideal solution would address the security issues mentioned above and implement a functioning controller loop to support container lifecycle events.

8 Discussion & conclusion

8.1 Future considerations

This chapter examines potential improvements to the proposed solution. As previously discussed, the proposed solution should not be used in production environments. A production-ready solution should incorporate a valid controller loop instead of the shell script that was proposed. Additionally, instead of relying on raw IPTables rules, the ideal solution should describe the policies with a custom resource, similar to NetworkPolicies. The controller loop should be responsible for managing both Pods and policy resources, similar to how many CNI plugins have been designed to accommodate NetworkPolicies. In contrast to common CNI plugins, the solution does not require the implementation of a CNI plugin, as the container runtime generates the loopback network interface. However, it is important to ensure that the selected container runtime does not require connectivity via the loopback device, which would be blocked by the applied policies.

8.2 Future of sidecars and service mesh

The release of Kubernetes version 1.28 in August 2023 brought with it the new "SidecarContainers" feature gate. This alpha-stage feature is designed to address the lifecycle and Pod termination issues that are currently experienced with sidecar containers [37]. Although existing Kubernetes primitives are capable of adequately managing sidecars, they are not sufficient for certain use cases [52]. For instance, service mesh sidecars must be running and ready before other containers to ensure that all traffic is routed through the mesh. Similarly, if the sidecar terminates before other containers during shutdown, traffic from other applications may be lost. Additionally, lifecycle-related issues can impede log and metric gathering sidecars, forcing applications to resort to unconventional workarounds. Furthermore, in the event of an OOM error, the sidecar will not restart for jobs with restartPolicy: Never. This can render the application unreachable, as is the case with service meshes, since the sidecar is necessary for application networking.

The introduction of sidecar containers as a new type of initContainer has made it easier to initiate and combine initContainers and sidecars in the startup sequence. However, the proposal explicitly states as a non-goal that it does not allow the enforcement of different security regulations for sidecars compared to other containers. Therefore, it does not appear that the lowest security boundary will change from Pod to container in the near future. Nevertheless, the new distinction between sidecars and other containers could allow this development in the future.

From a security standpoint, the safest option is to avoid sidecars altogether. It is worth mentioning that the sidecar proxy is not a requirement for the implementation of a service mesh. For example, Cilium service mesh uses eBPF for network layer operations and an Envoy proxy per host for application layer operations such as L7 load balancing and policies [47]. For sidecarless mTLS, Cilium combines TLS handshake and network level encryption with IPSec or Wireguard. This means that the service

mesh can actually operate without a proxy in some cases, and the proxy container is only used when necessary. The Envoy proxy is included in the cilium-operator, but since Cilium version 1.14, which was released in July 2023, the proxy can also be deployed as a DaemonSet independently.

Istio's service mesh also facilitates a sidecarless architecture. Ambient mesh [34], currently available as an open alpha version, uses ZTunnel proxies on each Node to provide L4 service mesh features such as mTLS, telemetry, authentication, and authorization. However, the ZTunnel is not capable of handling any L7 features, which are instead implemented by a waypoint proxy. The proxy operates on a per-namespace and per-service account basis, and it applies to all Pods in the same namespace by default. Sidecarless traffic encryption is enabled through encrypted HBONE tunnels.

Despite the advantages of sidecarless service mesh, it comes with its own drawbacks. Since all Pods on the Node use the same proxy, it can be subject to multi-tenancy issues such as the "noisy neighbor" anti-pattern, where one workload uses an excessive amount of resources and affects the performance of other workloads. Furthermore, the single proxy is a single point of failure, and if it fails, all Pods on the Node become unreachable. Additionally, the proxy is a more attractive target for attackers, as it can be used to impersonate any Pod on the Node.

The architecture of service meshes is a subject of much discussion in the industry, and the sidecarless design is not necessarily the next step in their development. In fact, the first service mesh, Linkerd, used the per-host proxy model in its version 1, but due to operational, management, and security issues, version 2 was based on sidecars.

8.3 Conclusion

This thesis provided an overview on containers, Kubernetes networking, sidecar design pattern, and Zero Trust security architecture. It identified the security risks associated with sidecar containers in Kubernetes and showed how an adversary could exploit them. For issues that could not be resolved with existing tools, the thesis proposed two proof-of-concept solutions for creating network isolation between the application and sidecar containers. Although following best practices in hardening Kubernetes clusters can help, the architecture of Pods in Kubernetes makes it difficult to isolate sidecars. The first proposed solution implements network isolation within the Pod's network namespace using IPTables, while the second solution creates a network that mimics the shared network namespace of sidecars. Solutions demonstrate that it is possible to isolate sidecars; however, the complexity and special infrastructure required to overcome this architectural limitation quickly outweigh the benefits. From a security standpoint, tried and tested components are always preferable to custom infrastructure that requires maintenance.

References

- [1] AppArmor. AppArmor. 2022. URL: https://apparmor.net/ (visited on 03/31/2023).
- [2] Docker Authors. *Docker overview*. 2023. URL: https://docs.docker.com/get-started/overview/ (visited on 04/06/2023).
- [3] Docker Authors. *Use containers to Build, Share and Run your applications*. 2023. URL: https://www.docker.com/resources/what-container/(visited on 04/06/2023).
- [4] etcd Authors. etcd. 2023. URL: https://etcd.io/ (visited on 04/05/2023).
- [5] Kubernetes Authors. *Admission Controllers Reference*. 2023. URL: https://kubernetes.io/docs/reference/access-authn-authz/admission-controllers/ (visited on 04/06/2023).
- [6] Kubernetes Authors. *Cluster Networking*. 2022. URL: https://kubernetes.io/docs/concepts/cluster-administration/networking/ (visited on 03/09/2023).
- [7] Kubernetes Authors. *Custom Resources*. 2023. URL: https://kubernetes.io/docs/concepts/extend-kubernetes/api-extension/custom-resources/ (visited on 07/16/2023).
- [8] Kubernetes Authors. *Deployments*. 2023. URL: https://kubernetes.io/docs/concepts/workloads/controllers/deployment/ (visited on 04/04/2023).
- [9] Kubernetes Authors. *Dynamic Admission Control*. 2023. URL: https://kubernetes.io/docs/reference/access-authn-authz/extensible-admission-controllers (visited on 08/15/2023).
- [10] Kubernetes Authors. *Kubernetes*. 2023. URL: https://kubernetes.io/(visited on 03/31/2023).
- [11] Kubernetes Authors. Kubernetes components. 2023. URL: https://kubernetes.io/docs/concepts/overview/components/ (visited on 04/05/2023).
- [12] Kubernetes Authors. *Network Plugins*. 2023. URL: https://kubernetes.io/docs/concepts/extend-kubernetes/compute-storage-net/network-plugins/(visited on 07/29/2023).
- [13] Kubernetes Authors. *Operator pattern*. 2023. URL: https://kubernetes.io/docs/concepts/extend-kubernetes/operator/(visited on 07/16/2023).
- [14] Kubernetes Authors. *Pod Security Admission*. 2023. URL: https://kubernetes.io/docs/concepts/security/pod-security-admission/(visited on 04/26/2023).
- [15] Kubernetes Authors. *Pod Security Standards*. 2023. URL: https://kubernetes.io/docs/concepts/security/pod-security-standards/(visited on 04/04/2023).

- [16] Kubernetes Authors. *Pods.* 2023. URL: https://kubernetes.io/concepts/workloads/pods/(visited on 04/04/2023).
- [17] Kubernetes Authors. Resource Management for Pods and Containers. 2023.

 URL: https://kubernetes.io/docs/concepts/configuration/
 manage-resources-containers/(visited on 05/30/2023).
- [18] Kubernetes Authors. Services. 2023. URL: https://kubernetes.io/docs/concepts/services-networking/service/ (visited on 04/04/2023).
- [19] The CNI Authors. *Container Network Interface (CNI) Specification*. 2023. URL: https://www.cni.dev/docs/spec/ (visited on 04/20/2023).
- [20] The CNI Authors. Loopback CNI plugin source code. 2023. URL: https://github.com/containernetworking/plugins/tree/v1.3.0/plugins/main/loopback (visited on 07/29/2023).
- [21] Gerald Budigiri et al. "Network policies in kubernetes: Performance evaluation and security analysis". In: 2021 Joint European Conference on Networks and Communications & 6G Summit (EuCNC/6G Summit). IEEE. 2021, pp. 407–412.
- [22] Thanh Bui. "Analysis of docker security". In: arXiv preprint arXiv:1501.02967 (2015).
- [23] Brendan Burns and David Oppenheimer. "Design patterns for container-based distributed systems". In: 8th {USENIX} workshop on hot topics in cloud computing (HotCloud 16). 2016.
- [24] Brendan Burns et al. "Borg, Omega, and Kubernetes". In: *Communications of the ACM* 59.5 (2016), pp. 50–57.
- [25] Theo Combe, Antony Martin, and Roberto Di Pietro. "To docker or not to docker: A security perspective". In: *IEEE Cloud Computing* 3.5 (2016), pp. 54–62.
- [26] The MITRE Corporation. *Containers Matrix*. 2023. URL: https://attack.mitre.org/matrices/enterprise/containers/(visited on 07/27/2023).
- [27] Michael Crosby. What is containerd? 2017. URL: https://www.docker.com/blog/what-is-containerd-runtime/ (visited on 08/15/2023).
- [28] Cilium developers. *Cilium*. 2023. URL: https://cilium.io/ (visited on 03/14/2023).
- [29] Cilium developers. Component overview. 2023. URL: https://docs.cilium.io/en/v1.13/overview/component-overview/ (visited on 04/12/2023).
- [30] Cilium developers. Component overview. 2023. URL: https://docs.cilium.io/en/v1.13/security/policy/language/ (visited on 04/12/2023).

- [31] Cilium developers. *Kubernetes Without kube-proxy*. 2023. URL: https://docs.cilium.io/en/v1.13/network/kubernetes/kubeproxy-free (visited on 04/12/2023).
- [32] Cilium developers. *Program types*. 2018. URL: https://docs.cilium.io/en/latest/bpf/progtypes/ (visited on 03/16/2023).
- [33] Cilium developers. *Transparent Encryption*. 2023. URL: https://docs.cilium.io/en/v1.13/security/network/encryption/ (visited on 04/12/2023).
- [34] Istio developers. Ambient Mesh Architecture. 2023. URL: https://istio.io/latest/docs/ops/ambient/architecture/ (visited on 08/19/2023).
- [35] Istio developers. *Install Istio with the Istio CNI plugin*. 2023. URL: https://istio.io/v1.17/docs/setup/additional-setup/cni/(visited on 06/14/2023).
- [36] Istio developers. *The Istio service mesh.* 2023. URL: https://istio.io/latest/about/service-mesh/ (visited on 04/06/2023).
- [37] Kubernetes developers. *Kubernetes v1.28 Changelog*. 2023. URL: https://github.com/kubernetes/kubernetes/blob/master/CHANGELOG/CHANGELOG-1.28.md#feature (visited on 08/24/2023).
- [38] Linux developers. *bpf.h in Linux source code*. 2023. URL: https://github.com/torvalds/linux/blob/v6.3/include/uapi/linux/bpf.h (visited on 06/23/2023).
- [39] Linux developers. capabilities(7) Linux manual page. 2023. URL: https://man7.org/linux/man-pages/man7/capabilities.7.html (visited on 03/31/2023).
- [40] Linux developers. *iptables*(8) *Linux man page*. 2023. URL: https://linux.die.net/man/8/iptables (visited on 07/29/2023).
- [41] Linux developers. namespaces(7) Linux manual page. 2023. URL: https://man7.org/linux/man-pages/man7/namespaces.7.html (visited on 03/31/2023).
- [42] Linux developers. seccomp(2) Linux manual page. 2023. URL: https://man7.org/linux/man-pages/man2/seccomp.2.html (visited on 03/31/2023).
- [43] Docker. Docker default Seccomp profile. 2022. URL: https://github.com/moby/moby/blob/23.0/profiles/seccomp/default.json (visited on 03/31/2023).
- [44] Docker. *Docker overview*. 2018. URL: https://docs.docker.com/get-started/overview/ (visited on 03/16/2023).
- [45] Docker. *Docker security*. 2023. URL: https://docs.docker.com/engine/security/(visited on 03/31/2023).

- [46] Martin Fowler and James Lewis. *Microservices*. 2014. URL: https://martinfowler.com/articles/microservices.html (visited on 05/09/2023).
- [47] Thomas Graf. Cilium 1.14 Effortless Mutual Authentication, Service Mesh, Networking Beyond Kubernetes, High-Scale Multi-Cluster, and Much More. 2023. URL: https://isovalent.com/blog/post/cilium-release-114/ (visited on 08/19/2023).
- [48] Thomas Graf. Cilium Service Mesh Everything You Need to Know. 2023. URL: https://isovalent.com/blog/post/cilium-service-mesh/(visited on 04/12/2023).
- [49] Kubernetes Network Plumbing Working Group. *multi-networkpolicy CRD*. 2023. URL: https://github.com/k8snetworkplumbingwg/multi-networkpolicy(visited on 07/03/2023).
- [50] Kubernetes Network Plumbing Working Group. *multi-networkpolicy-iptables*. 2023. URL: https://github.com/k8snetworkplumbingwg/multi-networkpolicy-iptables (visited on 07/03/2023).
- [51] Kubernetes Network Plumbing Working Group. *multi-networkpolicy-tc*. 2023. URL: https://github.com/k8snetworkplumbingwg/multi-networkpolicy-tc (visited on 07/03/2023).
- [52] Kubernetes Node Special Interest Group. *KEP-753: Sidecar containers*. 2023. URL: https://github.com/kubernetes/enhancements/tree/df246c8a3c89e1360ffa024f761e7ccc64d6e222/keps/sig-node/753-sidecar-containers (visited on 08/24/2023).
- [53] Network Plumbing Working Group. *Multus-CNI*. 2023. URL: https://github.com/k8snetworkplumbingwg/multus-cni(visited on 04/25/2023).
- [54] Network Plumbing Working Group. *Multus-CNI Configuration Reference*. 2023. URL: https://github.com/k8snetworkplumbingwg/multus-cni/blob/master/docs/configuration.md (visited on 04/25/2023).
- [55] The Kubernetes Networking Guide. *Calico*. 2023. URL: https://www.tkng.io/cni/calico/(visited on 03/14/2023).
- [56] The Kubernetes Networking Guide. Cilium. 2023. URL: https://www.tkng.io/cni/cilium/(visited on 03/14/2023).
- [57] The Kubernetes Networking Guide. *CNI*. 2023. URL: https://www.tkng.io/cni/(visited on 04/20/2023).
- [58] Michael Hausenblas. *Container Networking*. O'Reilly Media, Incorporated, 2018.
- [59] Toke Høiland-Jørgensen et al. "The express data path: Fast programmable packet processing in the operating system kernel". In: *Proceedings of the 14th international conference on emerging networking experiments and technologies*. 2018, pp. 54–66.

- [60] Pooyan Jamshidi et al. "Microservices: The journey so far and challenges ahead". In: *IEEE Software* 35.3 (2018), pp. 24–35.
- [61] Alper Kerman et al. "Implementing a zero trust architecture". In: *National Institute of Standards and Technology (NIST)* (2020).
- [62] Clément Labbe. A Simple Kubernetes Admission Webhook. 2022. URL: https://slack.engineering/simple-kubernetes-webhook/ (visited on 07/30/2023).
- [63] Xin Lin et al. "A measurement study on linux container security: Attacks and countermeasures". In: *Proceedings of the 34th Annual Computer Security Applications Conference*. 2018, pp. 418–429.
- [64] Steven McCanne and Van Jacobson. "The BSD Packet Filter: A New Architecture for User-level Packet Capture." In: *USENIX winter*. Vol. 46. 1993.
- [65] Dirk Merkel et al. "Docker: lightweight linux containers for consistent development and deployment". In: *Linux j* 239.2 (2014), p. 2.
- [66] Sebastiano Miano et al. "A framework for eBPF-based network functions in an era of microservices". In: *IEEE Transactions on Network and Service Management* 18.1 (2021), pp. 133–151.
- [67] Microsoft. Threat Matrix for Kubernetes. 2023. URL: https://microsoft.github.io/Threat-Matrix-for-Kubernetes/ (visited on 05/24/2023).
- [68] Francesco Minna et al. "Understanding the security implications of kubernetes networking". In: *IEEE Security & Privacy* 19.5 (2021), pp. 46–56.
- [69] Shixiong Qi, Sameer G Kulkarni, and KK Ramakrishnan. "Assessing container network interface plugins: Functionality, performance, and scalability". In: *IEEE Transactions on Network and Service Management* 18.1 (2020), pp. 656–671.
- [70] Matthew Rollings. *Deepce: Container enumeration and exploitation script.* 2023. URL: https://stealthcopter.github.io/deepce/ (visited on 07/28/2023).
- [71] Scott Rose et al. *Zero trust architecture*. Tech. rep. National Institute of Standards and Technology, 2020.
- [72] Nataliya Shevchenko et al. *Threat modeling: a summary of available methods*. Tech. rep. Carnegie Mellon University Software Engineering Institute Pittsburgh United . . . , 2018.
- [73] Tigera. *About Calico*. 2023. URL: https://docs.tigera.io/calico/3. 25/about (visited on 04/13/2023).
- [74] Tigera. About Network Policy. 2023. URL: https://docs.tigera.io/calico/latest/about/about-network-policy (visited on 04/13/2023).
- [75] Tigera. *Install calicoctl*. 2023. URL: https://docs.tigera.io/calico/3.25/operations/calicoctl/install (visited on 04/13/2023).

[76] Marcos AM Vieira et al. "Fast packet processing with ebpf and xdp: Concepts, code, challenges, and applications". In: *ACM Computing Surveys (CSUR)* 53.1 (2020), pp. 1–36.

A Dockerfile for penetration testing

```
FROM —platform=linux/amd64 ubuntu:22.04
3 RUN apt update
4 RUN apt install -y curl
6 # Setup kubectl
7 RUN curl -fsSLo /etc/apt/keyrings/kubernetes-archive-keyring.gpg
     https://packages.cloud.google.com/apt/doc/apt-key.gpg
8 RUN echo 'deb [signed-by=/etc/apt/keyrings/kubernetes-archive-
     keyring.gpg] https://apt.kubernetes.io/kubernetes-xenial main'
     tee /etc/apt/sources.list.d/kubernetes.list
10 # Install deps
11 RUN apt update
12 RUN apt install -y net-tools nmap neat kubectl etcd iputils-ping
     iproute2
# kubeletctl
15 RUN curl -LO https://github.com/cyberark/kubeletctl/releases/
     download/v1.9/kubeletctl_linux_amd64 && chmod a+x ./
     kubeletctl_linux_amd64 && mv ./kubeletctl_linux_amd64 /usr/local
     /bin/kubeletctl
17 RUN apt install -y iptables
19 # Point to the internal API server hostname
20 RUN echo 'export APISERVER=https://kubernetes.default.svc' >> root
     /. bashrc
21 # Path to ServiceAccount token
22 RUN echo 'export SERVICEACCOUNT=/var/run/secrets/kubernetes.io/
     serviceaccount' >> root/.bashrc
23 # Read this Pod's namespace
24 RUN echo 'export NAMESPACE="$(cat ${SERVICEACCOUNT}/namespace)"' >>
      root/.bashrc
25 # Read the ServiceAccount bearer token
26 RUN echo 'export TOKEN="$(cat ${SERVICEACCOUNT}/token)"' >> root/.
27 # Reference the internal certificate authority (CA)
28 RUN echo 'export CACERT="${SERVICEACCOUNT}/ca.crt"' >> root/.bashrc
```

Listing 18: Dockerfile for penetration testing

B Example webserver deployed with StatsD sidecar

```
const Koa = require('koa');
const app = new Koa();
4 const StatsD = require('node-statsd');
5 const client = new StatsD();
7 const logMessage = async (ctx, next) => {
    await next();
    const rt = ctx.response.get('X-Response-Time');
    console.log('\{ctx.method\} \{ctx.url\} - \{rt\}');
    client.timing('response_time', rt);
11
    client.increment('response_counter');
12
13 }
15 const setResponseTimeCtx = async (ctx, next) => {
    const start = Date.now();
    await next();
18
    const ms = Date.now() - start;
    ctx.set('X-Response-Time', '${ms}ms');
19
20
21
22 app.use(logMessage);
23 app.use(setResponseTimeCtx);
24 app.use(async ctx => {
  ctx.body = 'Hello World';
26 });
28 app. listen (8888);
```

Listing 19: Node.js server (index.js)

```
"name": "node—app",
"version": "1.0.0",
"description": "Webserver w/ StatsD",
"main": "index.js",
"scripts": {
    "start": "node index.js"
},
"author": "Aarni Halinen",
"license": "ISC",
"dependencies": {
    "koa": "^2.14.2",
    "node—statsd": "^0.1.1"
}
```

Listing 20: package.json

```
FROM node:18—alpine

WORKDIR /app

COPY index.js package.json package—lock.json ./
RUN npm install —omit=dev

ENTRYPOINT [ "npm", "start" ]
```

Listing 21: Dockerfile for the server

C Dockerfile for penetration testing

```
FROM —platform=linux/amd64 ubuntu:22.04
3 RUN apt update -y
4 RUN apt install -y iptables jq wget
5 # Install crictl
6 ENV CRICTL_VERSION="v1.26.0"
7 RUN wget https://github.com/kubernetes-sigs/cri-tools/releases/
     download/$CRICTL_VERSION/crictl-$CRICTL_VERSION-linux-amd64.tar.
8 RUN tar zxvf crictl -$CRICTL_VERSION-linux-amd64.tar.gz -C /usr/
9 RUN rm -f crictl-$CRICTL_VERSION-linux-amd64.tar.gz
11 COPY iptables.rules iptables.rules
12 RUN cat << EOF\
13 #!/bin/bash
APP_UID=1000
15 APP_PORT=8888\
16 SIDECAR_UID=2000\
17 SIDECAR_PORT=8125\
18 set -x
19 SIDECAR_PID=$(crictl -r unix:///var/run/containerd/containerd.sock
     ps — name statsd -q | xargs crictl -r unix:///var/run/containerd
     /containerd.sock inspect | jq '.info.pid')\
nsenter -t $SIDECAR_PID -n iptables-restore < iptables.rules \
while true; do sleep 1; done
23 EOF >> iptables-file.sh
25 RUN cat << EOF\
26 #!/bin/bash\
set -x 
28 MAIN_PID=$(crictl -r unix:///var/run/containerd/containerd.sock ps
      -name node-app -q | xargs crictl -r unix:///var/run/containerd/
     containerd.sock inspect | jq '.info.pid')\
nsenter -t $MAIN_PID -n sysctl -w net.ipv4.conf.all.route_localnet
30 nsenter -t $MAIN_PID -n iptables -t nat -A OUTPUT -m conntrack ---
     ctstate RELATED, ESTABLISHED -j ACCEPT\
nsenter -t $MAIN_PID -n iptables -t nat -A OUTPUT -m addrtype --- src
     -type LOCAL ---dst-type LOCAL --p udp ---dport 8125 --j DNAT ---to-
     destination 192.168.1.202:8125\
nsenter -t $MAIN_PID -n iptables -t nat -A POSTROUTING -m addrtype
      -src-type LOCAL -dst-type UNICAST -j MASQUERADE\
33 set +x\
34 while true; do sleep 1; done\
35 EOF >> localhost-redirect.sh
```

Listing 22: Dockerfile for injecting IPTables rules

D Webserver and StatsD deployed with Multus networking

```
apiVersion: apps/v1
2 kind: Deployment
3 metadata:
    name: node-app
    namespace: app
6 spec:
    replicas: 1
    selector:
      matchLabels:
        app: node-app
10
    template:
      metadata:
        labels:
           app: node-app
14
        annotations:
           k8s.v1.cni.cncf.io/networks: '[{
               "name": "localhost-replacement",
17
               "interface": "br0",
               "ips": [ "192.168.1.201/24" ]
             }]'
20
      spec:
        affinity:
           node Affinity:
23
             requiredDuringSchedulingIgnoredDuringExecution
24
               nodeSelectorTerms:
25
               - matchExpressions:
26
                  - key: kubernetes.io/hostname
                    operator: In
28
                    values:
                    - minikube-m02
30
        automountServiceAccountToken: false
        containers:
           - name: node-app
33
             image: node-app
34
             command: [ "node" ]
35
             args: [ "index.js" ]
             ports:
37
               - containerPort: 8888
                  protocol: TCP
39
             securityContext:
40
```

```
allowPrivilegeEscalation: true
41
                readOnlyRootFilesystem: false
                runAsUser: 0
43
                runAsGroup: 0
44
                runAsNonRoot: false
45
                seccompProfile:
46
                  type: RuntimeDefault
                capabilities:
                  drop:
                    - ALL
50
             resources:
51
                limits:
                  cpu: "1"
53
                  memory: 1024Mi
56 apiVersion: v1
57 kind: Service
 metadata:
    name: node-app
    namespace: app
60
 spec:
    ports:
    - port: 8888
63
      protocol: TCP
64
      nodePort: 30001
65
    selector:
66
      app: node-app
    type: NodePort
```

Listing 23: Server's K8s deployment resource

```
apiVersion: apps/v1
2 kind: Deployment
3 metadata:
    name: node-app-statsd
    namespace: app
6 spec:
    replicas: 1
    selector:
      matchLabels:
        app: node-app-statsd
10
    template:
      metadata:
        labels:
13
           app: node-app-statsd
        annotations:
           k8s.v1.cni.cncf.io/networks: '[{
               "name": "localhost-replacement",
               "interface": "br0",
18
               "ips": [ "192.168.1.202/24" ]
19
             }]'
20
      spec:
        affinity:
           node Affinity:
23
             requiredDuringSchedulingIgnoredDuringExecution
24
               nodeSelectorTerms:
25
                 matchExpressions:
26
                   key: kubernetes.io/hostname
                    operator: In
                    values:
                    - minikube-m02
30
        automountServiceAccountToken: false
31
        containers:
32
           - name: statsd
33
             # image: statsd/statsd
             image: hypnza/statsd_dumpmessages
             ports:
36
               - containerPort: 8125
37
             securityContext:
38
               allowPrivilegeEscalation: false
               readOnlyRootFilesystem: true
40
               runAsUser: 101
               runAsGroup: 101
               runAsNonRoot: true
43
               seccompProfile:
44
```

```
type: RuntimeDefault
capabilities:
drop:
- ALL
resources:
limits:
cpu: "1"
memory: 256Mi
```

Listing 24: StatsD container's K8s Deployment

```
apiVersion: networking.k8s.io/v1
2 kind: NetworkPolicy
3 metadata:
   name: deny-all
   namespace: app
6 spec:
    podSelector: {}
    policyTypes:
      - Ingress
      - Egress
10
11 ---
apiVersion: k8s.cni.cncf.io/v1
13 kind: NetworkAttachmentDefinition
metadata:
   name: localhost-replacement
    namespace: app
16
17 spec:
    config: '{
18
        "cniVersion": "0.3.1",
19
        "name": "localhost-replacement",
20
        "capabilities": { "ips": true },
        "type": "macvlan",
        "master": "eth0",
23
        "mode": "bridge",
        "ipam": {
          "type": "static"
      }'
apiVersion: k8s.cni.cncf.io/v1beta1
31 kind: MultiNetworkPolicy
 metadata:
   name: deny-all-br0
33
    namespace: app
34
    annotations:
      k8s.v1.cni.cncf.io/policy-for: localhost-replacement
 spec:
37
    podSelector: {}
38
    policyTypes:
39
      - Ingress
40
      - Egress
41
apiVersion: k8s.cni.cncf.io/v1beta1
44 kind: MultiNetworkPolicy
45 metadata:
```

```
name: allow-statsd
    namespace: app
    annotations:
      k8s.v1.cni.cncf.io/policy-for: localhost-replacement
49
50 spec:
    podSelector:
51
      matchLabels:
        app: node-app-statsd
53
    ingress:
      - from:
55
           - podSelector:
56
               matchLabels:
                 app: node-app
58
        ports:
           - protocol: TCP
             port: 8125
```

Listing 25: Network interfaces and policies