CADETE - P

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Project name:

CUTTING TABLE-NEW LINE

Device type:

WJ3020B 1Z-PJ-NL

Project number:

042-340

Drawing number: PTV-V52-N-0001

Revise: 080904

Documentation status:

USER'S DOCUMENTATION

Completed: PTV, spol. s r.o.

Phone/Fax: 00420-220 981 430
00420-220 980 419

Completion date: 08.10.2008

Max. page number: 126

Editor: FEDYSZYN MILAN

Count of pages: 126

INDEX

TECHNICAL REPORT 5
TECHNICAL REPORT 1 6
TECHNICAL REPORT 2 7
TECHNICAL REPORT 3 8
TECHNICAL REPORT 4 9
CIRCUIT DIAGRAM 10
NOTES 1 14
POWER SUPPLY DISTRIBUTION 1 15
POWER SUPPLY DISTRIBUTION 2 16
EXHAUST AEROSOL EXHAUST CENTRAL LUBRICATION 17
POWER SUPPLY DISTRIBUTION 3 18
CONTROL SYSTEM 19
CONTROL SYSTEM HMI 20
OPERATOR PANEL 1 21
OPERATOR PANEL 2 22
EMERGENCY STOP SAFETY MODULE 23
OPTICAL BARRIER LIGHT BARRIER 24
COMMUNICATION 25
REMOTE CONTROL HANDWHEEL 26
ELECTRIC DRIVES 1 27
ELECTRIC DRIVES 2 28
PLC CIRCUITS 29
ABRASIVE FEEDER LIGHT-HOUSE 30
PLC - A2 STANDARD EQUIPMENT 31
PLC - A3 STANDARD EQUIPMENT 32
PLC - A5 BARRIER SAFETY MODULE 33
EXTERNAL CIRCUITS (1) 34
X1 AXIS TROLLEY EXTERNAL CIRCUITS (1) 35
X1 AXIS TROLLEY EXTERNAL CIRCUITS (2) 36
Y1 AXIS TROLLEY EXTERNAL CIRCUITS 37
Y2 AXIS TROLLEY EXTERNAL CIRCUITS 38
EXTERNAL CIRCUITS Z1, Z2 AXIS A1, B1; A2, B2 39
Z1, Z2 AXIS TROLLEY EXTERNAL CIRCUITS 40
EXTERNAL CIRCUITS DYNAMIC WATER JET A1,B1, A2,B2 41
COMMUNICATION WITH HIGH PRESSURE PUMP JETS-3,8/60 COMPACT 42
ELECTRIC DRIVE X1 43
ELECTRIC DRIVE Y1 44
ELECTRIC DRIVE Y2 45
ELECTRIC DRIVE Z1 46
ELECTRIC DRIVE A1 47
ELECTRIC DRIVE B1 48
Z1, Z2 AXIS TROLLEY EXTERNAL CIRCUITS 49
EXTERNAL CIRCUITS Z1 AXIS ABRASIVE FEEDER 50
PLC 51
PLC - A2 52
PLC - A3 53
PLC - A5 54
ELECTRIC CABINET CONCEPTION 55
DEVICE MECH. ARRANGEMENT IN THE EL. CABINET "CLASSIC 56

INDEX

DEVICE MECH. ARRANGEMENT IN THE EL. CABINET "CLASSIC 57
DEVICE MECH. ARRANGEMENT IN THE EL. CABINET "CLASSIC 58
DEVICE MECHANICAL ARRANGEMENT IN THE PANEL CONTROL "NEW LINE 59
USED DEVICES 60
UNITS 1 61
SAFEGUARD DEVICES 62
CONTACTORS 63
TERMINALS 64
TERMINALS 65
TERMINALS 66
CONNECTORS - X1 AXIS 67
CONNECTORS - Y1 AXIS 68
CONNECTORS - Y2 AXIS 69
CONNECTORS - Z1 AXIS 70
CONNECTORS - A1 AXIS 71
CONNECTORS - B1 AXIS 72
OTHER CONNECTORS 73
POWER CABELS 74
DATA CABELS 75
SENSOR CABELS 76
SIGNAL CABELS 77
OTHER CABELS 78
BUTTON CONTROLS 79
SENSORS 80
DRIVERS, EM. VALVES 81
LIST OF CABLES WIRING DIAGRAM 82
DRIVER SERVO-CABELS 1 83
DRIVER SERVO-CABELS 2 84
SIGNAL CABELS 1 85
SIGNAL CABELS 2 86
SIGNAL CABELS 3 87
SIGNAL CABELS 4 88
SIGNAL CABELS 5 89
SIGNAL CABELS 6 90
SIGNAL CABELS 7 91
SENSOR CABELS 1 92
SENSOR CABELS 2 93
ACTION COMPONENTS CABELS 1 94
RESOLVERS AND ENCODERS CABELS 1 95
RESOLVERS AND ENCODERS CABELS 2 96
RESOLVERS AND ENCODERS CABELS 3 97
RESOLVERS AND ENCODERS CABELS 4 98
LIST OF TERMINALS DIAGRAM OF CONNECTION 99
TABLE XT1 100
TABLE XT2 101
TABLE XT3 102
TABLE XT4 103
TABLE XT5 104
TABLE XT6 105

INDEX

TABLE XT7 106
TABLE XC7 107
TABLE XT8, XC8 108
TABLE XT9 109
TABLE XT10, XC10 110
TABLE XT20, XC20 111
TABLE XT30, XC30 112
TABLE XT50, XC50 113
TABLE XT50.1, XC50.1 114
TABLE XC70.1 115
TABLE XCBQ1, XCM1 116
TABLE XCBQ3, XCM3 117
TABLE XCBQ4, XCM4 118
TABLE XCBQ5, XCM5 119
TABLE XCBQ7, XCM7 120
TABLE XCBQ8, XCM8 121
COMPONENT LIST 122
COMPONENT LIST 1 123

TECHNICAL REPORT

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

TECHNICAL REPORT 1

1. Initial materials

- Assigment from the machine producer PTV, spol. s r.o.

2. Range of eectro-project

The subject of the project is not a solution of the internal wiring of separate functional complexes embedded in the electric-cabinets. The units are wired in as functional blocks with their proper individual documentation. The project resolves only the provision of the power supply by the protected supplies for these units and their external hardware treatment.

- Internal wiring of the control cabinet water jet cutting machine.
- Internal wiring of the panel control cabinet.
- Specification of the separate location units inside of the cabinet.
- Interconnection of boxes with sensors and action elements.

3. The power-supply system

- The power-supply voltage system: TN-S, 3+N+PE-400/230V, 50-60Hz
  (The alternatively supplying power-supply voltage system:TN-C, 3+PEN -400/230V, 50-60Hz)
- Maximum bars short-circuit current: 10kA
- Installed power consumption of the machine: 5,5kW
- Recommended machine supply protection by means of the 25A/B circuit breaker or the PN 000 Gg 25A fuse
- Size of the supply cable: 5x2,5mm^2.
- As the machine does not include protection against overvoltage, it is necessary to protect the machine supply against overvoltage by the over-voltage protection of the 2nd degree.
- The project does not resolve compensation of the cosφ individually for this device. The device has the cosφ better than 0,85 and its compensation will be resolved centrally.

4. Protection against the dangerous touch voltage

The protection against the dangerous touch voltage is performed in accordance with EN 60204-1 art. 6.3.1, CSN 322000-4-41 (IEC 364-4-41) and the continuing ones. In the TN-C-S, 3+N+PE - 400/230V system the protection is performed by automatic disconnection of the circuits from the power-supply. This protection is extended with the supplementary protection by means of inclusion of the current protector as well as the supplementary protection by means of earthing, if you like the protective connection.

The parts of the distributor, which remain under voltage also when the main switch is turned off must be labeled visibly in accordance with 5036 IEC60417-1 – the black lightning on the yellow background inside of the black triangle – in the final arrangement in correspondence with the B.3.6 ISO 3864 label, with the minimum IP20 degree of protection – prevention from finger-touching. As the complex inner enclosure of the distributor does not satisfy the IP20 requirement after door opening, it is necessary to put an alert label on the distributor door in accordance with 5036 IEC60417-1 - the black lightning on the yellow background inside of the black triangle, if need be added by the text "Attention, electric device!"

5. Circuits of the emergency stop

Every protective component connected with the emergency-stop circuit, i.e. the buttons, limit switches etc., must satisfy the requirements given by CSN EN 60204-1 art. 10.7 and the continuing norm of CSN EN 418 (EN 418), chapter 4, i.e.. the mechanical installation of all components must be performed, in terms of construction, so the requirement of the enforced switch-off is satisfied (normally the component is not strained mechanically).

6. Environment in accordance with CSN

- The distributor is determined for standard environment in accordance with CSN 60204-1 art.4.4.
- Limitation of the outer temperature from +5°C to +30°C, the biggest change of the temperature in 30 min. 10°C max.
- Relative air humidity between 30% and 90%.

- The atmospheric pressure from 84 to 107 kPa. The device must work reliably up to 1000m above the sea level.
- Dustiness of the environment: 20mg/m^3 max. Size of the particles: 10µm max.
- Climatic resistance in accordance with CSN IEC 721-2-1 is WT (moderate climate)

7. Warehousing conditions

- Temperature of the environment from -25°C to +55°C
- Relative humidity from 30% to 95% at 30°C.
- Environment without aggressive gases and steams, dry and enclosed, protected against weather effects, humidity, dustiness and mechanical damage.

8. Transportation

- It must be performed in enclosed means of transport.
- The distributor must not be exposed to the effects of both rain and snow.
- The location in a transport means must be provided so damage of the distributor is impossible to come about. The transportation conditions are identical to the warehousing conditions.
- Permissible cyclical beats during transportation may reach 10g max. at the impulse length of 5-10ms.

The producer is not responsible for damage caused along transportation because of transporter's fault.

9. Technical description of the equipment

- The switchboard box is made of steel plates with protection IP54 according to ČSN EN 60529 (IEC 529), i.e. protection against dust is not fully covered, the dust cannot influence the equipment operation, however.
- The protection against the water spouted on the cover does not influence the equipment operation a negative way.
- The project processing is intended for the indoor location of cutting machine switchboard boxes.
- The button controllers and signal lamps are located on the front board of the main switchboard.
- The main switch is situated on the main switch board. If necessary, it is possible to lock the main switch when it is in „switch off" position.

10. Distributor measurement

- Insulation resistance – according to CSN EN 60 204-1 art.19.3 it is measured on the points which are galvanic-connected with the line voltage. The measured resistance of the points which are galvanic-connected with the line voltage must be more than 1MΩ.
- Dielectric strenght – according to CSN EN 60 204-1 art.19.4 it is tested immediately after measuring the insulation resistance on the same testing points, with the testing voltage of 1000V.
- Contact resistance – according to CSN EN 60 204-1 art.19.2 it is tested between the input terminal of the protective conductor and the places, on which the dangerous touch voltage could appear as a consequence of isolation defect. The measured value must not exceed the voltage of 1V at the current of 10A, 50Hz for the duration of at least 10s.
- Residual current circuit breaker: Measurement of the effectiveness of protection by means of the residual current circuit breaker.

11. Attendance and maintenance

- Attendance is described in the attendance manual, which is a separate document and is not a part of the electro-project.
- Maintenance The distributor is an electric device which requires qualified-personnel maintenance. The basic maintenance consists in the supply voltage check-up and device sight check, test of the residual current circuit breaker functioning by means of the function-test button (each month, others done in the 6-month intervals). During the maintenance terminals are tightened and the line voltage of 400V AC and 24V DC is subject to check-up.

As it is dealt with maintenance of the electric device it is necessary to follow valid precautionary prescripts.

Especially:

- The distributor must be located out of the working space of another machine as well as the machines working nearby. The access of the distributor attendance must be provided so it does not interfere with the working space of the machine or other machines.
- After switching off the main switch the voltage remains only on the input terminals of the distributor and the main switch. These devices must be labeled visibly in accordance with 417 IEC5036 – the black lightning on the yellow background inside of the black triangle in the final arrangement in correspondence with the 113ISO3864 label, with the minimum IP2x degree of protection – prevention from finger-touching.

Montage, repairs and maintenance of the distributor can only be performed by qualified personnel

12. Hygiene and working precautions

From the working safeness and health protection at work point of view, it is not necessary to make other precautions than those presented by CSN.

13. Prescripts and norms

The product satisfies the requirements of the CSN EN 60204-1:2000 norm, in which IEC204-1:1992 part 1 for electric devices of the working machines and associated norms are worked out.

TECHNICAL REPORT 4

REFERENCE NOTATION

	=FCE	FUNCTION DESCRIPTION
☑	=OPT.00	STANDARD EQUIPMENT "NEW LINE"
☐	=OPT.01	SPECIAL MACHINE INSTALATION "DYNAMITE"
☐	=OPT.02	SPECIAL MACHINE INSTALATION "FREE BEAM"
☐	=OPT.03	SPECIAL MACHINE INSTALATION "BASIC"
☑	=OPT.20	ABRASIVE FEEDER Z1
☑	=OPT.21	ABRASIVE FEEDER Z2
☐	=OPT.22	ABRASIVE FEEDER - VALVE Z1
☐	=OPT.23	ABRASIVE FEEDER - VALVE Z2
☑	=OPT.30	REMOTE CONTROL - HANDWHEEL (RS422)
☐	=OPT.31	REMOTE CONTROL - HANDWHEEL (RS232)
☐	=OPT.40	HIGH-PRESSURE PUMP I/O COMMUNICATION
☐	=OPT.41	HIGH-PRESSURE PUMP PTV STANDARD OLD
☐	=OPT.42	HIGH-PRESSURE PUMP PTV COMPACT OLD
☐	=OPT.43	HIGH-PRESSURE PUMP PTV - FLOW
☐	=OPT.44	HIGH-PRESSURE PUMP PTV - H2O
☐	=OPT.45	HIGH-PRESSURE PUMP PTV - ACCUSTREAM
☑	=OPT.47	HIGH-PRESSURE PUMP PTV RS485
☑	=OPT.48	HIGH-PRESSURE PUMP PTV ETHERNET
☑	=OPT.50	BARRIER SAFETY MODULE
☑	=OPT.51	LIGHT BARRIER
☐	=OPT.52	MECHANICAL BARRIER-DOOR
☐	=OPT.53	MECHANICAL BARRIER-PROTECTION SHIELD
☑	=OPT.55	LIGHT-HOUSE
☐	=OPT.60	DRILLING MACHINE Z1
☐	=OPT.61	DRILLING MACHINE Z2
☐	=OPT.62	VACUUM SUCTION OF ABRASIVE Z1
☐	=OPT.63	VACUUM SUCTION OF ABRASIVE Z2
☑	=OPT.65	HEIGHT CONTROL SYSTEM Z1
☐	=OPT.66	HEIGHT CONTROL SYSTEM Z2
☐	=OPT.67	DC EL.DRIVE Z1
☐	=OPT.68	DC EL.DRIVE Z2
☐	=OPT.70	CATCHER WATER LEVEL CONTROL
☐	=OPT.72	AEROSOL EXHAUST
☐	=OPT.80	SPECIAL EQUIPMENT
☑	=OPT.90	CENTRAL LUBRICATION
☐	=AXS.X_	X AXIS - AXIS TROLLEY "FREE BEAM"
☐	=AXS.Y_	Y AXIS - AXIS TROLLEY "FREE BEAM"
☐	=AXS.Z_	Z AXIS - AXIS TROLLEY "FREE BEAM"
☑	=AXS.X1	X1 AXIS - AXIS TROLLEY
☑	=AXS.X2	X2 AXIS - AXIS TROLLEY
☑	=AXS.Y1	Y1 AXIS - AXIS TROLLEY
☑	=AXS.Y2	Y2 AXIS - AXIS TROLLEY
☑	=AXS.Z1	Z1 AXIS - AXIS TROLLEY
☐	=AXS.Z2	Z2 AXIS - AXIS TROLLEY
☑	=AXS.A1	A1 AXIS - DYNAMIC WATER JET
☑	=AXS.B1	B1 AXIS - DYNAMIC WATER JET
☐	=AXS.A2	A2 AXIS - DYNAMIC WATER JET
☐	=AXS.B2	B2 AXIS - DYNAMIC WATER JET
☐	=AXS.C2	SPINDLE
☐	=OPT.IT	SUPPLY SYSTEM ISOLATION REZISTANCE MONITORING

	+LOC	LOCATION DESCRIPTION
☐	+EXTe	ELECTRICAL EXTERIOR
☐	+EXTm	MECHANICAL EXTERIOR
☐	+MX0	MAIN ELECTRIC CABINET
☐	+PAN	OPERATOR PANEL
☐	+PAE	EXTERNAL OPERATOR PANEL
☐	+MX1	WIRING BOX - X AXIS TROLLEY1
☐	+MX2	WIRING BOX - X AXIS TROLLEY2
☐	+MY1	WIRING BOX - Y AXIS TROLLEY1
☐	+MY2	WIRING BOX - Y AXIS TROLLEY2
☐	+MZ1	WIRING CONNECTION BOX - Z AXIS TROLLEY1
☐	+MZ2	WIRING CONNECTION BOX - Z AXIS TROLLEY2
☐	+MZ_	WIRING CONNECTION BOX - Z AXIS TROLLEY "FREE BEAM"
☐	+MAB1	WIRING BOX - DYNAMIC WATER JET A1, B1
☐	+MAB2	WIRING BOX - DYNAMIC WATER JET A2, B2
☐	+MC1	WIRING CONNECTION BOX - SPINDLE
☐	+MX80	WIRING CONNECTION BOX - SPECIAL EQUIPMENT
☐	+MXY	WIRING BOX - X,Y AXIS TROLLEY
☐	+MX53	WIRING BOX

CIRCUIT DIAGRAM

ELECTROINSTALATION PLATE

PRODUCER		PTV, spol. s r.o.	
TYPE DESIGNATION		WJ3020B 1Z-PJ-NL	
SERIAL NUMBER		042-340	
CIRCUIT DIAGRAM		PTV-V52-N-0001	
POWER SUPPLY VOLTAGE SYSTEM		TN-C-S, 3+N+PE - 400/230 [V] AC	
SUPPLY FREQUENCY	50 [Hz]	BUS BAR PROTECTION	25 [A]
INSTALLED CONSUMPTION		5,5 [kW]	COS φ >0,85
CONTROL CIRCUIT POWER SUPPLY		24 [V] DC	
LIGHTING VOLTAGE		- - -	
MAXIMUM SHORT-CIRCUIT CURRENT OF BUSBAR		10 [kA]	
OVERVOLTAGE PROTECTION	- - -	ELECTRIC CABINET HOUSING	IP54

LISTING OF REVISIONS 1

SHEET TITLE: NOTES 1	14
SHEET TITLE: POWER SUPPLY DISTRIBUTION 1	15
SHEET TITLE: POWER SUPPLY DISTRIBUTION 2	16
SHEET TITLE: EXHAUST AEROSOL EXHAUST CENTRAL LUBRICATION	17
SHEET TITLE: POWER SUPPLY DISTRIBUTION 3	18
SHEET TITLE: CONTROL SYSTEM	19
SHEET TITLE: CONTROL SYSTEM HMI	20
SHEET TITLE: OPERATOR PANEL 1	21
SHEET TITLE: OPERATOR PANEL 2	22
SHEET TITLE: EMERGENCY STOP SAFETY MODULE	23
SHEET TITLE: OPTICAL BARRIER LIGHT BARRIER	24
SHEET TITLE: COMMUNICATION	25
SHEET TITLE: REMOTE CONTROL HANDWHEEL	26
SHEET TITLE: ELECTRIC DRIVES 1	27


LISTING OF REVISIONS 2

SHEET TITLE: ELECTRIC DRIVES 2	28
SHEET TITLE: PLC CIRCUITS	29
SHEET TITLE: ABRASIVE FEEDER LIGHT-HOUSE	30
SHEET TITLE: PLC - A2 STANDARD EQUIPMENT	31
SHEET TITLE: PLC - A3 STANDARD EQUIPMENT	32
SHEET TITLE: PLC - A5 BARRIER SAFETY MODULE	33
SHEET TITLE: EXTERNAL CIRCUITS (1)	34
SHEET TITLE: X1 AXIS TROLLEY EXTERNAL CIRCUITS (1)	35
SHEET TITLE: X1 AXIS TROLLEY EXTERNAL CIRCUITS (2)	36
SHEET TITLE: Y1 AXIS TROLLEY EXTERNAL CIRCUITS	37
SHEET TITLE: Y2 AXIS TROLLEY EXTERNAL CIRCUITS	38
SHEET TITLE: EXTERNAL CIRCUITS Z1, Z2 AXIS A1, B1; A2, B2	39
SHEET TITLE: Z1, Z2 AXIS TROLLEY EXTERNAL CIRCUITS	40
SHEET TITLE: EXTERNAL CIRCUITS DYNAMIC WATER JET A1,B1, A2,B2	41

LISTING OF REVISIONS 3

SHEET TITLE: COMMUNICATION WITH HIGH PRESSURE PUMP JETS-3,8/60 COMPACT	42
SHEET TITLE: ELECTRIC DRIVE X1	43
SHEET TITLE: ELECTRIC DRIVE Y1	44
SHEET TITLE: ELECTRIC DRIVE Y2	45
SHEET TITLE: ELECTRIC DRIVE Z1	46
SHEET TITLE: ELECTRIC DRIVE A1	47
SHEET TITLE: ELECTRIC DRIVE B1	48
SHEET TITLE: Z1, Z2 AXIS TROLLEY EXTERNAL CIRCUITS	49
SHEET TITLE: EXTERNAL CIRCUITS Z1 AXIS ABRASIVE FEEDER	50

NOTES 1

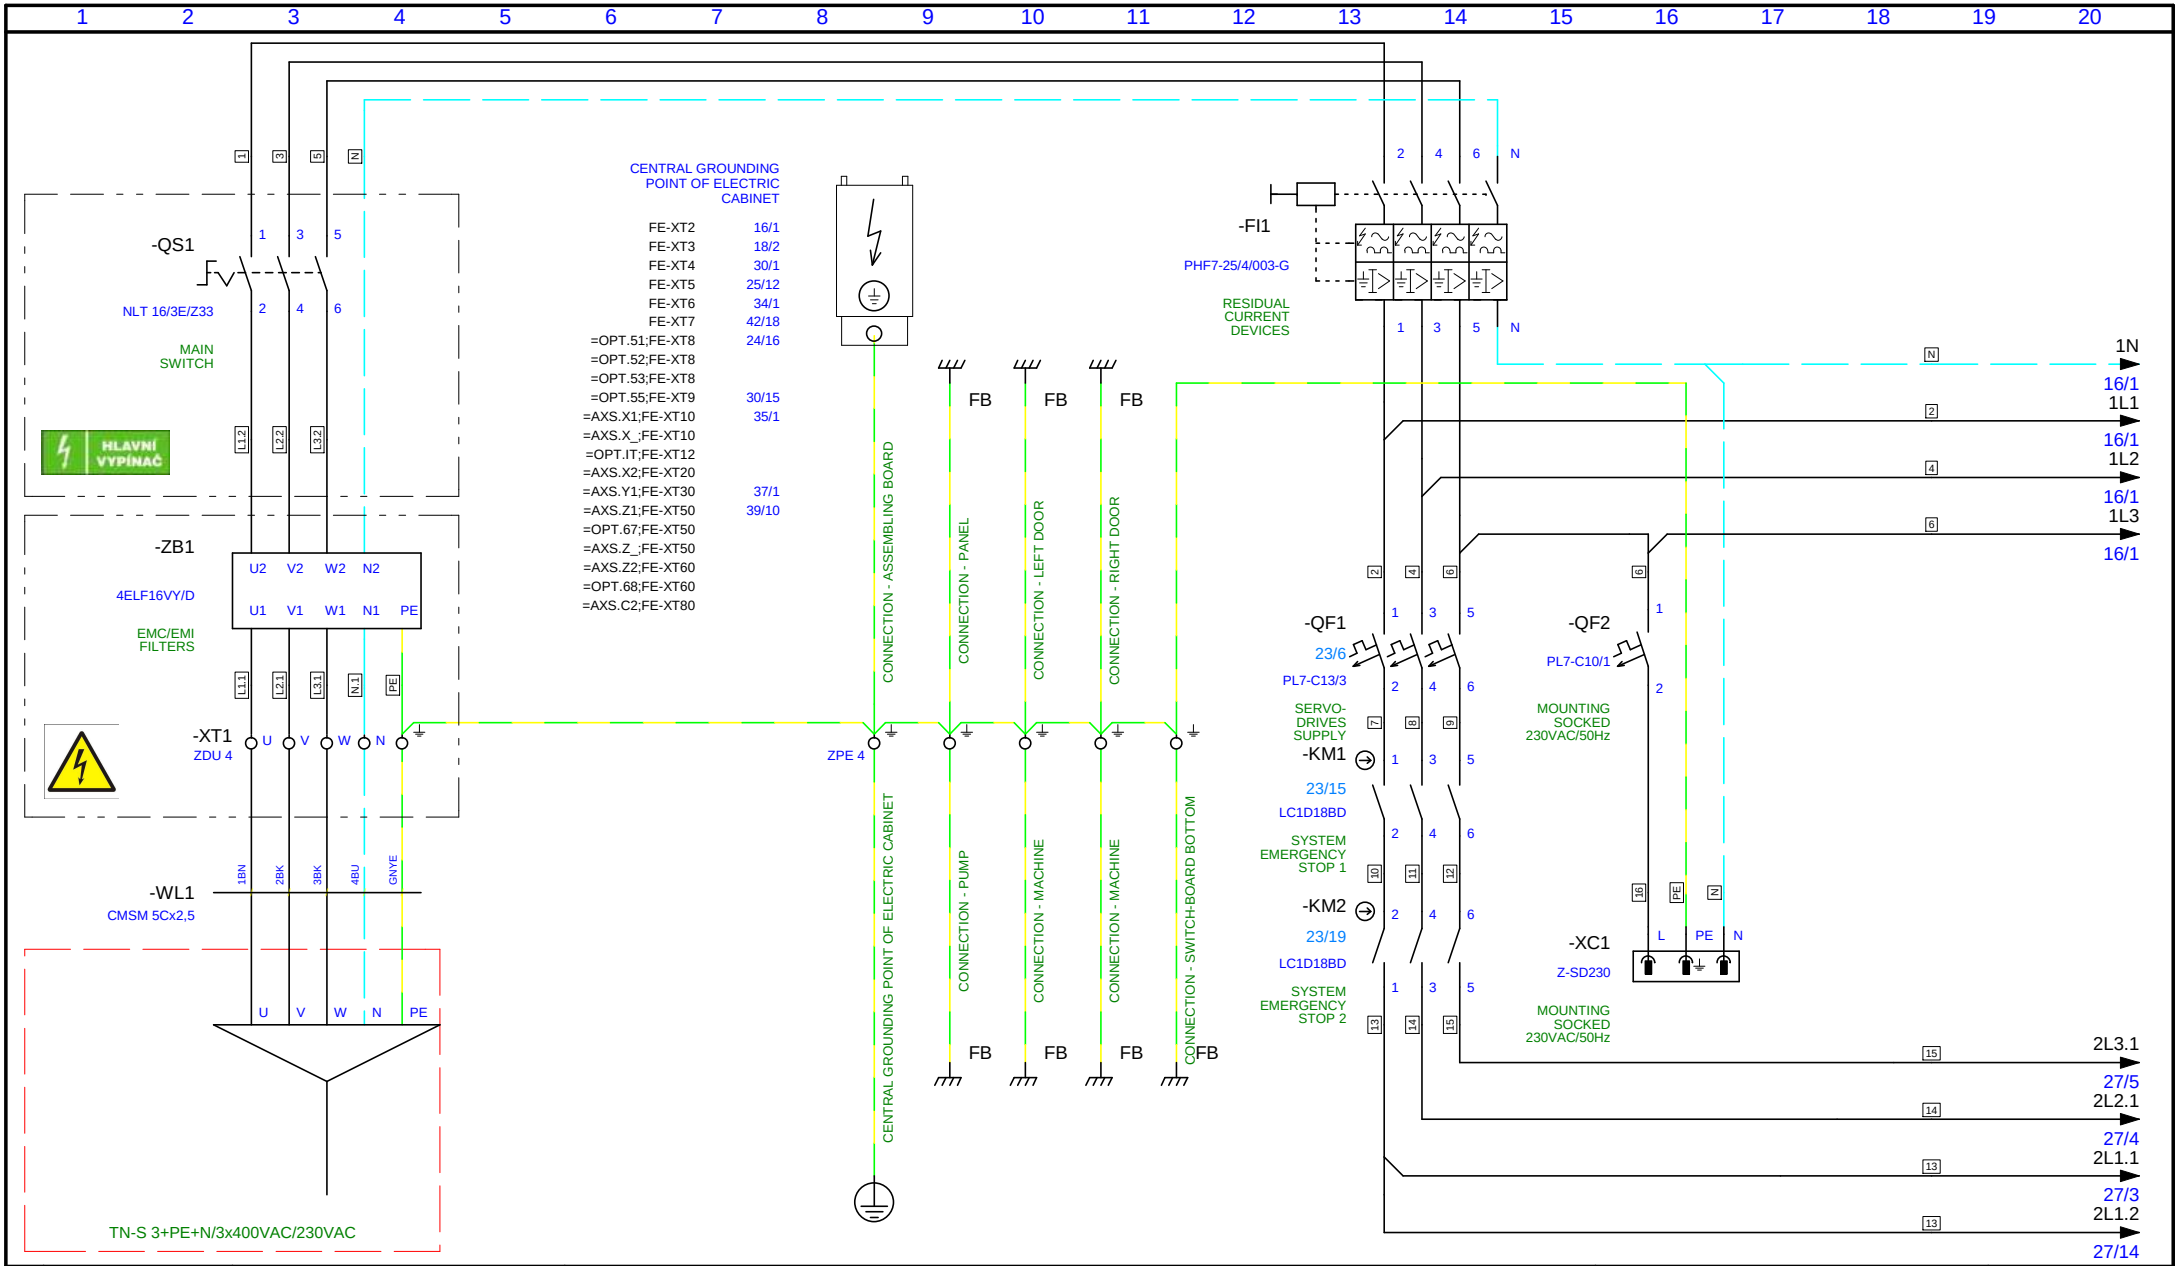

Revision			
	D:	Revision:	
	C:	Date: 9.10.2008 11:21:1	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **POWER SUPPLY DISTRIBUTION 1**


Drawing: **PTV-V52-N-0001**

Func.ref: =OPT.00+MX0

Equipment: **WJ3020B 1Z-PJ-NL**

Page: 15

of: 126

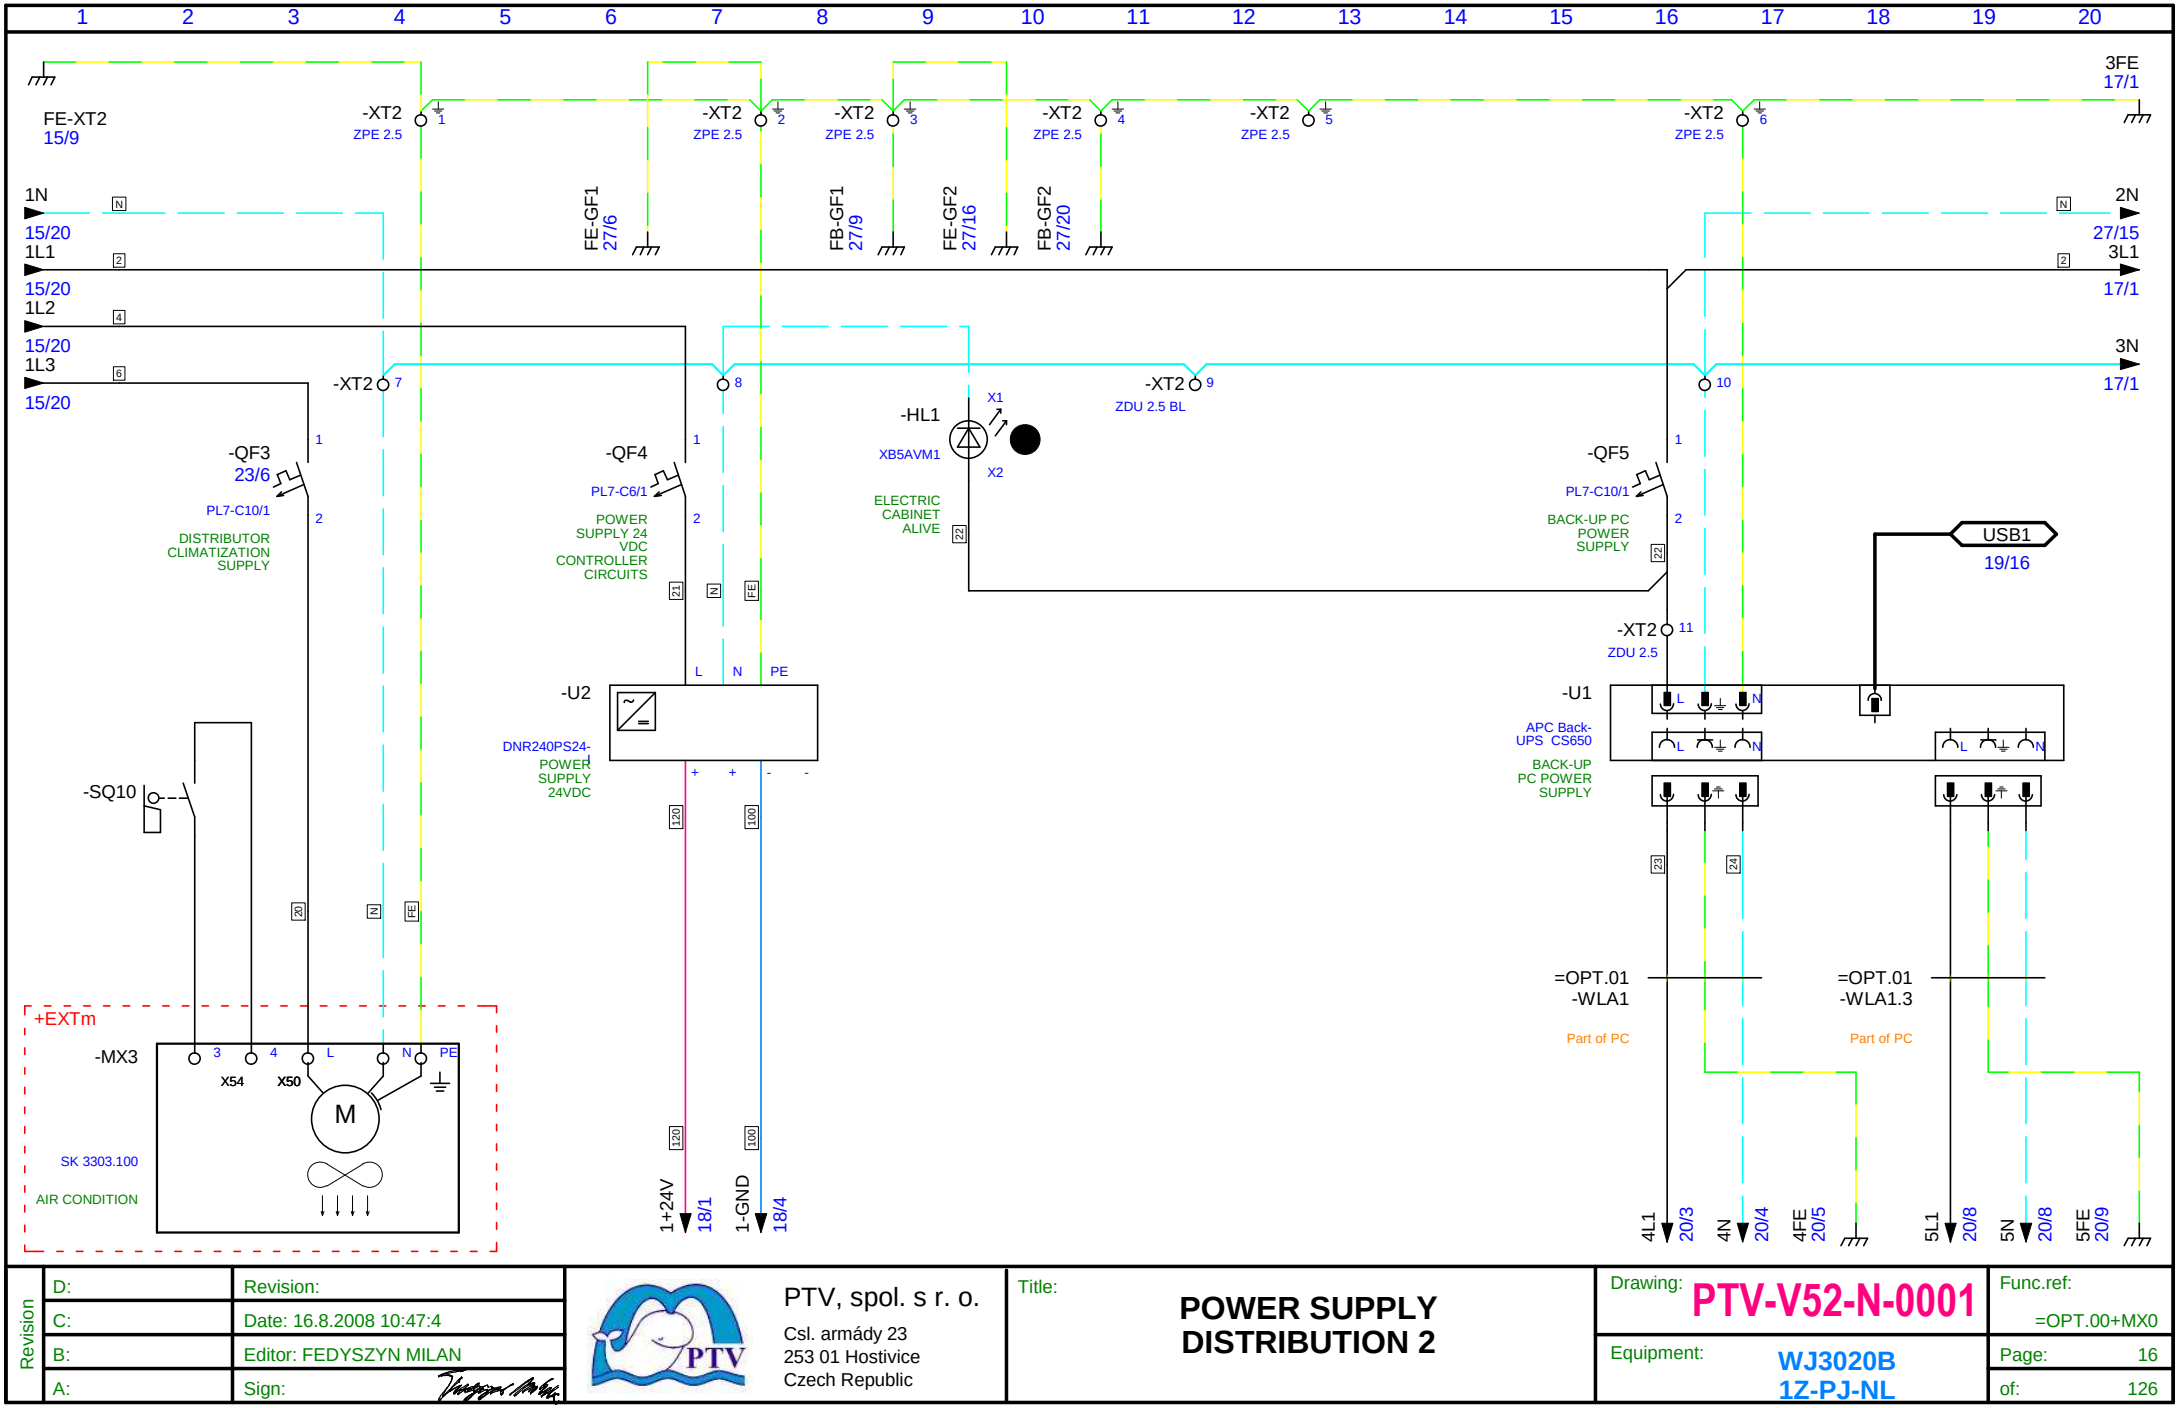

Revision			
	D:	Revision:	
	C:	Date: 16.8.2008 10:47:4	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **POWER SUPPLY DISTRIBUTION 2**


Drawing: **PTV-V52-N-0001**

Func.ref: =OPT.00+MX0


Equipment: **WJ3020B 1Z-PJ-NL**

Page: 16

of: 126

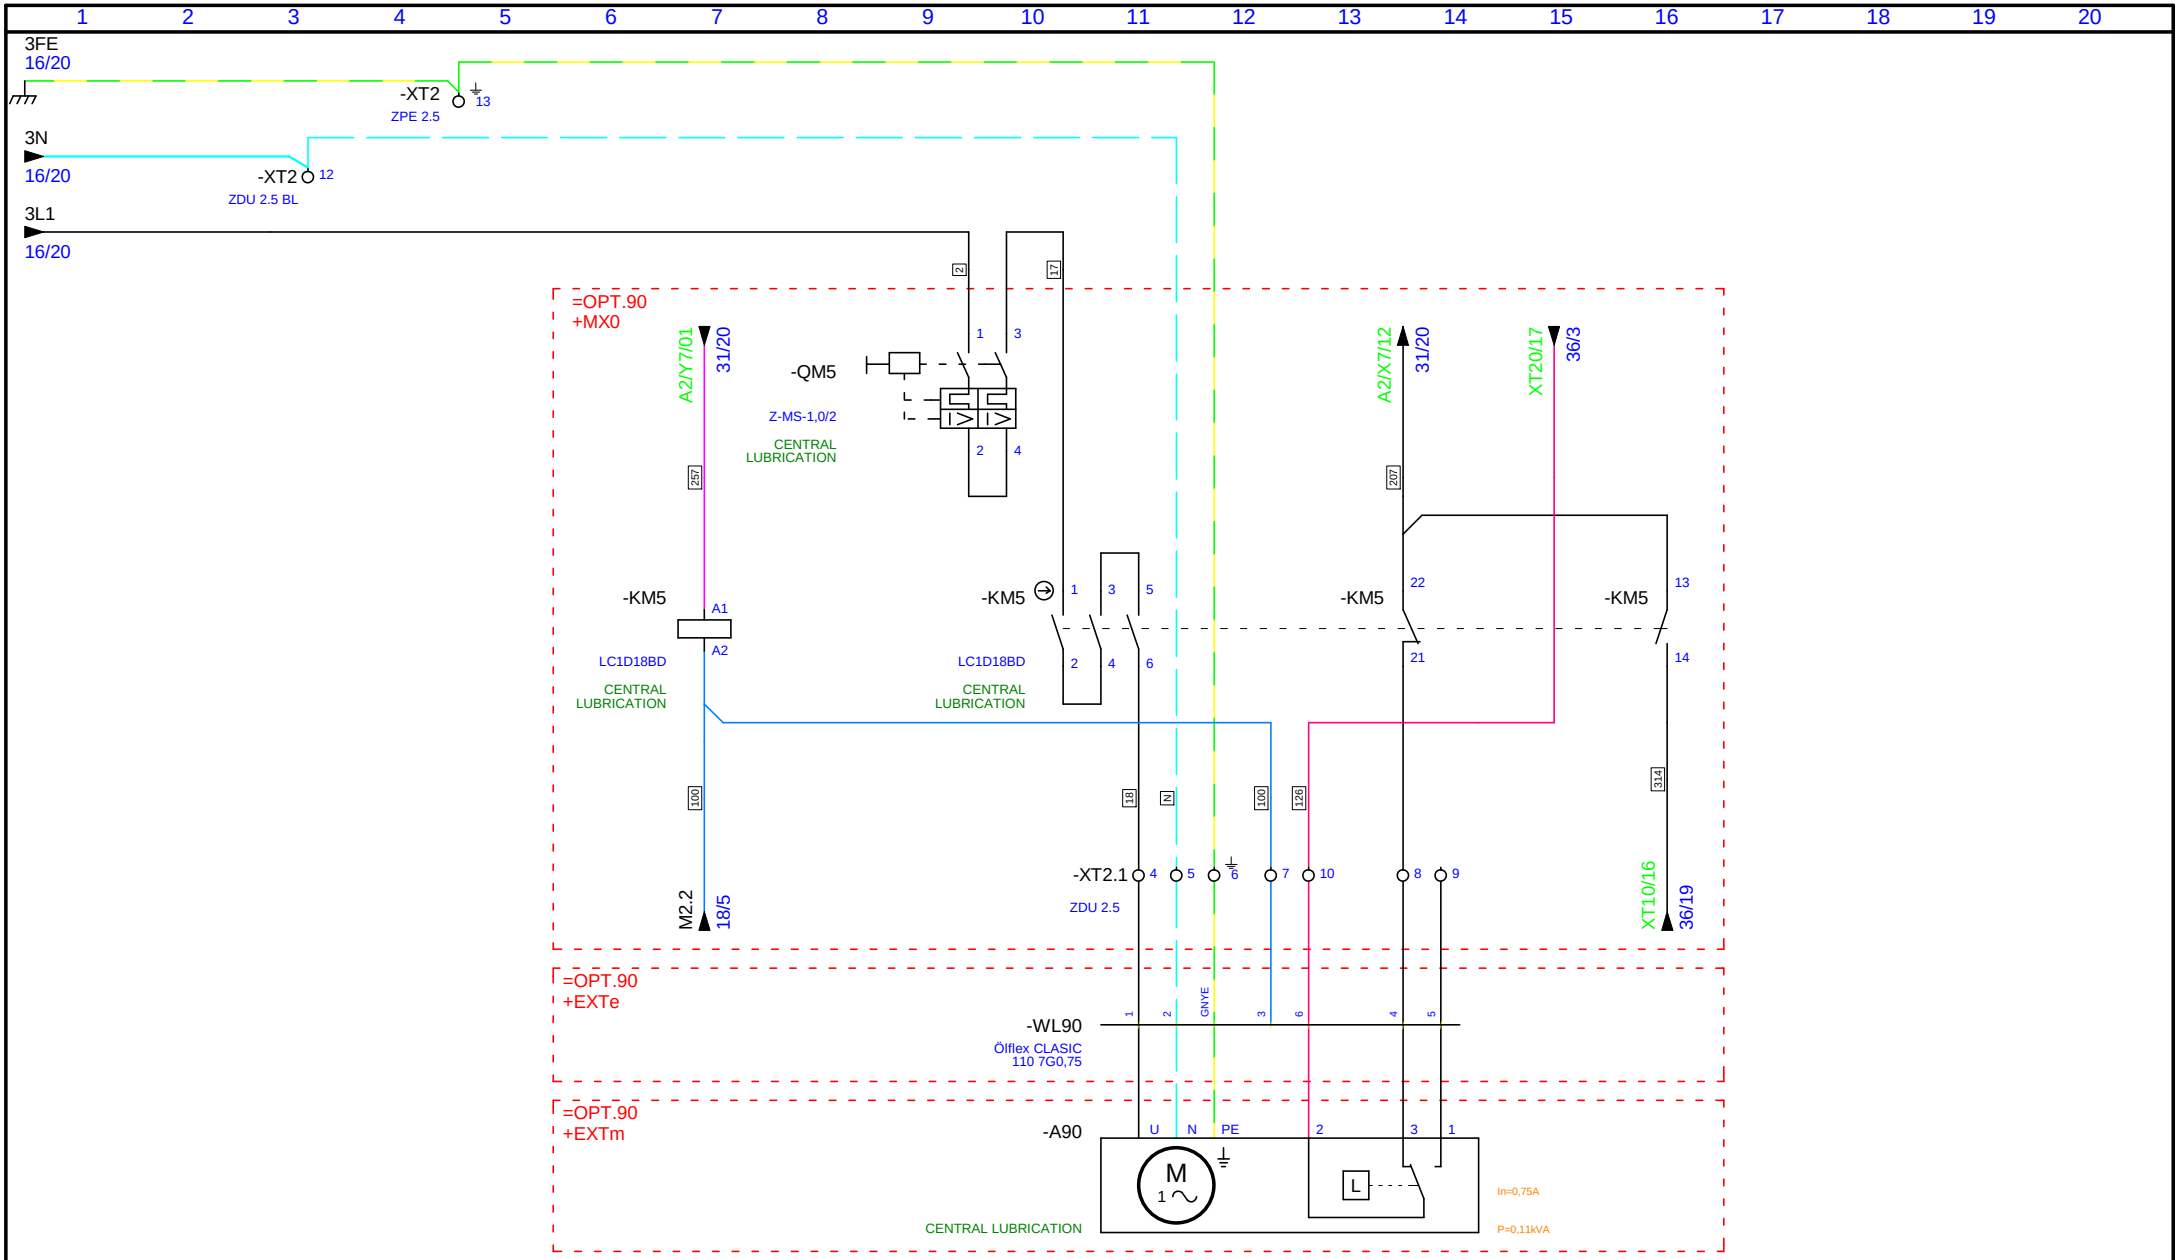

Revision							
	D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **EXHAUST AEROSOL EXHAUST CENTRAL LUBRICATION**	Drawing: **PTV-V52-N-0001**	Func.ref: =OPT.00+MX0
	C:	Date: 6.11.2012 13:37:2				
	B:	Editor: FEDYSZYN MILAN			Equipment: **WJ3020B 1Z-PJ-NL**	Page: 17
	A:	Sign:				of: 126

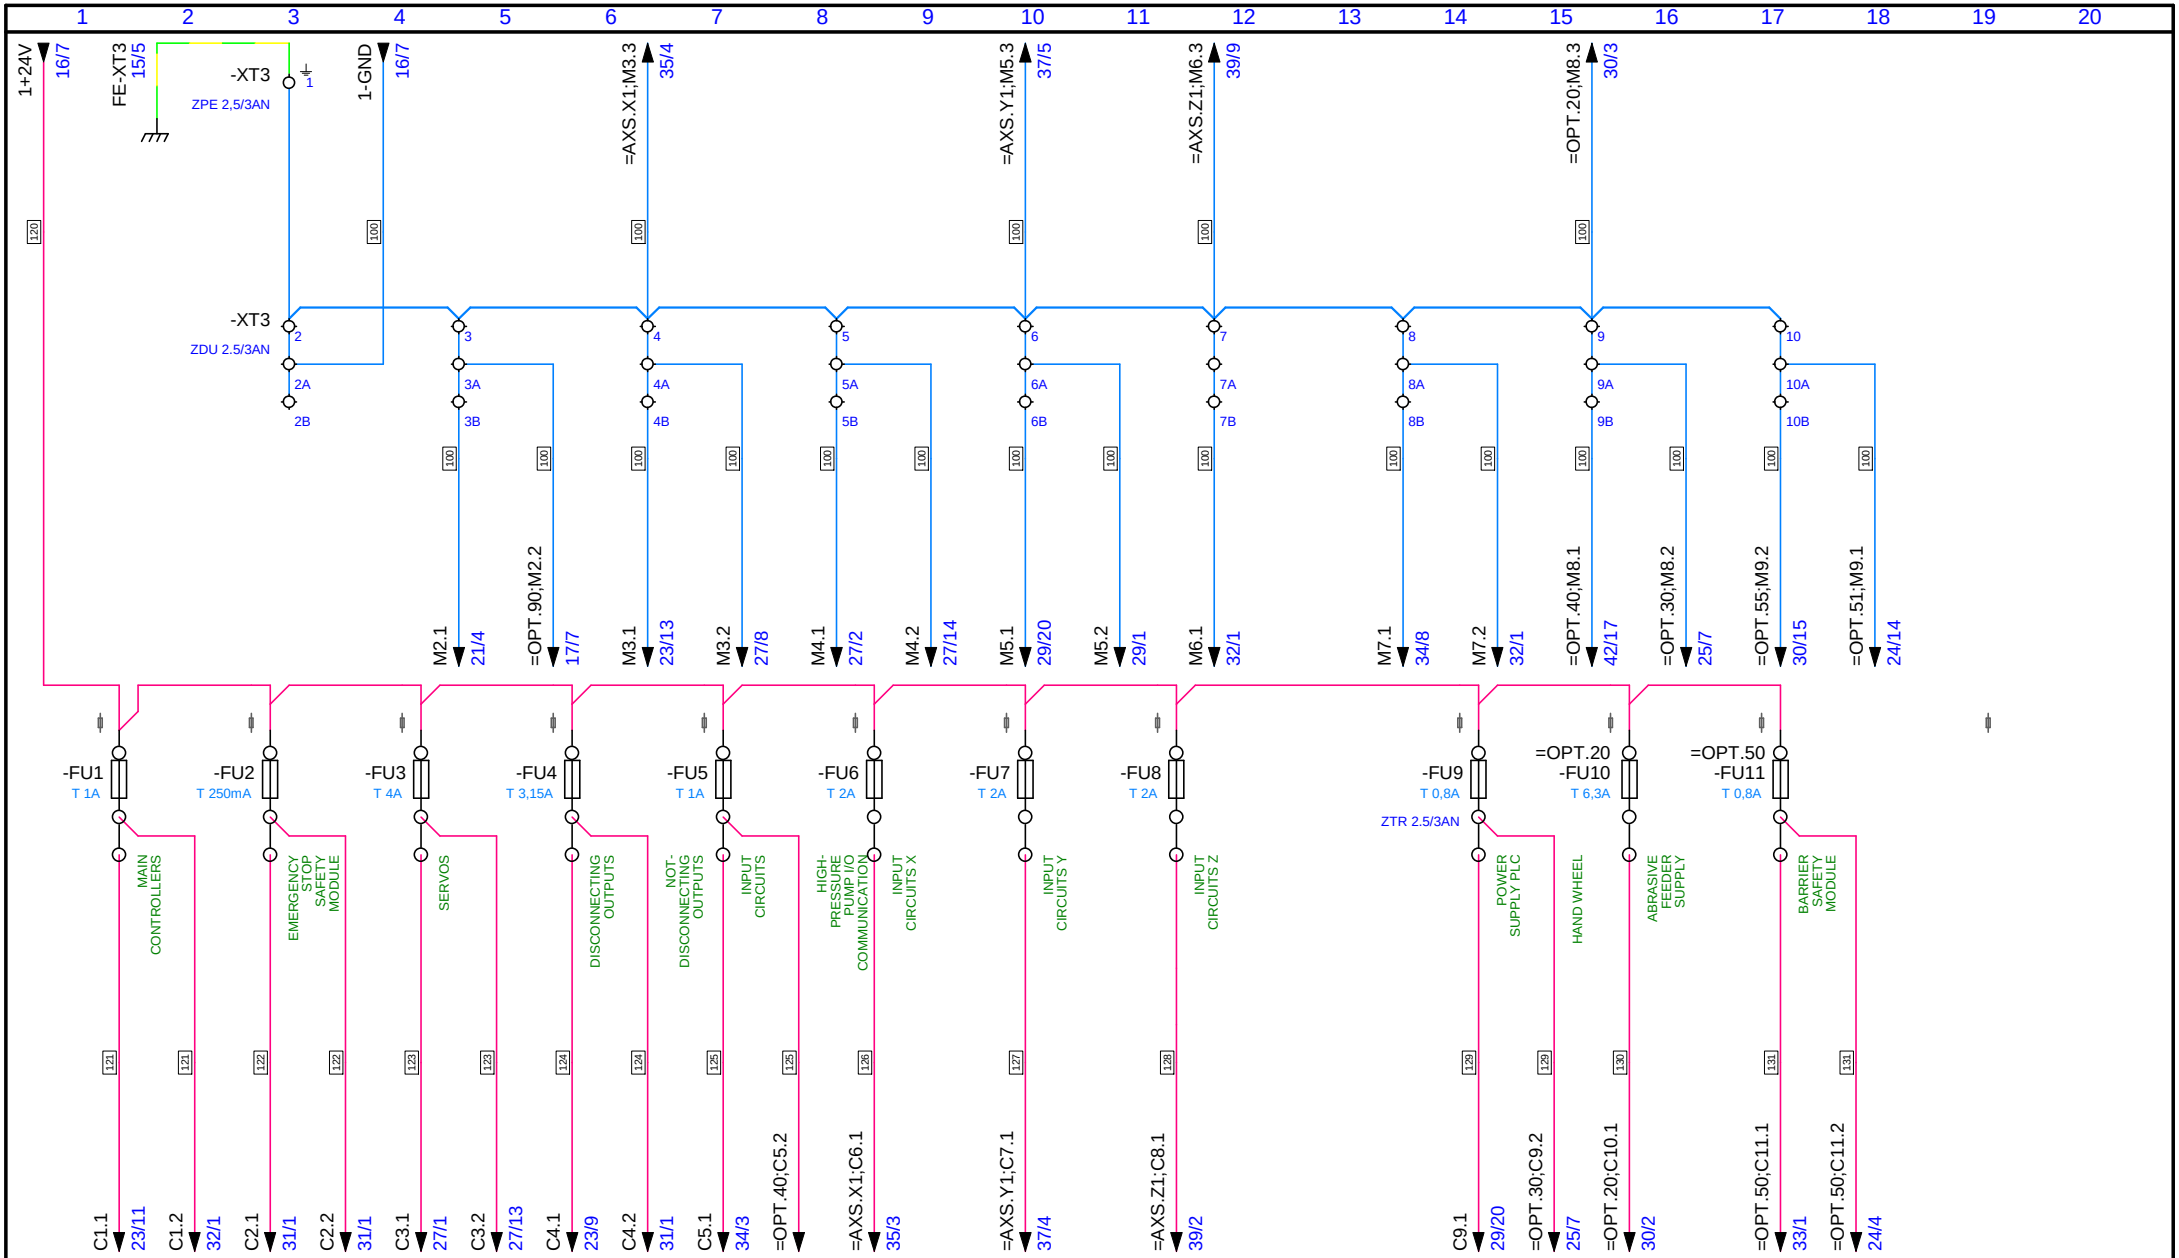

Revision			
	D:	Revision:	
	C:	Date: 6.11.2012 13:38:1	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **POWER SUPPLY DISTRIBUTION 3**


Drawing: **PTV-V52-N-0001**

Func.ref: =OPT.00+MX0

Equipment: **WJ3020B 1Z-PJ-NL**

Page: 18

of: 126

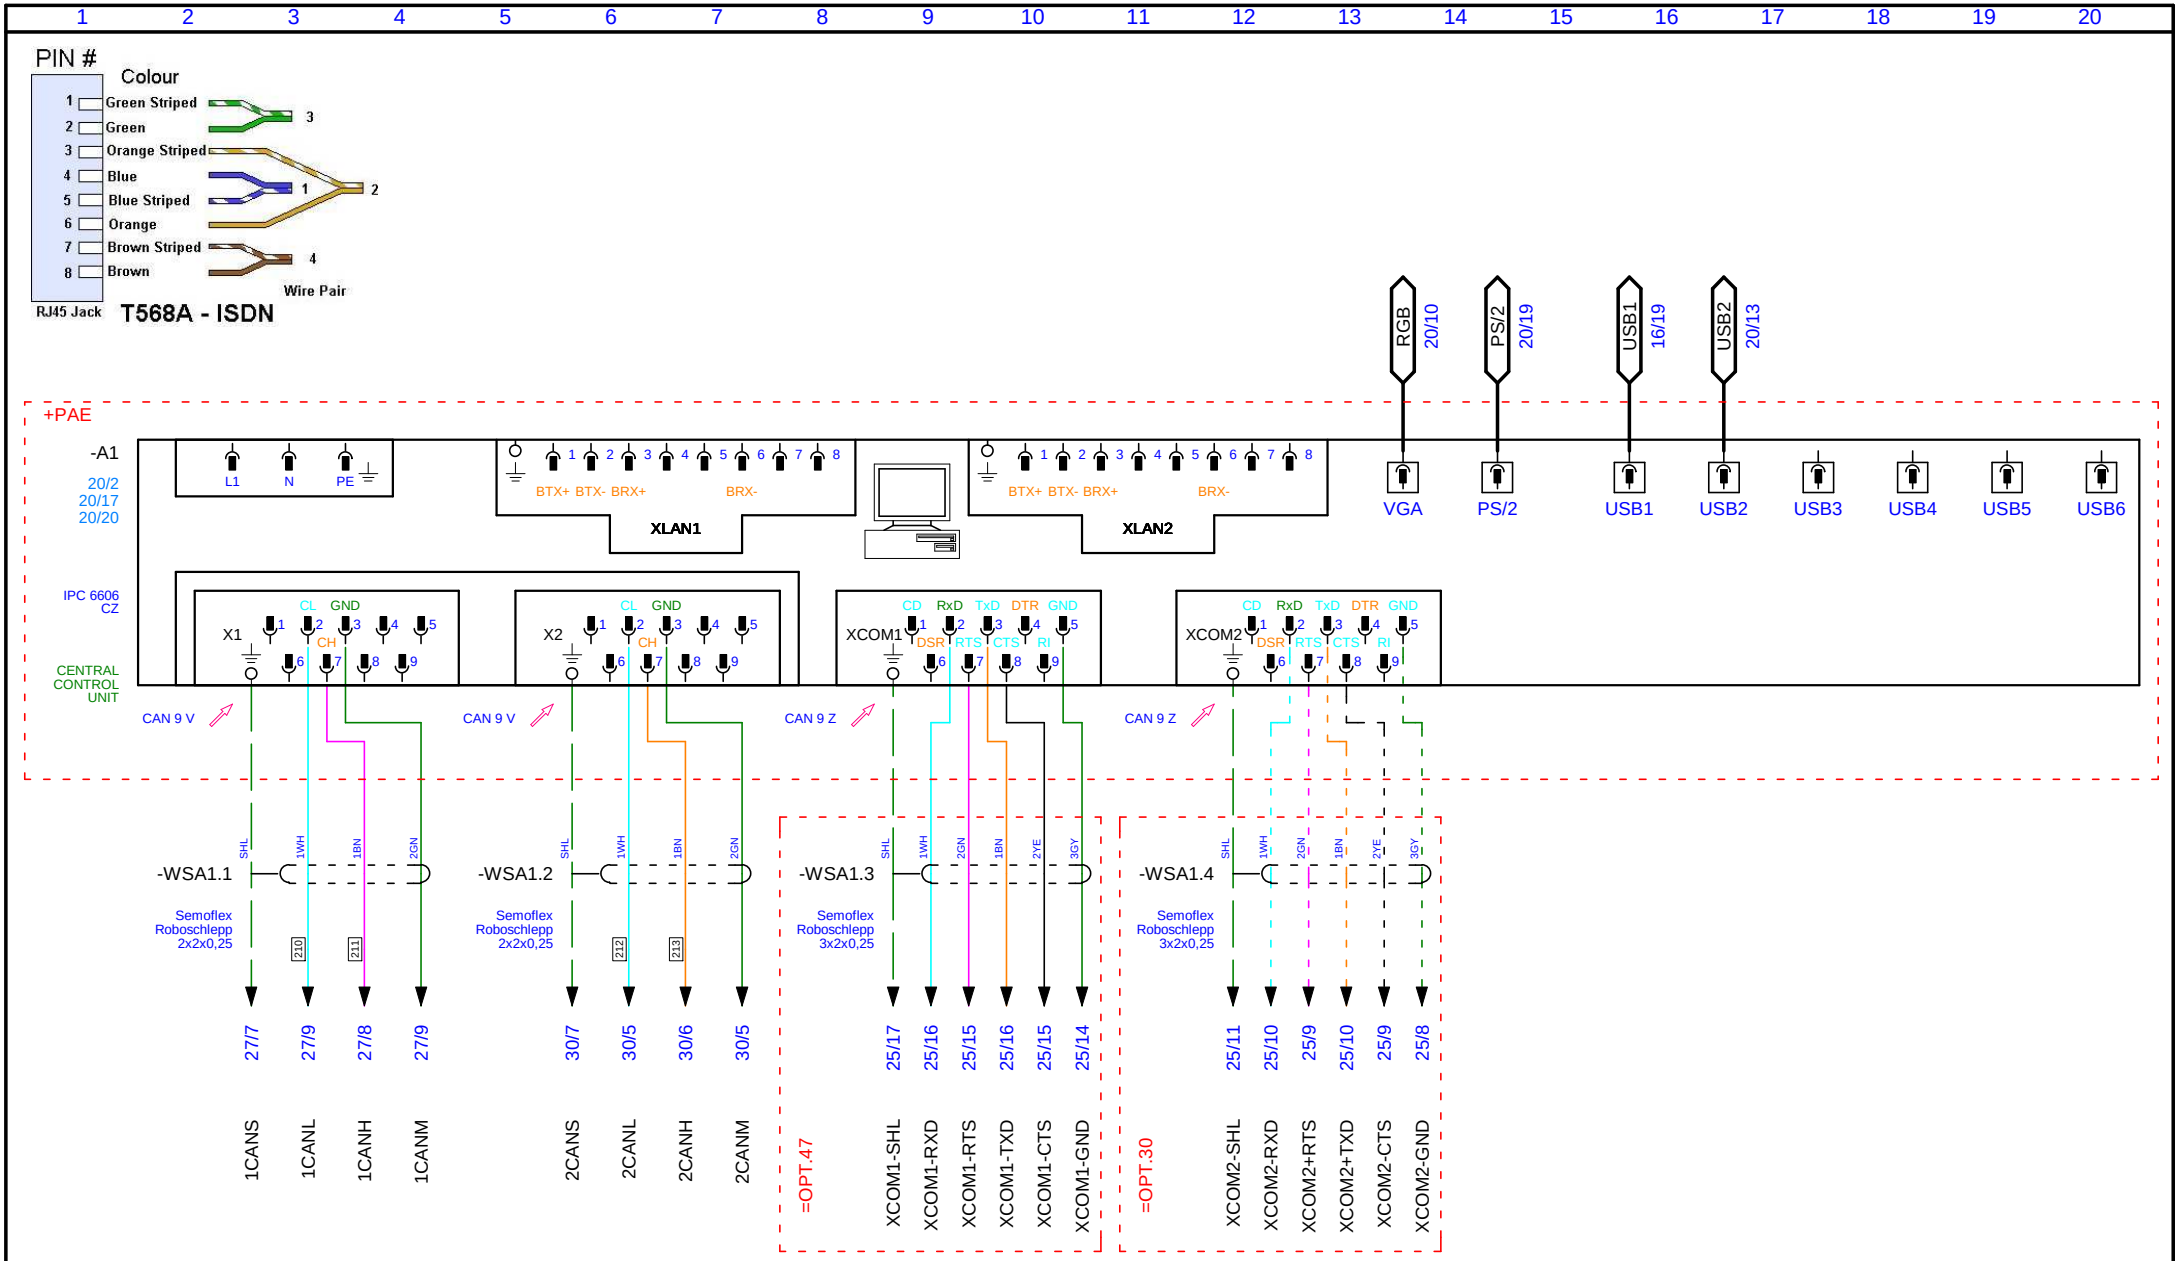

Revision			
	D:	Revision:	
	C:	Date: 1.11.2012 10:15:3	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **CONTROL SYSTEM**


Drawing: **PTV-V52-N-0001**

Func.ref: =OPT.00+MX0

Equipment: **WJ3020B 1Z-PJ-NL**

Page: 19

of: 126

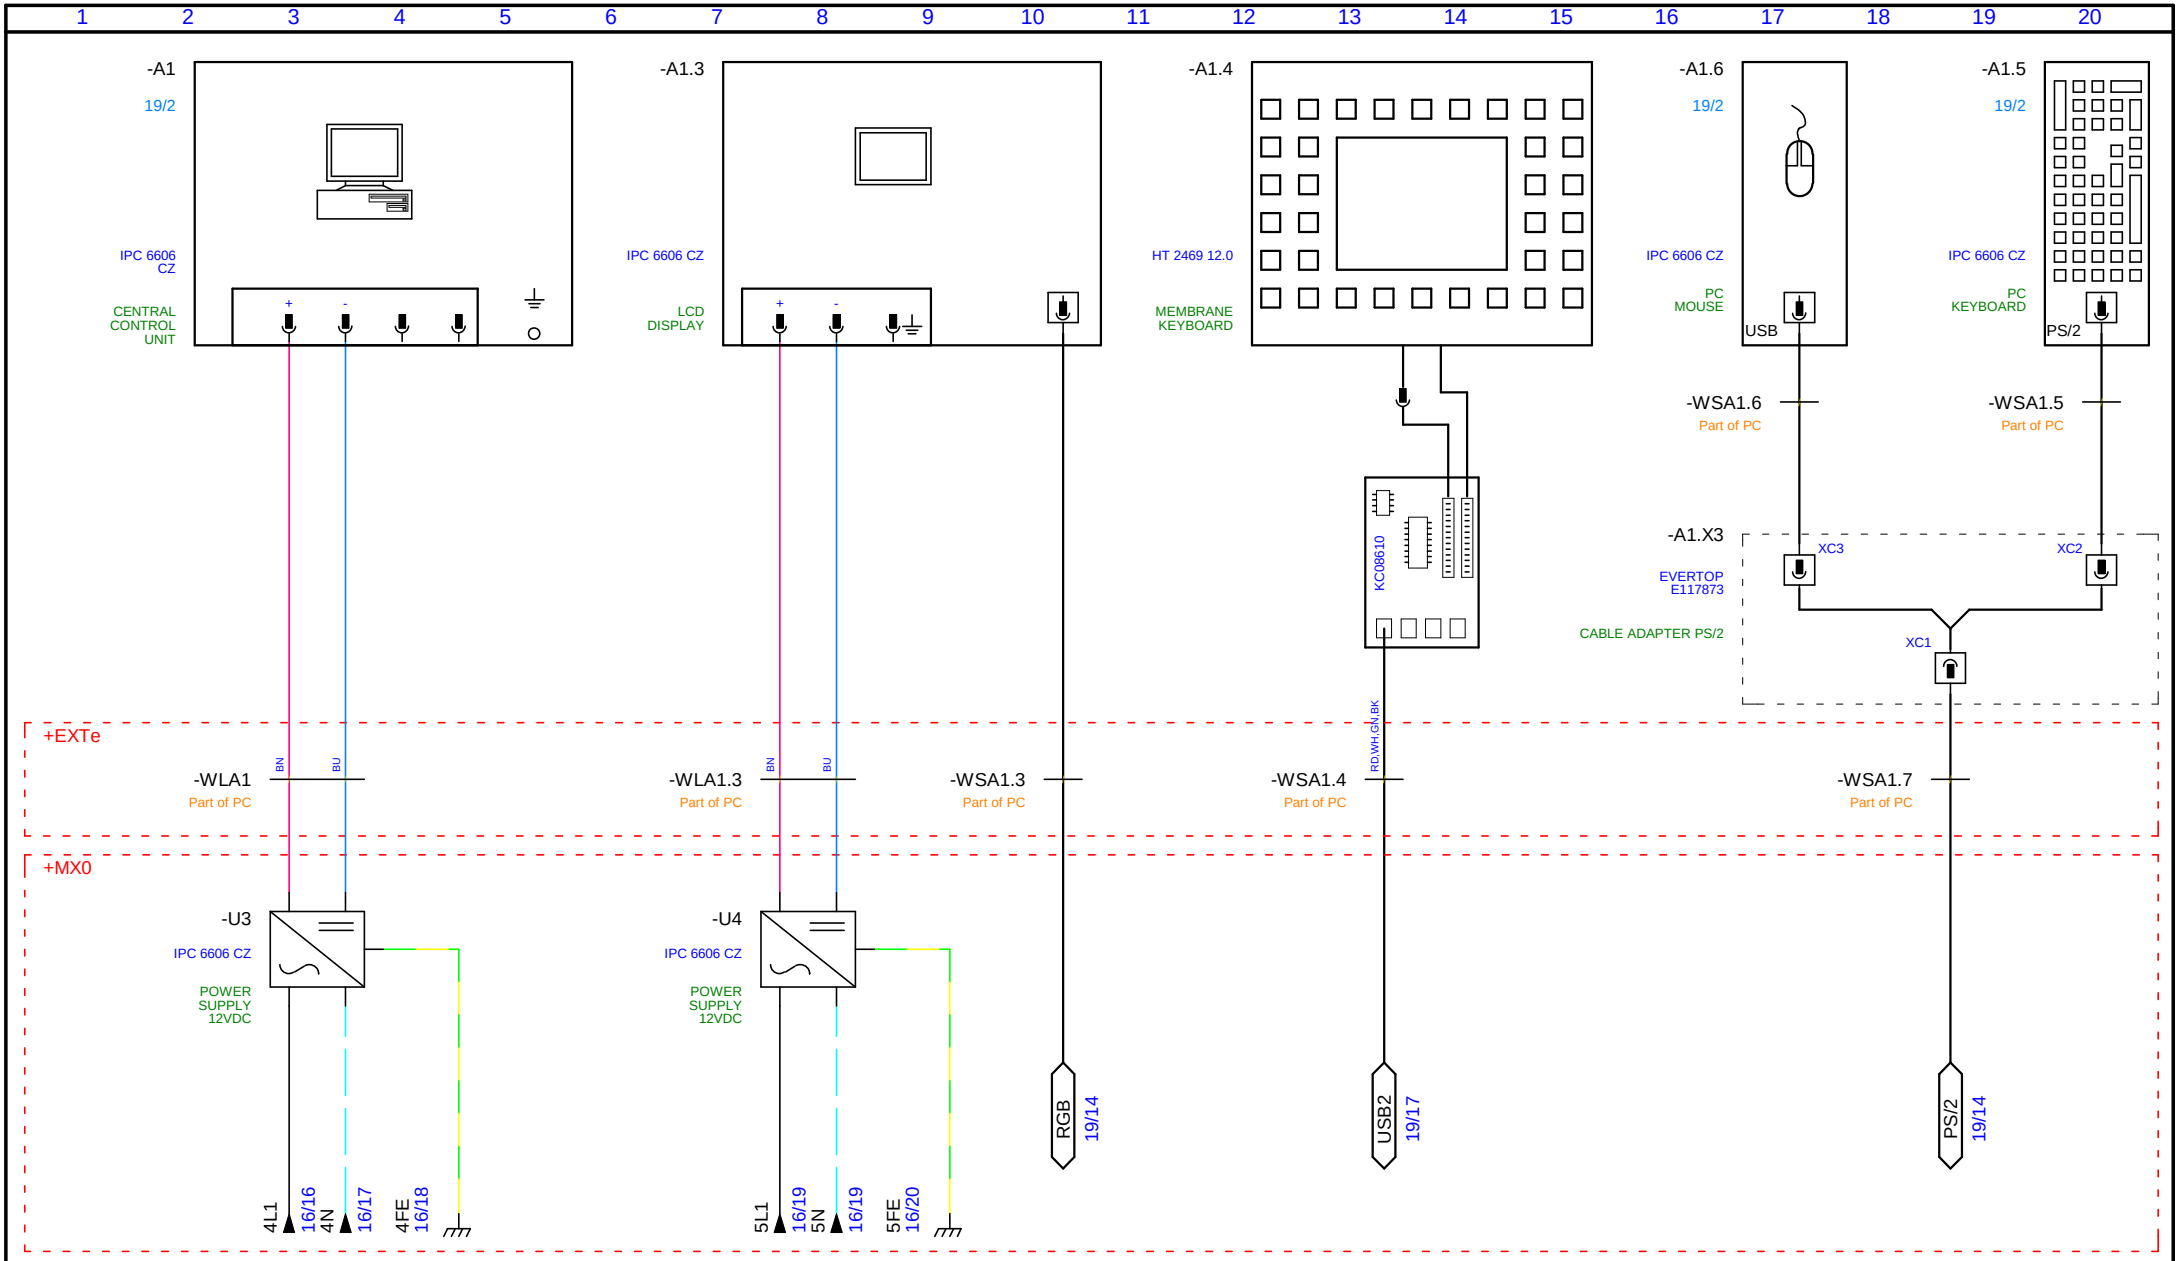

Revision		
	D:	Revision:
	C:	Date: 9.10.2008 12:57:5
	B:	Editor: FEDYSZYN MILAN
	A:	Sign:

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **CONTROL SYSTEM HMI**


Drawing: **PTV-V52-N-0001**

Func.ref: =OPT.00+PAE


Equipment: **WJ3020B 1Z-PJ-NL**

Page: 20


of: 126

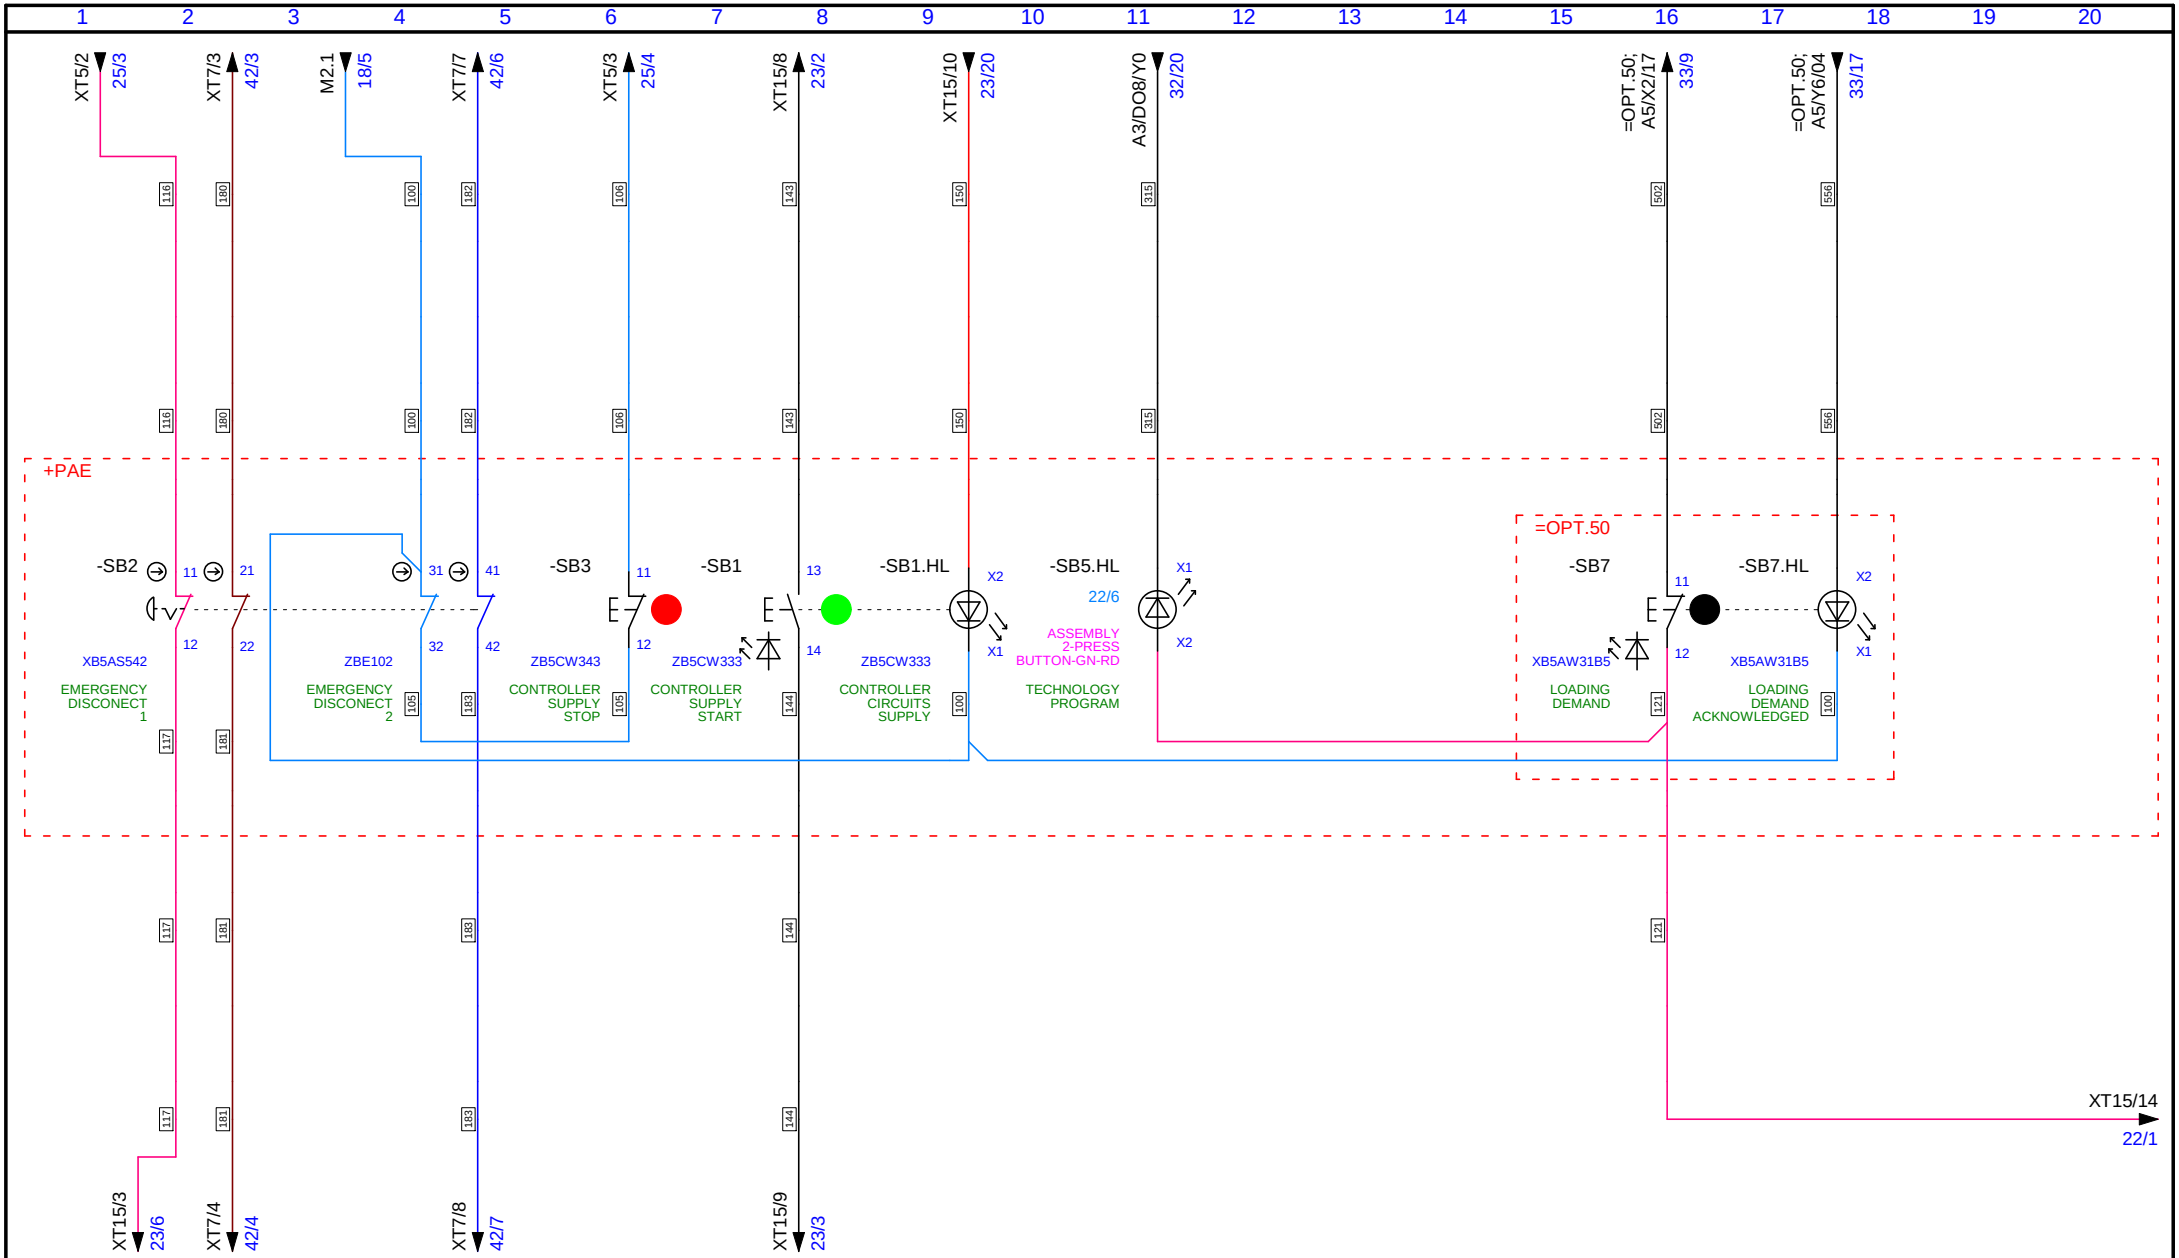

Revision						
	D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **OPERATOR PANEL 1**	Drawing: **PTV-V52-N-0001**	Func.ref: =OPT.00+MX0
	C:	Date: 6.11.2012 13:38:1			Equipment: **WJ3020B 1Z-PJ-NL**	Page: 21
	B:	Editor: FEDYSZYN MILAN				of: 126
	A:	Sign:				

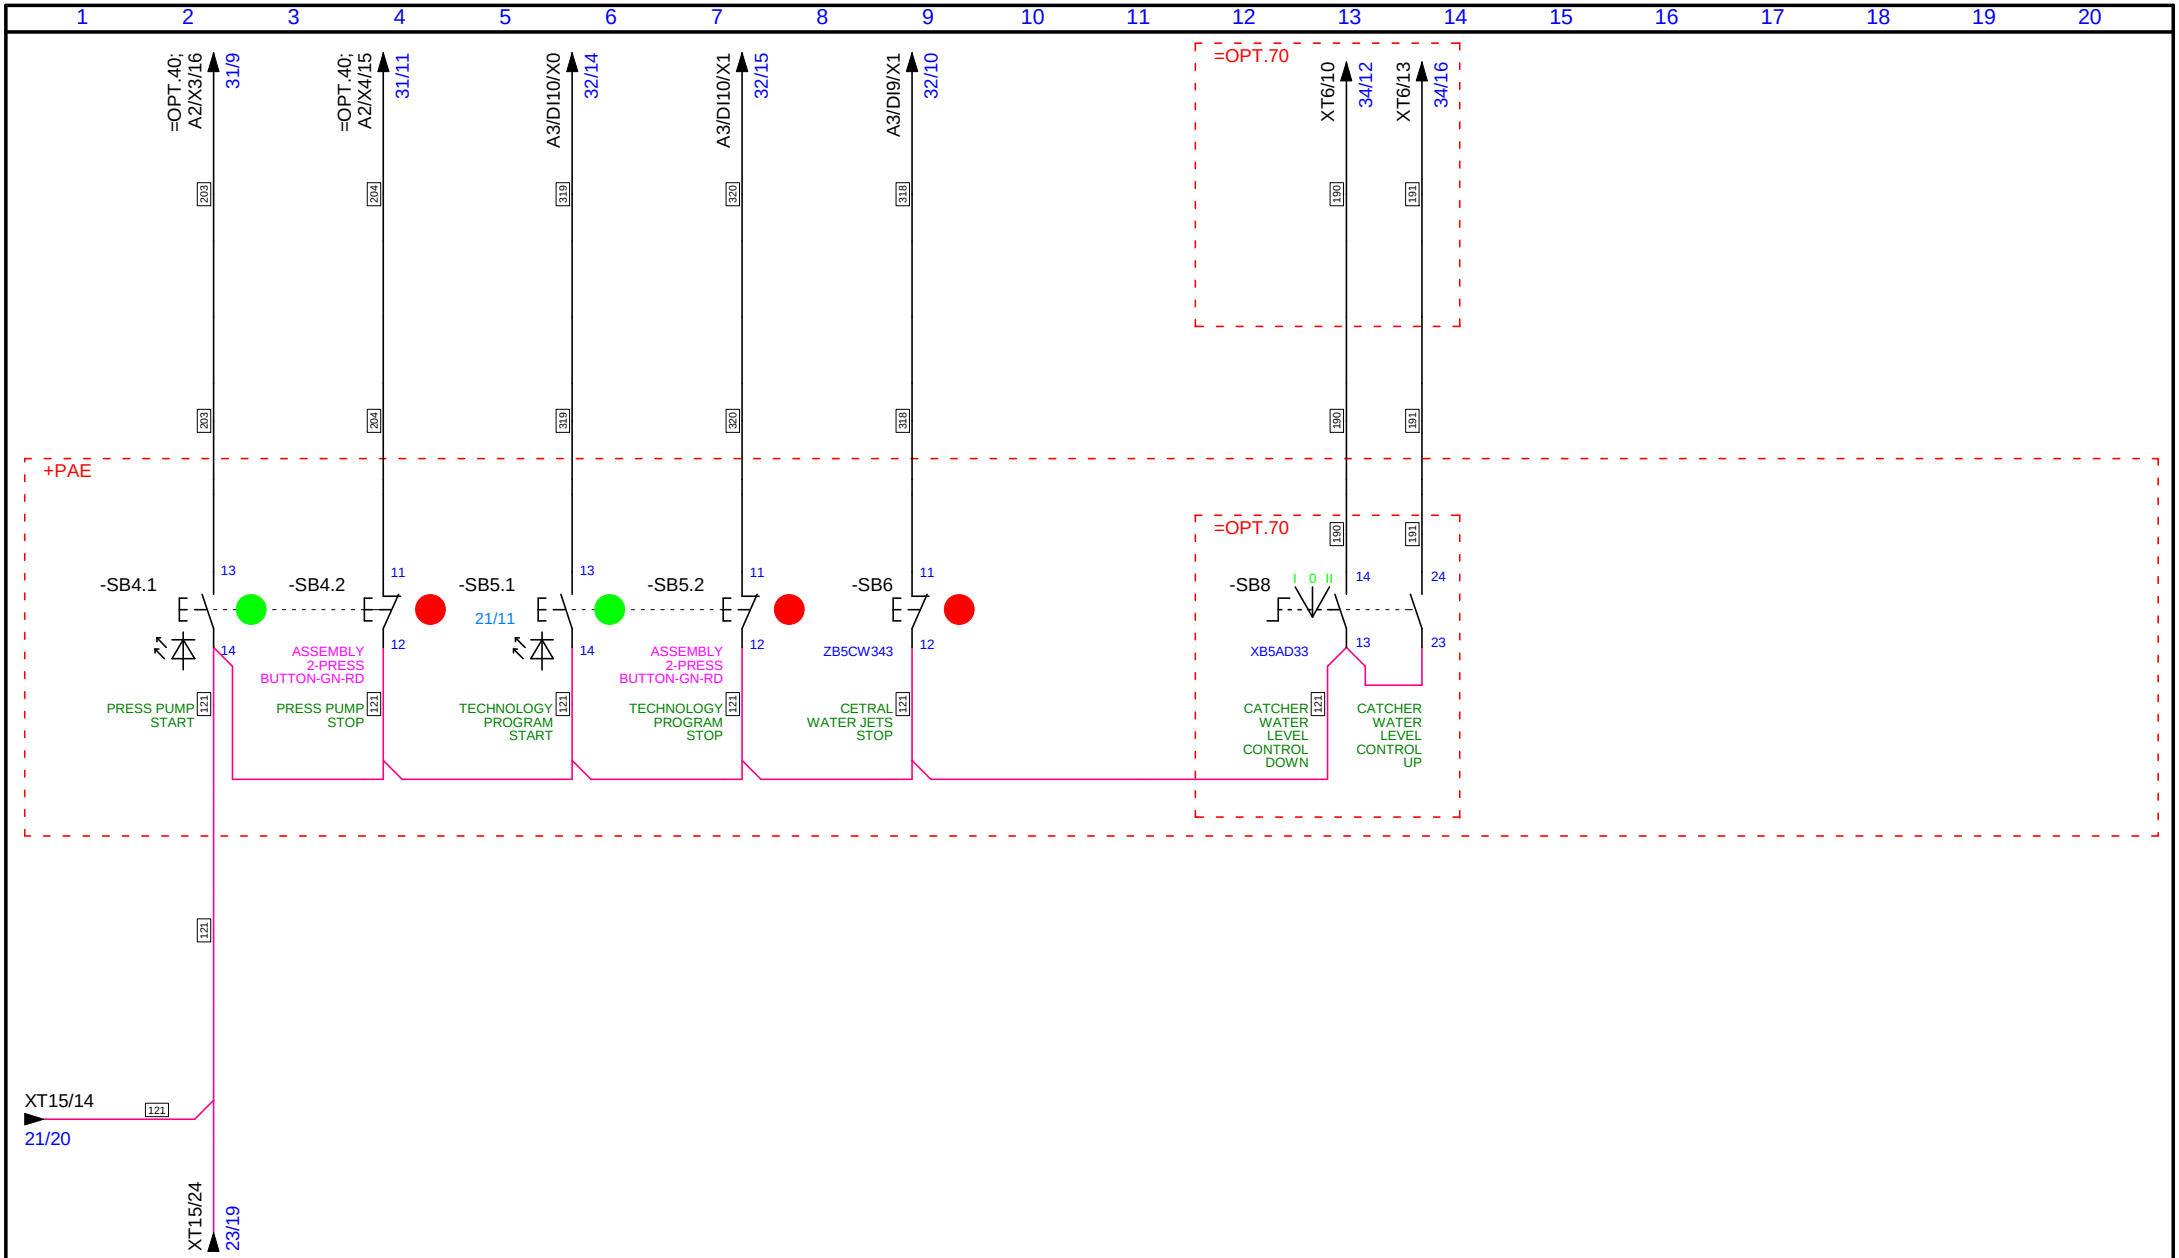

Revision			
D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **OPERATOR PANEL 2**
C:	Date: 6.11.2012 13:36:2		Drawing: **PTV-V52-N-0001**
B:	Editor: FEDYSZYN MILAN		Equipment: **WJ3020B 1Z-PJ-NL**
A:	Sign:		Func.ref: =OPT.00+MX0 Page: 22 of: 126

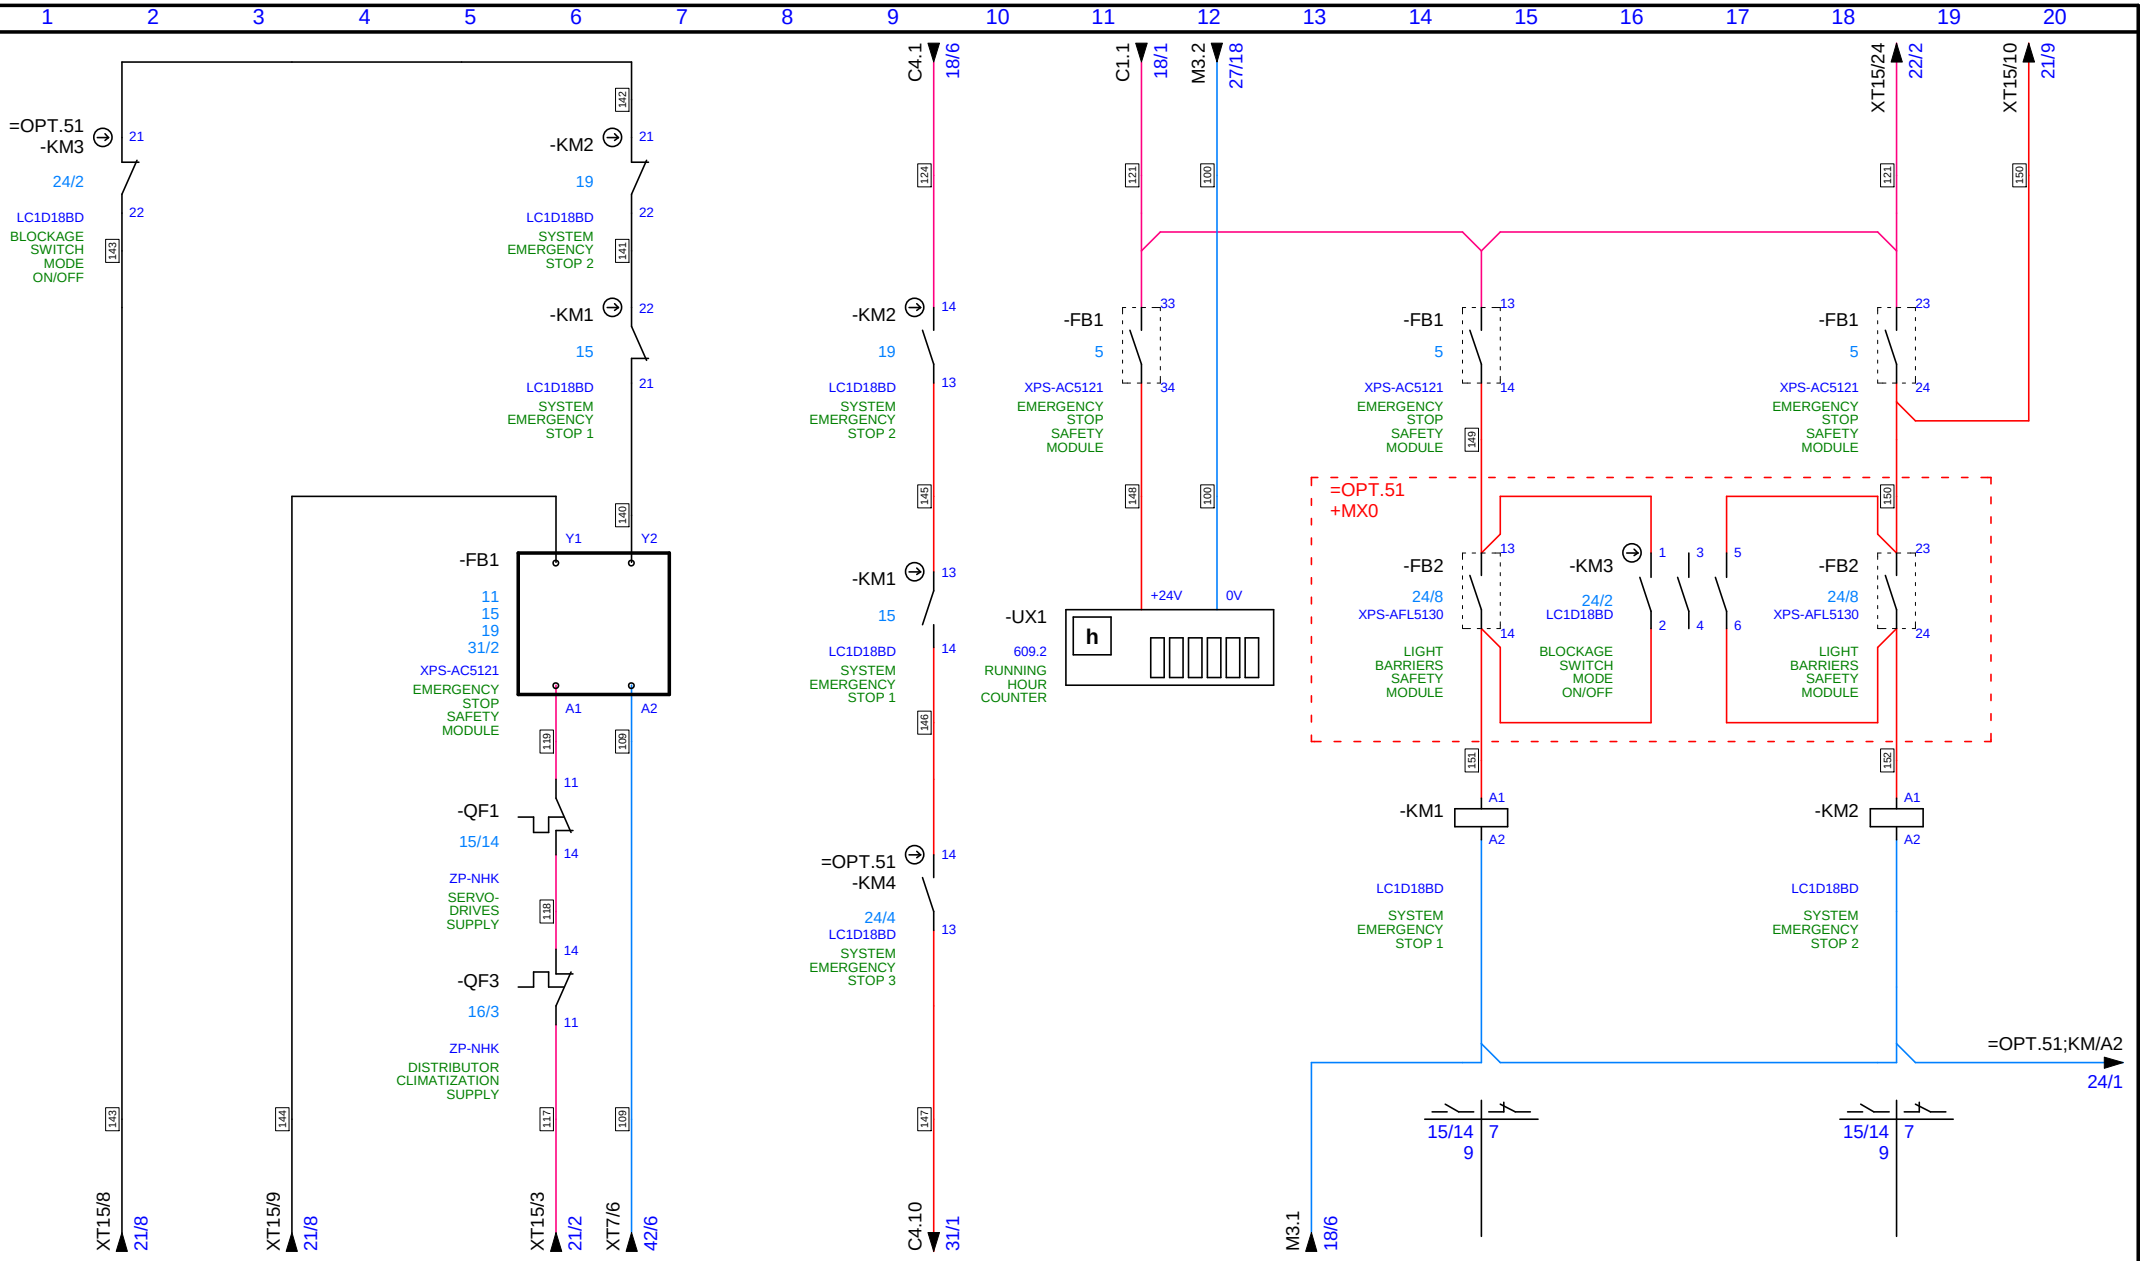

Revision			
	D:	Revision:	
	C:	Date: 9.10.2008 11:21:1	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **EMERGENCY STOP SAFETY MODULE**


Drawing: **PTV-V52-N-0001**

Func.ref: =OPT.00+MX0

Equipment: **WJ3020B 1Z-PJ-NL**

Page: 23

of: 126

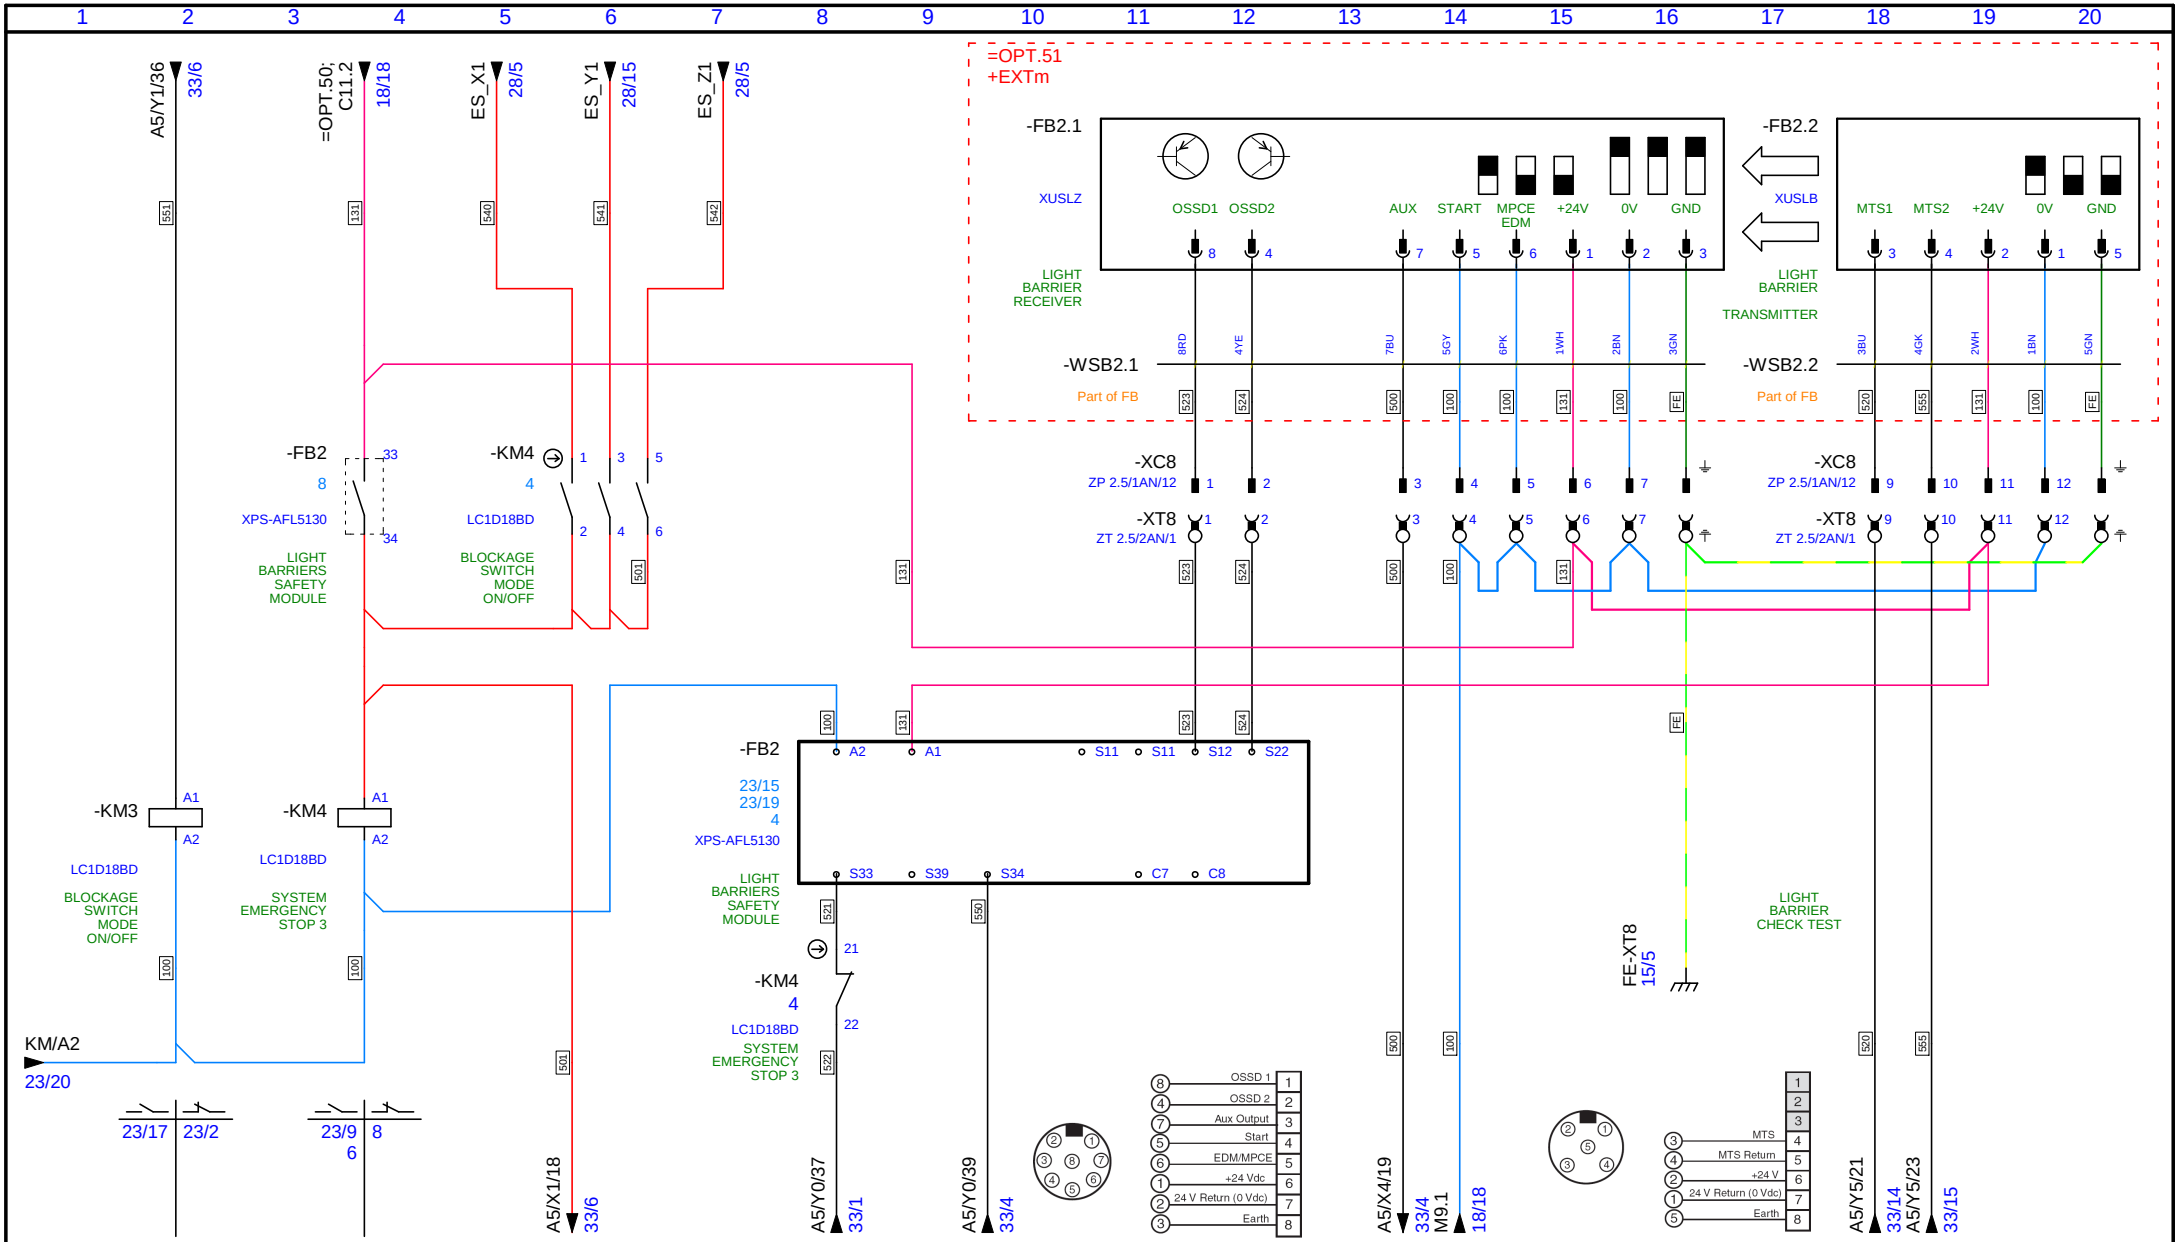

Revision			
	D:	Revision:	
	C:	Date: 6.11.2012 13:38:1	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **OPTICAL BARRIER LIGHT BARRIER**


Drawing: **PTV-V52-N-0001**

Equipment: **WJ3020B 1Z-PJ-NL**


Func.ref: =OPT.51+MX0

Page: 24

of: 126

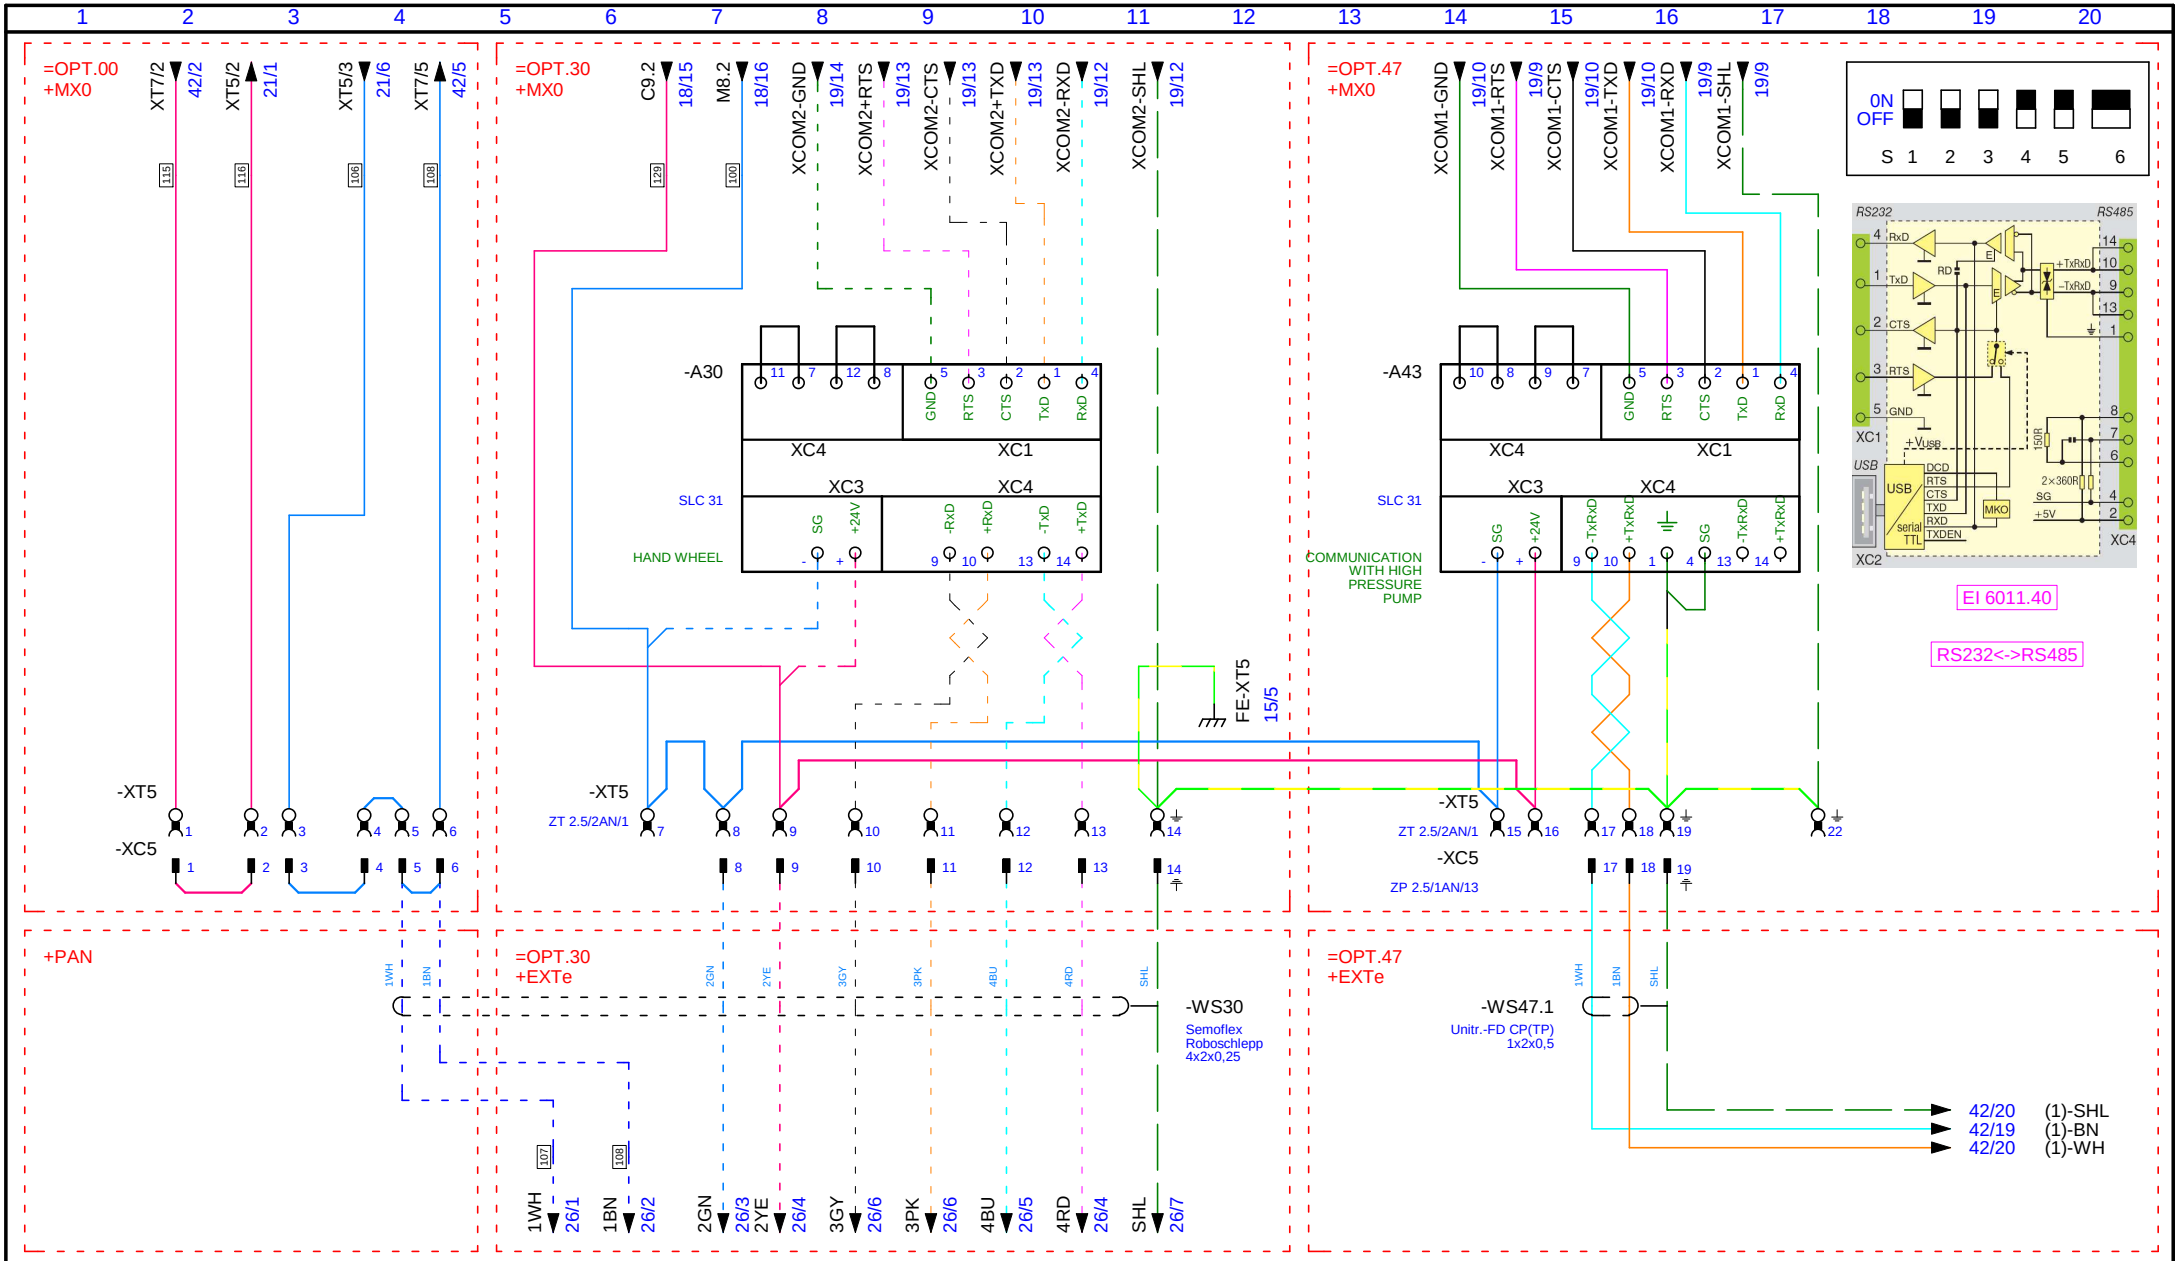

Revision							
	D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **COMMUNICATION**	Drawing: **PTV-V52-N-0001**	Func.ref: =OPT.00+EXTe
	C:	Date: 9.10.2008 11:21:1				
	B:	Editor: FEDYSZYN MILAN			Equipment: **WJ3020B 1Z-PJ-NL**	Page: 25
	A:	Sign:				of: 126

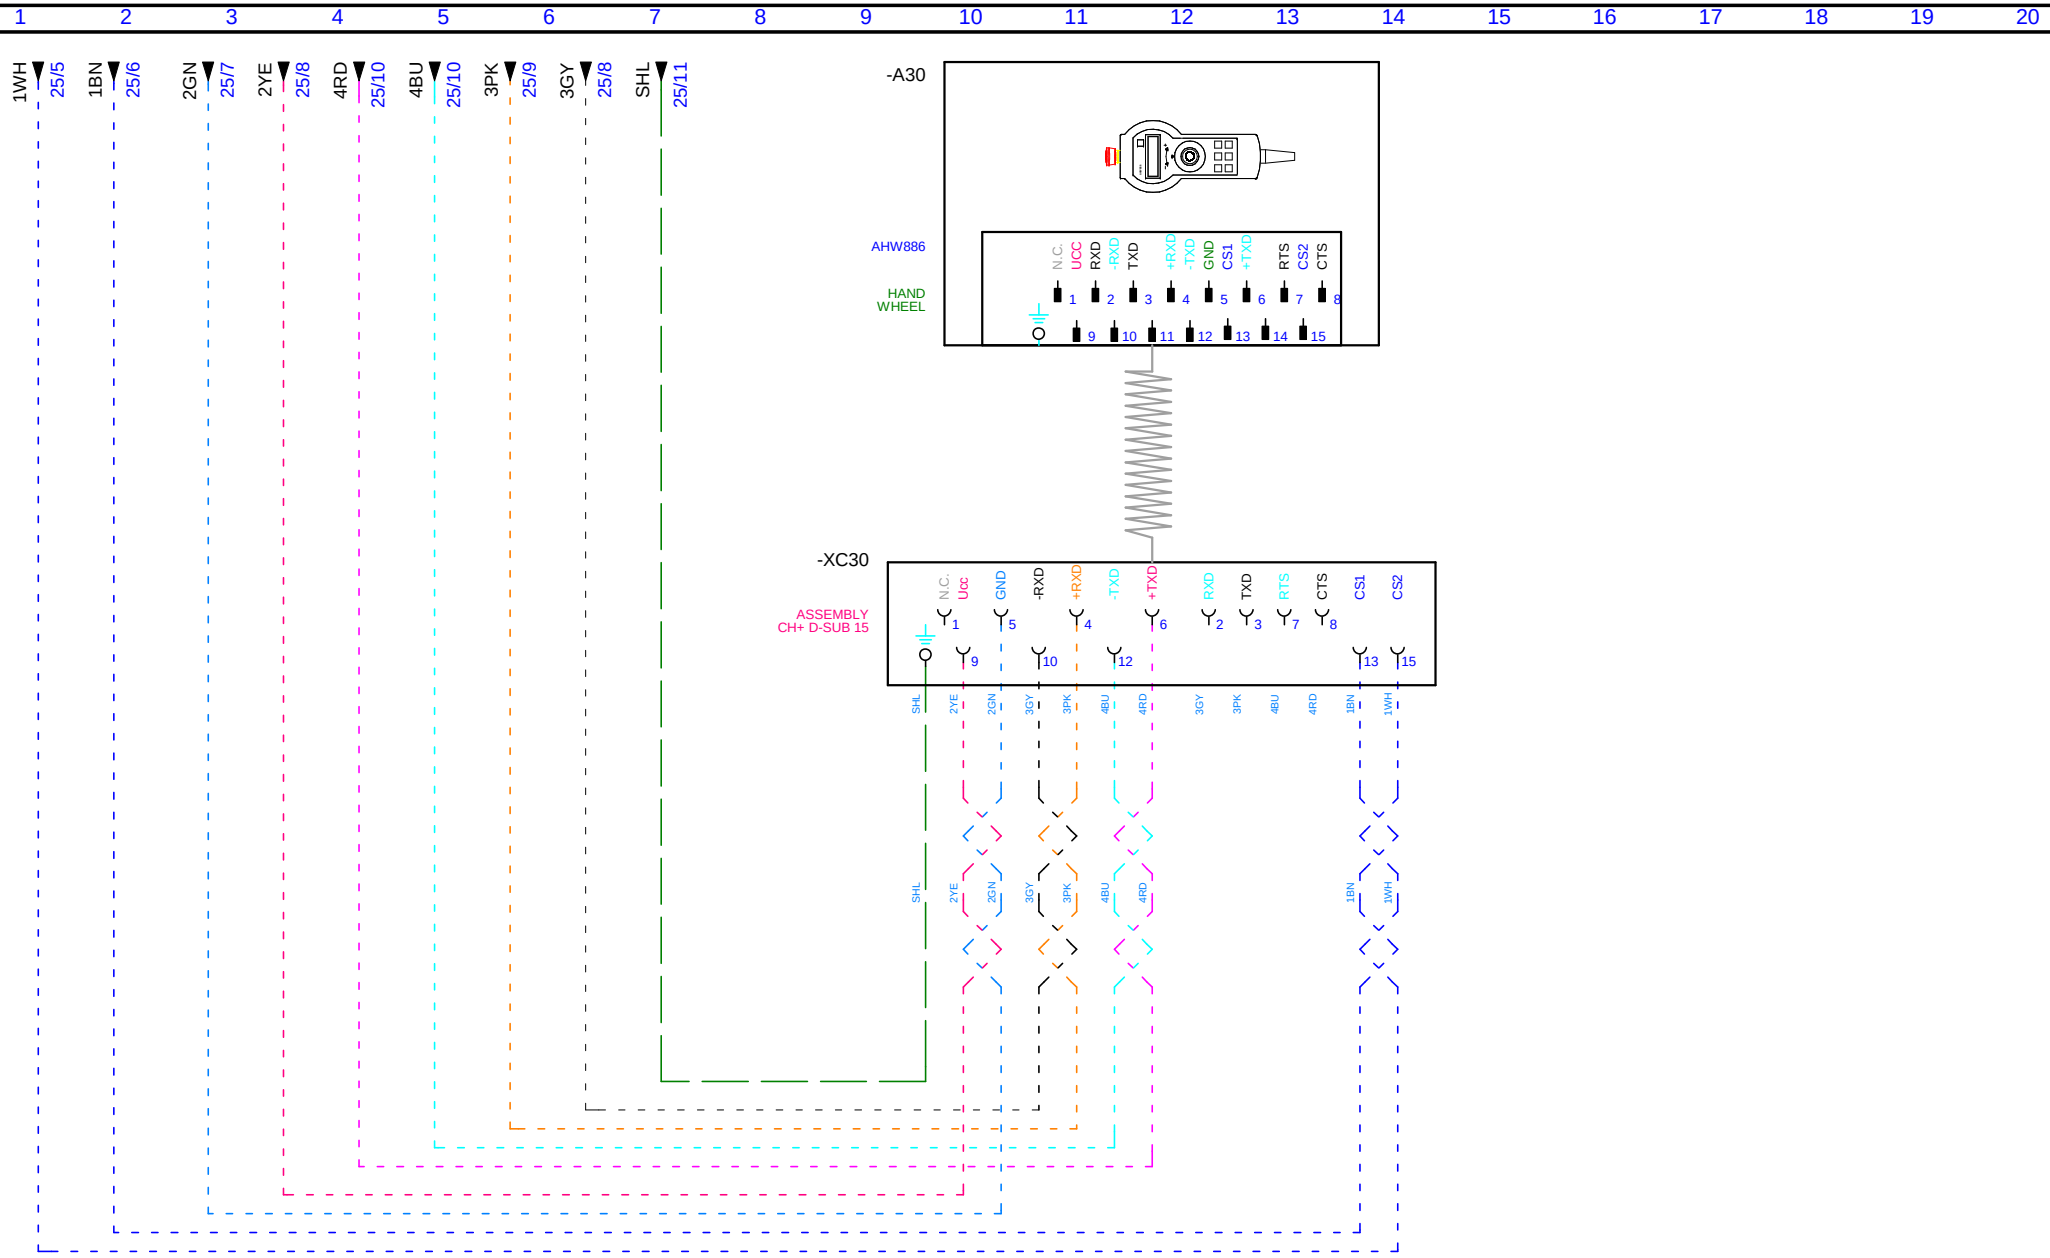

Revision			
D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **REMOTE CONTROL HANDWHEEL**
C:	Date: 29.7.2008 7:44:00		
B:	Editor: FEDYSZYN MILAN		
A:	Sign:		


Drawing: **PTV-V52-N-0001**

Func.ref: =OPT.30+EXTe


Equipment: **WJ3020B 1Z-PJ-NL**

Page: 26

of: 126

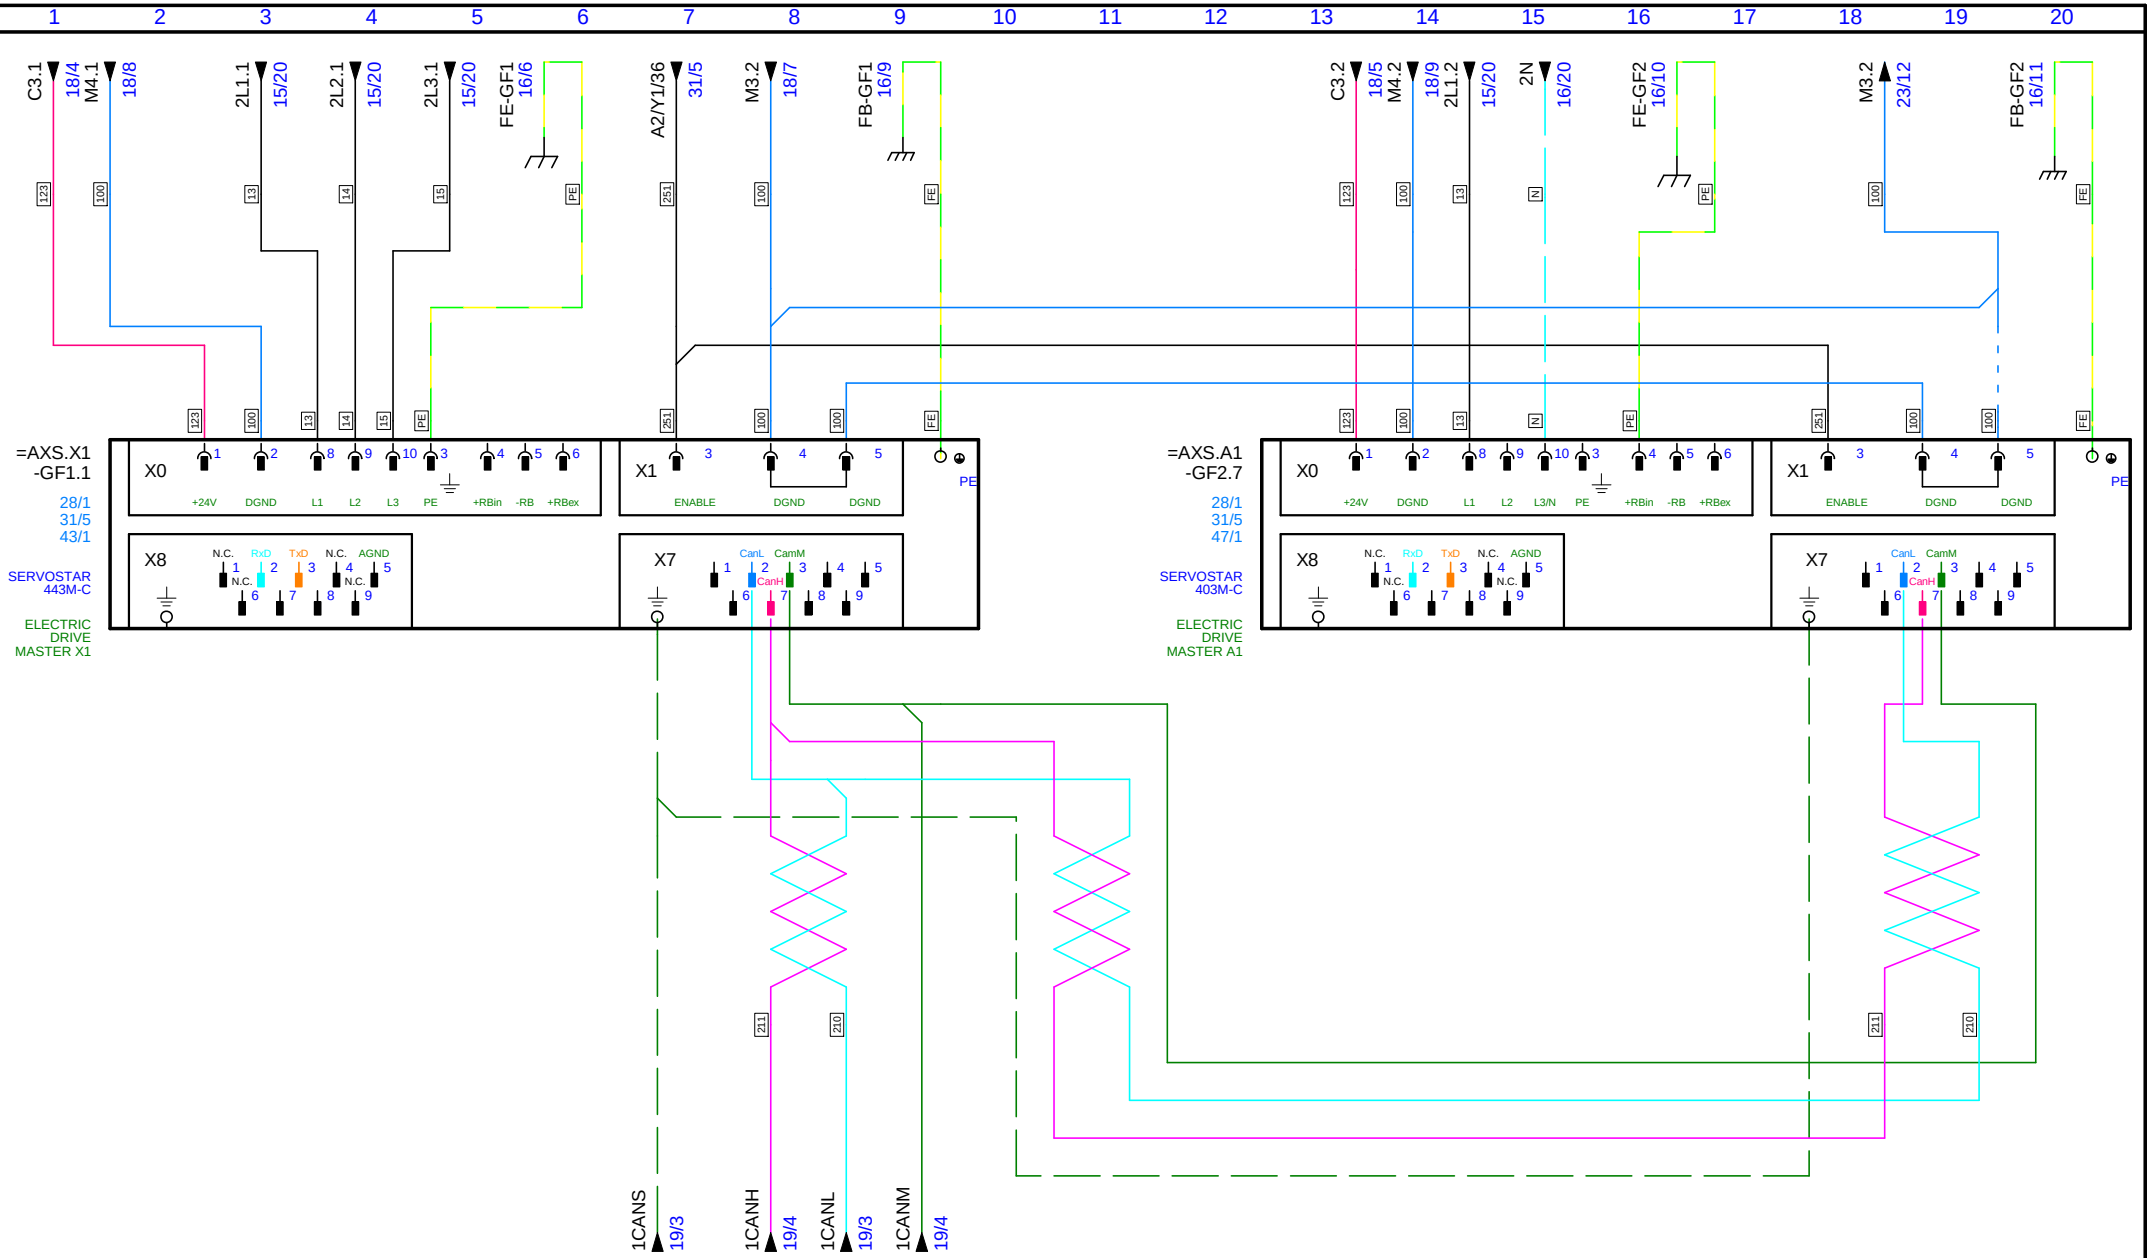

Revision						
	D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **ELECTRIC DRIVES 1**	Drawing: **PTV-V52-N-0001**	Func.ref: =OPT.00+MX0
	C:	Date: 1.11.2012 10:06:5			Equipment: **WJ3020B 1Z-PJ-NL**	Page: 27
	B:	Editor: FEDYSZYN MILAN				of: 126
	A:	Sign:				

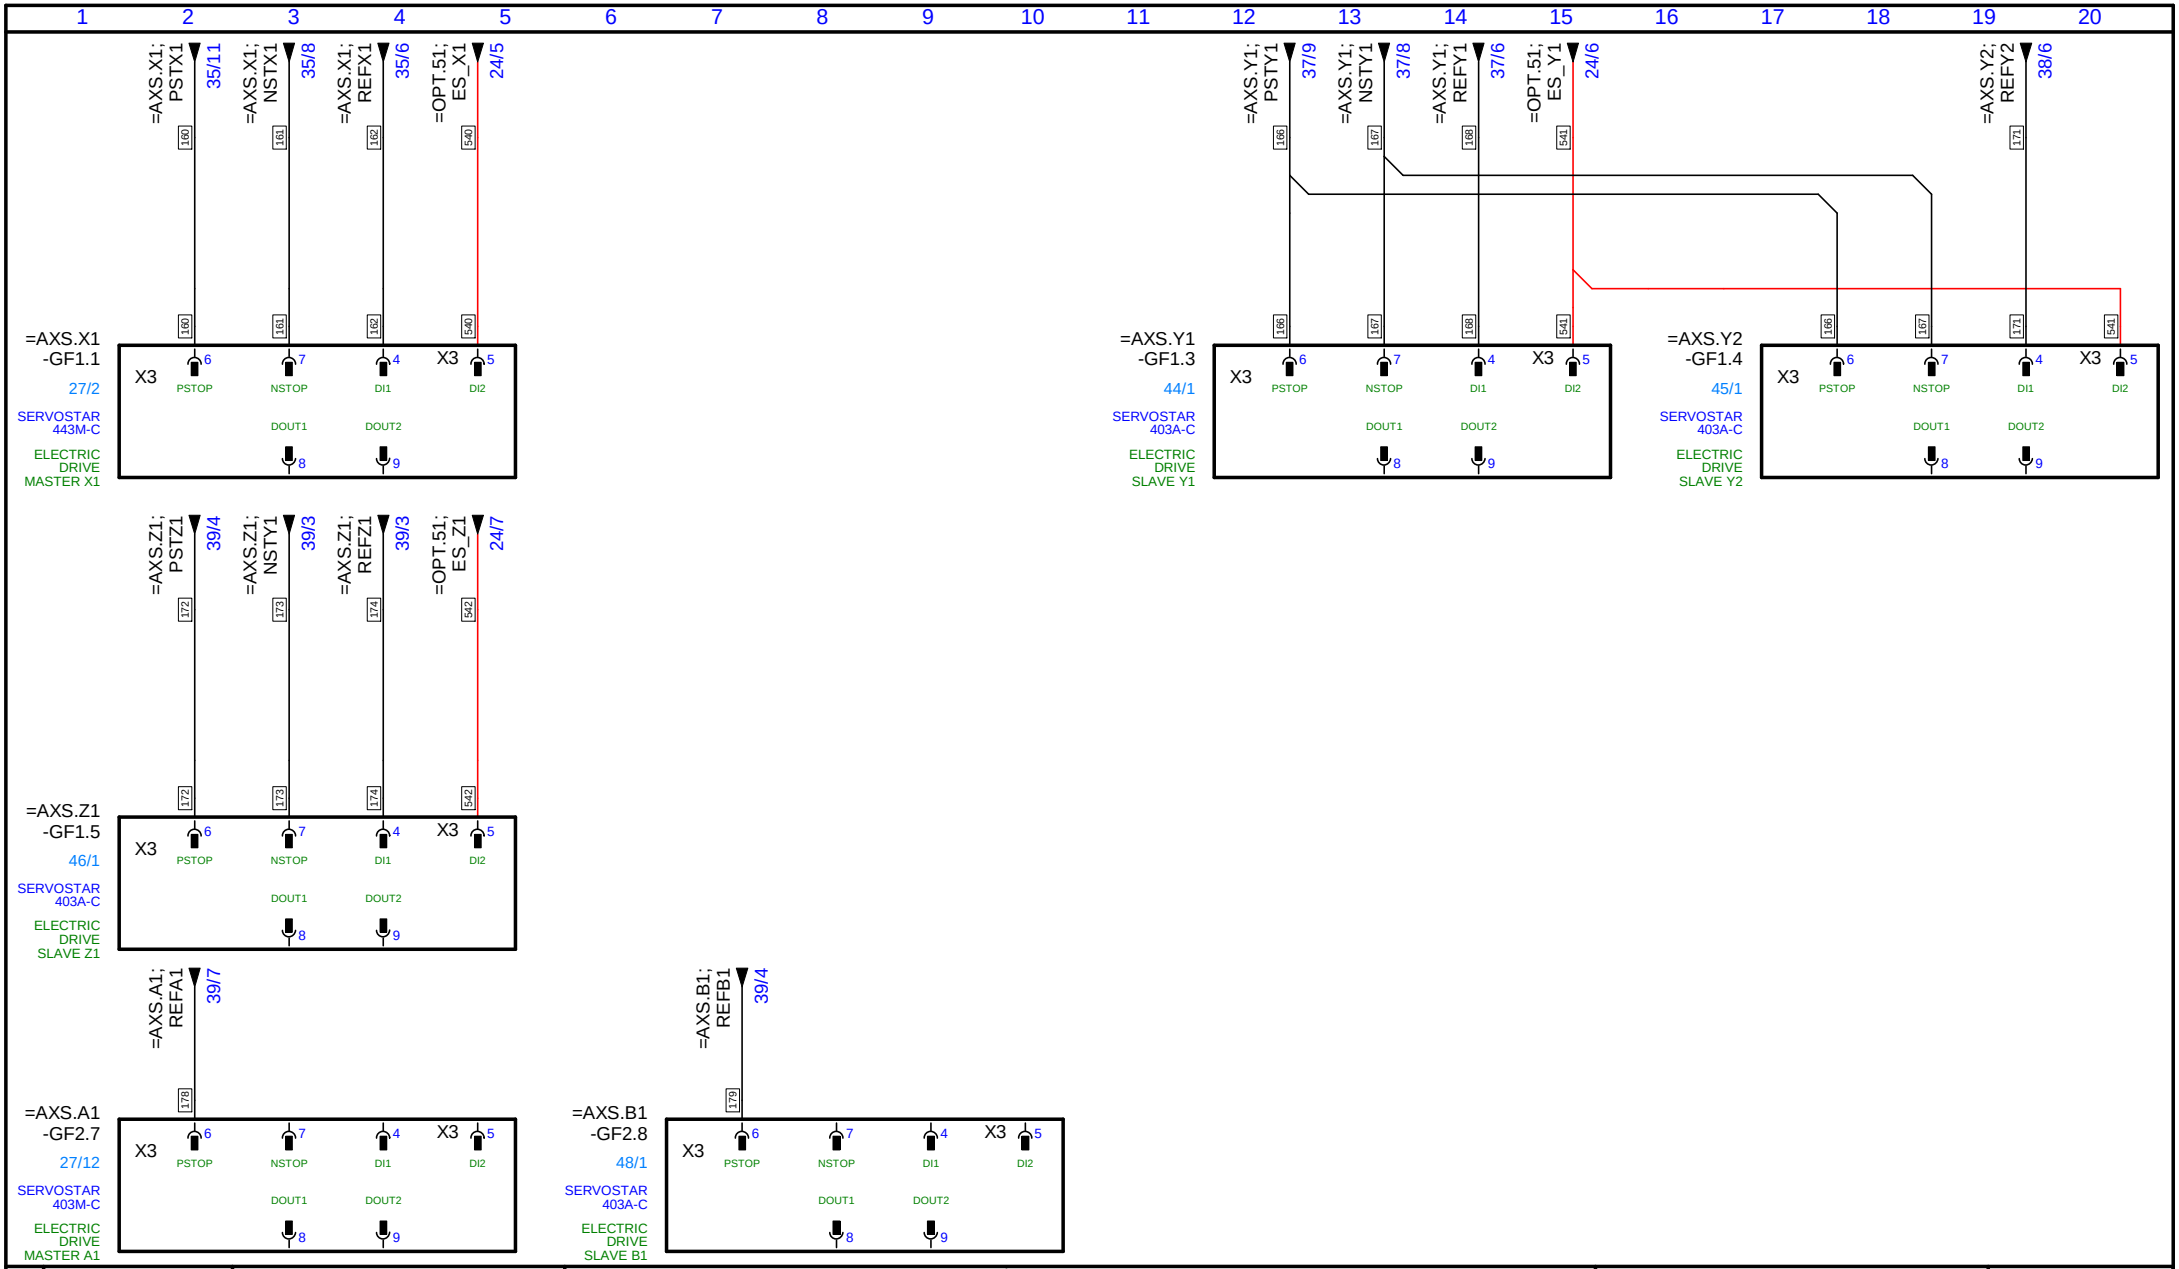

Revision		
	D:	Revision:
	C:	Date: 1.11.2012 10:06:5
	B:	Editor: FEDYSZYN MILAN
	A:	Sign:

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **ELECTRIC DRIVES 2**


Drawing: **PTV-V52-N-0001**

Func.ref: =OPT.00+MX0

Equipment: **WJ3020B 1Z-PJ-NL**



Revision							
	D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **PLC CIRCUITS**	Drawing: **PTV-V52-N-0001**	Func.ref: =OPT.00+MX0
	C:	Date: 6.11.2012 13:38:1			Equipment: **WJ3020B 1Z-PJ-NL**	Page: 29
	B:	Editor: FEDYSZYN MILAN				of: 126
	A:	Sign:				

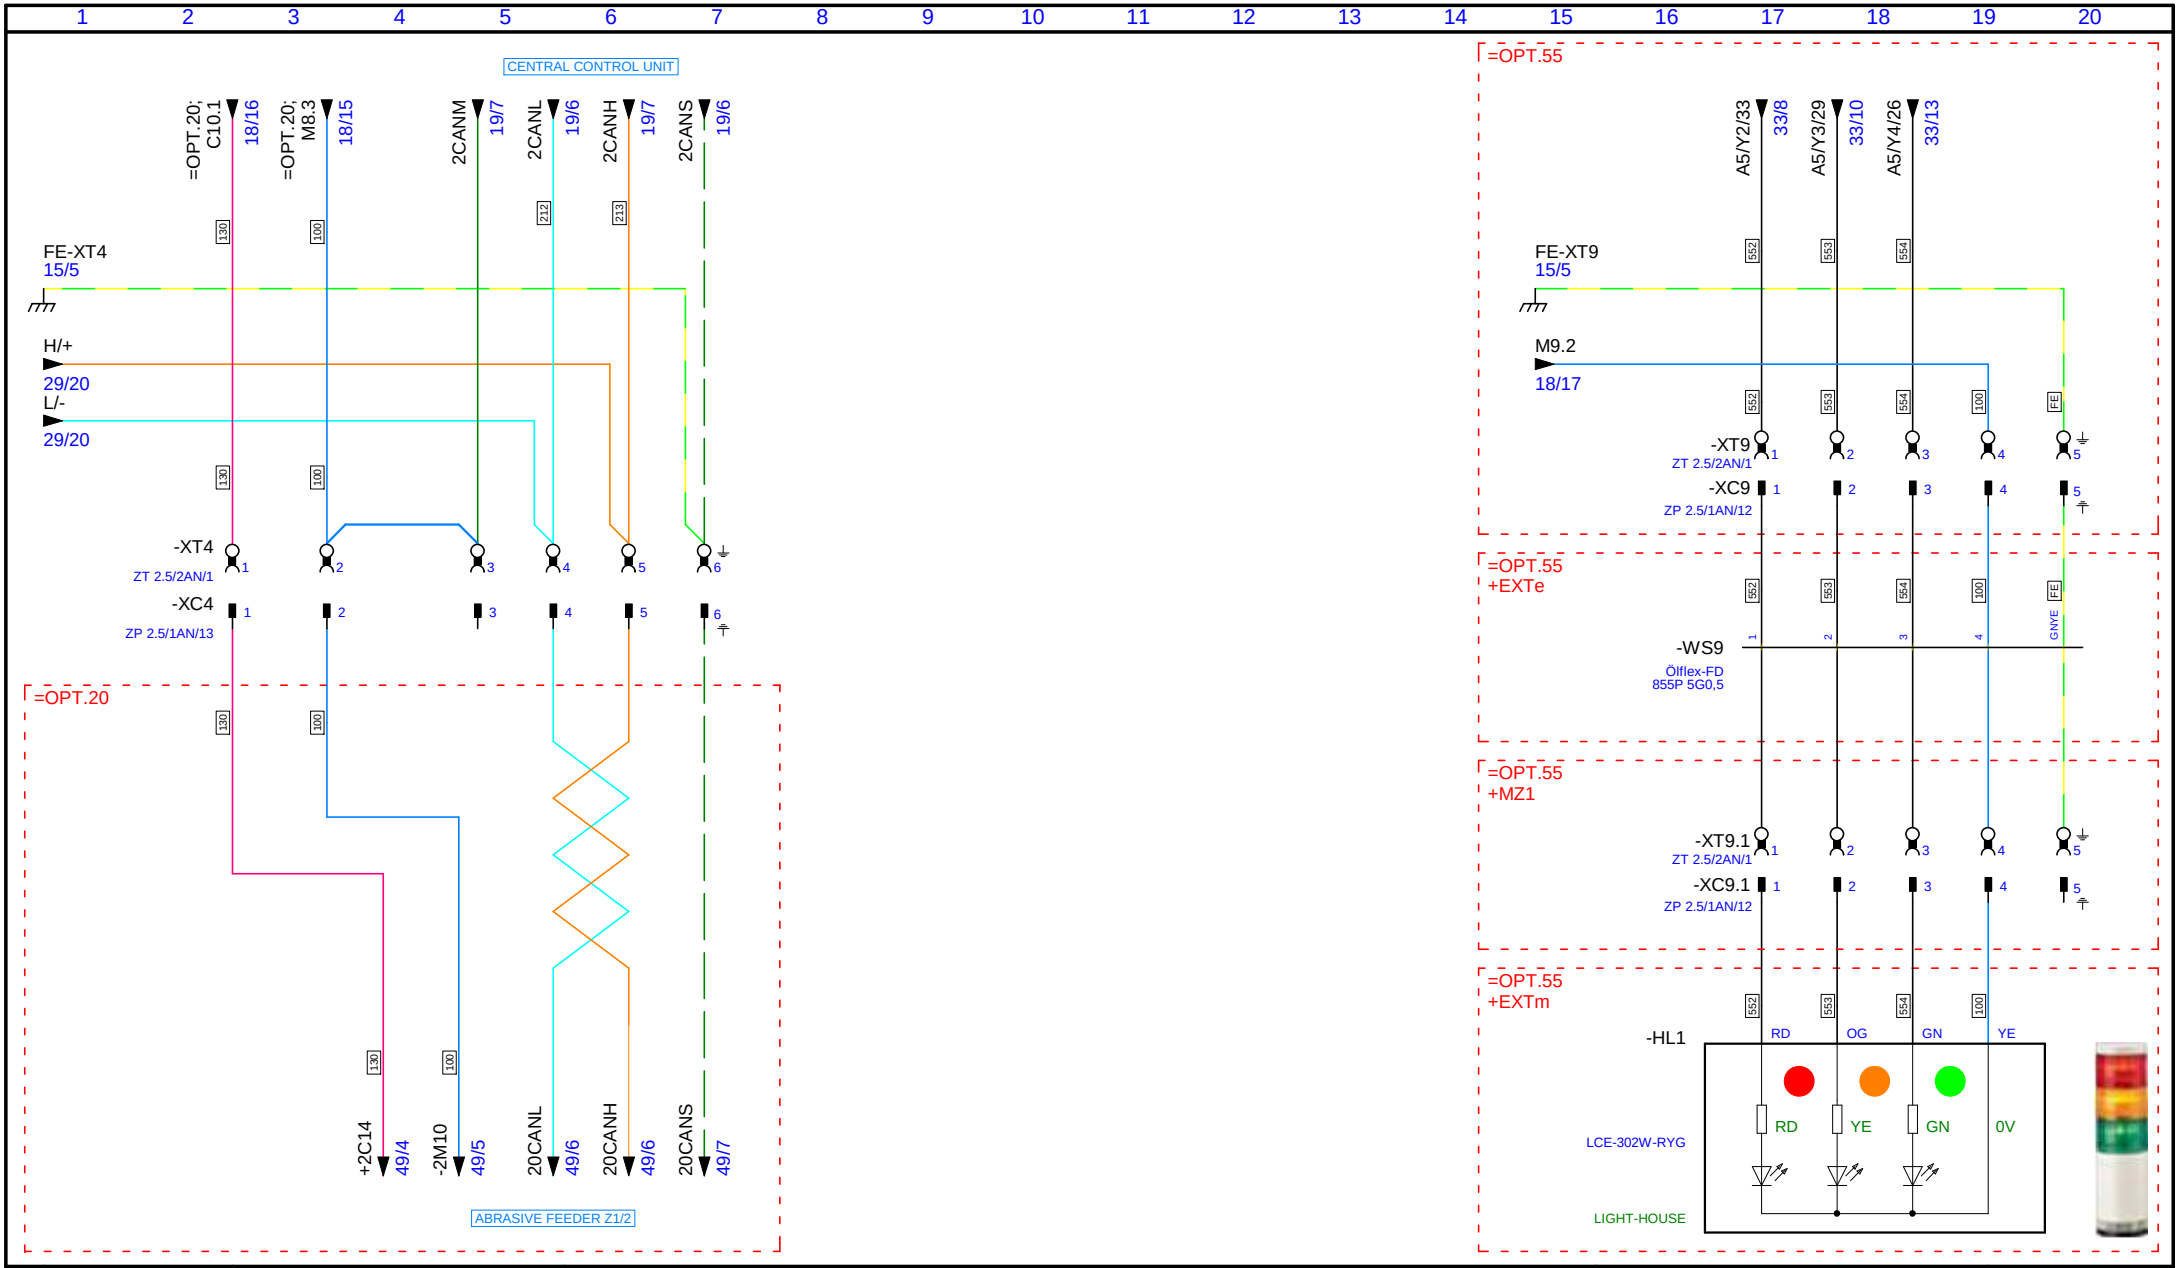

Revision		
	D:	Revision:
	C:	Date: 6.11.2012 13:38:1
	B:	Editor: FEDYSZYN MILAN
	A:	Sign:

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title:

ABRASIVE FEEDER LIGHT-HOUSE


Drawing: PTV-V52-N-0001

Func.ref: =OPT.00+MX0

Equipment: WJ3020B 1Z-PJ-NL

Page: 30

of: 126

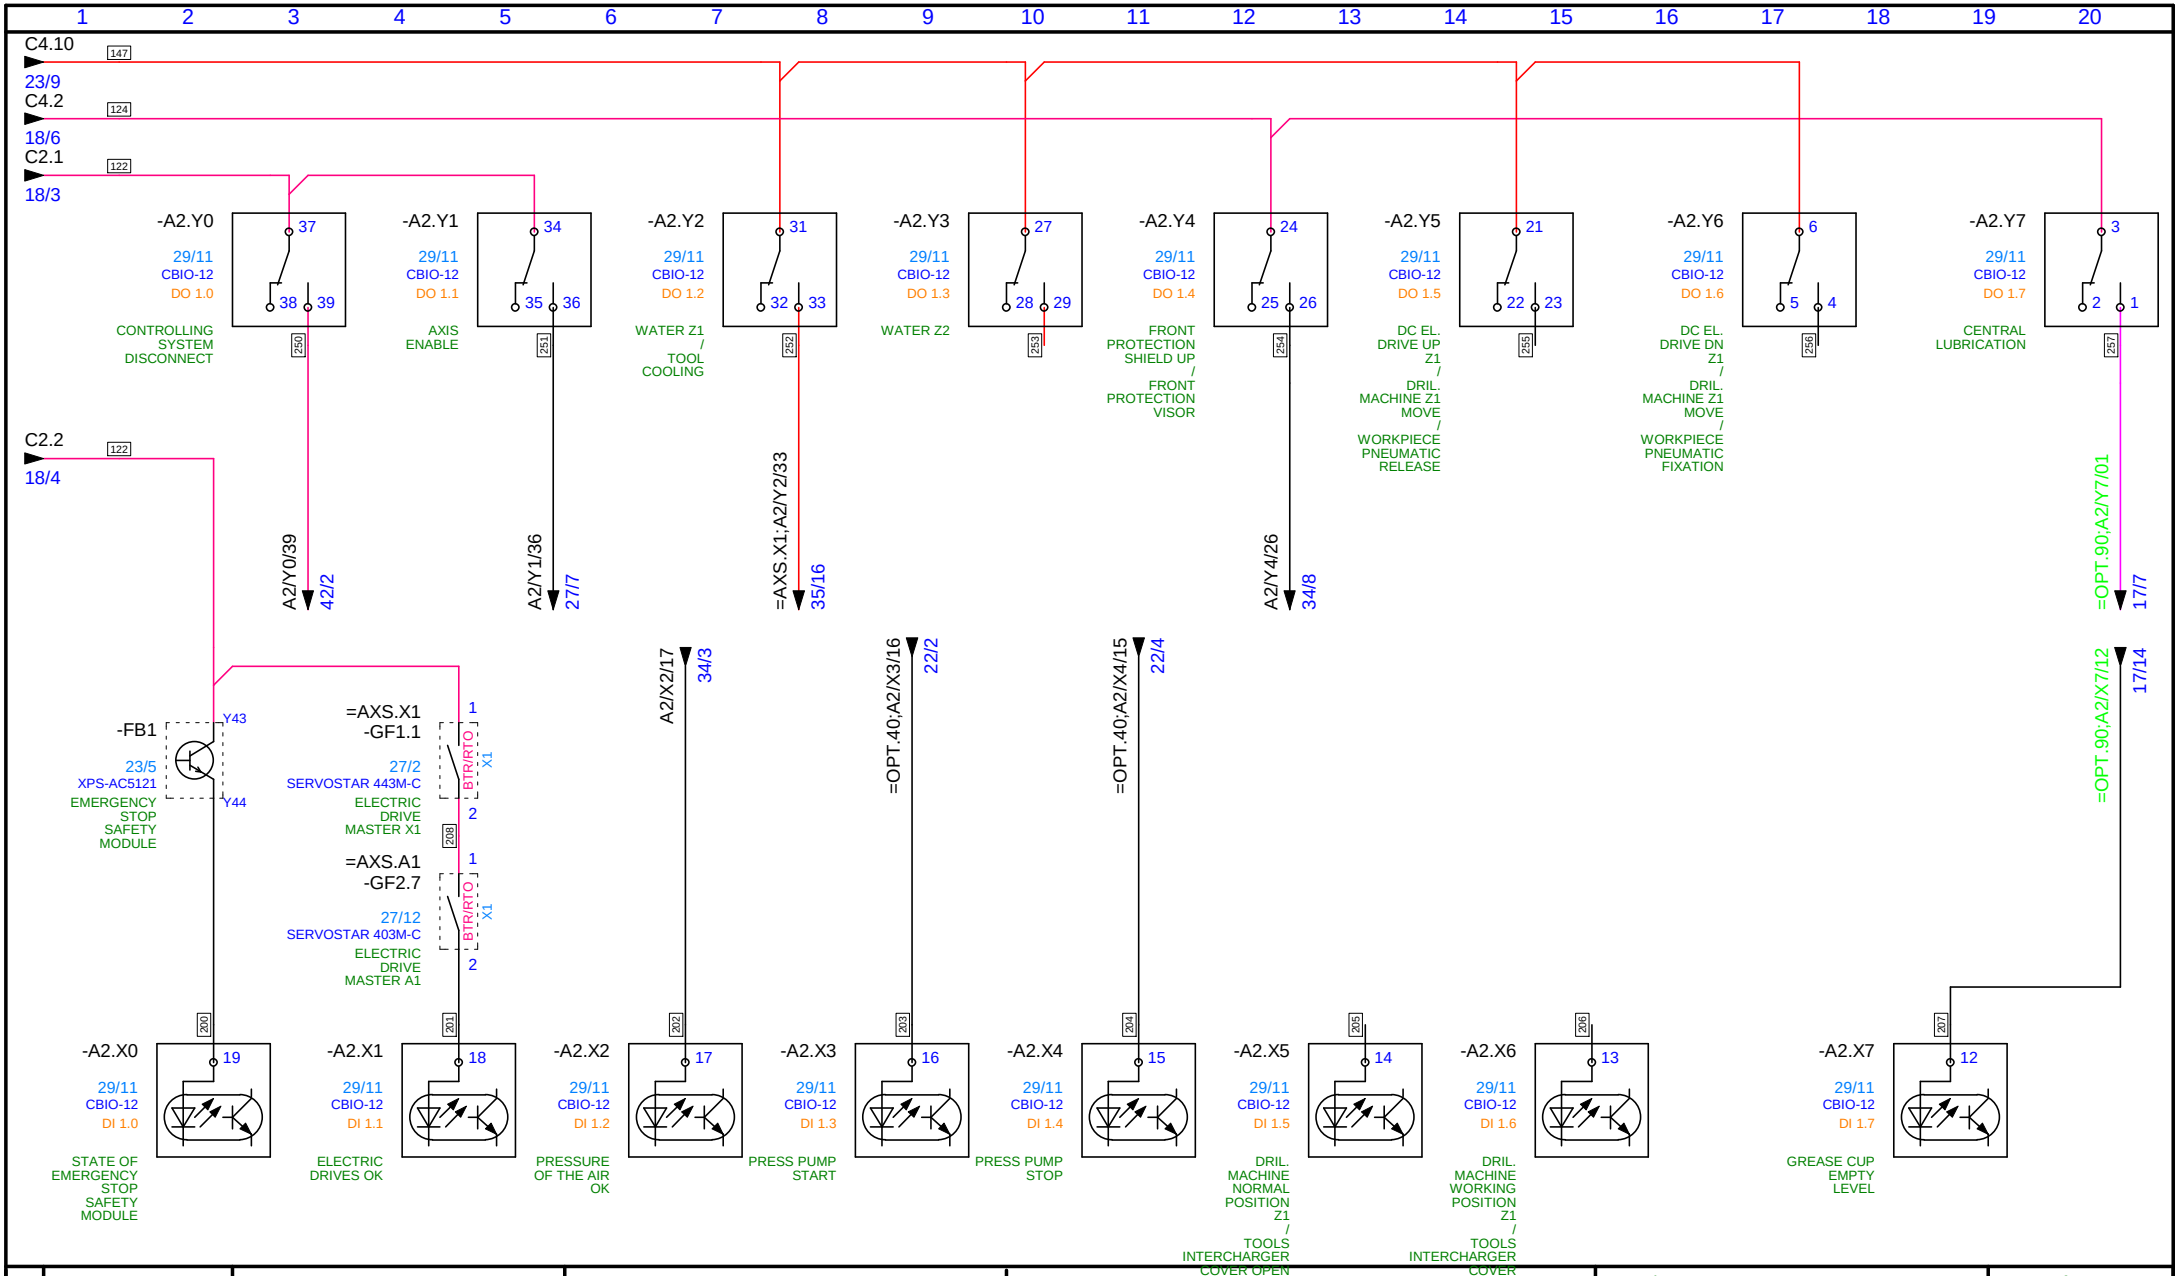

Revision			
	D:	Revision:	
	C:	Date: 9.10.2008 11:21:1	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **PLC - A2 STANDARD EQUIPMENT**


Drawing: **PTV-V52-N-0001**

Func.ref: =OPT.00+MX0

Equipment: **WJ3020B 1Z-PJ-NL**

Page: 31

of: 126

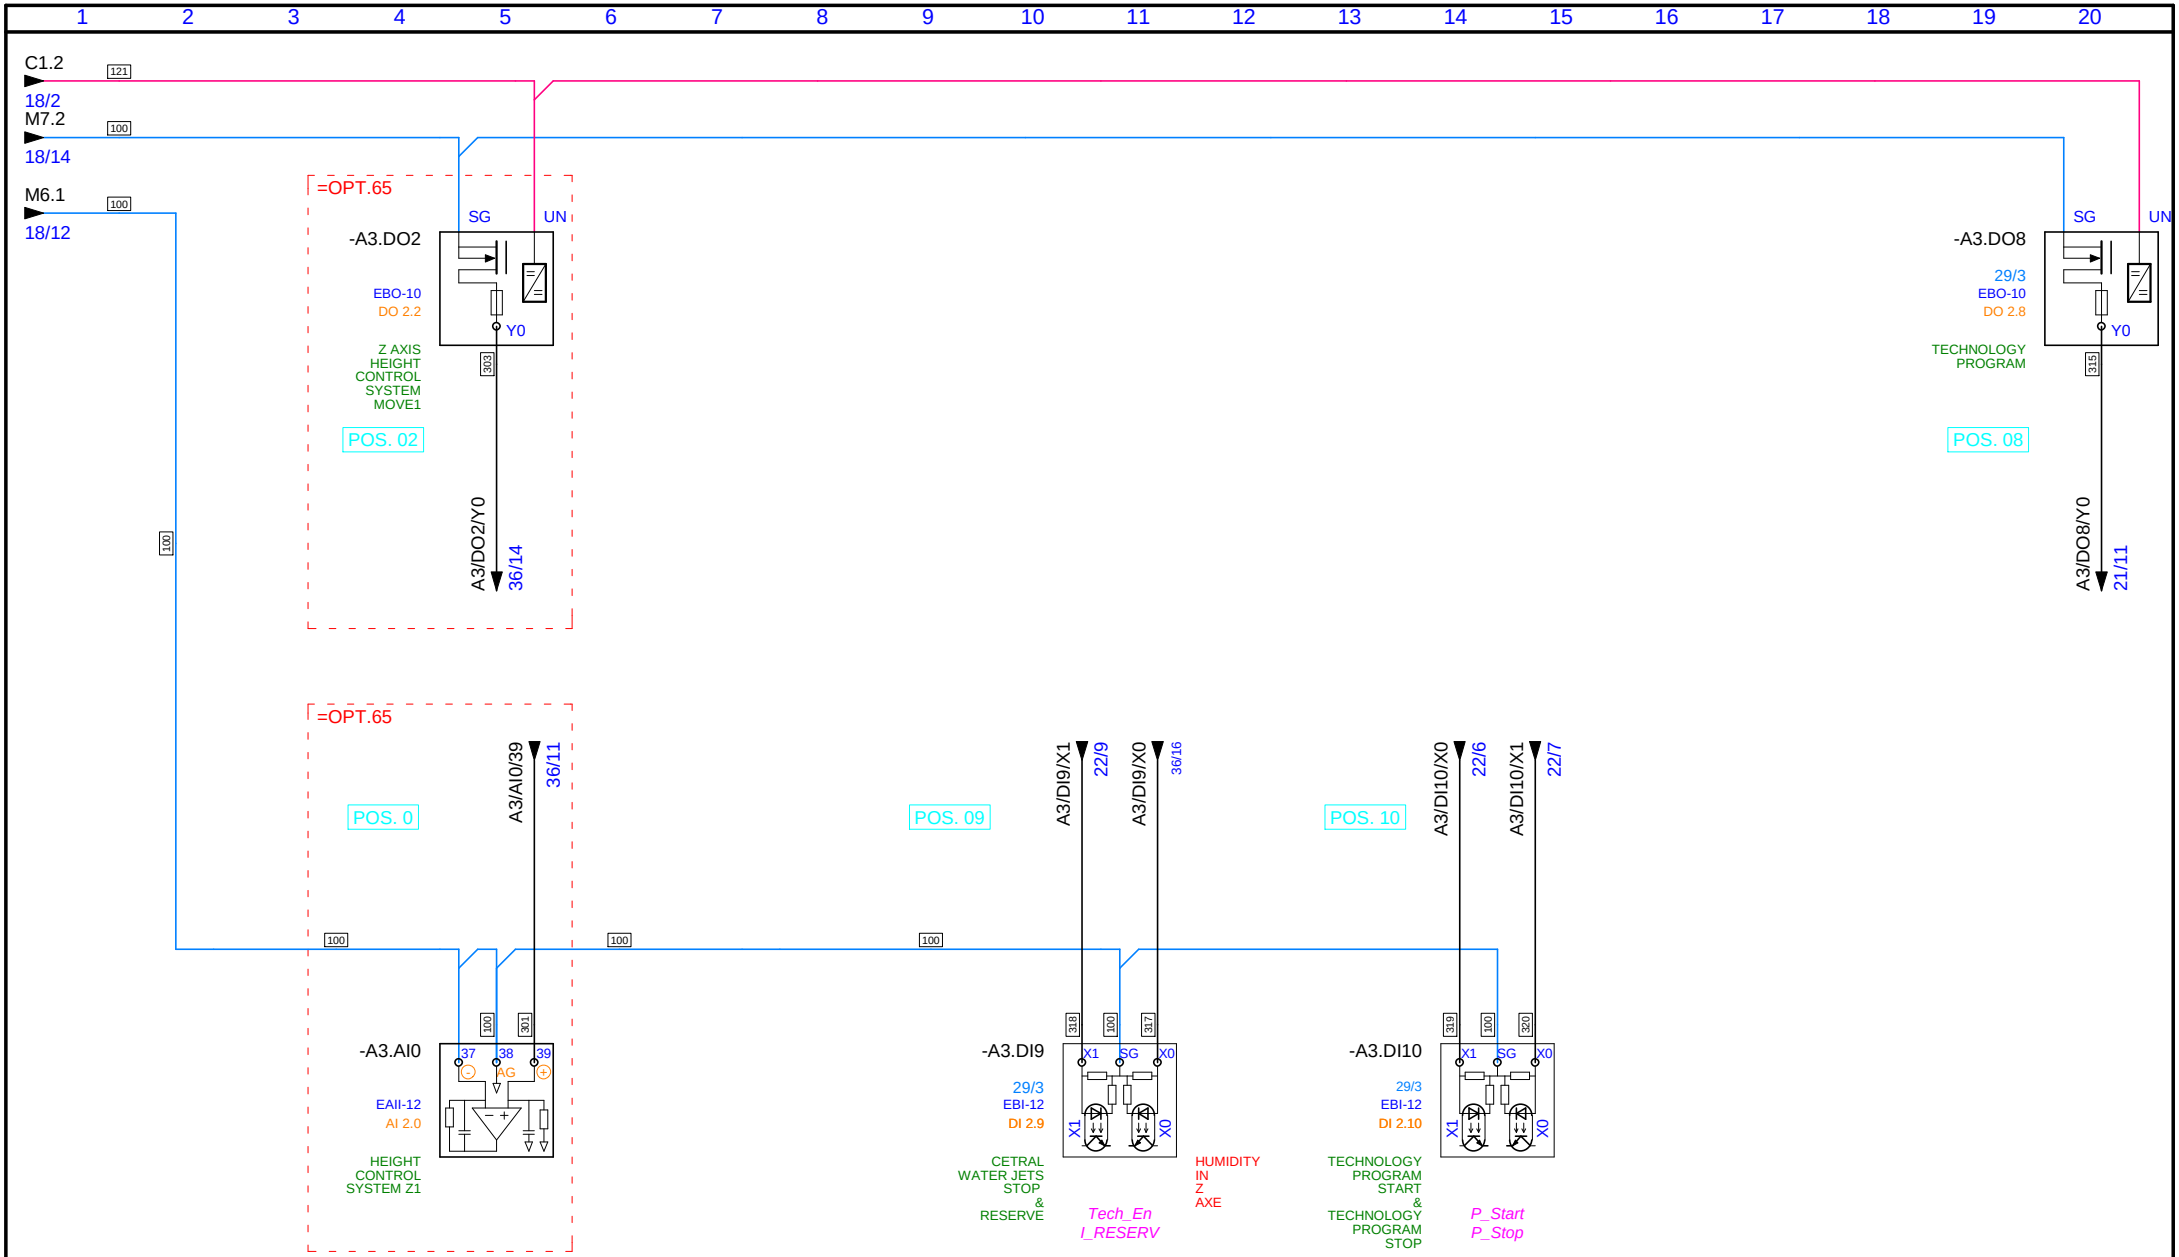

Revision			
	D:	Revision:	
	C:	Date: 6.11.2012 13:37:2	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title:

PLC - A3 STANDARD EQUIPMENT


Drawing: PTV-V52-N-0001

Func.ref: =OPT.00+MX0

Equipment: WJ3020B 1Z-PJ-NL

Page: 32

of: 126

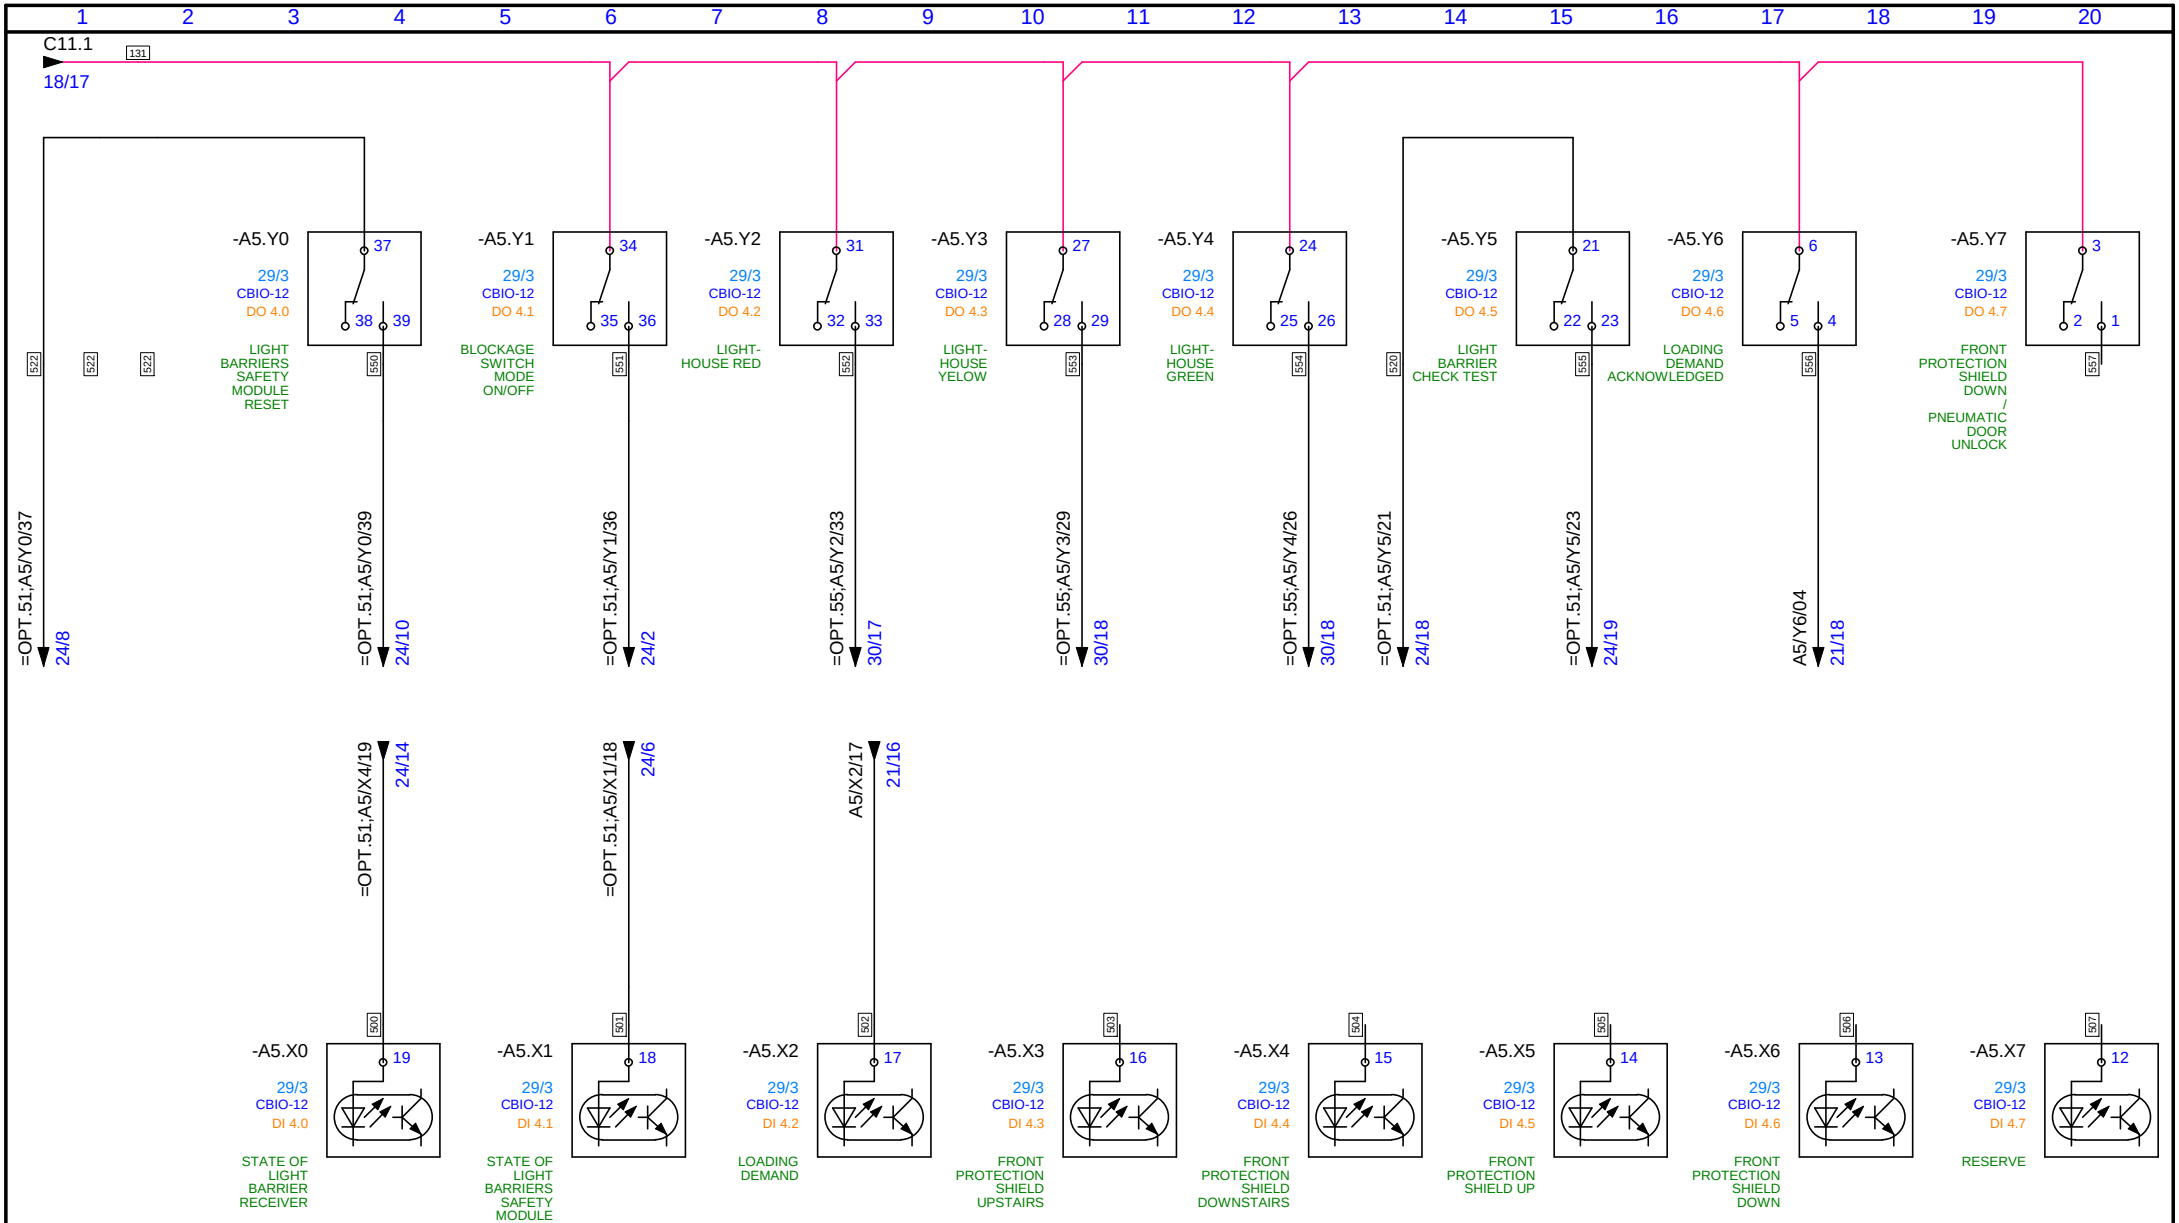

Revision			
	D:	Revision:	
	C:	Date: 6.11.2012 13:38:1	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title:

PLC - A5 BARRIER SAFETY MODULE


Drawing: PTV-V52-N-0001

Func.ref: =OPT.50+MX0

Equipment: WJ3020B 1Z-PJ-NL

Page: 33

of: 126

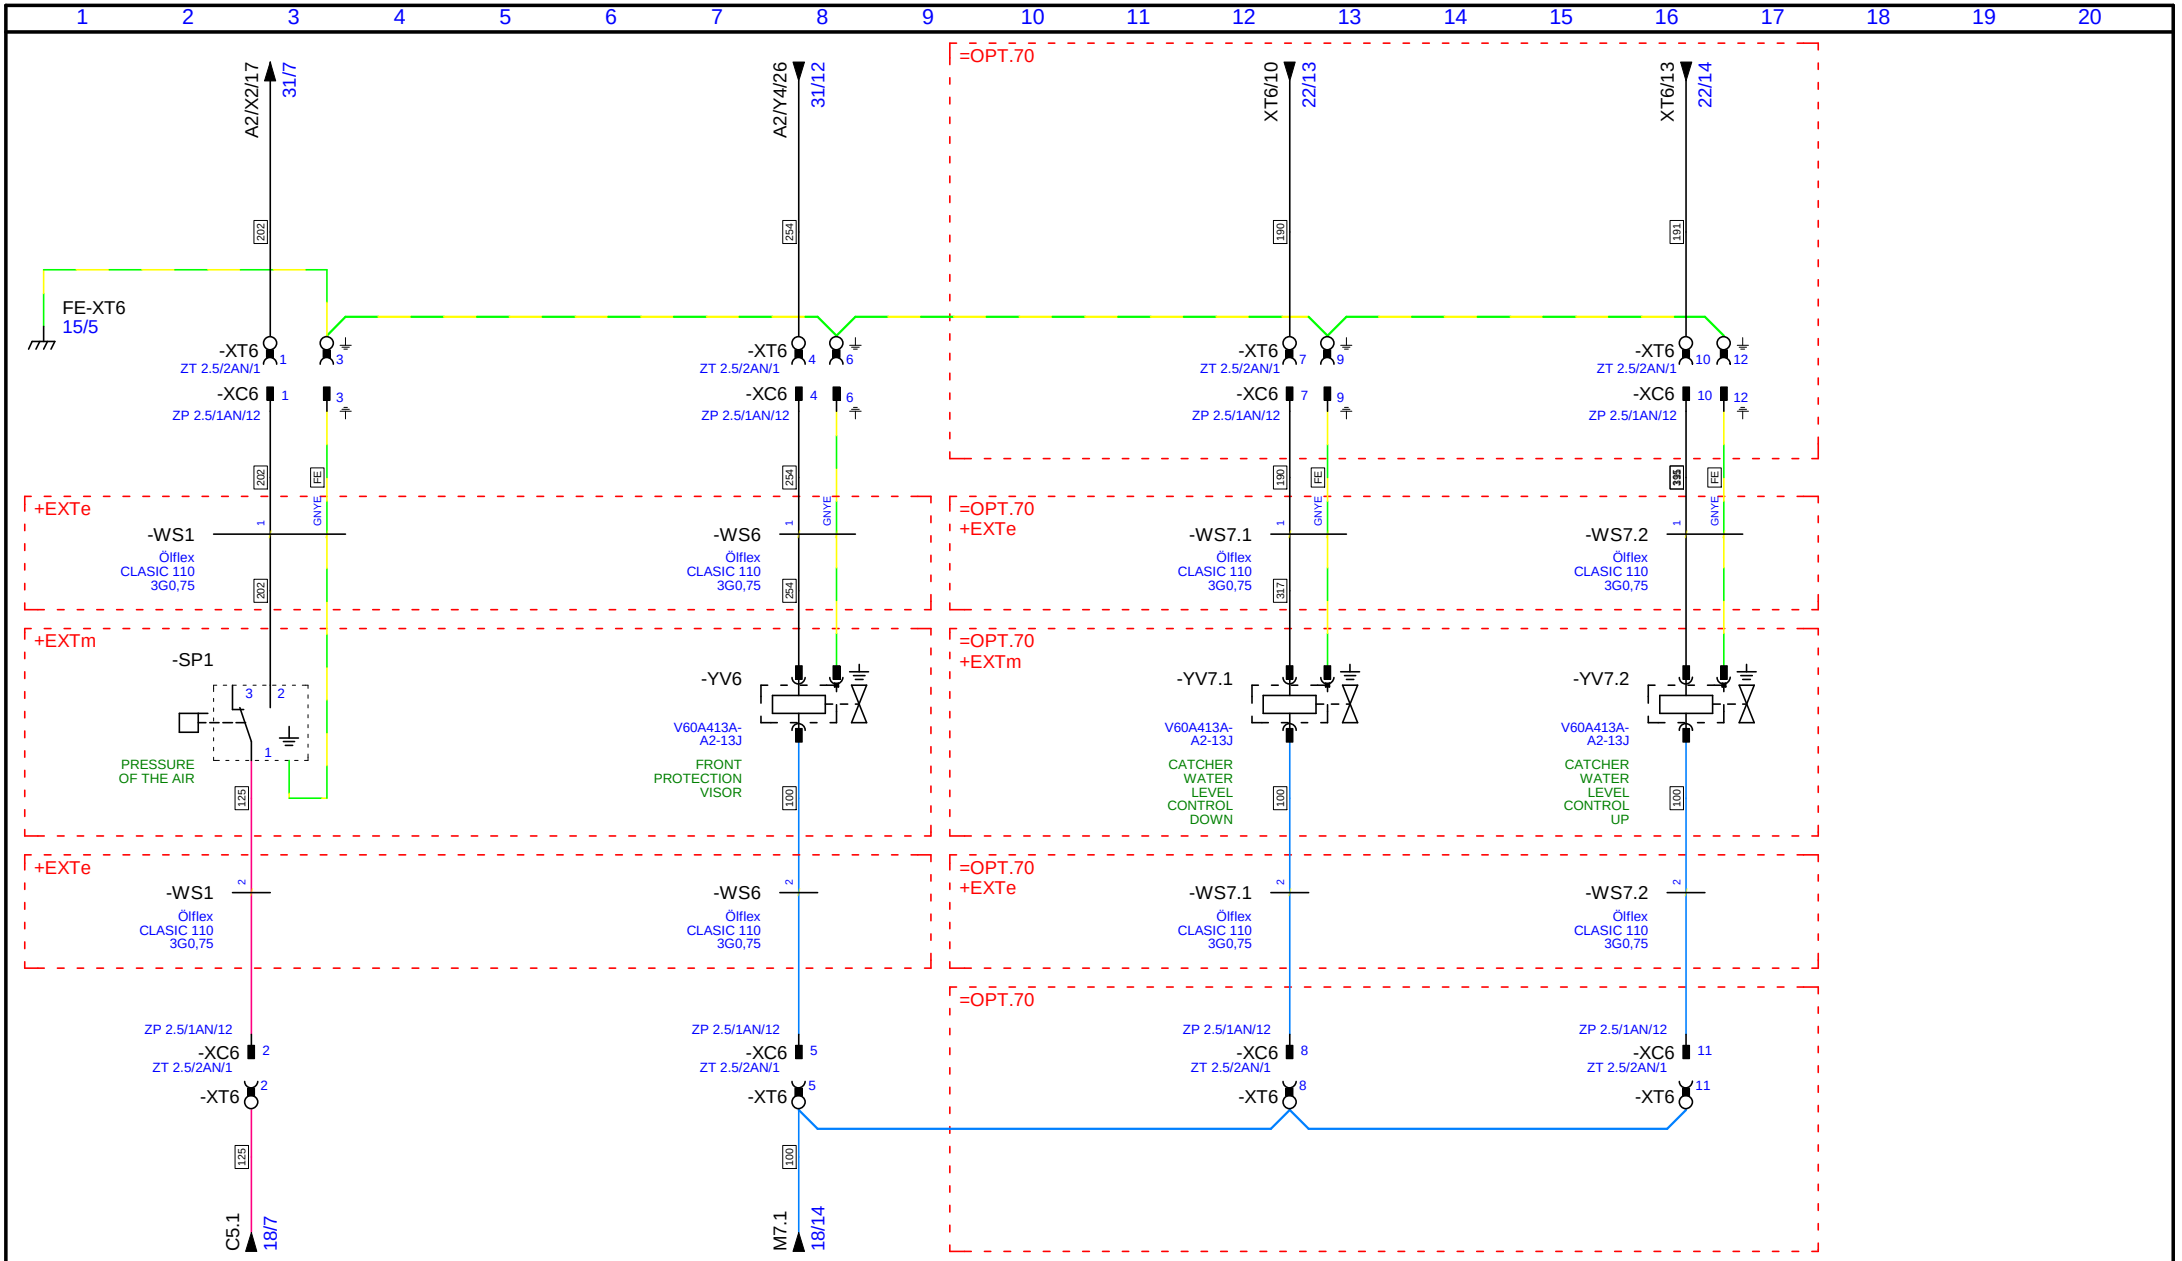

Revision			
	D:	Revision:	
	C:	Date: 9.10.2008 11:02:1	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **EXTERNAL CIRCUITS (1)**


Drawing: **PTV-V52-N-0001**

Func.ref: =OPT.00+MX0

Equipment: **WJ3020B 1Z-PJ-NL**

Page: 34

of: 126

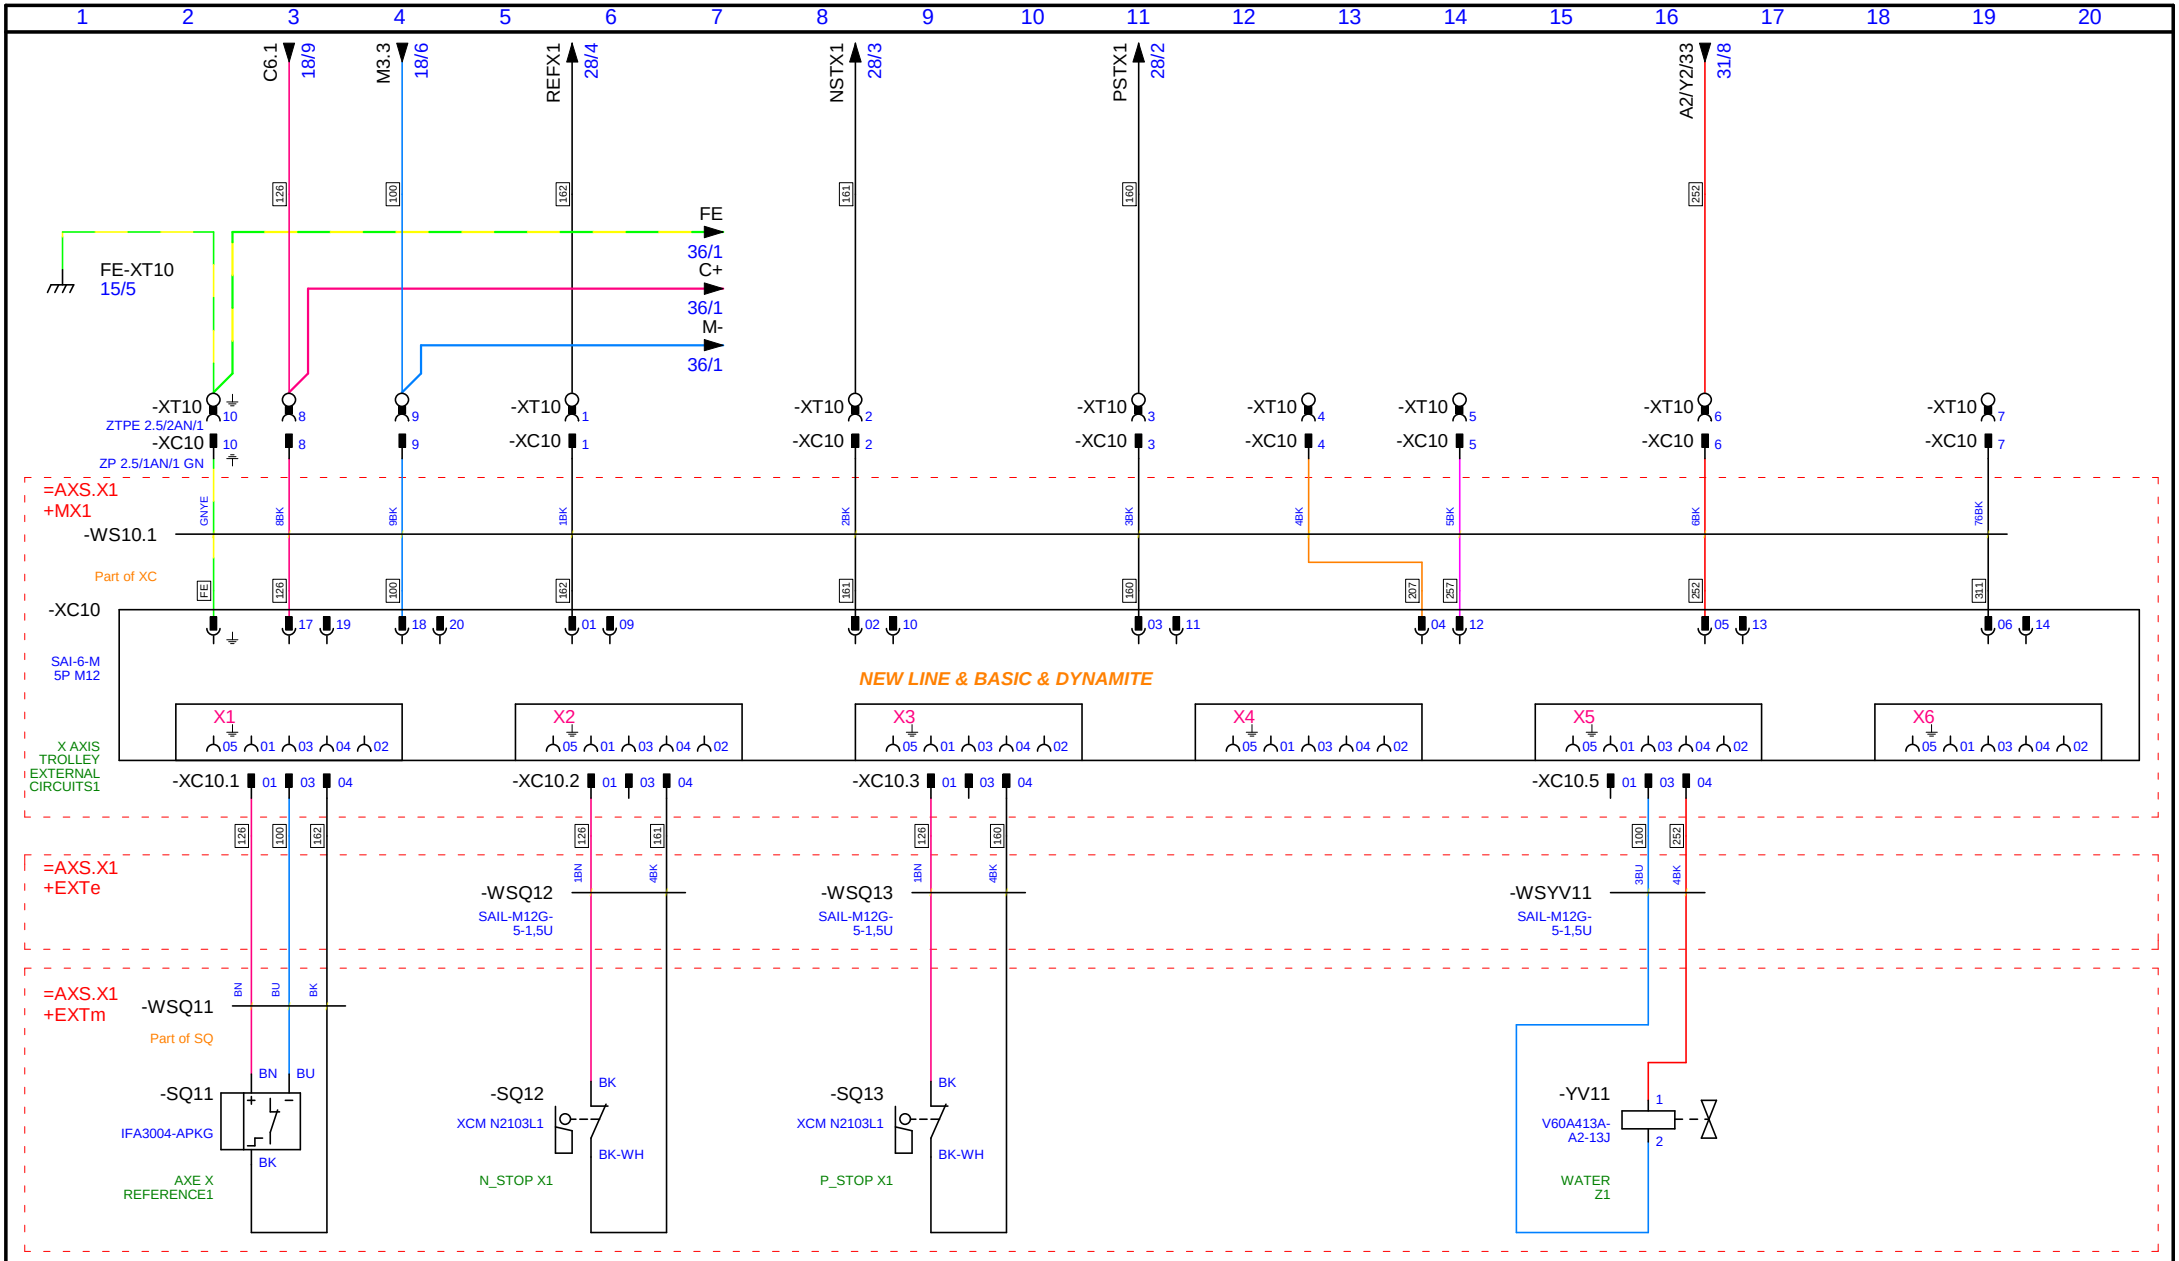

Revision			
	D:	Revision:	
	C:	Date: 6.11.2012 13:37:2	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **X1 AXIS TROLLEY EXTERNAL CIRCUITS (1)**


Drawing: **PTV-V52-N-0001**

Equipment: **WJ3020B 1Z-PJ-NL**

Func.ref: =AXS.X1+MX0

Page: 35

of: 126

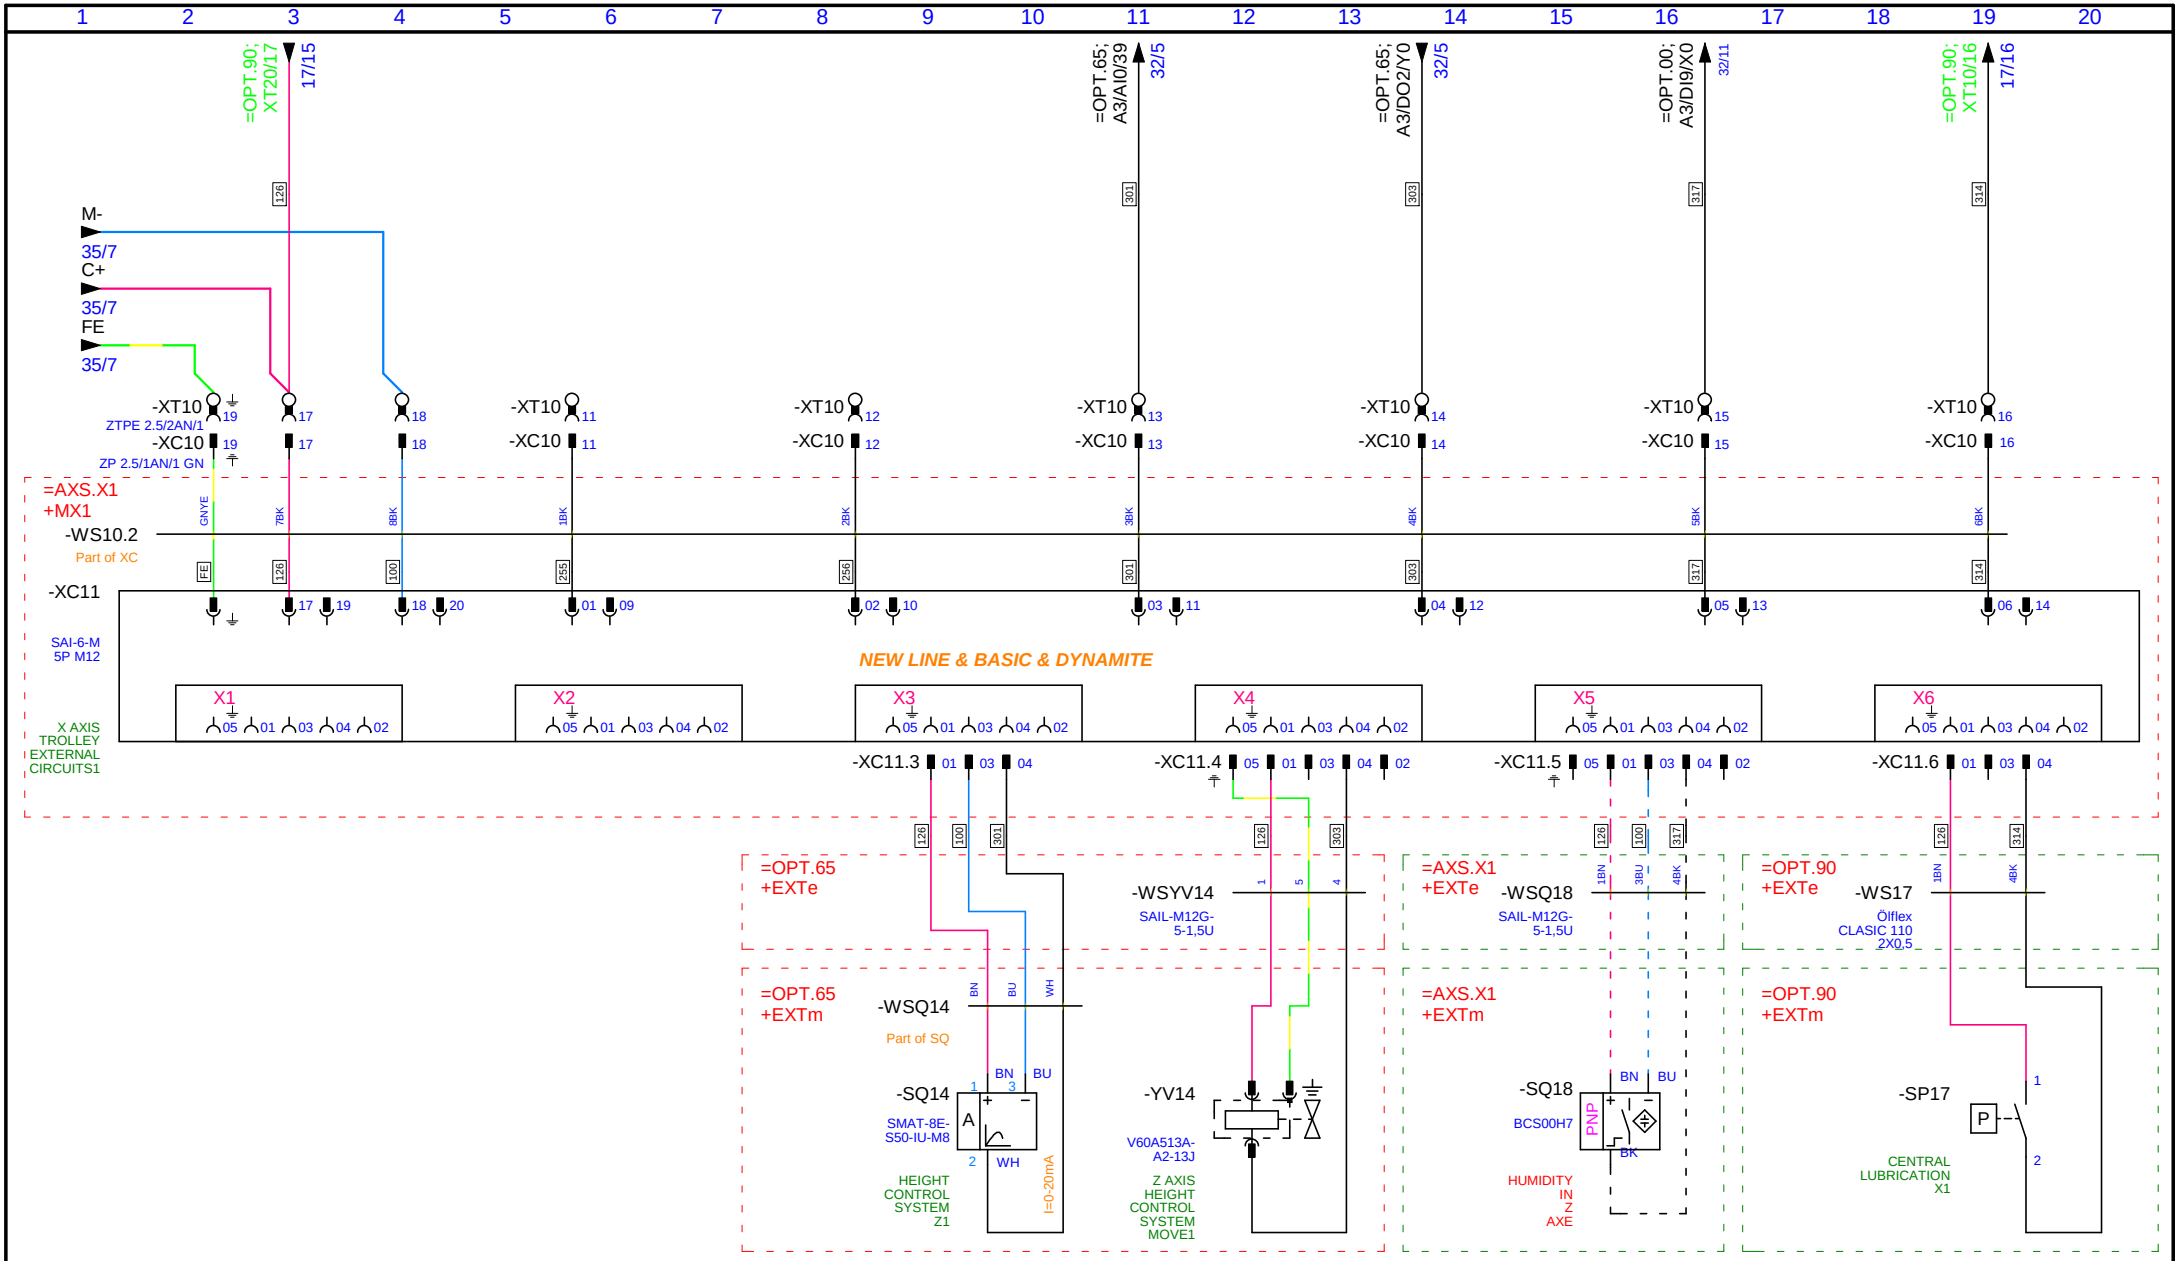

Revision			
	D:	Revision:	
	C:	Date: 6.11.2012 13:37:2	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **X1 AXIS TROLLEY EXTERNAL CIRCUITS (2)**


Drawing: **PTV-V52-N-0001**

Func.ref: =AXS.X1+MX0

Equipment: **WJ3020B 1Z-PJ-NL**

Page: 36

of: 126

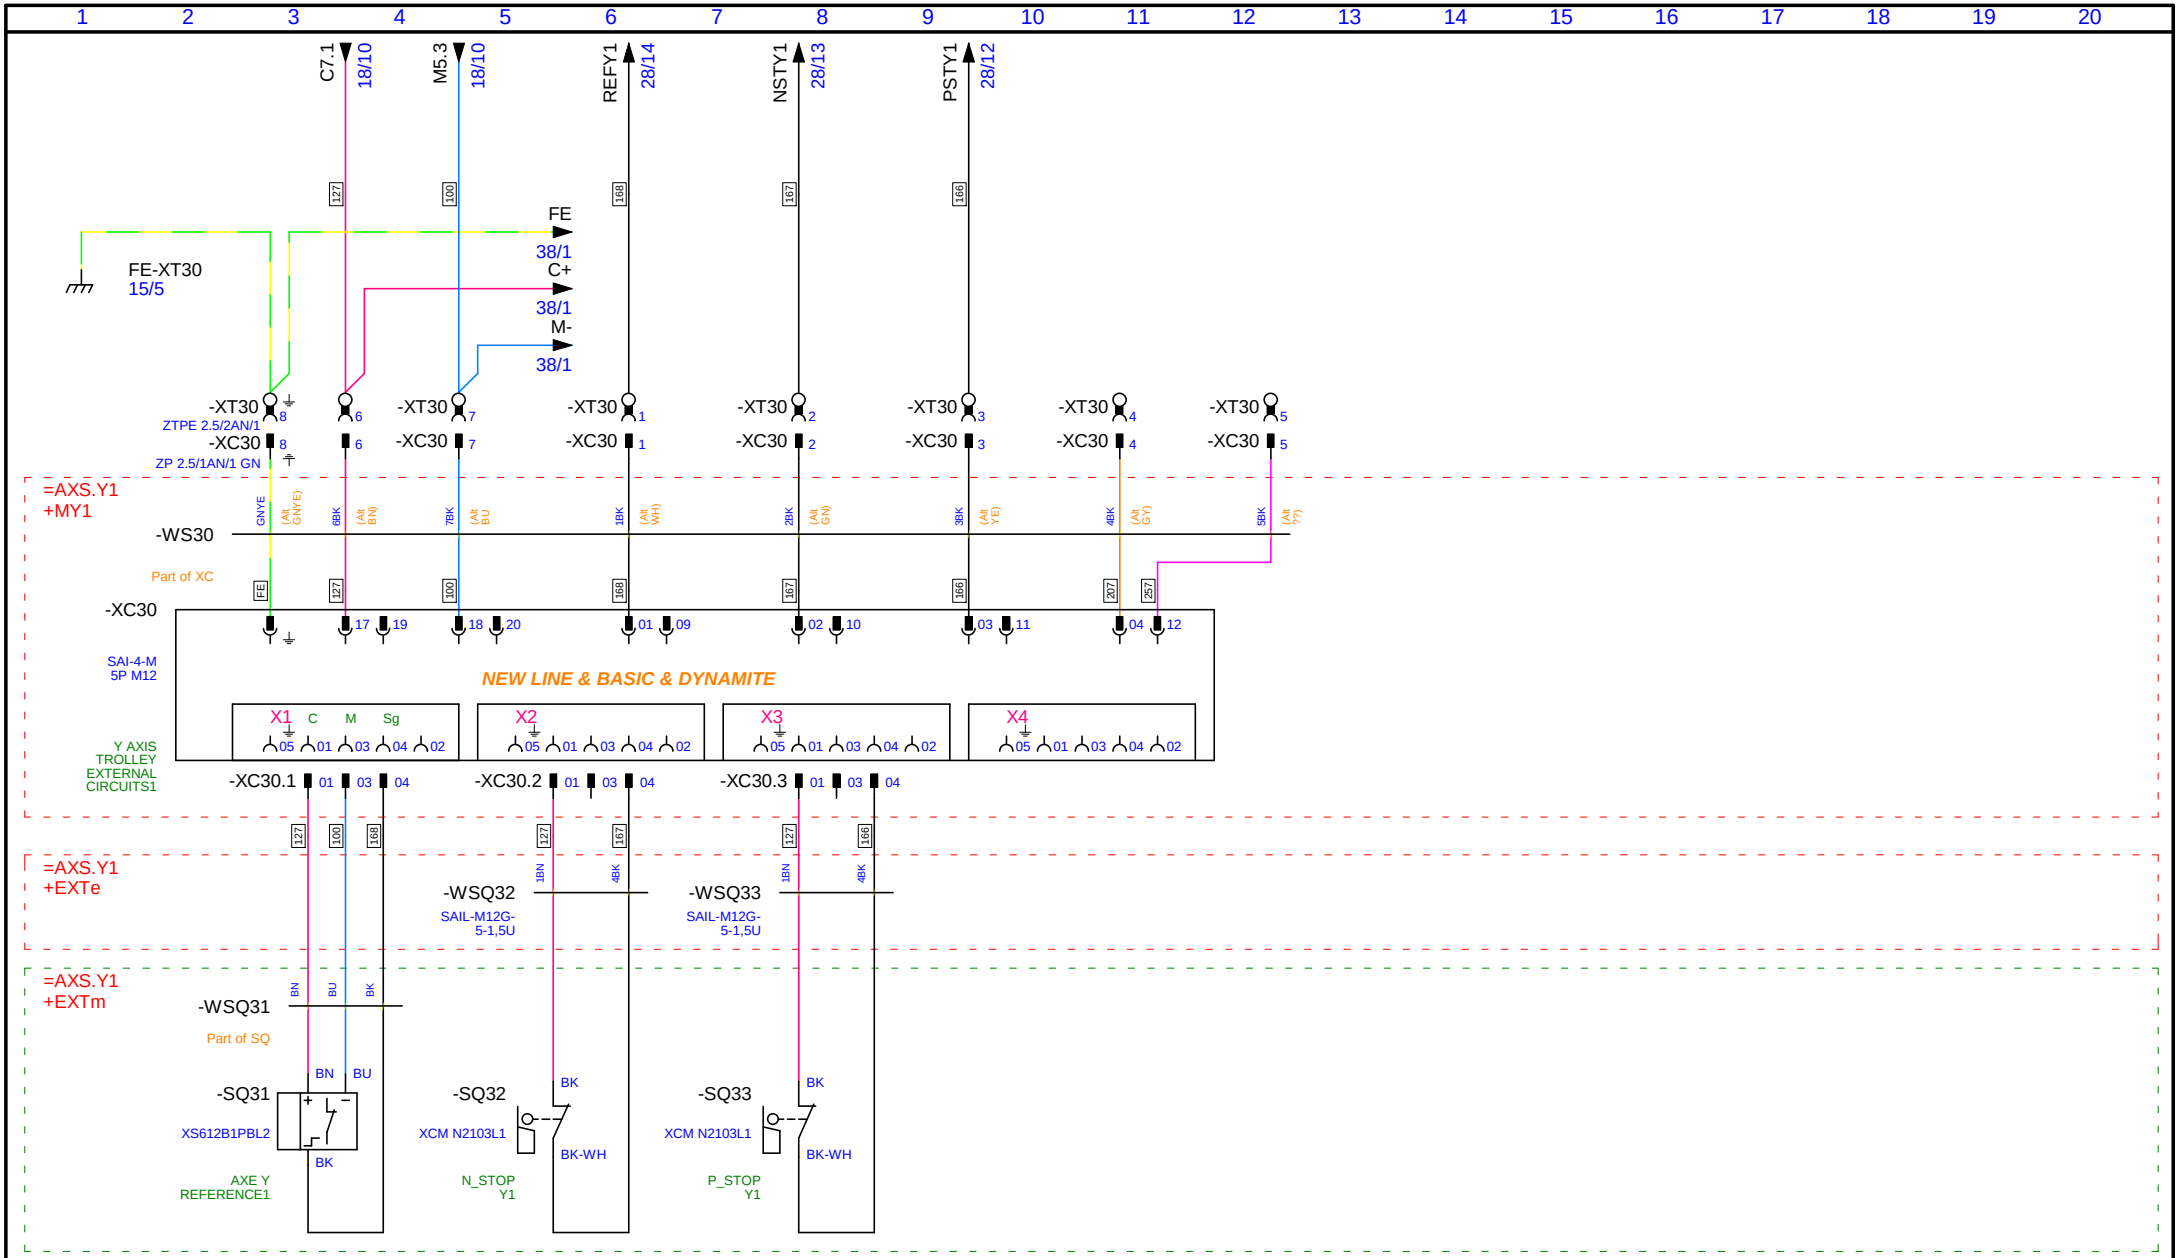

Revision			
	D:	Revision:	
	C:	Date: 9.10.2008 11:20:5	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **Y1 AXIS TROLLEY EXTERNAL CIRCUITS**


Drawing: **PTV-V52-N-0001**

Func.ref: =AXS.Y1+MX0


Equipment: **WJ3020B 1Z-PJ-NL**

Page: 37

of: 126

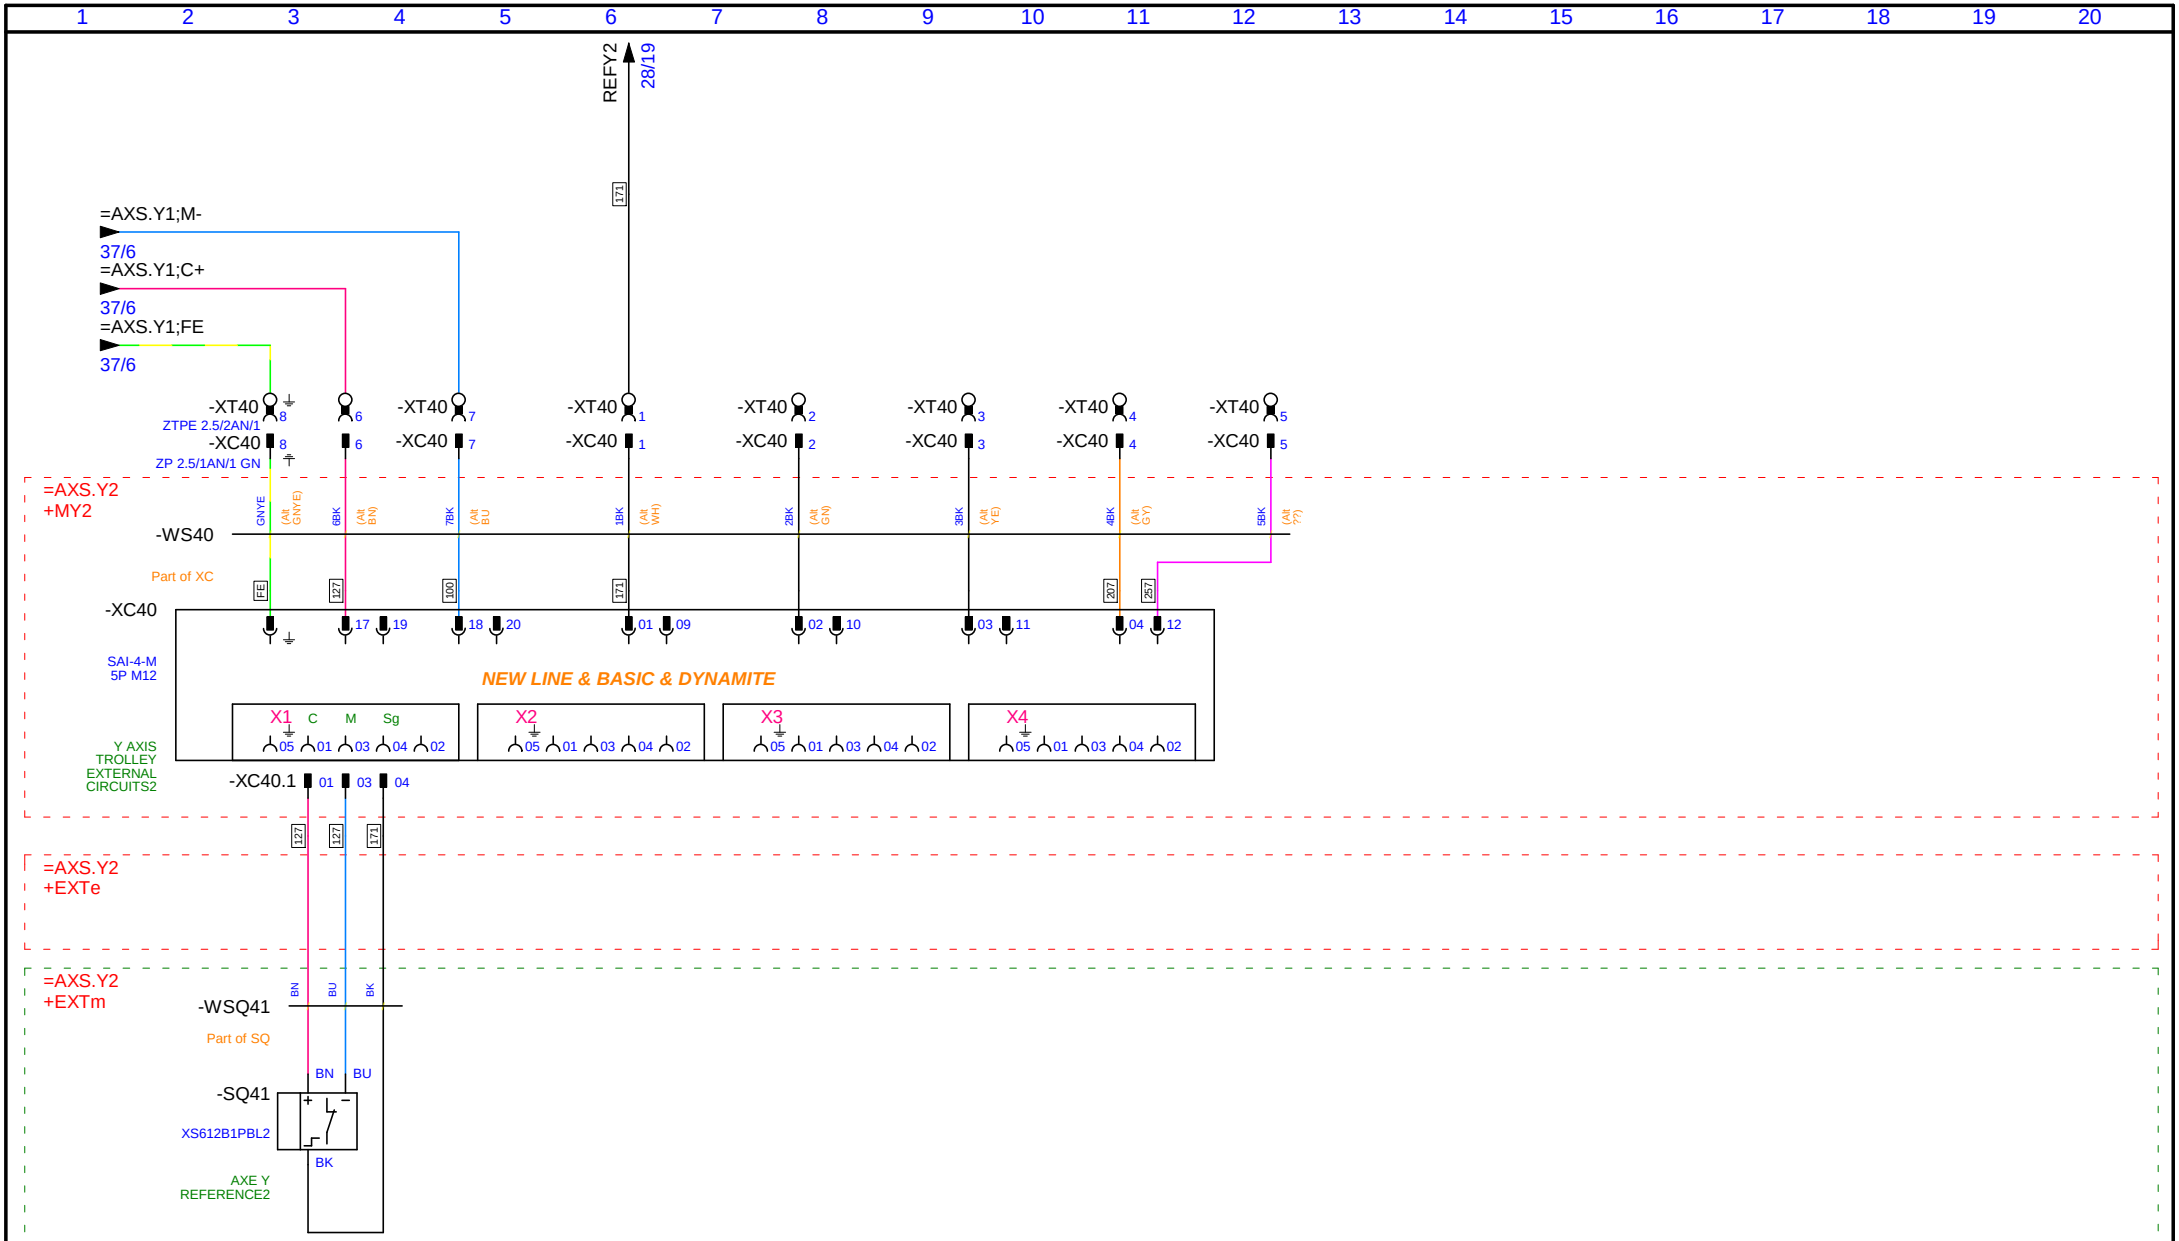

Revision							
	D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **Y2 AXIS TROLLEY EXTERNAL CIRCUITS**	Drawing: **PTV-V52-N-0001**	Func.ref: =AXS.Y2+MX0
	C:	Date: 9.10.2008 11:20:5				
	B:	Editor: FEDYSZYN MILAN			Equipment: **WJ3020B 1Z-PJ-NL**	Page: 38
	A:	Sign:				of: 126

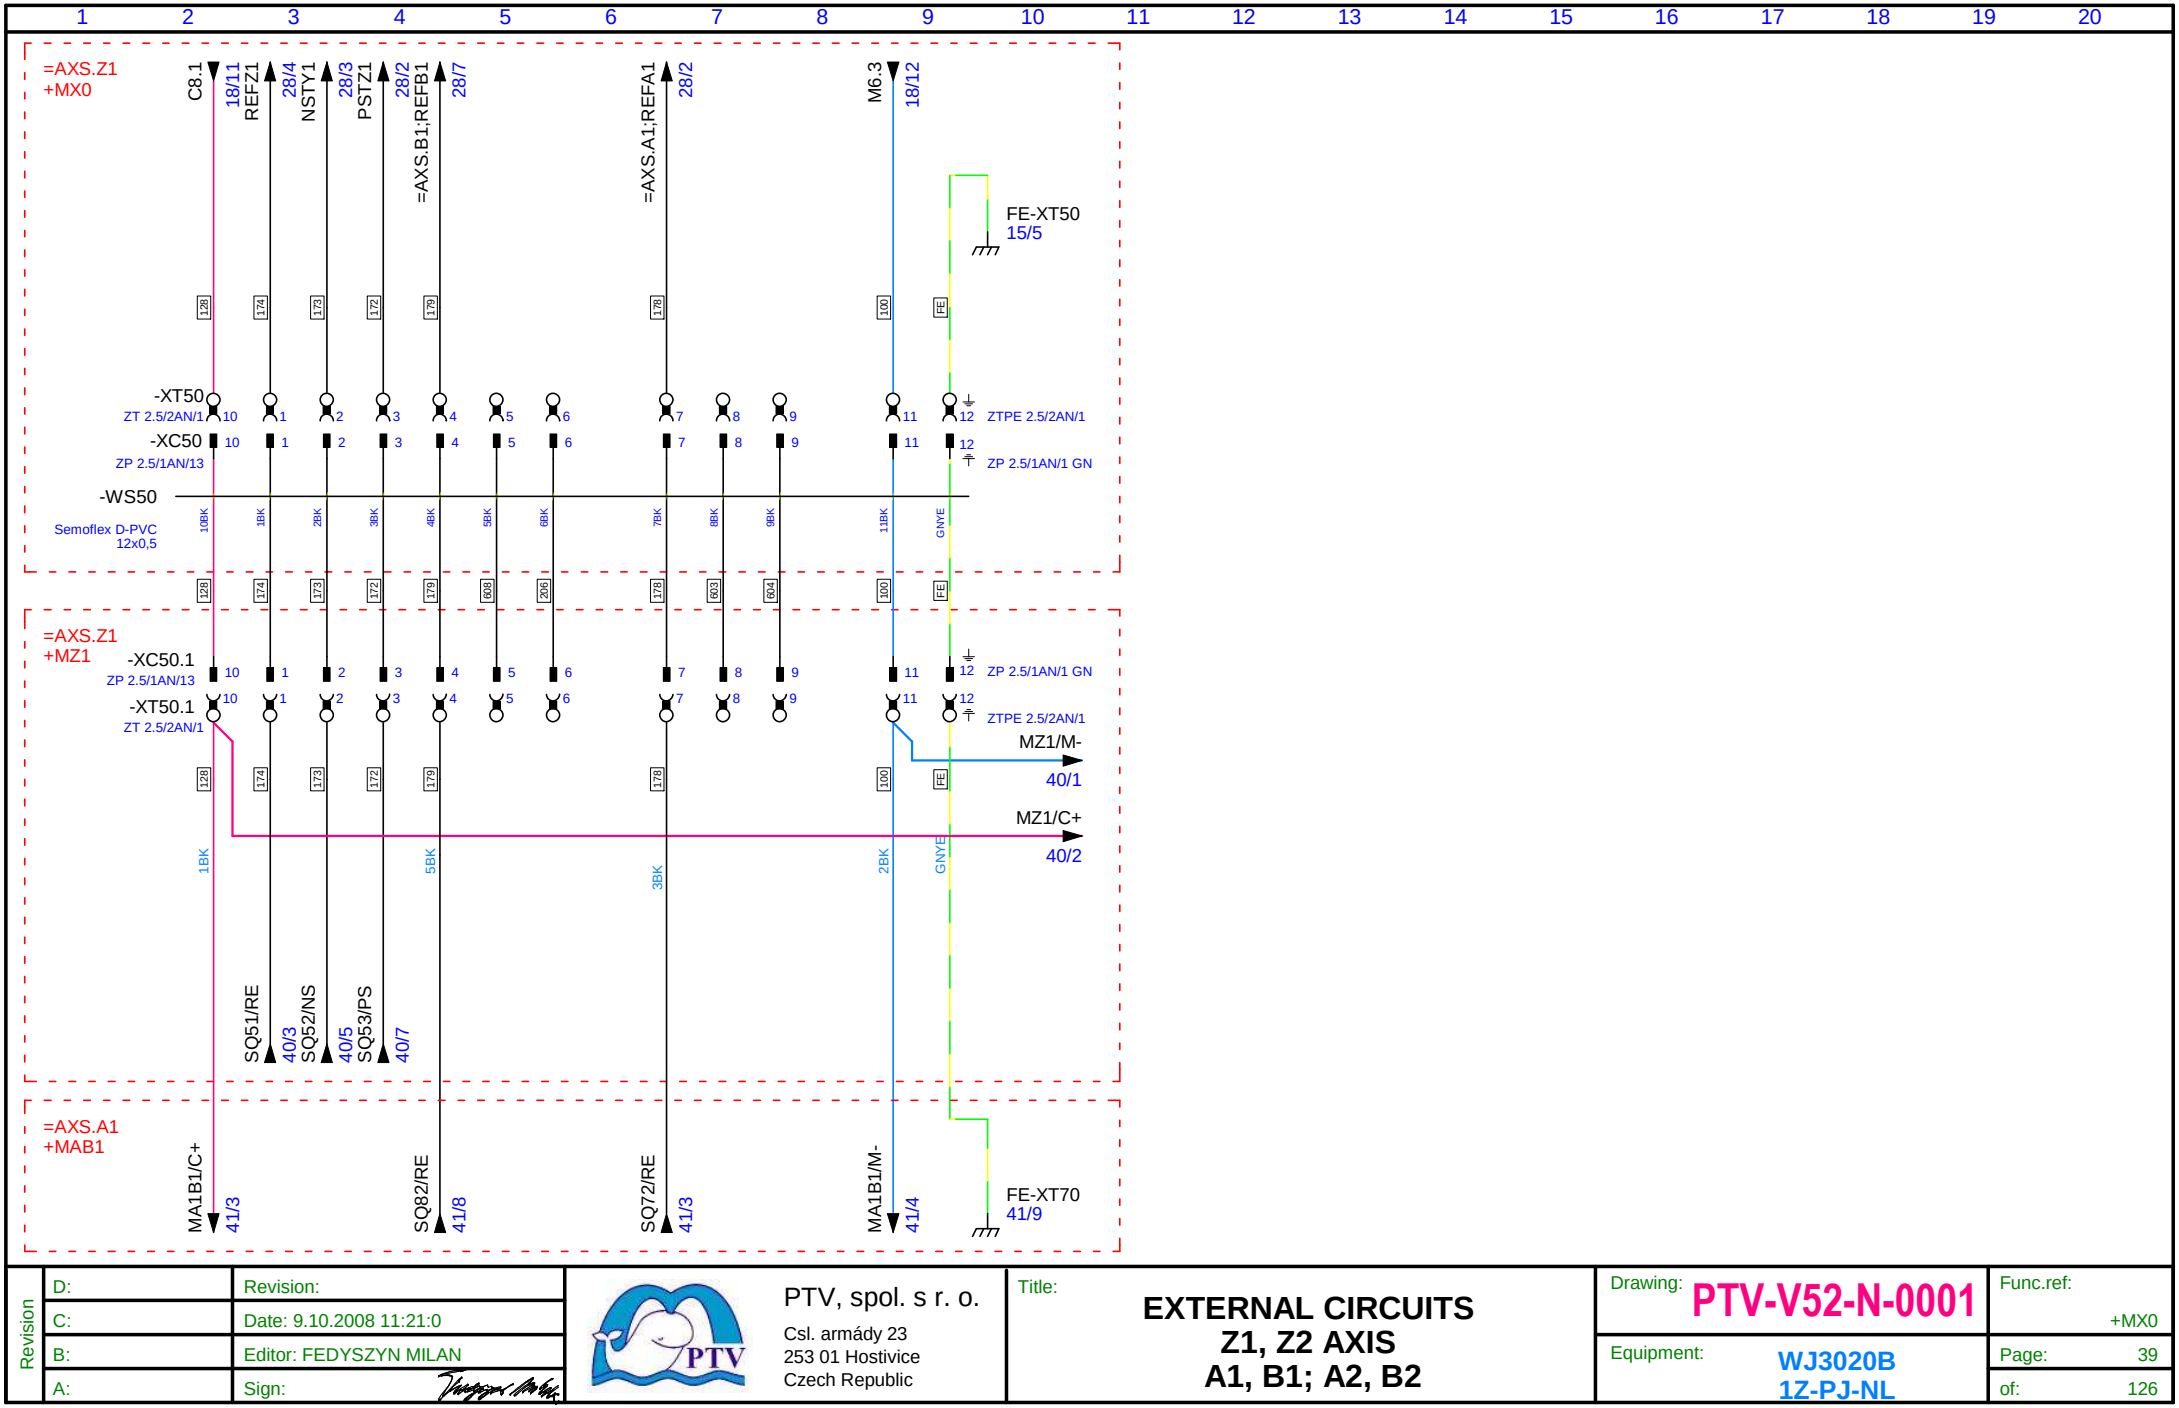

Revision			
	D:	Revision:	
	C:	Date: 9.10.2008 11:21:0	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title:

EXTERNAL CIRCUITS
Z1, Z2 AXIS
A1, B1; A2, B2


Drawing: PTV-V52-N-0001

Func.ref: +MX0

Equipment: WJ3020B 1Z-PJ-NL


Page: 39

of: 126

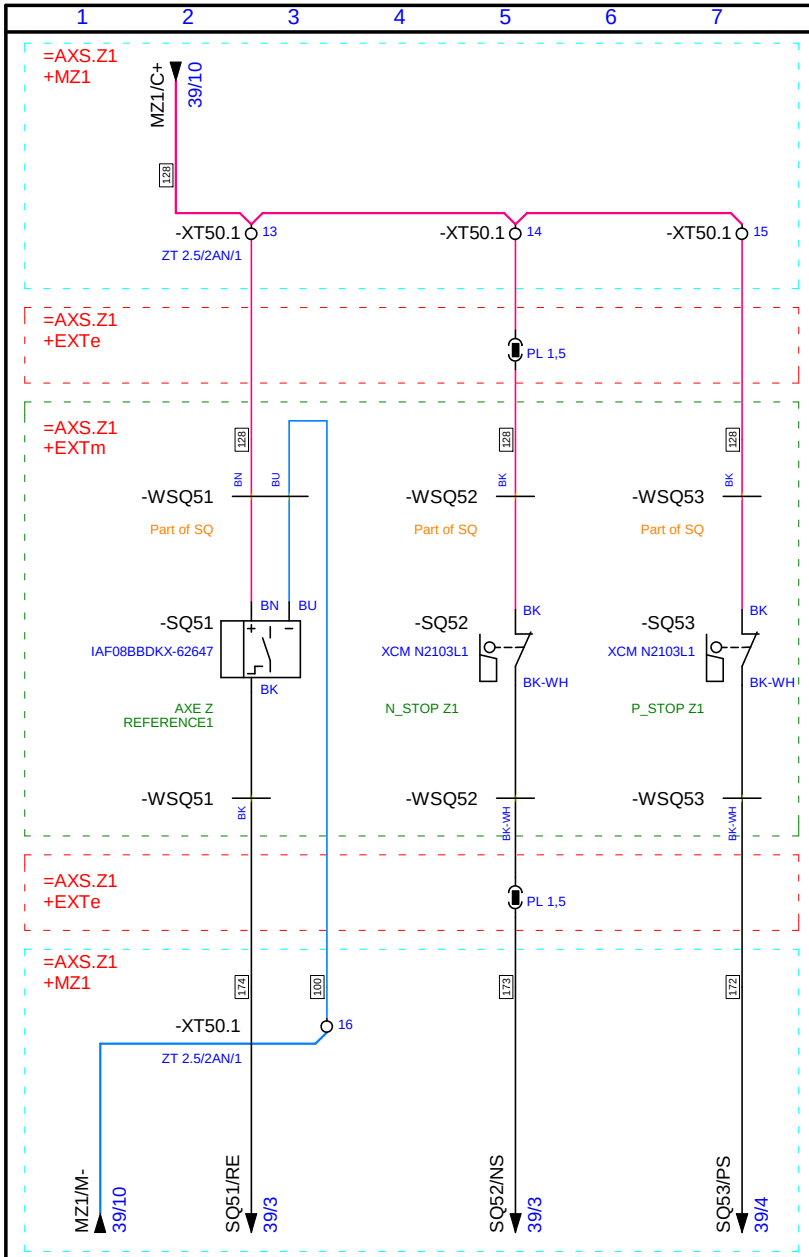

Revision			
D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **Z1, Z2 AXIS TROLLEY EXTERNAL CIRCUITS**
C:	Date: 9.10.2008 11:21:0		
B:	Editor: FEDYSZYN MILAN		
A:	Sign:		

Drawing: **PTV-V52-N-0001**	Func.ref: =OPT.IT+MZ2	
Equipment: **WJ3020B 1Z-PJ-NL**	Page: 40	of: 126

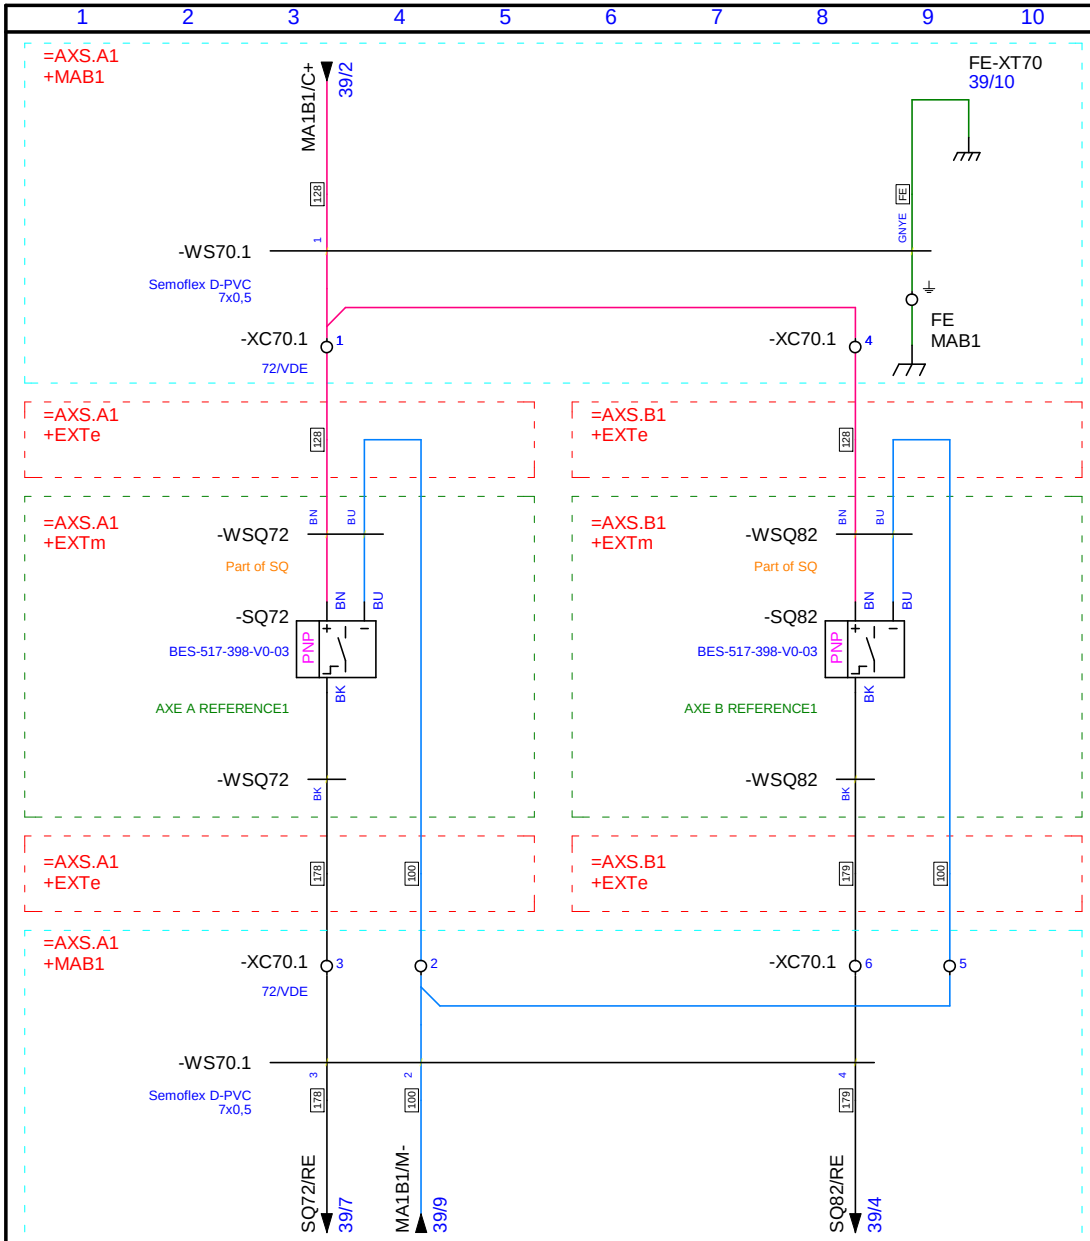

Revision			
	D:	Revision:	
	C:	Date: 1.11.2012 10:04:4	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title:

EXTERNAL CIRCUITS DYNAMIC WATER JET A1,B1, A2,B2


Drawing: PTV-V52-N-0001

Func.ref: =OPT.IT+MAB2

Equipment: WJ3020B 1Z-PJ-NL

Page: 41

of: 126

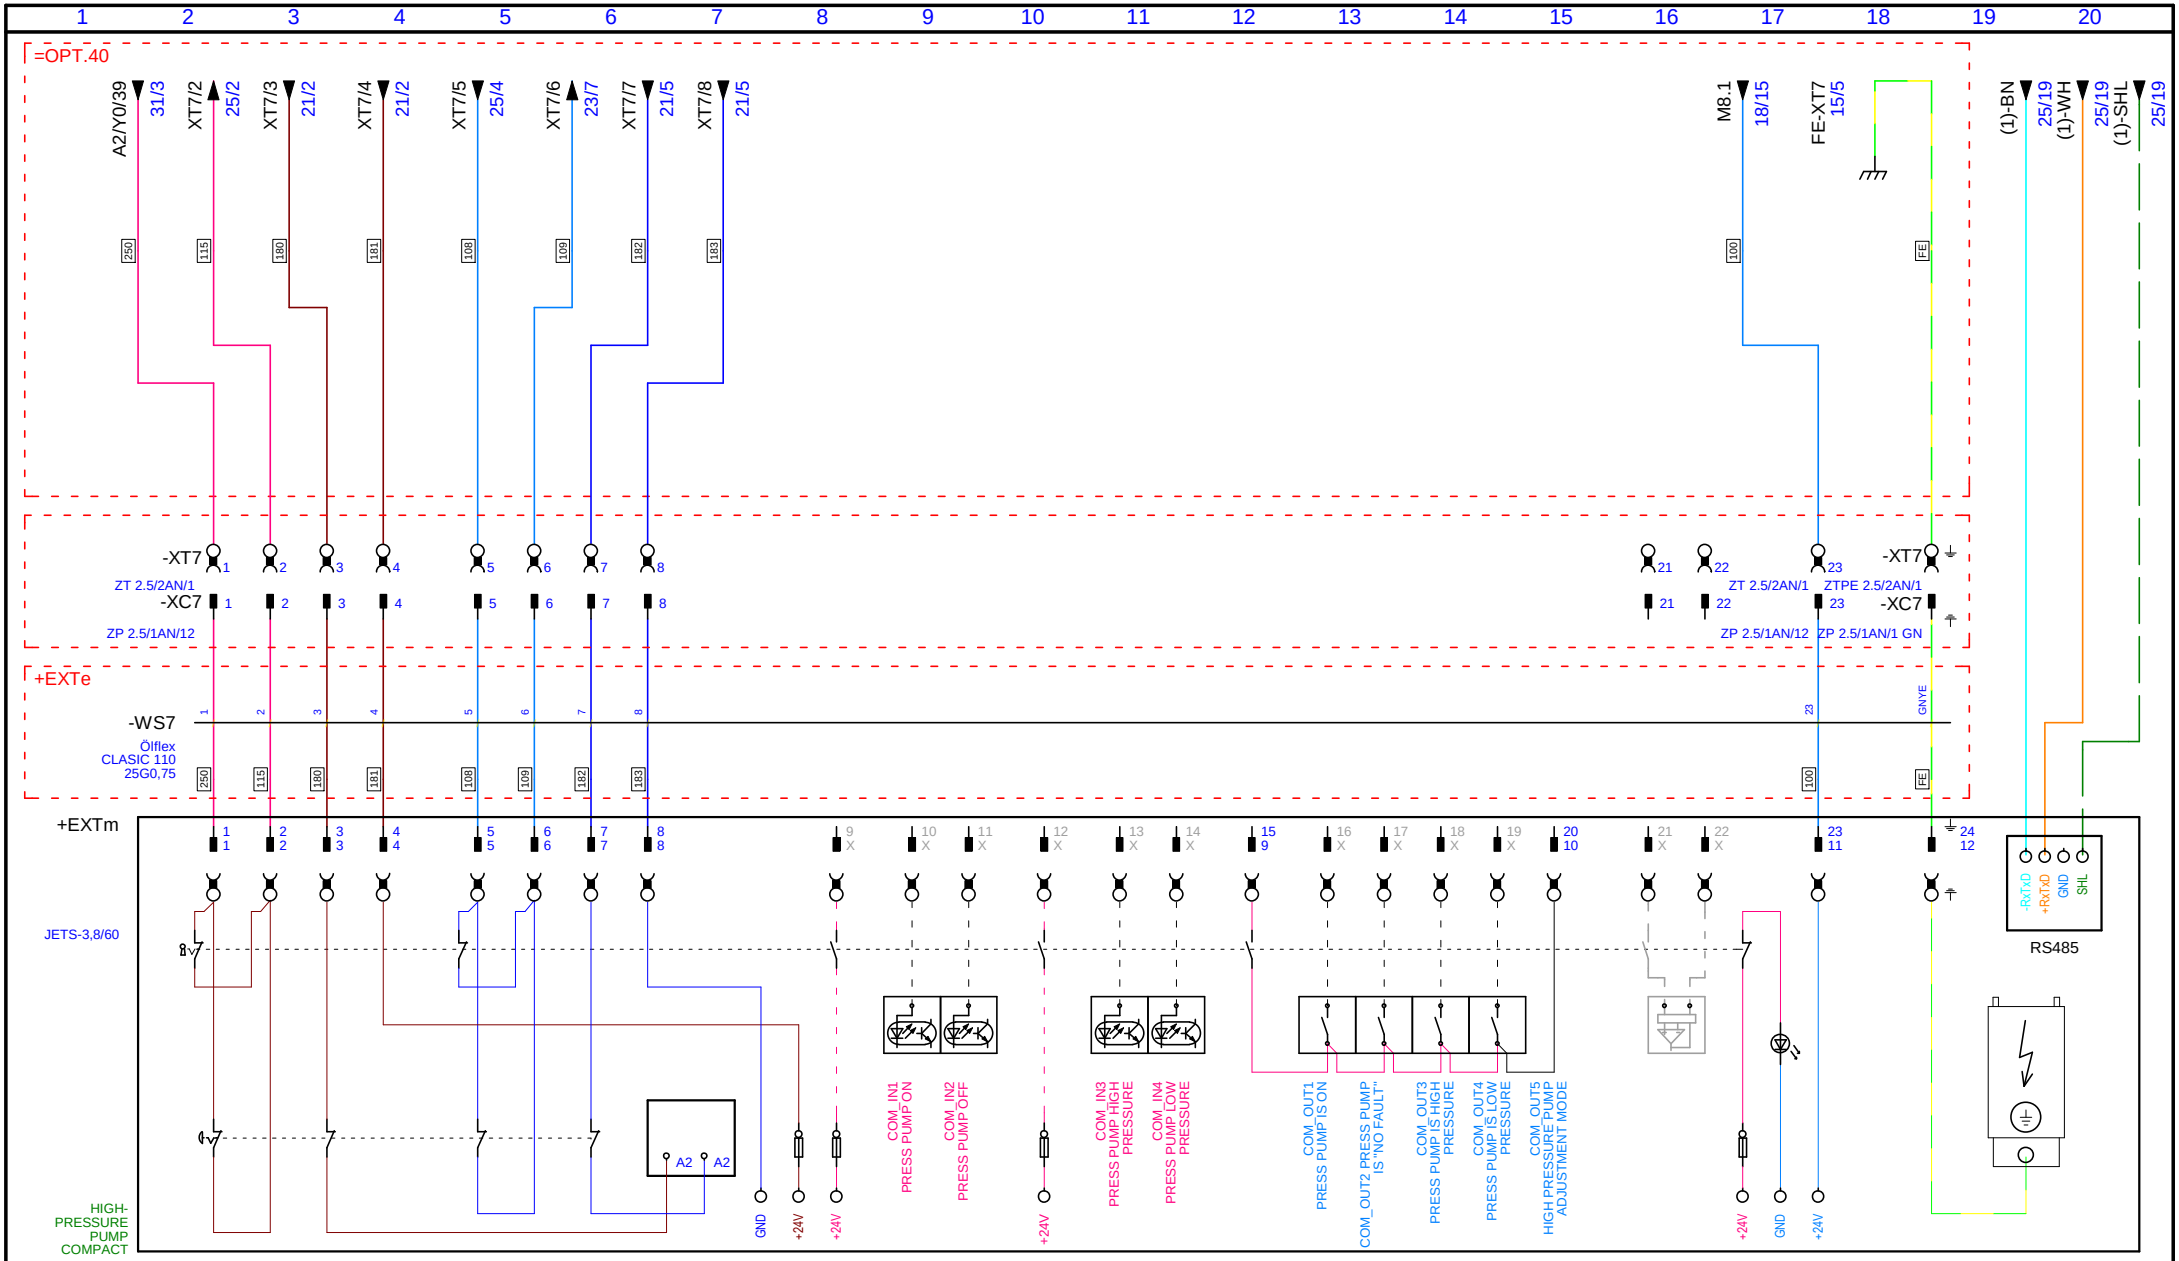

Revision		
D:	Revision:	
C:	Date: 1.11.2012 10:04:2	
B:	Editor: FEDYSZYN MILAN	
A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **COMMUNICATION WITH HIGH PRESSURE PUMP JETS-3,8/60 COMPACT**

Drawing: **PTV-V52-N-0001**

Equipment: **WJ3020B 1Z-PJ-NL**

Func.ref: =OPT.47+MX0

Page: 42

of: 126

-GF1.1

27/2

SERVOSTAR 443M-C

ELECTRIC DRIVE X1

NEW LINE & BASIC & FREE BEAM

X5: SHL, THETA, S4, S3, R2 / THETA, S2, S1, R1

X6: U2, V2, W2, PE, BRAKE+, BRAKE-

X2: B-, 0V, A-, UP(8V), DATA+, HallU, TH, HallV / B+, 0VSEN, A+, UPSEN, DATA-, TH, HallW

X4: PGND, NI+, NI-, A-, A+ / B+, B-, N.C., N.C.

Stift Pin	Signal	Stift Pin	Signal
1	sin+ (S2)	10	Vss+ (R1)
2	sin- (S4)	11	cos+ (S1)
3	n.c.	12	cos- (S3)
4	n.c.		
5	n.c.		
6	n.c.		
7	Vss- (R3)		
8	Temp +		
9	Temp -	Schirm/Shield	Gehäuse/housing

Stift Pin	Kabel Cable	Signal
1	rot red	U
2	schwarz black	V
3	grün/gelb green/yellow	PE
4	weiss white	n.c.
5	braun brown	n.c.
6	weiss white	W
Schirm/Shield		Gehäuse/housing

+EXTe

-WSM1.1
Semoflex Roboschlepp 4x2x0,25

-WLM1
Ölflex-FD 855CP 4G1

+MX1

-XCBQ1.1
ASSEMBLY
EPIC M23 F6 N7-10

-XCM1
EPIC CIRCON LS1 F6 3+PE+4K 8,5-11

+EXTm

-WSM1.1
Part of M

-WLM1
Part of M

-M1

HPG-20A-XX-H-RES-SP

RESOLVER

ELECTRIC DRIVE X1

Revision		
D:	Revision:	
C:	Date: 1.11.2012 10:06:5	
B:	Editor: FEDYSZYN MILAN	
A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **ELECTRIC DRIVE X1**

Drawing: **PTV-V52-N-0001**

Func.ref: =AXS.X1+MX0

Equipment: **WJ3020B 1Z-PJ-NL**

Page: 43

of: 126

-GF1.3

28/12

SERVOSTAR 403A-C

ELECTRIC DRIVE Y1

NEW LINE & BASIC & FREE BEAM

X5 SHL 1, THETA 2, S4 3, S3 4, R2 5, THETA 6, S2 7, S1 8, R1 9

X6 U2 4, V2 6, W2 5, PE 3, BRAKE+ 2, BRAKE- 1

X2 B- 1, 0V 2, A- 3, UP(8V) 4, DATA+ 5, HallU 6, TH 7, HallV 8, B+ 9, 0VSEN 10, A+ 11, UPSEN 12, DATA- 13, TH 14, HallW 15

X4 PGND 1, NI+ 2, NI- 3, A- 4, A+ 5, B+ 6, B- 7, N.C. 8, N.C. 9

Shift Pin	Signal	Shift Pin	Signal
1	sin+ (S2)	10	Vss+ (R1)
2	sin- (S4)	11	cos+ (S1)
3	n.c.	12	cos- (S3)
4	n.c.		
5	n.c.		
6	n.c.		
7	Vss- (R3)		
8	Temp +		
9	Temp -	Schirm/Shield	Gehäuse/housing

Shift Pin	Kabel Cable	Signal
1	rot red	U
2	schwarz black	V
3	grün/gelb green/yellow	PE
4	weiss white	n.c.
5	braun brown	n.c.
6	weiss white	W
Schirm/Shield		Gehäuse/housing

+EXTe

-WSM3.1
Semoflex Roboschlepp 4x2x0,25

SHL, 4BU, 4RD, 1BN, 1WH, 2GN, 2YE, 3GY, 3PK

-WLM3
Ölflex-FD 855CP 4G1

1WH, 2WH, 3WH, GNYE, SHL

+MY1

-XCBQ3.1
ASSEMBLY EPIC M23 F6 N7-10

SH, 9, 8, 1, 2, 11, 12, 7, 10

-XCM3
EPIC CIRCON LS1 F6 3+PE+4K 8,5-11

1, 2, 6, 3, SH

+EXTm

-WSM3.1
Part of M

SHL, 4BU, 4RD, 1BN, 1WH, 2GN, 2YE, 3GY, 3PK

-WLM3
Part of M

1WH, 2WH, 3WH, GNYE, SHL

-M3

HPG-20A-XX-H-RES-SP

SH, T+, S2, S3, R1, T1, S4, S1, R3

U, V, W, PE, SH, Br+, BR-

RESOLVER

ELECTRIC DRIVE Y1

Revision		
D:	Revision:	
C:	Date: 1.11.2012 10:06:5	
B:	Editor: FEDYSZYN MILAN	
A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **ELECTRIC DRIVE Y1**

Drawing: **PTV-V52-N-0001**

Func.ref: =AXS.Y1+MX0

Equipment: WJ3020B 1Z-PJ-NL

Page: 44

of: 126

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

-GF1.4

28/17

SERVOSTAR 403A-C

ELECTRIC DRIVE Y2

NEW LINE & BASIC & FREE BEAM

X5: SHL, THETA, S4, S3, R2 / THETA, S2, S1, R1

X6: U2, V2, W2, PE, BRAKE+, BRAKE-

X2: B-, 0V, A-, UP(8V), DATA+, HallU, TH, HallV / B+, 0VSEN, A+, UPSEN, DATA-, TH, HallW

X4: PGND, NI+, NI-, A-, A+ / B+, B-, N.C., N.C.

Stift Pin	Signal	Stift Pin	Signal
1	sin+ (S2)	10	Vss+ (R1)
2	sin- (S4)	11	cos+ (S1)
3	n.c.	12	cos- (S3)
4	n.c.		
5	n.c.		
6	n.c.		
7	Vss- (R3)		
8	Temp +		
9	Temp -	Schirm/Shield	Gehäuse/housing

Stift Pin	Kabel Cable	Signal
1	rot red	U
2	schwarz black	V
3	grün/gelb green/yellow	PE
4	weiss (0,25mm²) white	n.c.
5	braun (0,25mm²) brown	n.c.
6	weiss white	W
Schirm/Shield	Gehäuse/housing	

+EXTe

-WSM4.1
Semoflex Roboschlepp 4x2x0,25

-WLM4
Ölflex-FD 855CP 4G1

+MY2

-XCBQ4.1
ASSEMBLY EPIC M23 F6 N7-10

-XCM4
EPIC CIRCON LS1 F6 3+PE+4K 8,5-11

+EXTm

-WSM4.1
Part of M

-WLM4
Part of M

-M4

HPG-20A-XX-H-RES-SP

RESOLVER

ELECTRIC DRIVE Y2

Revision		
D:	Revision:	
C:	Date: 1.11.2012 10:06:5	
B:	Editor: FEDYSZYN MILAN	
A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **ELECTRIC DRIVE Y2**


Drawing: **PTV-V52-N-0001**

Func.ref: =AXS.Y2+MX0

Equipment: **WJ3020B 1Z-PJ-NL**

Page: 45

of: 126

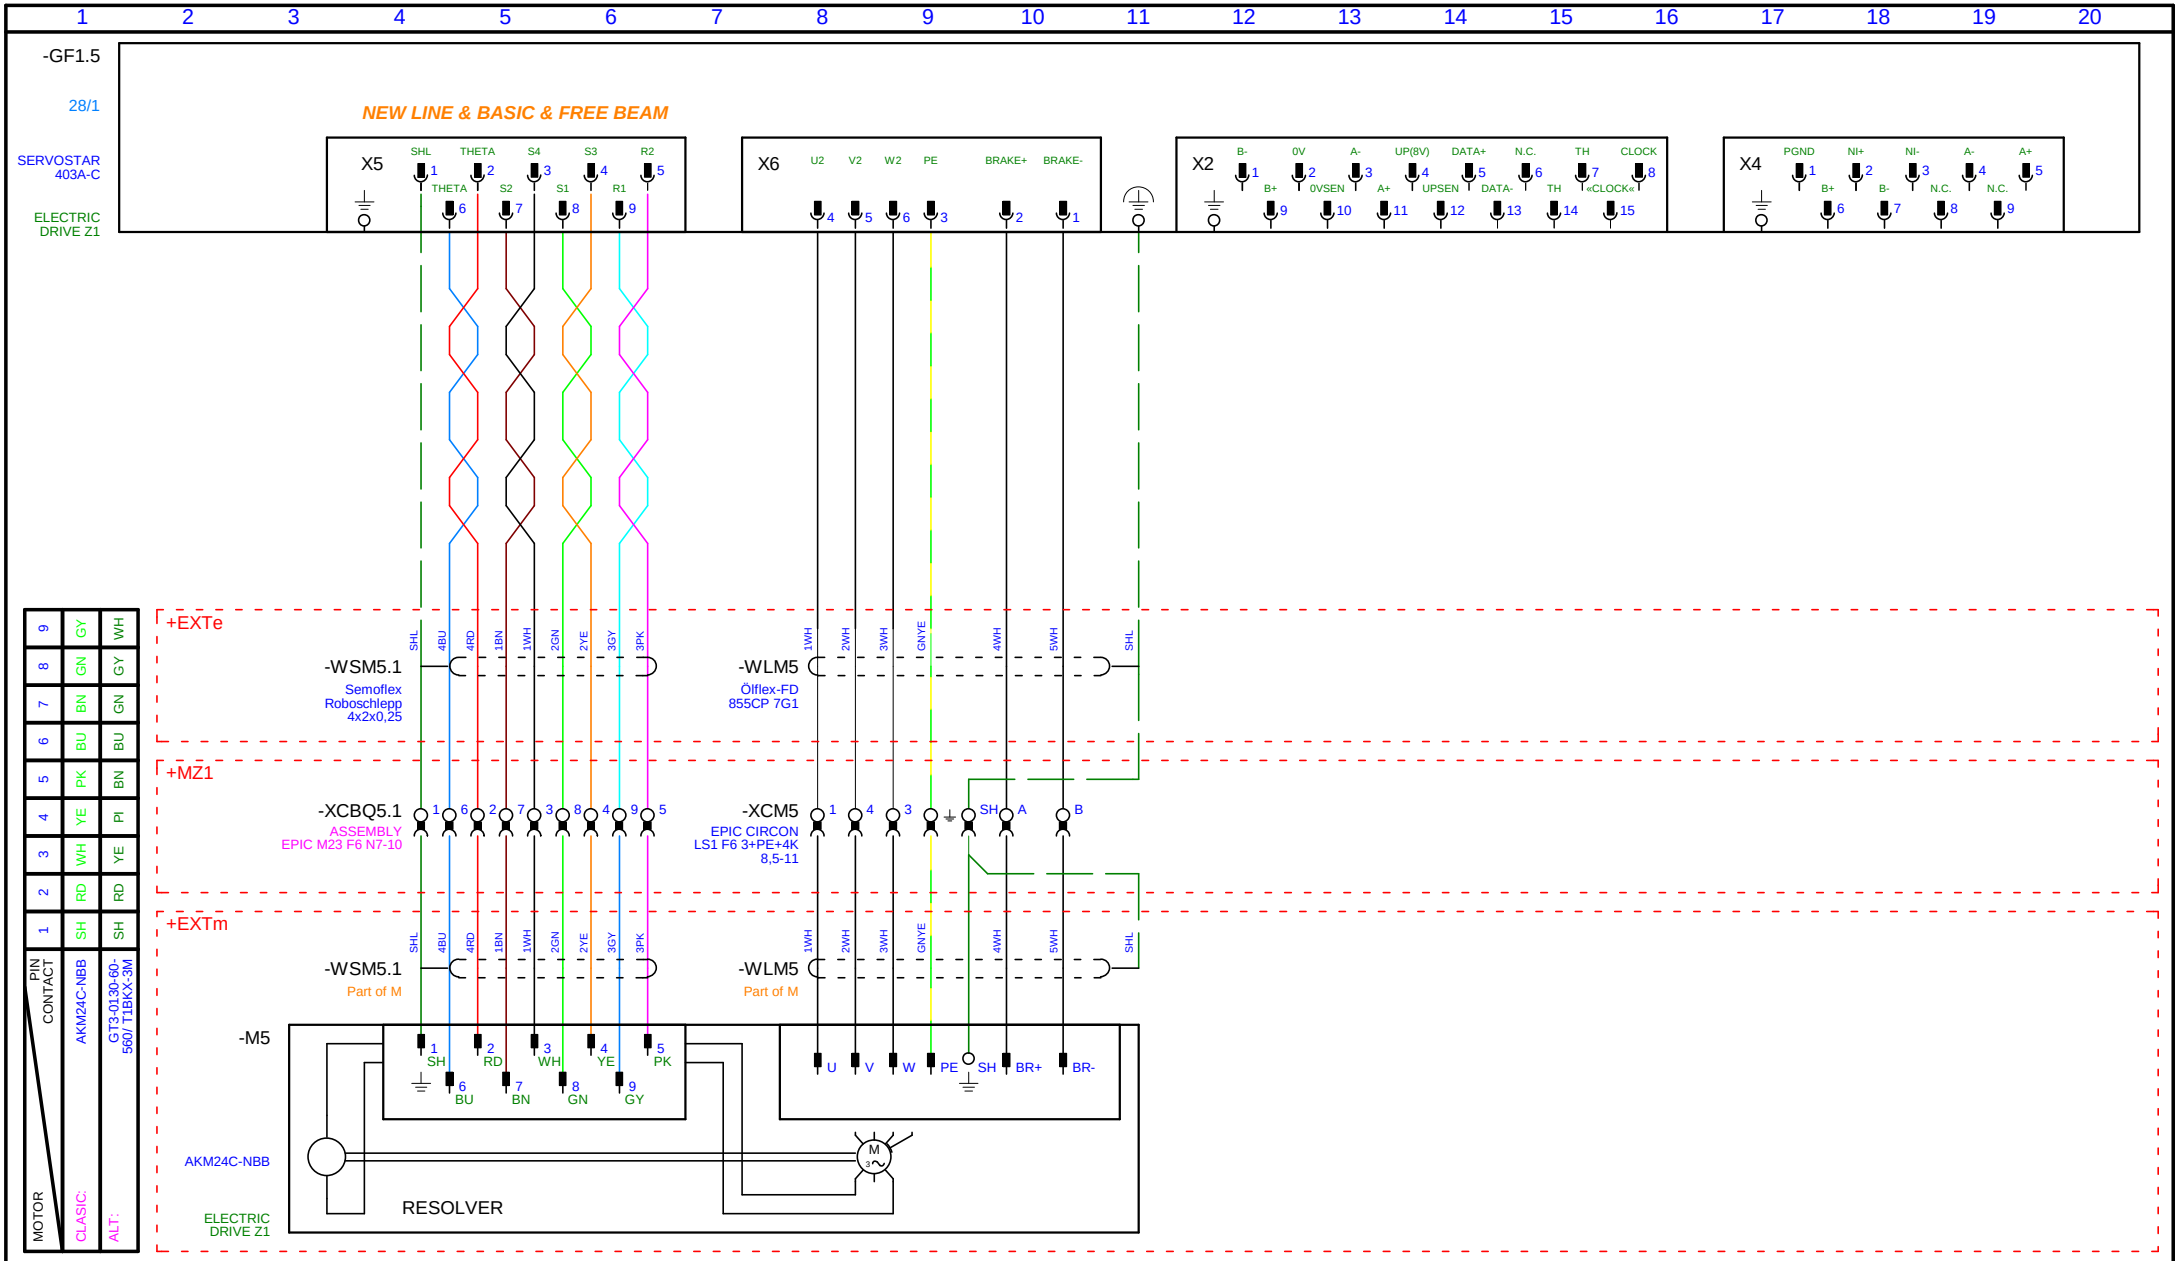

Revision			
	D:	Revision:	
	C:	Date: 1.11.2012 10:06:5	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title: **ELECTRIC DRIVE Z1**


Drawing: **PTV-V52-N-0001**

Func.ref: =AXS.Z1+MX0


Equipment: **WJ3020B 1Z-PJ-NL**

Page: 46

of: 126

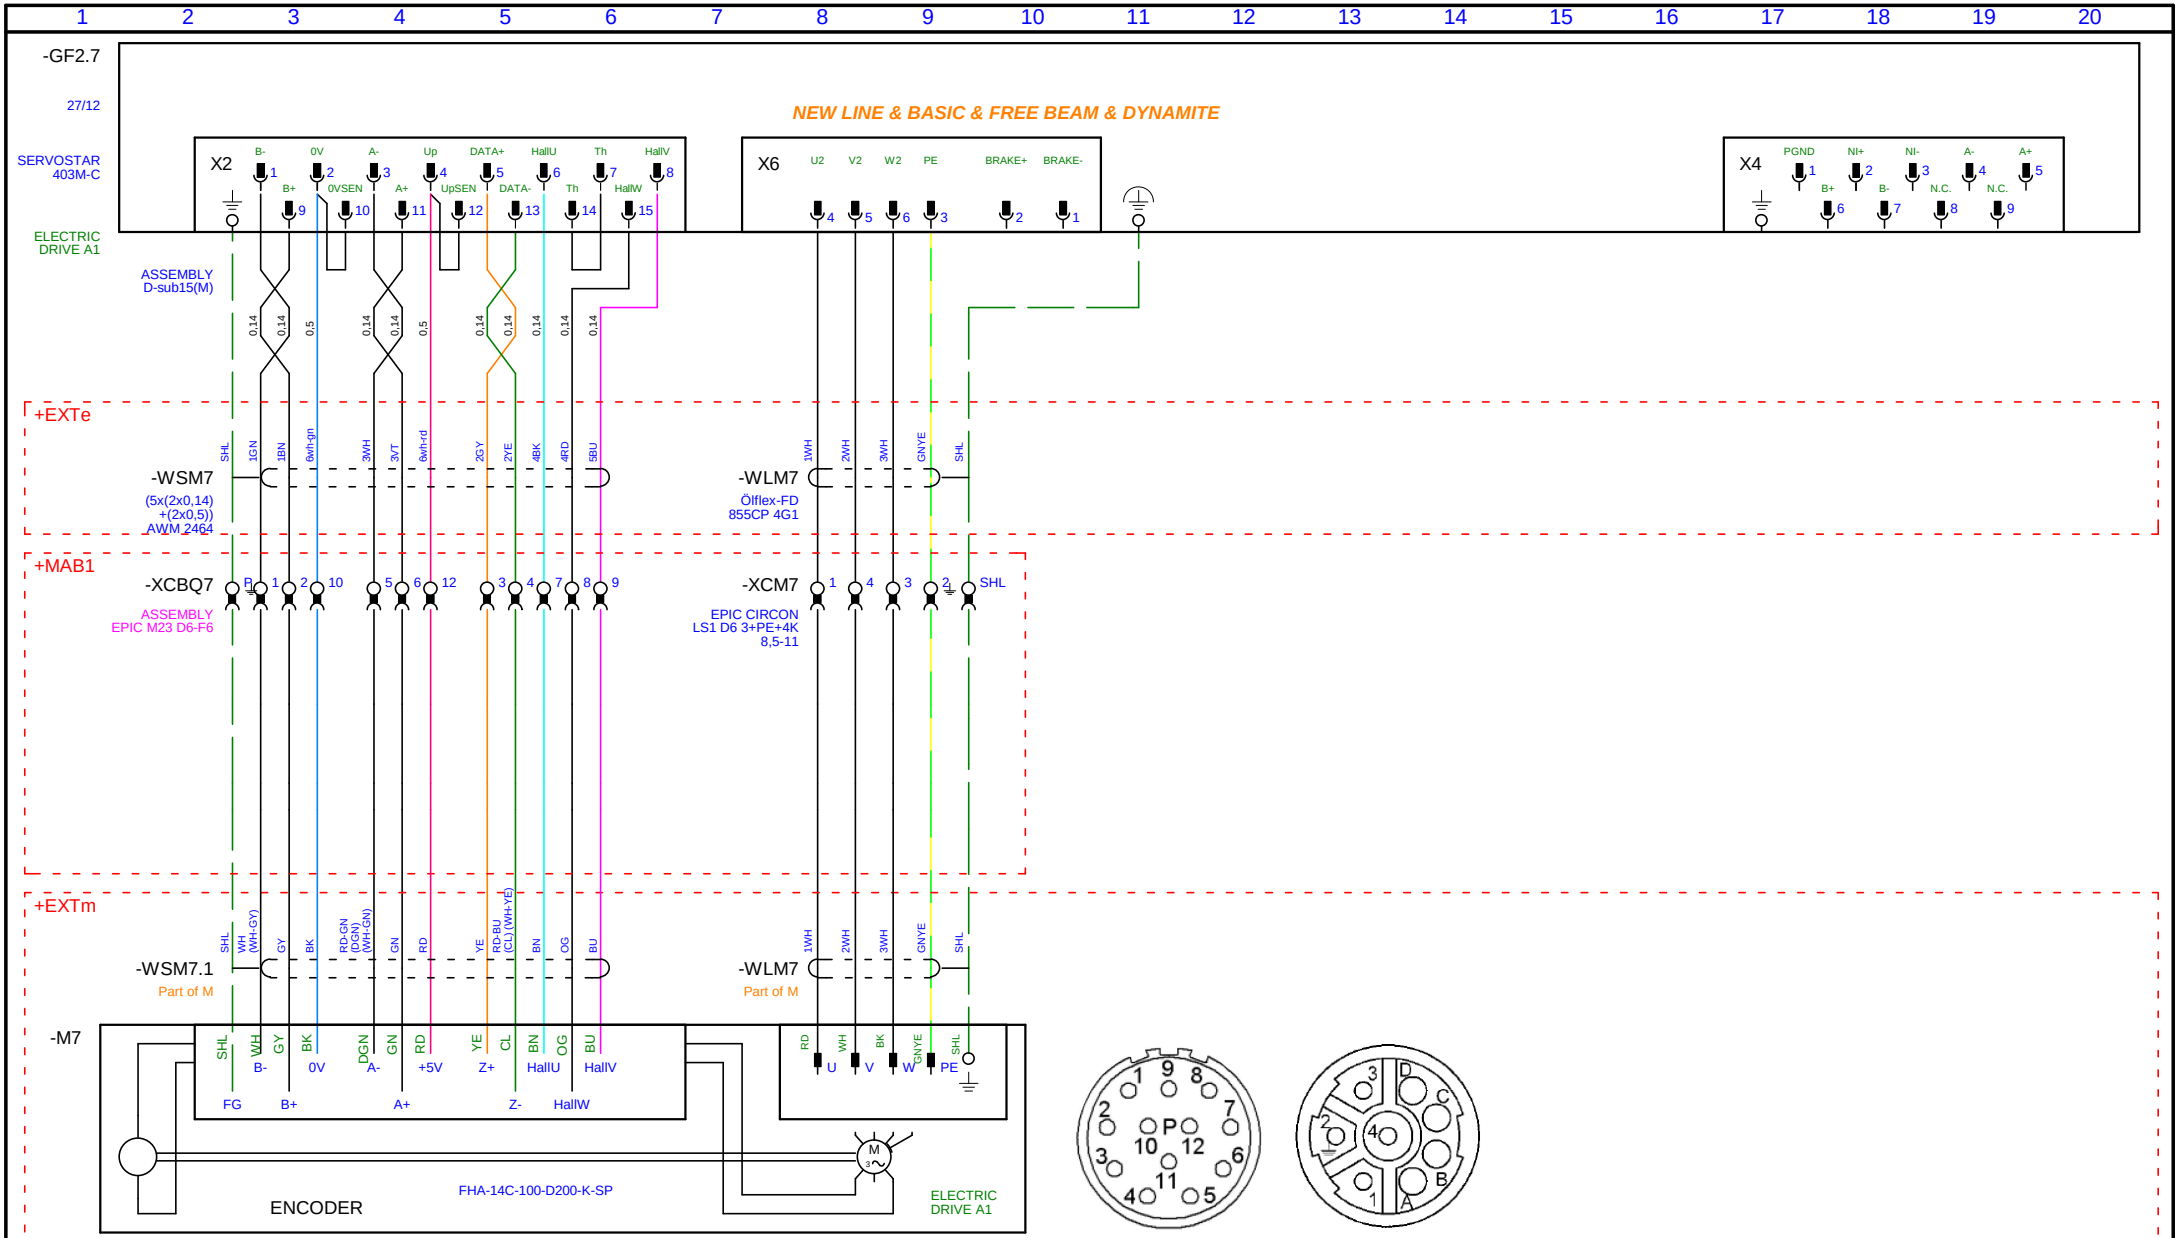


Revision			
D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **ELECTRIC DRIVE A1**
C:	Date: 1.11.2012 10:06:5		Drawing: **PTV-V52-N-0001**
B:	Editor: FEDYSZYN MILAN		Equipment: **WJ3020B 1Z-PJ-NL**
A:	Sign:		Func.ref: =AXS.A1+MX0 Page: 47 of: 126

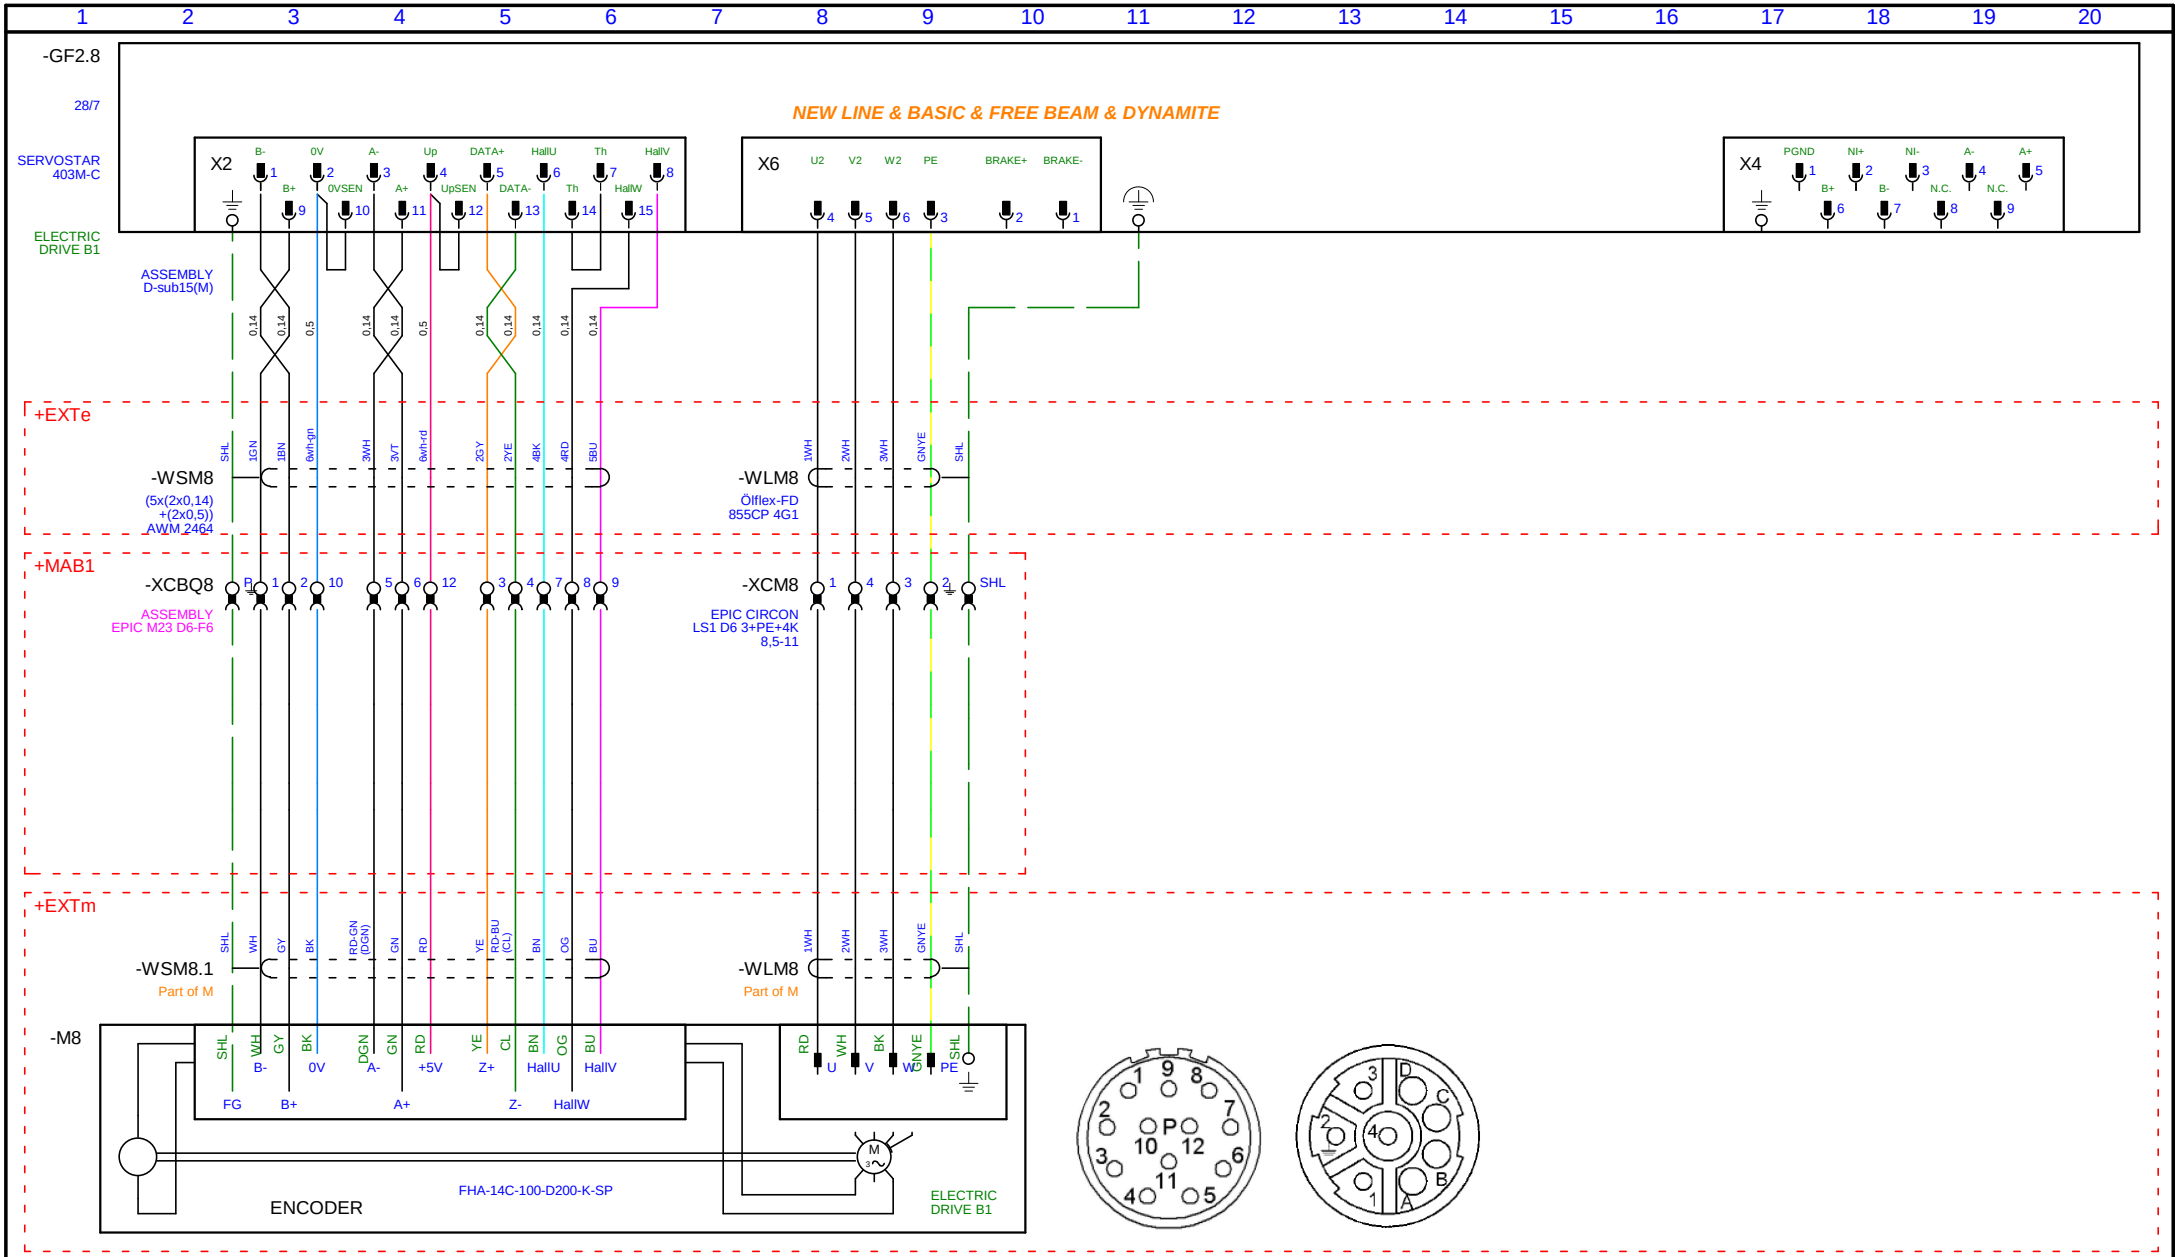

Revision			
D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **ELECTRIC DRIVE B1**
C:	Date: 1.11.2012 10:06:5		
B:	Editor: FEDYSZYN MILAN		
A:	Sign:		

Drawing: **PTV-V52-N-0001**
Func.ref: =AXS.B1+MX0
Equipment: **WJ3020B 1Z-PJ-NL**
Page: 48
of: 126

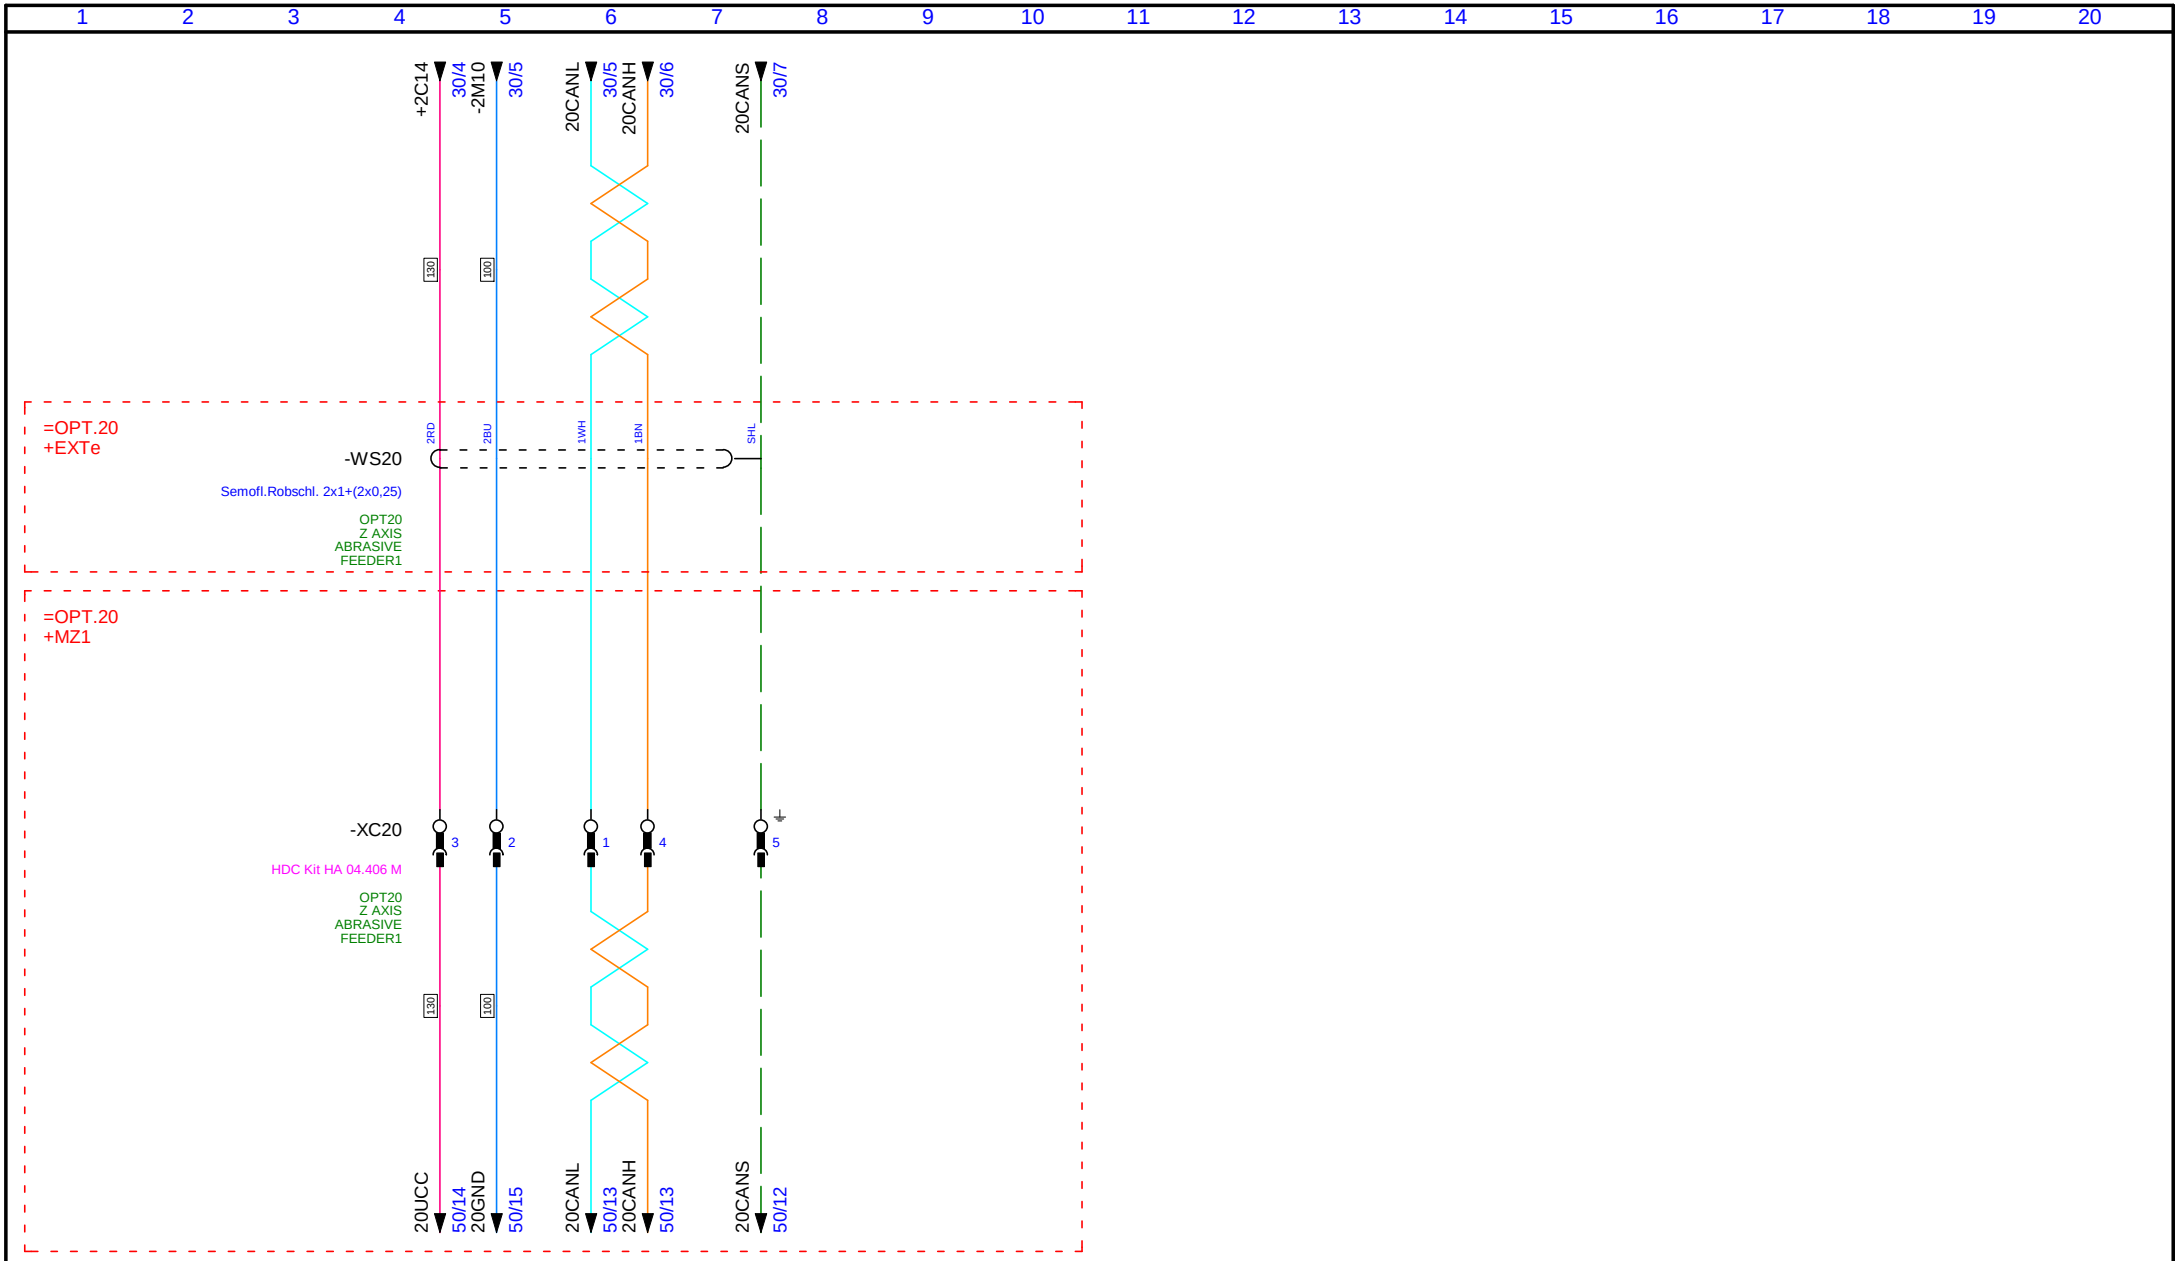

Revision			
	D:	Revision:	
	C:	Date: 1.11.2012 10:06:5	
	B:	Editor: FEDYSZYN MILAN	
	A:	Sign:	

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

Title:

Z1, Z2 AXIS TROLLEY EXTERNAL CIRCUITS


Drawing: PTV-V52-N-0001

Func.ref: =OPT.20+MX0

Equipment: WJ3020B 1Z-PJ-NL

Page: 49

of: 126

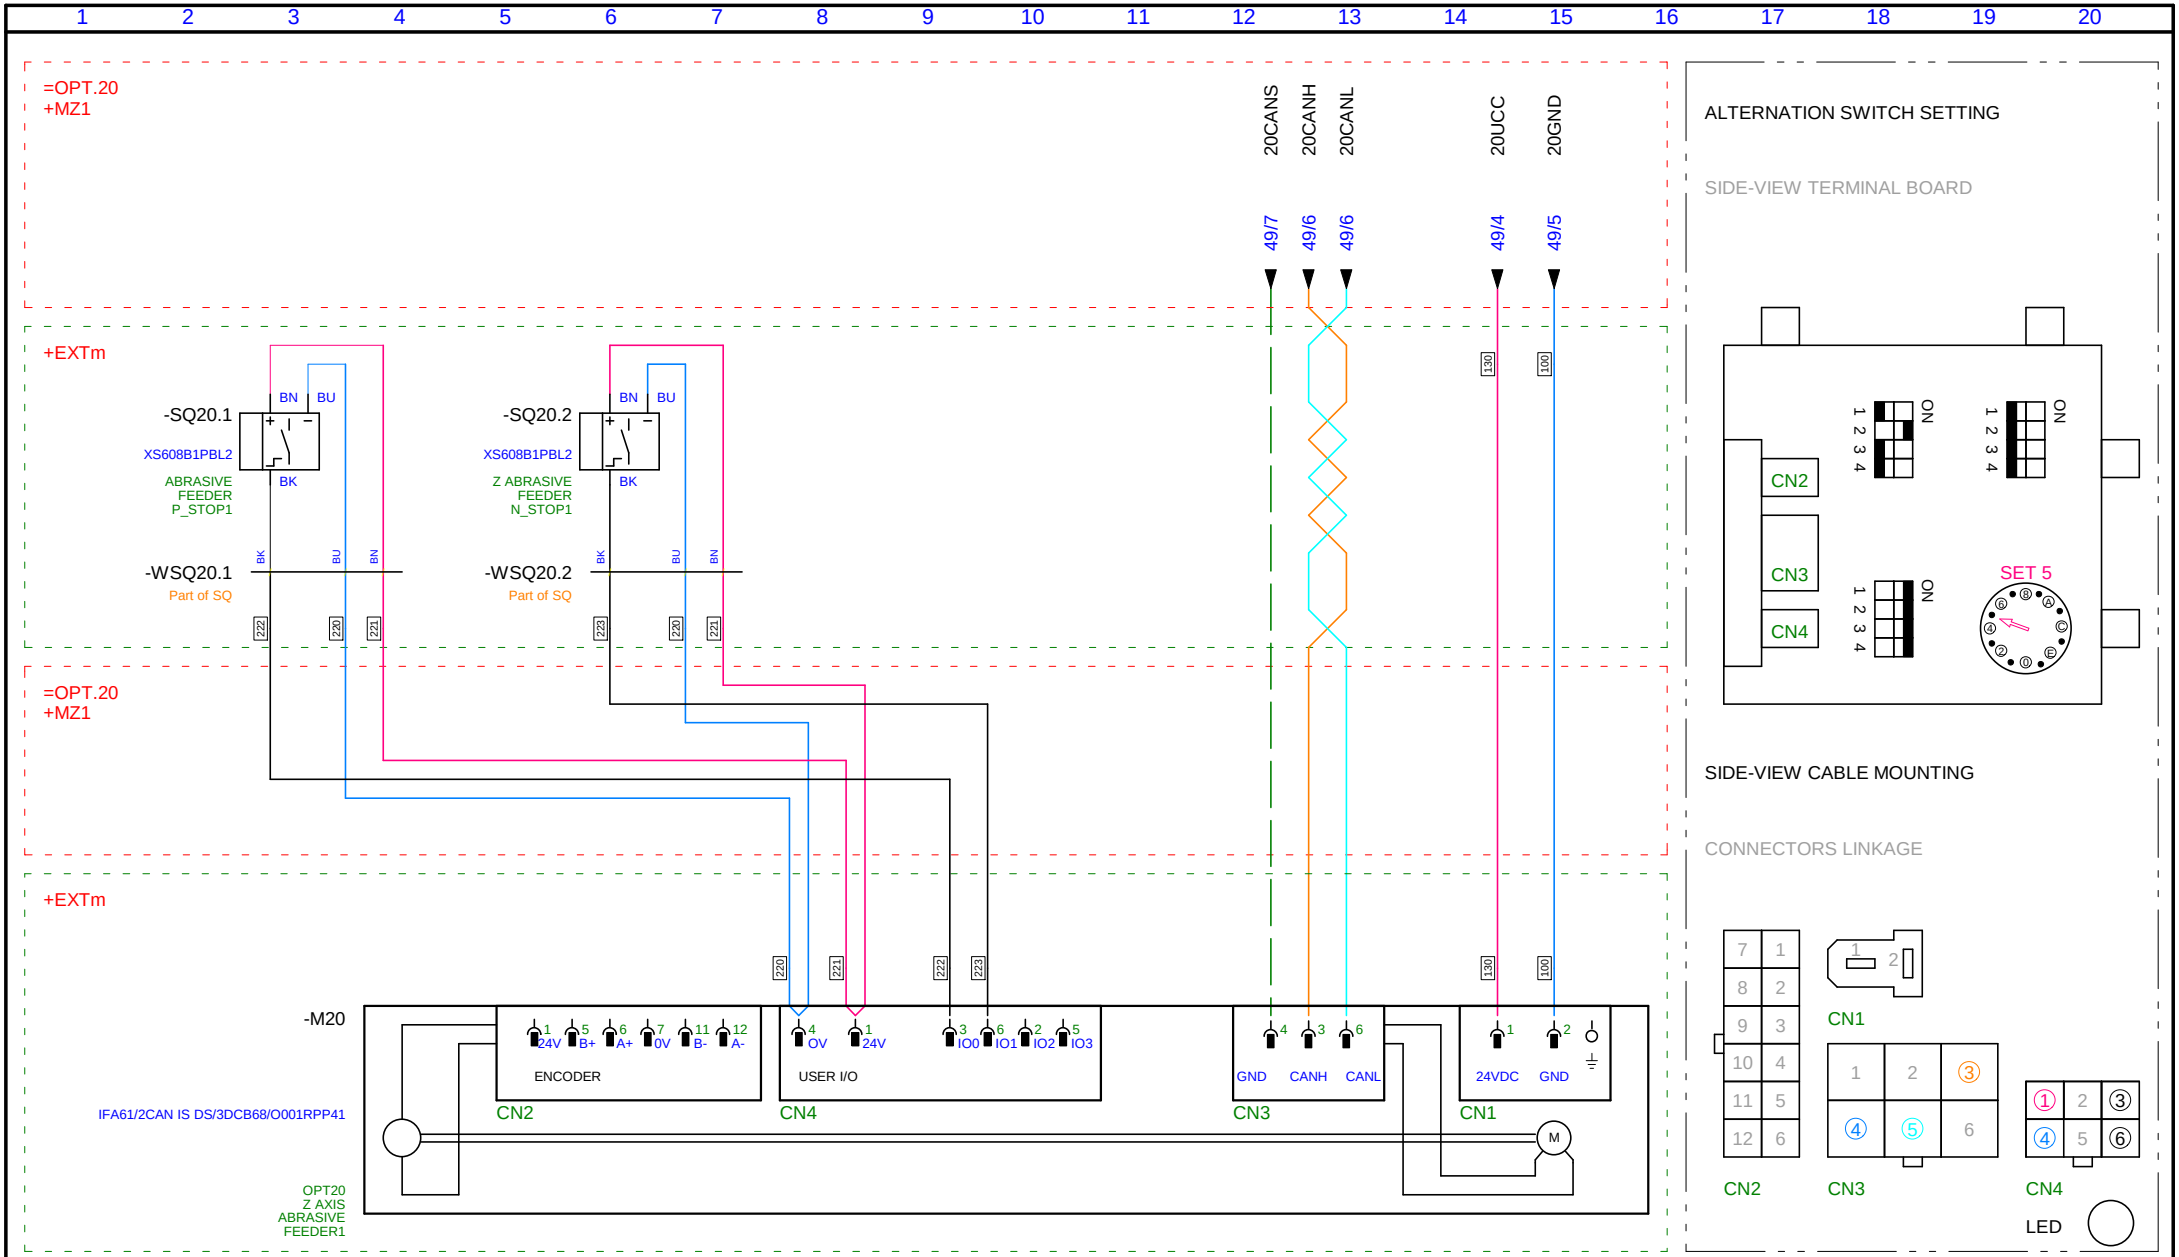

Revision			
D:	Revision:	PTV, spol. s r. o. Csl. armády 23 253 01 Hostivice Czech Republic	Title: **EXTERNAL CIRCUITS Z1 AXIS ABRASIVE FEEDER**
C:	Date: 1.11.2012 10:06:5		
B:	Editor: FEDYSZYN MILAN		
A:	Sign:		

Drawing: **PTV-V52-N-0001**

Func.ref: =OPT.20+MZ1

Equipment: **WJ3020B 1Z-PJ-NL**

Page: 50

of: 126

PLC

PLC - A2

BLOCK TERMINAL	I/O ADR.	POT.	Connected element	FUNCTION	IDENTIFICATOR	PG.
-A2:19	DI 1.0	200	-FB1	STATE OF EMERGENCY STOP SAFETY MODULE		31/2
18	DI 1.1	201	-GF2.7	ELECTRIC DRIVES OK		31/5
17	DI 1.2	202	-XT6	PRESSURE OF THE AIR OK		31/7
16	DI 1.3	203	-SB4	PRESS PUMP START		31/9
15	DI 1.4	204	-SB4	PRESS PUMP STOP		31/11
14	DI 1.5	205		DRIL.MACHINE NORMAL POSITION Z1 / TOOLS INTERCHARGER COVER OPEN		31/13
13	DI 1.6	206		DRIL.MACHINE WORKING POSITION Z1 / TOOLS INTERCHARGER COVER CLOSED		31/15
12	DI 1.7	207	-KM5	GREASE CUP EMPTY LEVEL		31/19
-A2:39	DO 1.0	250	-XT7	CONTROLLING SYSTEM DISCONNECT		31/3
36	DO 1.1	251	-GF1.1	AXIS ENABLE		31/5
33	DO 1.2	252	-XT10	WATER Z1 / TOOL COOLING		31/8
29	DO 1.3	253		WATER Z2		31/10
26	DO 1.4	254	-XT6	FRONT PROTECTION SHIELD UP / FRONT PROTECTION VISOR		31/12
23	DO 1.5	255		DC EL. DRIVE UP Z1 / DRIL.MACHINE Z1 MOVE / WORKPIECE PNEUMATIC RELEASE		31/15
4	DO 1.6	256		DC EL. DRIVE DN Z1 / DRIL.MACHINE Z1 MOVE / WORKPIECE PNEUMATIC FIXATION		31/17
1	DO 1.7	257	-KM5	CENTRAL LUBRICATION		31/20

PLC - A3

BLOCK TERMINAL	I/O ADR.	POT.	Connected element	FUNCTION	IDENTIFICATOR	PG.
-A3:X0	DI 2.9	317	-XT10	CETRAL WATER JETS STOP & RESERVE	*I_RESERV*	32/11
X1	DI 2.9	318	-SB6	CETRAL WATER JETS STOP & RESERVE	*Tech_En*	32/10
X0	DI 2.10	320	-SB5	TECHNOLOGY PROGRAM START & TECHNOLOGY PROGRAM STOP	*P_Stop*	32/15
X1	DI 2.10	319	-SB5	TECHNOLOGY PROGRAM START & TECHNOLOGY PROGRAM STOP	*P_Start*	32/14
39	AI 2.0	301	-XT10	HEIGHT CONTROL SYSTEM Z1		32/5
Y0	DO 2.2	303	-XT10	Z AXIS HEIGHT CONTROL SYSTEM MOVE1		32/5


PLC - A5


BLOCK TERMINAL	I/O ADR.	POT.	Connected element	FUNCTION	IDENTIFICATOR	PG.
-A5:19	DI 4.0	500	-XT8	STATE OF LIGHT BARRIER RECEIVER		33/4
18	DI 4.1	501	-KM4	STATE OF LIGHT BARRIERS SAFETY MODULE		33/6
17	DI 4.2	502	-SB7	LOADING DEMAND		33/9
16	DI 4.3	503		FRONT PROTECTION SHIELD UPSTAIRS		33/11
15	DI 4.4	504		FRONT PROTECTION SHIELD DOWNSTAIRS		33/13
14	DI 4.5	505		FRONT PROTECTION SHIELD UP		33/15
13	DI 4.6	506		FRONT PROTECTION SHIELD DOWN		33/18
12	DI 4.7	507		RESERVE		33/20
-A5:39	DO 4.0	550	-FB2	LIGHT BARRIERS SAFETY MODULE RESET		33/4
36	DO 4.1	551	-KM3	BLOCKAGE SWITCH MODE ON/OFF		33/6
33	DO 4.2	552	-XT9	LIGHT-HOUSE RED		33/8
29	DO 4.3	553	-XT9	LIGHT-HOUSE YELOW		33/10
26	DO 4.4	554	-XT9	LIGHT-HOUSE GREEN		33/13
23	DO 4.5	555	-XT8	LIGHT BARRIER CHECK TEST		33/15
4	DO 4.6	556	-SB7	LOADING DEMAND ACKNOWLEDGED		33/17
1	DO 4.7	557		FRONT PROTECTION SHIELD DOWN / PNEUMATIC DOOR UNLOCK		33/20

ELECTRIC CABINET CONCEPTION

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

DEVICE MECH. ARRANGEMENT IN THE EL. CABINET "CLASSIC

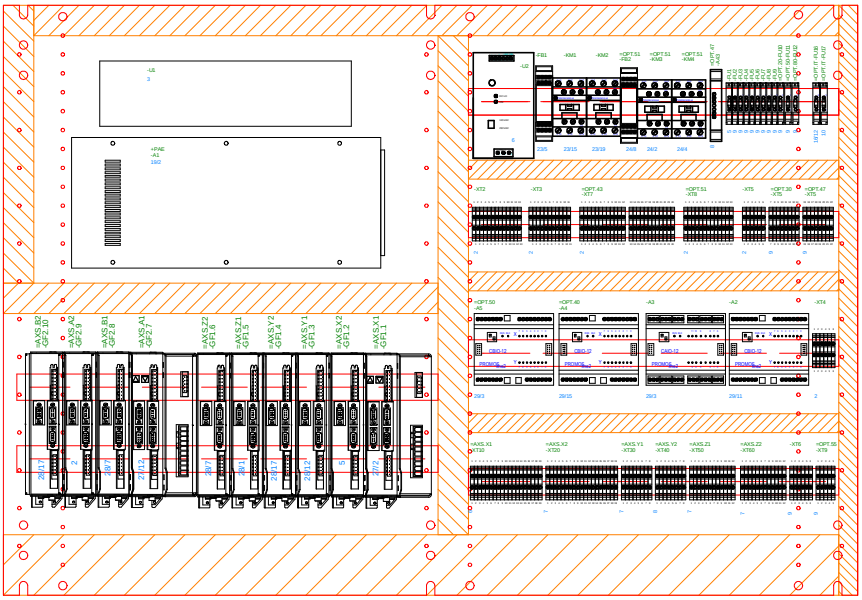

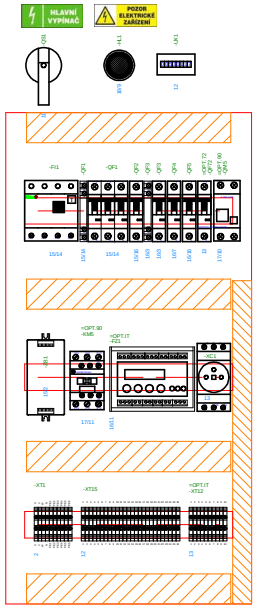



M: 1:10


PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

PTV-V52-N-0001

WJ3020B
1Z-PJ-NL

6.11.2012 13:39:14

DEVICE MECH. ARRANGEMENT IN THE EL. CABINET "CLASSIC

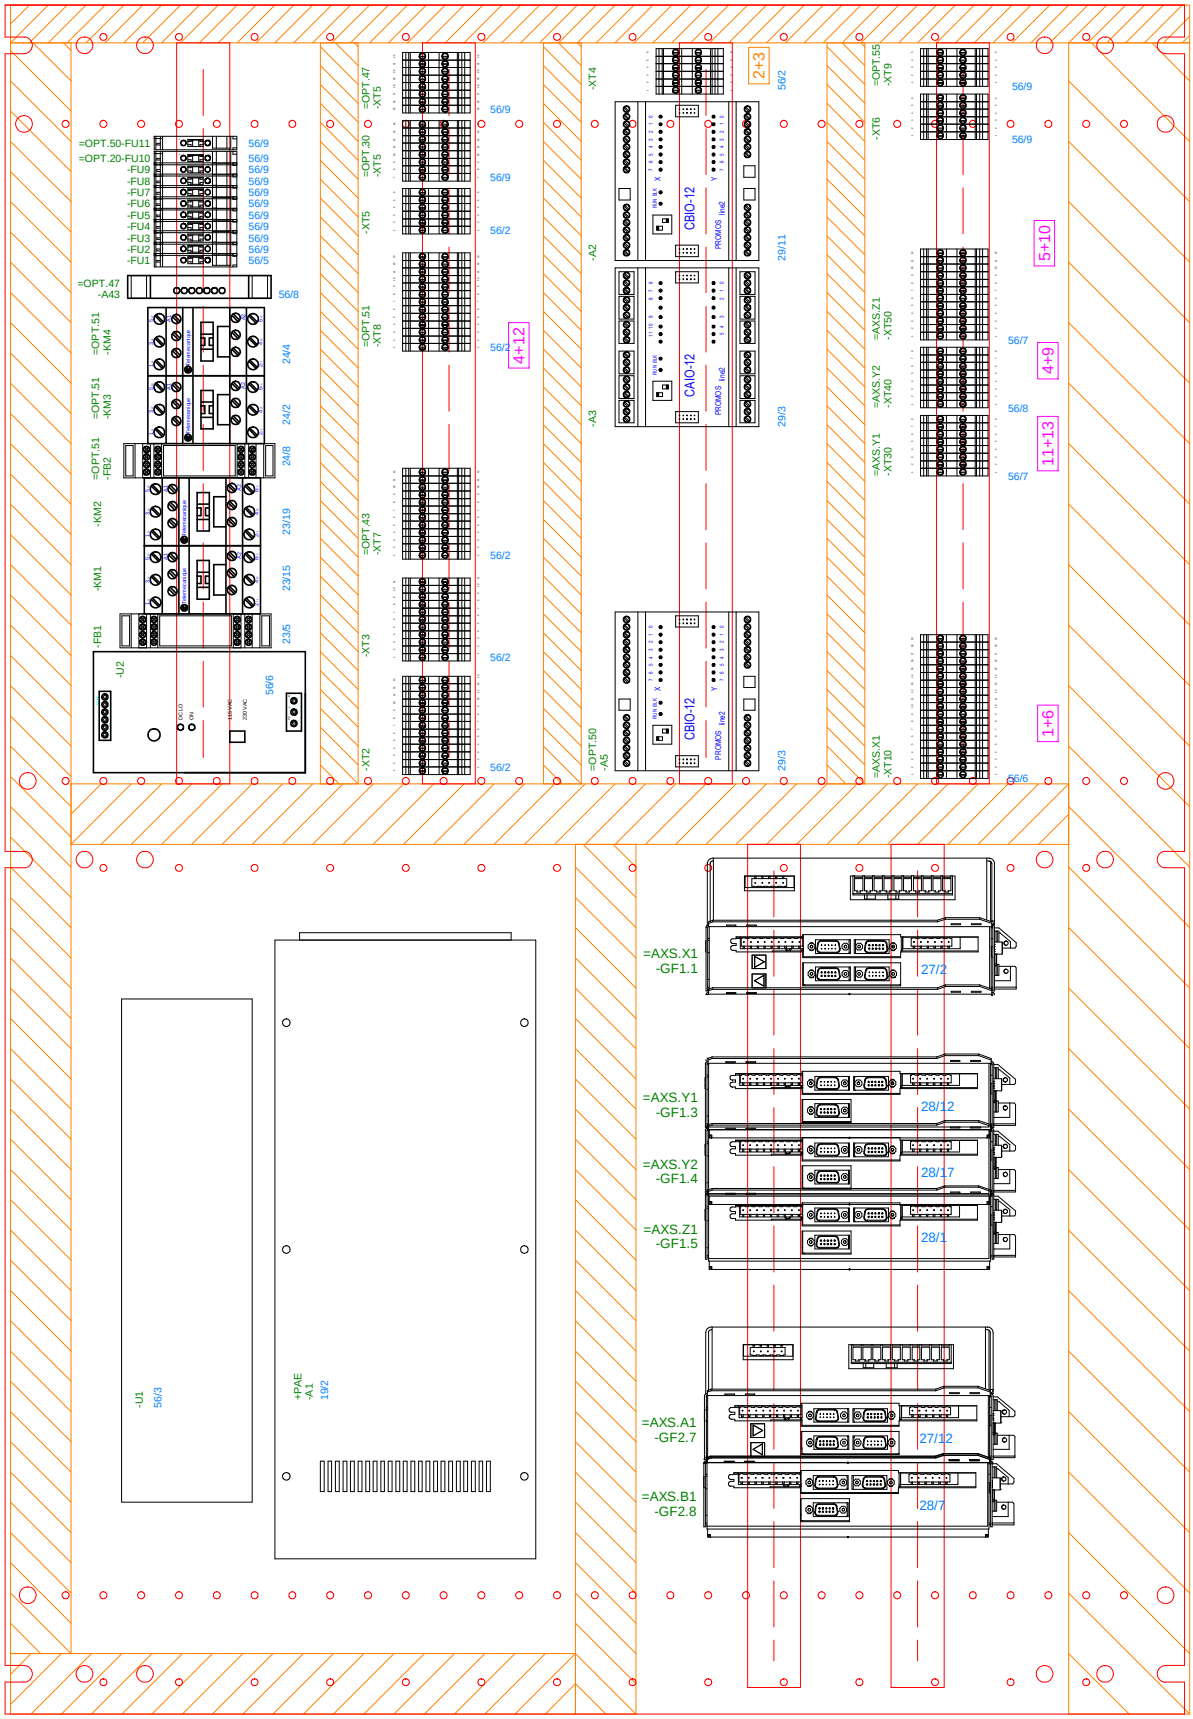

M: 1:5


PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

PTV-V52-N-0001

WJ3020B
1Z-PJ-NL

6.11.2012 13:39:14

DEVICE MECH. ARRANGEMENT IN THE EL. CABINET "CLASSIC

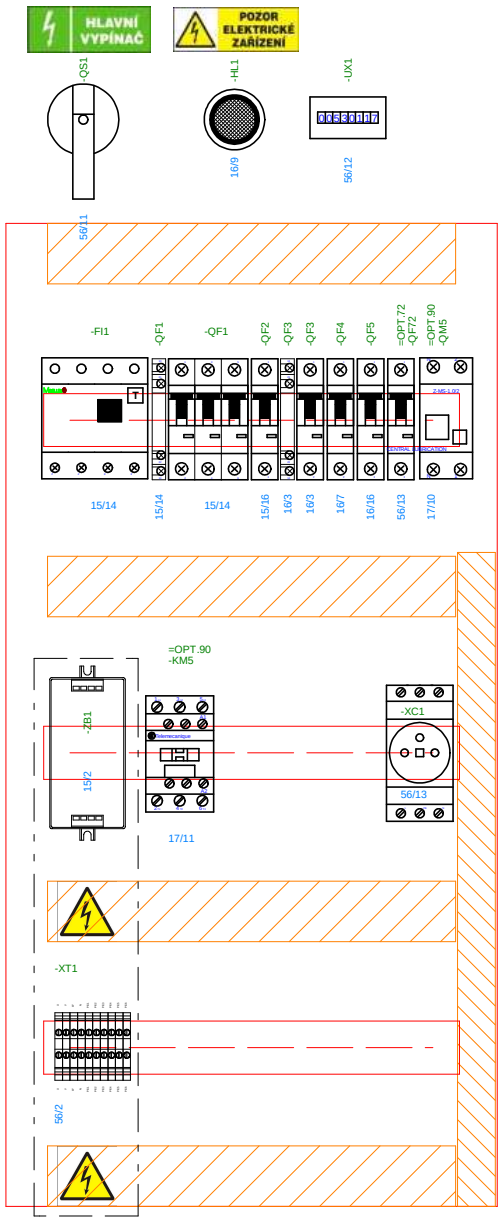

M: 1:5


PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic


PTV-V52-N-0001

WJ3020B
1Z-PJ-NL

6.11.2012 13:39:14

DEVICE MECHANICAL ARRANGEMENT IN THE PANEL CONTROL "NEW LINE

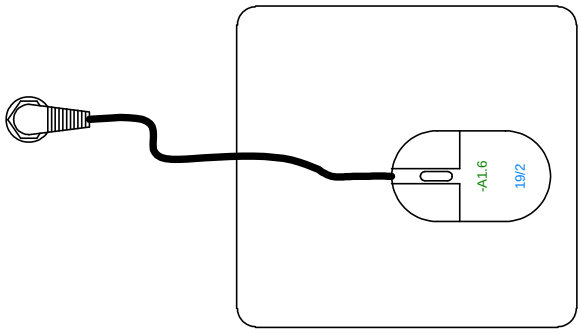

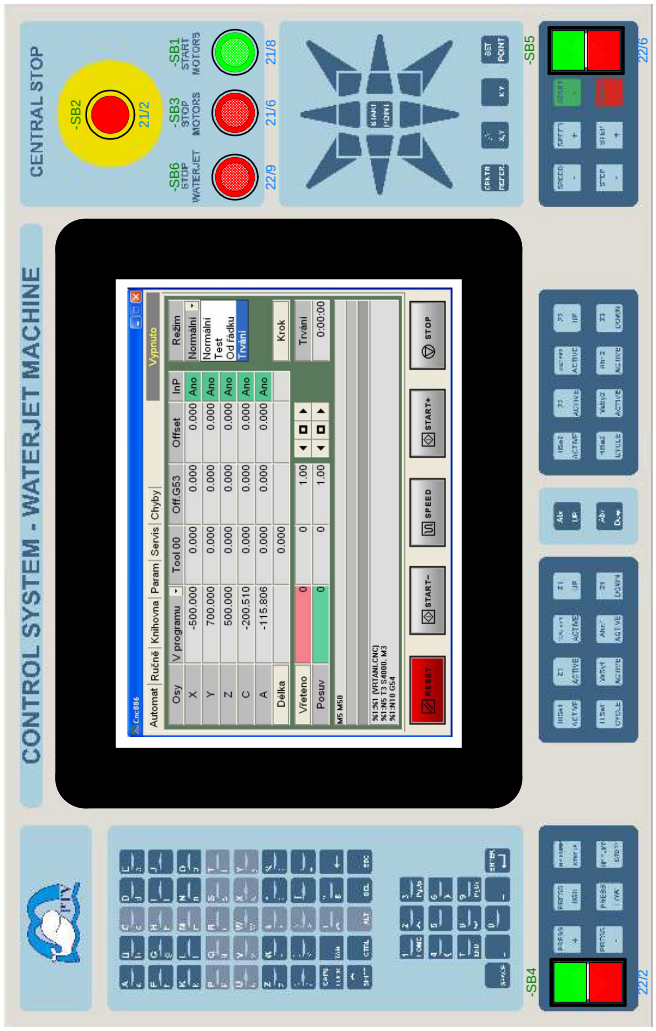

M: 1:5

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

PTV-V52-N-0001

WJ3020B
1Z-PJ-NL

6.11.2012 13:39:14

USED DEVICES

UNITS 1

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-GF2.7	=AXS.A1+MX0	1	8F13-403M	SERVOSTAR 403M-C	230/400VAC/max.7kW, In=3A(max.9A), 160-310 VDC	ELECTRIC DRIVE MASTER A1	27/12
-GF2.8	=AXS.B1+MX0	1	8F13-403A	SERVOSTAR 403A-C	230/400VAC/max.7kW, In=3A(max.9A), 160-310 VDC	ELECTRIC DRIVE SLAVE B1	28/7
-"-	=AXS.B1+MX0	1	8F13-403M	SERVOSTAR 403M-C	230/400VAC/max.7kW, In=3A(max.9A), 160-310 VDC	ELECTRIC DRIVE B1	48/1
-GF1.1	=AXS.X1+MX0	1	8F13-443M	SERVOSTAR 443M-C	230/400VAC/max.7kW, In=3A(max.9A), 160-310 VDC	ELECTRIC DRIVE MASTER X1	27/2
-GF1.3	=AXS.Y1+MX0	1	8F13-403A	SERVOSTAR 403A-C	230/400VAC/max.7kW, In=3A(max.9A), 160-310 VDC	ELECTRIC DRIVE SLAVE Y1	28/12
-GF1.4	=AXS.Y2+MX0	1	8F13-403A	SERVOSTAR 403A-C	230/400VAC/max.7kW, In=3A(max.9A), 160-310 VDC	ELECTRIC DRIVE SLAVE Y2	28/17
-GF1.5	=AXS.Z1+MX0	1	8F13-403A	SERVOSTAR 403A-C	230/400VAC/max.7kW, In=3A(max.9A), 160-310 VDC	ELECTRIC DRIVE SLAVE Z1	28/1
-A2	=OPT.00+MX0	1	EA12-5852	CBIO-12	8 DI(24VDC),8 DO(NO-NC relé/8A), 24VDC, CANopen	8 DI,8 DO, 24VDC, CANopen	29/11
-A2.X	=OPT.00+MX0	1	EA12-9202	In-Co02	Připojovací svorkovnice sběrnice bez zakončení	CONNECTING TERMINAL-BOARD	29/15
-A3	=OPT.00+MX0	1	EA12-5842	CAIO-12	12 AI nebo 12 AO nap. 24VDC, CANopen	12 AI V 12 AO, 24VDC, CANopen	29/3
-A3.DI9	=OPT.00+MX0	1	EA12-5712	EBI-12	2 BI pro CAIO-12, Uin=24V/ Iin=8mA	CETRAL WATER JETS STOP & RESERVE	32/11
-A3.DI10	=OPT.00+MX0	1	EA12-5712	EBI-12	2 BI pro CAIO-12, Uin=24V/ Iin=8mA	TECHNOLOGY PROGRAM START & TECHNOLOGY PROGRAM STOP	32/14
-A3.DO8	=OPT.00+MX0	1	EA12-5210	EBO-10	1 BO pro CAIO-12, Uin=12-40VDC/ Imax=2A	TECHNOLOGY PROGRAM	32/20
-A3.X	=OPT.00+MX0	1	EA12-9201	In-Co01	Propojovací můstek bez zakončení	CONNECTING BRIDGE	29/7
-U1	=OPT.00+MX0	1	4UV1-1650	APC Back-UPS CS650	UPS/1F-230VAC/650VA, 400W/160-285V, USB2.0, COM	BACK-UP PC POWER SUPPLY	16/15
-U2	=OPT.00+MX0	1	4UV1-1310	DNR240PS24-I	186-264V AC/22,5-28,5V DC/10A, (240W)	POWER SUPPLY 24VDC	16/6
-UX1	=OPT.00+MX0	1	4UXB1-6092	609.2	609.2 /24VDC/černá na panel/otv. 22x50mm, IP65	RUNNING HOUR COUNTER	23/11
-ZB1	=OPT.00+MX0	1	4ZF4-16VY	4ELF16VY/D	400V, 16A, 3L+N+PE,0,3mA únik, Pz=2,8W, na DIN	EMC/EMI FILTERS	15/2
-A1	=OPT.00+PAE	1	4YC9-R091	KRYT CAN 9	kryt CANNON 9, NeMetalizovaný	CANopen 1	19/2
-"-	=OPT.00+PAE	1	9A31-0001	IPC 6606 CZ	Průmyslové PC 2,8Gz,256Mb, RAM,HD,CD RO	CENTRAL CONTROL UNIT	19/2
-A1.6	=OPT.00+PAE	1	41G1-0700	FEC 5,0	Feritové jádro na kulatý kabel d=5mm	PC MOUSE	20/17
-A1.X1	=OPT.00+PAE	1	4YC1-V090	CAN 9 V	vidlice CANNON s pájecím žlábkem 9 pin	CANopen 1	19/2
-A1.X2	=OPT.00+PAE	1	4YC1-V090	CAN 9 V	vidlice CANNON s pájecím žlábkem 9 pin	CANopen 2	19/5
-A1.X3	=OPT.00+PAE	1		EVERTOP E117873		CABLE ADAPTER PS/2	20/17
-A1.XCOM1	=OPT.00+PAE	1	4YC1-Z090	CAN 9 Z	zásuvka CANNON s pájecím žlábkem 9 pin	XCOM 1	19/9
-A1.XCOM1.1	=OPT.00+PAE	1	4YC9-R091	KRYT CAN 9	kryt CANNON 9, NeMetalizovaný	-"-	19/9
-A1.XCOM2	=OPT.00+PAE	1	4YC1-Z090	CAN 9 Z	zásuvka CANNON s pájecím žlábkem 9 pin	XCOM 2	19/12
-A1.XCOM2.1	=OPT.00+PAE	1	4YC9-R091	KRYT CAN 9	kryt CANNON 9, NeMetalizovaný	-"-	19/12
-A30	=OPT.30+EXTe	1	AAP8-1886	AHW886	AHW886, 24VDC, RS422, 1NC	HAND WHEEL	26/10
-"-	=OPT.30+MX0	1	EA13-1130	SLC 31	Převodník RS232 nebo USB na RS422 (s P422GPS)	-"-	25/7
-A5	=OPT.50+MX0	1	EA12-5852	CBIO-12	8 DI(24VDC),8 DO(NO-NC relé/8A), 24VDC, CANopen	8 DI,8 DO, 24VDC, CANopen	29/3
-A5.X	=OPT.50+MX0	1	EA12-9201	In-Co01	Propojovací můstek bez zakončení	CONNECTING BRIDGE	29/7
-A3.AI0	=OPT.65+MX0	1	EA12-5952	EAII-12	1 AI pro CAIO-12, 8 bit převodník, Irozsah 0-20mA	HEIGHT CONTROL SYSTEM Z1	32/5
-A3.DO2	=OPT.65+MX0	1	EA12-5210	EBO-10	1 BO pro CAIO-12, Uin=12-40VDC/ Imax=2A	Z AXIS HEIGHT CONTROL SYSTEM MOVE1	32/5
-A90	=OPT.90+EXTm	1				CENTRAL LUBRICATION	17/11

SAFEGUARD DEVICES

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-FI1	=OPT.00+MX0	1	4DK7-G253	PHF7-25/4/003-G	3F+N, 25A/3mA citlivost G	RESIDUAL CURRENT DEVICES	15/14
-FU1	=OPT.00+MX0	1	4FE1-0010	T 1A	T/35, 5x20mm, 1A	MAIN CONTROLLERS	18/1
-"-	=OPT.00+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	HLAVNÍ STYKAČE, OVLADAČE	56/5
-"-	=OPT.00+MX0	1	4XW9-1S30	SIHA 3/G20	In=18A/400VAC/6,3kV; LGY	In=18A/400VAC/6,3kV; LGY	
-"-	=OPT.00+MX0	1	4XW9-1T3S	ZTR 2.5/3AN	průřez 0,5-4; 1x, In=18A/400VAC/6,3kV; LGY; 2 výst	MAIN CONTROLLERS	18/1
-FU2	=OPT.00+MX0	1	4FE1-0002	T 250mA	T/35, 5x20mm, 250mA	EMERGENCY STOP SAFETY MODULE	18/3
-"-	=OPT.00+MX0	1	4XW9-1S30	SIHA 3/G20	In=18A/400VAC/6,3kV; LGY	In=18A/400VAC/6,3kV; LGY	
-"-	=OPT.00+MX0	1	4XW9-1T3S	ZTR 2.5/3AN	průřez 0,5-4; 1x, In=18A/400VAC/6,3kV; LGY; 2 výst	EMERGENCY STOP SAFETY MODULE	18/3
-FU3	=OPT.00+MX0	1	4FE1-0040	T 4A	T/35, 5x20mm, 4A	SERVOS	18/4
-"-	=OPT.00+MX0	1	4XW9-1S30	SIHA 3/G20	In=18A/400VAC/6,3kV; LGY	In=18A/400VAC/6,3kV; LGY	
-"-	=OPT.00+MX0	1	4XW9-1T3S	ZTR 2.5/3AN	průřez 0,5-4; 1x, In=18A/400VAC/6,3kV; LGY; 2 výst	SERVOS	18/4
-FU4	=OPT.00+MX0	1	4FE1-0031	T 3,15A	T/35, 5x20mm, 3,15A	DISCONNECTING OUTPUTS	18/5
-"-	=OPT.00+MX0	1	4XW9-1S30	SIHA 3/G20	In=18A/400VAC/6,3kV; LGY	In=18A/400VAC/6,3kV; LGY	
-"-	=OPT.00+MX0	1	4XW9-1T3S	ZTR 2.5/3AN	průřez 0,5-4; 1x, In=18A/400VAC/6,3kV; LGY; 2 výst	DISCONNECTING OUTPUTS	18/6
-FU5	=OPT.00+MX0	1	4FE1-0010	T 1A	T/35, 5x20mm, 1A	INPUT CIRCUITS	18/7
-"-	=OPT.00+MX0	1	4XW9-1S30	SIHA 3/G20	In=18A/400VAC/6,3kV; LGY	In=18A/400VAC/6,3kV; LGY	
-"-	=OPT.00+MX0	1	4XW9-1T3S	ZTR 2.5/3AN	průřez 0,5-4; 1x, In=18A/400VAC/6,3kV; LGY; 2 výst	INPUT CIRCUITS	18/7
-FU6	=OPT.00+MX0	1	4FE1-0020	T 2A	T/35, 5x20mm, 2A	INPUT CIRCUITS X	18/8
-"-	=OPT.00+MX0	1	4XW9-1S30	SIHA 3/G20	In=18A/400VAC/6,3kV; LGY	In=18A/400VAC/6,3kV; LGY	
-"-	=OPT.00+MX0	1	4XW9-1T3S	ZTR 2.5/3AN	průřez 0,5-4; 1x, In=18A/400VAC/6,3kV; LGY; 2 výst	INPUT CIRCUITS X	18/9
-FU7	=OPT.00+MX0	1	4FE1-0020	T 2A	T/35, 5x20mm, 2A	INPUT CIRCUITS Y	18/10
-"-	=OPT.00+MX0	1	4XW9-1S30	SIHA 3/G20	In=18A/400VAC/6,3kV; LGY	In=18A/400VAC/6,3kV; LGY	
-"-	=OPT.00+MX0	1	4XW9-1T3S	ZTR 2.5/3AN	průřez 0,5-4; 1x, In=18A/400VAC/6,3kV; LGY; 2 výst	INPUT CIRCUITS Y	18/10
-FU8	=OPT.00+MX0	1	4FE1-0020	T 2A	T/35, 5x20mm, 2A	INPUT CIRCUITS Z	18/11
-"-	=OPT.00+MX0	1	4XW9-1S30	SIHA 3/G20	In=18A/400VAC/6,3kV; LGY	In=18A/400VAC/6,3kV; LGY	
-"-	=OPT.00+MX0	1	4XW9-1T3S	ZTR 2.5/3AN	průřez 0,5-4; 1x, In=18A/400VAC/6,3kV; LGY; 2 výst	INPUT CIRCUITS Z	18/11
-FU9	=OPT.00+MX0	1	4FE1-0008	T 0,8A	T/35, 5x20mm, 0,8A	FUSE	18/14
-"-	=OPT.00+MX0	1	4XW9-1S30	SIHA 3/G20	In=18A/400VAC/6,3kV; LGY	In=18A/400VAC/6,3kV; LGY	
-"-	=OPT.00+MX0	1	4XW9-1T3S	ZTR 2.5/3AN	průřez 0,5-4; 1x, In=18A/400VAC/6,3kV; LGY; 2 výst	POWER SUPPLY PLC	18/14
-QF1	=OPT.00+MX0	1	4QK3-C130	PL7-C13/3	13A/C, 10kA, IP20, AC 230V	SERVO-DRIVES SUPPLY	15/14
-"-	=OPT.00+MX0	1	4QK9-1NHK	ZP-NHK	1A AC/ 2A DC, IP20, 2 P	-"-	23/6
-QF2	=OPT.00+MX0	1	4QK1-C100	PL7-C10/1	10A/C, 10kA, IP20, AC 230V	MOUNTING SOCKED 230VAC/50Hz	15/16
-QF3	=OPT.00+MX0	1	4QK1-C100	PL7-C10/1	10A/C, 10kA, IP20, AC 230V	DISTRIBUTOR CLIMATIZATION SUPPLY	16/3
-"-	=OPT.00+MX0	1	4QK9-1NHK	ZP-NHK	1A AC/ 2A DC, IP20, 2 P	-"-	23/6
-QF4	=OPT.00+MX0	1	4QK1-C060	PL7-C6/1	6A/C, 10kA, IP20, AC 230V	POWER SUPPLY 24 VDC CONTROLLER CIRCUITS	16/7
-QF5	=OPT.00+MX0	1	4QK1-C100	PL7-C10/1	10A/C, 10kA, IP20, AC 230V	BACK-UP PC POWER SUPPLY	16/16
-FU10	=OPT.20+MX0	1	4FE1-0063	T 6,3A	T/35, 5x20mm, 6,3A	ABRASIVE FEEDER SUPPLY SWITCH	18/15
-"-	=OPT.20+MX0	1	4XW9-1S30	SIHA 3/G20	In=18A/400VAC/6,3kV; LGY	In=18A/400VAC/6,3kV; LGY	
-"-	=OPT.20+MX0	1	4XW9-1T3S	ZTR 2.5/3AN	průřez 0,5-4; 1x, In=18A/400VAC/6,3kV; LGY; 2 výst	ABRASIVE FEEDER SUPPLY	18/16
-FU11	=OPT.50+MX0	1	4FE1-0008	T 0,8A	T/35, 5x20mm, 0,8A	LIGHT BARRIERS SAFETY MODULE	18/17
-"-	=OPT.50+MX0	1	4XW9-1S30	SIHA 3/G20	In=18A/400VAC/6,3kV; LGY	In=18A/400VAC/6,3kV; LGY	
-"-	=OPT.50+MX0	1	4XW9-1T3S	ZTR 2.5/3AN	průřez 0,5-4; 1x, In=18A/400VAC/6,3kV; LGY; 2 výst	BARRIER SAFETY MODULE	18/17
-FU12	=OPT.80+MX0	1	4FE1-0031	T 3,15A	T/35, 5x20mm, 3,15A	SPECIAL EQUIPMENT	18/19
-QM5	=OPT.90+MX0	1	4RK1-2005	Z-MS-1,0/2	0,63-1,00A	CENTRAL LUBRICATION	17/10

CONTACTORS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-KM1	=OPT.00+MX0	1	4KT4-2182	LC1D18BD	7,5kW AC3;18A; Cívka 24V DC	SYSTEM EMERGENCY STOP 1	23/15
-KM2	=OPT.00+MX0	1	4KT4-2182	LC1D18BD	7,5kW AC3;18A; Cívka 24V DC	SYSTEM EMERGENCY STOP 2	23/19
-KM3	=OPT.51+MX0	1	4KT4-2182	LC1D18BD	7,5kW AC3;18A; Cívka 24V DC	BLOCKAGE SWITCH MODE ON/OFF	24/2
-KM4	=OPT.51+MX0	1	4KT4-2182	LC1D18BD	7,5kW AC3;18A; Cívka 24V DC	SYSTEM EMERGENCY STOP 3	24/4
-KM5	=OPT.90+MX0	1	4KT4-2182	LC1D18BD	7,5kW AC3;18A; Cívka 24V DC	CENTRAL LUBRICATION	17/11

TERMINALS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-XT10	=AXS.X1+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/7
-"-	=AXS.X1+MX0	1	4XW7-2W1S	ZAP/TW ZT2.5/2AN	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	56/8
-"-	=AXS.X1+MX0	1	4XW7-2X00	ZVR ZP2.5	pro svorku ZT 2,5/2AN/1	pro svorku ZT 2,5/2AN/1	56/9
-"-	=AXS.X1+MX0	2	4XW7-2X01	KOSF ZT2.5	pro svorku ZT 2,5/2AN/1	-"-	56/10
-"-	=AXS.X1+MX0	1	4XW7-2X02	ZZE ZP2.5	pro svorku ZT 2,5/2AN/1	-"-	56/12
-"-	=AXS.X1+MX0	17	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	X AXIS TROLLEY EXTERNAL CIRCUITS1	35/6
-"-	=AXS.X1+MX0	2	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	35/2
-XT20	=AXS.X2+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/7
-"-	=AXS.X2+MX0	1	4XW7-2W1S	ZAP/TW ZT2.5/2AN	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	56/8
-"-	=AXS.X2+MX0	1	4XW7-2X00	ZVR ZP2.5	pro svorku ZT 2,5/2AN/1	pro svorku ZT 2,5/2AN/1	56/9
-"-	=AXS.X2+MX0	2	4XW7-2X01	KOSF ZT2.5	pro svorku ZT 2,5/2AN/1	-"-	56/10
-"-	=AXS.X2+MX0	1	4XW7-2X02	ZZE ZP2.5	pro svorku ZT 2,5/2AN/1	-"-	56/12
-XT30	=AXS.Y1+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/7
-"-	=AXS.Y1+MX0	2	4XW7-2QVL	ZQV 2.5N/50 GE	průřez 2,5; 2x, In=24A; izolovaný, LGY	průřez 2,5; 2x, In=24A; izolovaný, LGY	56/13
-"-	=AXS.Y1+MX0	1	4XW7-2W1S	ZAP/TW ZT2.5/2AN	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	56/8
-"-	=AXS.Y1+MX0	1	4XW7-2X00	ZVR ZP2.5	pro svorku ZT 2,5/2AN/1	pro svorku ZT 2,5/2AN/1	56/9
-"-	=AXS.Y1+MX0	2	4XW7-2X01	KOSF ZT2.5	pro svorku ZT 2,5/2AN/1	-"-	56/10
-"-	=AXS.Y1+MX0	1	4XW7-2X02	ZZE ZP2.5	pro svorku ZT 2,5/2AN/1	-"-	56/12
-"-	=AXS.Y1+MX0	7	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	Y AXIS TROLLEY EXTERNAL CIRCUITS1	37/6
-"-	=AXS.Y1+MX0	1	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	37/3
-XT40	=AXS.Y2+MX0	7	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	Y AXIS TROLLEY EXTERNAL CIRCUITS2	38/6
-"-	=AXS.Y2+MX0	1	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	38/3
-XT50	=AXS.Z1+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/7
-"-	=AXS.Z1+MX0	1	4XW7-2W1S	ZAP/TW ZT2.5/2AN	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	56/8
-"-	=AXS.Z1+MX0	1	4XW7-2X00	ZVR ZP2.5	pro svorku ZT 2,5/2AN/1	pro svorku ZT 2,5/2AN/1	56/9
-"-	=AXS.Z1+MX0	2	4XW7-2X01	KOSF ZT2.5	pro svorku ZT 2,5/2AN/1	-"-	56/10
-"-	=AXS.Z1+MX0	1	4XW7-2X02	ZZE ZP2.5	pro svorku ZT 2,5/2AN/1	-"-	56/12
-"-	=AXS.Z1+MX0	11	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	Z AXIS TROLLEY EXTERNAL CIRCUITS1	39/3
-"-	=AXS.Z1+MX0	1	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	39/9
-XT50.1	=AXS.Z1+MZ1	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/6
-"-	=AXS.Z1+MZ1	1	4XW7-2W1S	ZAP/TW ZT2.5/2AN	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	56/2
-"-	=AXS.Z1+MZ1	1	4XW7-2X00	ZVR ZP2.5	pro svorku ZT 2,5/2AN/1	pro svorku ZT 2,5/2AN/1	56/3
-"-	=AXS.Z1+MZ1	2	4XW7-2X01	KOSF ZT2.5	pro svorku ZT 2,5/2AN/1	-"-	56/4
-"-	=AXS.Z1+MZ1	1	4XW7-2X02	ZZE ZP2.5	pro svorku ZT 2,5/2AN/1	-"-	56/5
-"-	=AXS.Z1+MZ1	15	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	Z AXIS TROLLEY EXTERNAL CIRCUITS1	39/3
-"-	=AXS.Z1+MZ1	1	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	39/9
-XT60	=AXS.Z2+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/7
-"-	=AXS.Z2+MX0	1	4XW7-2W1S	ZAP/TW ZT2.5/2AN	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	56/8
-"-	=AXS.Z2+MX0	1	4XW7-2X00	ZVR ZP2.5	pro svorku ZT 2,5/2AN/1	pro svorku ZT 2,5/2AN/1	56/9
-"-	=AXS.Z2+MX0	2	4XW7-2X01	KOSF ZT2.5	pro svorku ZT 2,5/2AN/1	-"-	56/10
-"-	=AXS.Z2+MX0	1	4XW7-2X02	ZZE ZP2.5	pro svorku ZT 2,5/2AN/1	-"-	56/12
-XT60.1	=AXS.Z2+MZ2	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/13
-"-	=AXS.Z2+MZ2	1	4XW7-2W1S	ZAP/TW ZT2.5/2AN	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	pro svorku ZT 2,5/2AN/1 ; izolovaný, LGY	56/8
-"-	=AXS.Z2+MZ2	1	4XW7-2X00	ZVR ZP2.5	pro svorku ZT 2,5/2AN/1	pro svorku ZT 2,5/2AN/1	56/9
-"-	=AXS.Z2+MZ2	2	4XW7-2X01	KOSF ZT2.5	pro svorku ZT 2,5/2AN/1	-"-	56/10
-"-	=AXS.Z2+MZ2	1	4XW7-2X02	ZZE ZP2.5	pro svorku ZT 2,5/2AN/1	-"-	56/11
-XT1	=OPT.00+MX0	1	4XW5-8QV3	ZQV 4/3 GE	průřez 4; 3x, In=32A; izolovaný, LGY	průřez 4; 3x, In=32A; izolovaný, LGY	56/4
-"-	=OPT.00+MX0	1	4XW5-8W1S	ZAP/TW 4 DB	pro svorku ZDU4; izolovaný, LGY	pro svorku ZDU4; izolovaný, LGY	56/3

TERMINALS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-XT1	=OPT.00+MX0	1	4XW5-821M	ZDU 4BL	pro průřez 0,5-6 mm, 2 pruž.vstupy, 1 hřeben	MACHINE MAIN SUPPLY	15/4
-"-	=OPT.00+MX0	3	4XW5-821S	ZDU 4	pro průřez 0,5-6 mm, 2 pruž.vstupy, 1 hřeben	-"-	15/3
-"-	=OPT.00+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/2
-"-	=OPT.00+MX0	6	4XW6-821Z	ZPE 4	pro průřez 0,5-6 mm, 2 pruž.vstupy, 1 hřeben	MACHINE MAIN SUPPLY	15/4
-XT2	=OPT.00+MX0	1	4XW5-7W1S	ZAP/TW 1	pro svorku ZDU 2,5; izolovaný, LGY	pro svorku ZDU 2,5; izolovaný, LGY	56/3
-"-	=OPT.00+MX0	5	4XW5-722M	ZDU 2.5 BL	pro průřez 0,5-2,5 mm, 2 pruž.vstupy, 2 hřebeny	N DISTRIBUTION	16/4
-"-	=OPT.00+MX0	1	4XW5-722S	ZDU 2.5	pro průřez 0,5-2,5 mm, 2 pruž.vstupy, 2 hřebeny	pro průřez 0,5-2,5 mm, 2 pruž. vstupy, 2 hřebeny	16/16
-"-	=OPT.00+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/2
-"-	=OPT.00+MX0	7	4XW6-720Z	ZPE 2.5	pro průřez 0,5-2,5 mm, 2 pruž.vstupy	GNYE DISTRIBUTION	16/4
-XT3	=OPT.00+MX0	1	4XW5-7W2S	ZAP/TW 2 DB	pro svorku ZDU 2,5/3AN ; izolovaný, LGY	pro svorku ZDU 2,5/3AN ; izolovaný, LGY	56/3
-"-	=OPT.00+MX0	9	4XW5-731S	ZDU 2.5/3AN	pro průřez 0,5-2,5 mm, 3 pruž.vstupy, 1 hřeben	FUNCTION	18/3
-"-	=OPT.00+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/2
-"-	=OPT.00+MX0	1	4XW6-730Z	ZPE 2,5/3AN	pro průřez 0,5-2,5 mm, 3 pruž.vstupy	pro průřez 0,5-2,5 mm, 3 pruž. vstupy	18/3
-XT4	=OPT.00+MX0	1	4XW5-7QVL	ZQV 2.5/50	průřez 2,5; 50x, In=24A; izolovaný, LGY	průřez 2,5; 50x, In=24A; izolovaný, LGY	56/4
-"-	=OPT.00+MX0	1	4XW5-7W2S	ZAP/TW 2 DB	pro svorku ZDU 2,5/3AN ; izolovaný, LGY	pro svorku ZDU 2,5/3AN ; izolovaný, LGY	56/3
-"-	=OPT.00+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/2
-"-	=OPT.00+MX0	5	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	CANopen DISTRIBUTION	30/2
-"-	=OPT.00+MX0	1	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	30/7
-XT5	=OPT.00+MX0	1	4XW5-7QVL	ZQV 2.5/50	průřez 2,5; 50x, In=24A; izolovaný, LGY	průřez 2,5; 50x, In=24A; izolovaný, LGY	56/4
-"-	=OPT.00+MX0	1	4XW5-7W1S	ZAP/TW 1	pro svorku ZDU 2,5; izolovaný, LGY	pro svorku ZDU 2,5; izolovaný, LGY	56/3
-"-	=OPT.00+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/2
-"-	=OPT.00+MX0	6	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	HAND WHEEL	25/2
-XT6	=OPT.00+MX0	4	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	PRESSURE OF THE AIR	34/3
-"-	=OPT.00+MX0	2	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	34/3
-XT9	=OPT.00+MX0	1	4XW5-7QVL	ZQV 2.5/50	průřez 2,5; 50x, In=24A; izolovaný, LGY	průřez 2,5; 50x, In=24A; izolovaný, LGY	56/13
-"-	=OPT.00+MX0	1	4XW5-7W1S	ZAP/TW 1	pro svorku ZDU 2,5; izolovaný, LGY	pro svorku ZDU 2,5; izolovaný, LGY	56/12
-"-	=OPT.00+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/11
-XT5	=OPT.30+MX0	7	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	HAND WHEEL	25/7
-"-	=OPT.30+MX0	1	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	25/11
-XT7	=OPT.43+MX0	1	4XW5-7W2S	ZAP/TW 2 DB	pro svorku ZDU 2,5/3AN ; izolovaný, LGY	pro svorku ZDU 2,5/3AN ; izolovaný, LGY	56/3
-"-	=OPT.43+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/2
-XT5	=OPT.47+MX0	4	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	COMMUNICATION WITH HIGH PRESSURE PUMP	25/14
-"-	=OPT.47+MX0	2	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	25/16
-XT7	=OPT.47+MX0	11	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	42/2
-"-	=OPT.47+MX0	1	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	42/19
-XT8	=OPT.51+MX0	1	4XW5-7QVL	ZQV 2.5/50	průřez 2,5; 50x, In=24A; izolovaný, LGY	průřez 2,5; 50x, In=24A; izolovaný, LGY	56/4
-"-	=OPT.51+MX0	1	4XW5-7W1S	ZAP/TW 1	pro svorku ZDU 2,5; izolovaný, LGY	pro svorku ZDU 2,5; izolovaný, LGY	56/3
-"-	=OPT.51+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/2
-"-	=OPT.51+MX0	11	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	LIGHT BARRIER RECEIVER	24/12
-"-	=OPT.51+MX0	2	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	24/16
-"-	=OPT.52+MX0	1	4XW5-7QVL	ZQV 2.5/50	průřez 2,5; 50x, In=24A; izolovaný, LGY	průřez 2,5; 50x, In=24A; izolovaný, LGY	56/7
-"-	=OPT.52+MX0	1	4XW5-7W1S	ZAP/TW 1	pro svorku ZDU 2,5; izolovaný, LGY	pro svorku ZDU 2,5; izolovaný, LGY	56/6
-"-	=OPT.52+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/5
-"-	=OPT.53+MX0	1	4XW5-7QVL	ZQV 2.5/50	průřez 2,5; 50x, In=24A; izolovaný, LGY	průřez 2,5; 50x, In=24A; izolovaný, LGY	56/10
-"-	=OPT.53+MX0	1	4XW5-7W1S	ZAP/TW 1	pro svorku ZDU 2,5; izolovaný, LGY	pro svorku ZDU 2,5; izolovaný, LGY	56/9
-"-	=OPT.53+MX0	2	4XW5-PZEW	ZEW	pro svorku ZDU; LGY	pro svorku ZDU; LGY	56/8
-XT9	=OPT.55+MX0	4	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	LIGHT-HOUSE	30/17
-"-	=OPT.55+MX0	1	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	30/20

TERMINALS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-XT9.1	=OPT.55+MZ1	4	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	LIGHT-HOUSE	30/17
-"-	=OPT.55+MZ1	1	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	30/20
-XT6	=OPT.70+MX0	4	4XW7-212S	ZT 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;2 hřebeny	CATCHER WATER LEVEL CONTROL DOWN	34/12
-"-	=OPT.70+MX0	2	4XW8-212Z	ZTPE 2.5/2AN/1	průřez 0,5-2,5 mm,1 pruž.vst, 1 konektor;0 hřebeny	-"-	34/13
-XT2.1	=OPT.90+MX0	5	4XW5-722S	ZDU 2.5	pro průřez 0,5-2,5 mm, 2 pruž.vstupy, 2 hřebeny	CENTRAL LUBRICATION	17/11

CONNECTORS - X1 AXIS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-XCBQ1.1	=AXS.X1+MX1	1	4YB3-4I18	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.X1+MX1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.X1+MX1	1	4YB3-4Z00	EPIC M23 F6 N7-10	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	
-XCM1	=AXS.X1+MX1	1	4YB3-3ZD7	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11, (F) 2/1mm	ELECTRIC DRIVE X1	43/8

CONNECTORS - Y1 AXIS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-XCBQ3.1	=AXS.Y1+MY1	1	4YB3-4I18	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y1+MY1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y1+MY1	1	4YB3-4Z00	EPIC M23 F6 N7-10	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	
-XCM3	=AXS.Y1+MY1	1	4YB3-3ZD7	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11, (F) 2/1mm	ELECTRIC DRIVE Y1	44/8

CONNECTORS - Y2 AXIS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-XCBQ4.1	=AXS.Y2+MY2	1	4YB3-4I18	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y2+MY2	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Y2+MY2	1	4YB3-4Z00	EPIC M23 F6 N7-10	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	
-XCM4	=AXS.Y2+MY2	1	4YB3-3ZD7	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11, (F) 2/1mm	ELECTRIC DRIVE Y2	45/8

CONNECTORS - Z1 AXIS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-XCBQ5.1	=AXS.Z1+MZ1	1	4YB3-4I18	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Z1+MZ1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.Z1+MZ1	1	4YB3-4Z00	EPIC M23 F6 N7-10	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	
-XCM5	=AXS.Z1+MZ1	2	4YB3-3ZD7	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11, (F) 2/1mm	ELECTRIC DRIVE Z1	46/8

CONNECTORS - A1 AXIS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-XCBQ7	=AXS.A1+MAB1	1	4YB3-4I12	P (anti clockwise) =12, 73002712	P (anti clockwise)=12, 73002712	P (anti clockwise)=12, 73002712	
-"-	=AXS.A1+MAB1	1	4YB3-4I18	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.A1+MAB1	1	4YB3-4V00	EPIC M23 D6 N7-10	EPIC CIRCON M23 D6 N7-10 mm, Coding ring BK	EPIC CIRCON M23 D6 N7-10 mm, Coding ring BK	
-"-	=AXS.A1+MAB1	1	4YB3-4Z00	EPIC M23 F6 N7-10	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	
-XCM7	=AXS.A1+MAB1	1	4YB3-3VF7	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11, (F) 2/1mm	ELECTRIC DRIVE A1	47/8
-"-	=AXS.A1+MAB1	1	4YB3-3ZD7	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11, (F) 2/1mm	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11, (F) 2/1mm	

CONNECTORS - B1 AXIS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-XCBQ8	=AXS.B1+MAB1	1	4YB3-4I12	P (anti clockwise) =12, 73002712	P (anti clockwise)=12, 73002712	P (anti clockwise)=12, 73002712	
-"-	=AXS.B1+MAB1	1	4YB3-4I18	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	E (clockwise)=12, 73002718	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MD1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4MK1	EPIC M23 BCEMS 1MM 1.0 AU	EPIC M23 BCEMS 1MM 1.0 AU (F) 0,14-1mm2	-"-	
-"-	=AXS.B1+MAB1	1	4YB3-4V00	EPIC M23 D6 N7-10	EPIC CIRCON M23 D6 N7-10 mm, Coding ring BK	EPIC CIRCON M23 D6 N7-10 mm, Coding ring BK	
-"-	=AXS.B1+MAB1	1	4YB3-4Z00	EPIC M23 F6 N7-10	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	EPIC CIRCON M23 F6 N7-10 mm, Coding ring BK	
-XCM8	=AXS.B1+MAB1	1	4YB3-3VF7	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11, (F) 2/1mm	ELECTRIC DRIVE B1	48/8
-"-	=AXS.B1+MAB1	1	4YB3-3ZD7	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11, (F) 2/1mm	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11, (F) 2/1mm	

OTHER CONNECTORS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-XC70.1	=AXS.A1+MAB1	1	4XE1-600B	72/VDE	lustrsvorka pro průřez 1,5, bílá	AXE A REFERENCE1	41/3
-XC10	=AXS.X1+MX0	2	4XW7-25CS	ZP 2.5/1AN/12	průřez 0,5-2,5 mm, 12-pólová sv. konektorová	X AXIS TROLLEY EXTERNAL CIRCUITS1	35/6
-"-	=AXS.X1+MX0	2	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	35/2
-"-	=AXS.X1+MX1	1	4YWR-2S64	SAI-6-M 5P M12	Integrátor pasivní 6(F) x 5-pole /30V/2A/IP68	-"-	35/1
-XC11	=AXS.X1+MX1	1	4YWR-2S64	SAI-6-M 5P M12	Integrátor pasivní 6(F) x 5-pole /30V/2A/IP68	-"-	36/1
-XC11.5	=AXS.X1+MX1	1	4YWR-M120	SAIS-5/7	Konektor na kabel rovný M12/5/7-30V/2A/IP68	-"-	36/15
-XC30	=AXS.Y1+MX0	1	4XW7-25DS	ZP 2.5/1AN/13	průřez 0,5-2,5 mm, 13-pólová sv. konektorová	Y AXIS TROLLEY EXTERNAL CIRCUITS1	37/6
-"-	=AXS.Y1+MX0	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	37/3
-"-	=AXS.Y1+MY1	1	4YWR-2S44	SAI-4-M 5P M12	Integrátor pasivní 4(F) x 5-pole /30V/2A/IP68	-"-	37/2
-XC40	=AXS.Y2+MX0	1	4XW7-25DS	ZP 2.5/1AN/13	průřez 0,5-2,5 mm, 13-pólová sv. konektorová	Y AXIS TROLLEY EXTERNAL CIRCUITS2	38/6
-"-	=AXS.Y2+MX0	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	38/3
-"-	=AXS.Y2+MY2	1	4YWR-2S44	SAI-4-M 5P M12	Integrátor pasivní 4(F) x 5-pole /30V/2A/IP68	-"-	38/2
-XC50	=AXS.Z1+MX0	1	4XW7-25DS	ZP 2.5/1AN/13	průřez 0,5-2,5 mm, 13-pólová sv. konektorová	Z AXIS TROLLEY EXTERNAL CIRCUITS1	39/3
-"-	=AXS.Z1+MX0	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	39/9
-XC50.1	=AXS.Z1+MZ1	1	4XW7-25DS	ZP 2.5/1AN/13	průřez 0,5-2,5 mm, 13-pólová sv. konektorová	-"-	39/3
-"-	=AXS.Z1+MZ1	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	39/9
-XC1	=OPT.00+MX0	1	4YH1-Z230	Z-SD230	16A, 230V, přímá, Schuko	MOUNTING SOCKED 230VAC/50Hz	15/16
-XC4	=OPT.00+MX0	1	4XW7-25DS	ZP 2.5/1AN/13	průřez 0,5-2,5 mm, 13-pólová sv. konektorová	CANopen DISTRIBUTION	30/2
-"-	=OPT.00+MX0	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	30/7
-XC5	=OPT.00+MX0	1	4XW7-25DS	ZP 2.5/1AN/13	průřez 0,5-2,5 mm, 13-pólová sv. konektorová	HAND WHEEL	25/2
-XC6	=OPT.00+MX0	1	4XW7-25CS	ZP 2.5/1AN/12	průřez 0,5-2,5 mm, 12-pólová sv. konektorová	PRESSURE OF THE AIR	34/3
-"-	=OPT.00+MX0	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	34/3
-XC20	=OPT.20+MZ1	1	4YW1-12S0 M	HDC Kit HA 04.406	Plast, zásuvka panel 90st, vidlice přímá kabelová	OPT20 Z AXIS ABRASIVE FEEDER1	49/6
-XC30	=OPT.30+EXTe	1	4IG3-201C	SB C 1,6/0,8	černá, 1,6/0,8; smršťovací poměr 2:1	černá, 1,6/0,8; smršťovací poměr 2:1	
-"-	=OPT.30+EXTe	1	4IG3-201C	SB C 1,6/0,8	černá, 1,6/0,8; smršťovací poměr 2:1	-"-	
-"-	=OPT.30+EXTe	1	4IG3-201C	SB C 1,6/0,8	černá, 1,6/0,8; smršťovací poměr 2:1	-"-	
-"-	=OPT.30+EXTe	1	4IG3-201C	SB C 1,6/0,8	černá, 1,6/0,8; smršťovací poměr 2:1	-"-	
-"-	=OPT.30+EXTe	1	4IG3-201C	SB C 1,6/0,8	černá, 1,6/0,8; smršťovací poměr 2:1	-"-	
-"-	=OPT.30+EXTe	1	4IG3-201C	SB C 1,6/0,8	černá, 1,6/0,8; smršťovací poměr 2:1	-"-	
-"-	=OPT.30+EXTe	1	4IG3-201C	SB C 1,6/0,8	černá, 1,6/0,8; smršťovací poměr 2:1	-"-	
-"-	=OPT.30+EXTe	1	4IG3-201C	SB C 1,6/0,8	černá, 1,6/0,8; smršťovací poměr 2:1	-"-	
-"-	=OPT.30+EXTe	1	4YC1-Z150	CAN 15 Z	zásuvka CANNON s pájecím žlábkem 15 pin	zásuvka CANNON s pájecím žlábkem 15 pin	
-"-	=OPT.30+EXTe	1	4YK1-1P01	CR 15 AD1	Deska konektoru pro montáž D-SUB 15 PIN vel. 44.27	Deska konektoru pro montáž D-SUB 15 PIN vel. 44.27	
-"-	=OPT.30+EXTe	1	4YK1-1Z01	CHI 06 LS	Kryt zásuvky s přírubou průchozí +víčko vel. 44.27	Kryt zásuvky s přírubou průchozí +víčko vel. 44.27	
-XC5	=OPT.30+MX0	1	4XW7-25DS	ZP 2.5/1AN/13	průřez 0,5-2,5 mm, 13-pólová sv. konektorová	HAND WHEEL	25/7
-"-	=OPT.30+MX0	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	25/11
-"-	=OPT.47+MX0	1	4XW7-25DS	ZP 2.5/1AN/13	průřez 0,5-2,5 mm, 13-pólová sv. konektorová	COMMUNICATION WITH HIGH PRESSURE PUMP	25/15
-"-	=OPT.47+MX0	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	25/16
-XC7	=OPT.47+MX0	2	4XW7-25CS	ZP 2.5/1AN/12	průřez 0,5-2,5 mm, 12-pólová sv. konektorová	průřez 0,5-2,5 mm, 12-pólová sv. konektorová	42/2
-"-	=OPT.47+MX0	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	42/19
-XC8	=OPT.51+MX0	1	4XW7-25CS	ZP 2.5/1AN/12	průřez 0,5-2,5 mm, 12-pólová sv. konektorová	LIGHT BARRIER RECEIVER	24/12
-"-	=OPT.51+MX0	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	24/16
-XC9	=OPT.55+MX0	1	4XW7-25CS	ZP 2.5/1AN/12	průřez 0,5-2,5 mm, 12-pólová sv. konektorová	LIGHT-HOUSE	30/17
-"-	=OPT.55+MX0	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	30/20
-XC9.1	=OPT.55+MZ1	1	4XW7-25CS	ZP 2.5/1AN/12	průřez 0,5-2,5 mm, 12-pólová sv. konektorová	-"-	30/17
-"-	=OPT.55+MZ1	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	30/20
-XC6	=OPT.70+MX0	1	4XW7-25CS	ZP 2.5/1AN/12	průřez 0,5-2,5 mm, 12-pólová sv. konektorová	CATCHER WATER LEVEL CONTROL DOWN	34/12
-"-	=OPT.70+MX0	1	4XW8-251Z	ZP 2.5/1AN/1 GN	průřez 0,5-2,5 mm, 1-pólová sv. konektorová zž	-"-	34/13

POWER CABELS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-WLM7	=AXS.A1+EXTe	1	4WL4-504G	Ölflex-FD 855CP 4G1	126g/m, d=9mm, R=7,5d	ELECTRIC DRIVE A1	47/9
-"-	=AXS.A1+EXTm	1		Part of M		-"-	47/9
-WLM8	=AXS.B1+EXTe	1	4WL4-504G	Ölflex-FD 855CP 4G1	126g/m, d=9mm, R=7,5d	ELECTRIC DRIVE B1	48/9
-"-	=AXS.B1+EXTm	1		Part of M		-"-	48/9
-WLM1	=AXS.X1+EXTe	1	4WL4-504G	Ölflex-FD 855CP 4G1	126g/m, d=9mm, R=7,5d	ELECTRIC DRIVE X1	43/9
-"-	=AXS.X1+EXTm	1		Part of M		-"-	43/9
-WLM3	=AXS.Y1+EXTe	1	4WL4-504G	Ölflex-FD 855CP 4G1	126g/m, d=9mm, R=7,5d	ELECTRIC DRIVE Y1	44/9
-"-	=AXS.Y1+EXTm	1		Part of M		-"-	44/9
-WLM4	=AXS.Y2+EXTe	1	4WL4-504G	Ölflex-FD 855CP 4G1	126g/m, d=9mm, R=7,5d	ELECTRIC DRIVE Y2	45/9
-"-	=AXS.Y2+EXTm	1		Part of M		-"-	45/9
-WLM5	=AXS.Z1+EXTe	1	4WL4-507G	Ölflex-FD 855CP 7G1	196g/m, d=11,8mm, R=7,5d	ELECTRIC DRIVE Z1	46/11
-"-	=AXS.Z1+EXTm	1		Part of M		-"-	46/11
-WL1	=OPT.00+MX0	5	4WK1-705C	CMSM 5Cx2,5	max.21A, 330,6g/m, d=14,5mm	POWER SUPPLY CABLE	15/2
-WL90	=OPT.90+EXTe	1	4WL8-407G	Ölflex CLASIC 110 7G0,75	50,0g/m, d=7,3mm, Ue/U:300/500, VDE	50,0g/m, d=7,3mm, Ue/U:300/500, VDE	17/11

DATA CABELS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-WS70.1	=AXS.A1+MAB1	1	4WB1-207X	Semoflex D-PVC 7x0,5	83g/m, d=8,3mm, R=12d; zk. napětí 2,0kV	AXE A REFERENCE1	41/3
-WS10.1	=AXS.X1+MX1	1		Part of XC		X AXIS TROLLEY EXTERNAL CIRCUITS1	35/2
-WS10.2	=AXS.X1+MX1	1		Part of XC		-"-	36/2
-WS30	=AXS.Y1+MY1	1		Part of XC		Y AXIS TROLLEY EXTERNAL CIRCUITS1	37/2
-WS40	=AXS.Y2+MY2	1		Part of XC		Y AXIS TROLLEY EXTERNAL CIRCUITS2	38/2
-WS50	=AXS.Z1+MX0	1	4WB1-212X	Semoflex D-PVC 12x0,5	150/m, d=10,0mm, R=12d; zk. napětí 2,0kV	EXTERNAL CIRCUITS TROLLEY Z1, A1,B1	39/2
-WS1	=OPT.00+EXTe	1	4WL8-403G	Ölflex CLASIC 110 3G0,75	21,6g/m, d=5,7mm, Ue/U:300/500, VDE	PRESSURE OF THE AIR	34/2
-WS6	=OPT.00+EXTe	1	4WL8-403G	Ölflex CLASIC 110 3G0,75	21,6g/m, d=5,7mm, Ue/U:300/500, VDE	FRONT PROTECTION VISOR	34/8
-WS20	=OPT.20+EXTe	1	4WB3-Z122	Semofl.Robschl. 2x1+(2x0,25)	XXg/m, d=X,Xmm, R=XXd; zk. napětí 2,0kV, PUR	OPT20 Z AXIS ABRASIVE FEEDER1	49/7
-WS30	=OPT.30+EXTe	1	4WB3-1420	Semoflex Roboschlepp 4x2x0,35	35g/m, d=7,8mm, R=7,5d; zk. napětí 2,0kV, PUR	HAND WHEEL	25/11
-WS7	=OPT.47+EXTe	1	4WL8-425G	Ölflex CLASIC 110 25G0,75	180,0g/m, d=13,8mm, Ue/U:300/500, VDE	COMMUNICATION WITH HIGH PRESSURE PUMP JETS-3,8/60 STANDARD	42/2
-WS47.1	=OPT.47+EXTe	1	4WL7-3210	Unitr.-FD CP(TP) 1x2x0,5	47g/m, d=6,4mm, R=7,5d	COMMUNICATION WITH HIGH PRESSURE PUMP	25/16
-WSB2.1	=OPT.51+EXTm	1		Part of FB		LIGHT BARRIER RECEIVER	24/11
-WSB2.2	=OPT.51+EXTm	1		Part of FB		LIGHT BARRIER TRANSMITTER	24/18
-WS9	=OPT.55+EXTe	1	4WL3-305G	Ölflex-FD 855P 5G0,5	14g/m, d=5,9mm, R=5d	LIGHT-HOUSE	30/17
-WS7.1	=OPT.70+EXTe	1	4WL8-403G	Ölflex CLASIC 110 3G0,75	21,6g/m, d=5,7mm, Ue/U:300/500, VDE	CATCHER WATER LEVEL CONTROL DOWN	34/12
-WS7.2	=OPT.70+EXTe	1	4WL8-403G	Ölflex CLASIC 110 3G0,75	21,6g/m, d=5,7mm, Ue/U:300/500, VDE	CATCHER WATER LEVEL CONTROL UP	34/16
-WS17	=OPT.90+EXTe	1	4WL8-302X	Ölflex CLASIC 110 2X0,5	15g/m, d=5,1mm, Ue/U:300/500, VDE	CENTRAL LUBRICATION X1	36/19

SENSOR CABELS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-WSQ72	=AXS.A1+EXTm	1		Part of SQ		AXE A REFERENCE1	41/3
-WSQ82	=AXS.B1+EXTm	1		Part of SQ		AXE B REFERENCE1	41/8
-WSQ12	=AXS.X1+EXTe	1	4YW2-5M01	SAIL-M12G-5-1,5U	Konektor M12 (Male) 5-polový s 1,5m kabelem	N_STOP X1	35/6
-WSQ13	=AXS.X1+EXTe	1	4YW2-5M01	SAIL-M12G-5-1,5U	Konektor M12 (Male) 5-polový s 1,5m kabelem	P_STOP X1	35/9
-WSQ18	=AXS.X1+EXTe	1	4YW2-5M01	SAIL-M12G-5-1,5U	Konektor M12 (Male) 5-polový s 1,5m kabelem	Konektor M12 (Male) 5-polový s 1,5m kabelem	36/15
-WSQ11	=AXS.X1+EXTm	1		Part of SQ		AXE X REFERENCE1	35/2
-WSQ32	=AXS.Y1+EXTe	1	4YW2-5M01	SAIL-M12G-5-1,5U	Konektor M12 (Male) 5-polový s 1,5m kabelem	N_STOP Y1	37/5
-WSQ33	=AXS.Y1+EXTe	1	4YW2-5M01	SAIL-M12G-5-1,5U	Konektor M12 (Male) 5-polový s 1,5m kabelem	P_STOP Y1	37/8
-WSQ31	=AXS.Y1+EXTm	1		Part of SQ		AXE Y REFERENCE1	37/3
-WSQ41	=AXS.Y2+EXTm	1		Part of SQ		AXE Y REFERENCE2	38/3
-WSQ51	=AXS.Z1+EXTm	1		Part of SQ		AXE Z REFERENCE1	40/2
-WSQ52	=AXS.Z1+EXTm	1		Part of SQ		N_STOP Z1	40/5
-WSQ53	=AXS.Z1+EXTm	1		Part of SQ		P_STOP Z1	40/7
-WSQ20.1	=OPT.20+EXTm	1		Part of SQ		ABRASIVE FEEDER P_STOP1	50/3
-WSQ20.2	=OPT.20+EXTm	1		Part of SQ		Z ABRASIVE FEEDER N_STOP1	50/6
-WSQ14	=OPT.65+EXTm	1		Part of SQ		HEIGHT CONTROL SYSTEM Z1	36/9

SIGNAL CABELS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-WSM7	=AXS.A1+EXTe	1	4WI1-1027	(5x(2x0,14)+(2x0,5)) AWM 2464	113g/m, d=9,5mm, R=10d; zk. napětí 0, 5kV, TEF	ELECTRIC DRIVE A1	47/2
-WSM7.1	=AXS.A1+EXTm	1		Part of M		-"-	47/2
-WSM8	=AXS.B1+EXTe	1	4WI1-1027	(5x(2x0,14)+(2x0,5)) AWM 2464	113g/m, d=9,5mm, R=10d; zk. napětí 0, 5kV, TEF	ELECTRIC DRIVE B1	48/2
-WSM8.1	=AXS.B1+EXTm	1		Part of M		-"-	48/2
-WSM1.1	=AXS.X1+EXTe	1	4WB3-1420	Semoflex Roboschlepp 4x2x0, 25	35g/m, d=7,8mm, R=7,5d; zk. napětí 2, 0kV, PUR	ELECTRIC DRIVE X1	43/4
-"-	=AXS.X1+EXTm	1		Part of M		-"-	43/4
-WSM3.1	=AXS.Y1+EXTe	1	4WB3-1420	Semoflex Roboschlepp 4x2x0, 25	35g/m, d=7,8mm, R=7,5d; zk. napětí 2, 0kV, PUR	ELECTRIC DRIVE Y1	44/4
-"-	=AXS.Y1+EXTm	1		Part of M		-"-	44/4
-WSM4.1	=AXS.Y2+EXTe	1	4WB3-1420	Semoflex Roboschlepp 4x2x0, 25	35g/m, d=7,8mm, R=7,5d; zk. napětí 2, 0kV, PUR	ELECTRIC DRIVE Y2	45/4
-"-	=AXS.Y2+EXTm	1		Part of M		-"-	45/4
-WSM5.1	=AXS.Z1+EXTe	1	4WB3-1420	Semoflex Roboschlepp 4x2x0, 25	35g/m, d=7,8mm, R=7,5d; zk. napětí 2, 0kV, PUR	ELECTRIC DRIVE Z1	46/4
-"-	=AXS.Z1+EXTm	1		Part of M		-"-	46/4

OTHER CABELS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-WSYV11	=AXS.X1+EXTe	1	4YW2-5M01	SAIL-M12G-5-1,5U	Konektor M12 (Male) 5-polový s 1,5m kabelem	WATER Z1	35/15
-WSA1.1	=OPT.00+MX0	1	4WB3-1220	Semoflex Roboschlepp 2x2x0, 25	22g/m, d=6,6mm, R=7,5d; zk. napětí 2, 0kV, PUR	CANopen 1	19/3
-WSA1.2	=OPT.00+MX0	1	4WB3-1220	Semoflex Roboschlepp 2x2x0, 25	22g/m, d=6,6mm, R=7,5d; zk. napětí 2, 0kV, PUR	CANopen 2	19/6
-WSA1.4	=OPT.30+MX0	1	4WB3-1320	Semoflex Roboschlepp 3x2x0, 25	30g/m, d=7,1mm, R=7,5d; zk. napětí 2, 0kV, PUR	XCOM 2	19/12
-WSA1.3	=OPT.47+MX0	1	4WB3-1320	Semoflex Roboschlepp 3x2x0, 25	30g/m, d=7,1mm, R=7,5d; zk. napětí 2, 0kV, PUR	-"-	19/9
-WSYV14	=OPT.65+EXTe	1	4YW2-5M01	SAIL-M12G-5-1,5U	Konektor M12 (Male) 5-polový s 1,5m kabelem	Z AXIS HEIGHT CONTROL SYSTEM MOVE1	36/12

BUTTON CONTROLS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-QS1	=OPT.00+MX0	1	4CY1-0160	NLT 16/3E/Z33	16A, AC3/5,5KW, AC23/7,5kW, 3P	MAIN SWITCH	15/3
-SB1	=OPT.00+PAE	1	4BT2-960Z	ZB5AW0B31	Polosestava LED integrovaná 24V, zelená, 1NO	Polosestava LED integrovaná 24V, zelená, 1NO	
-"-	=OPT.00+PAE	1	4BT2-530Z	ZB5CW333	Montáž s polosestavou objímky s LED, 24V, zelená	CONTROLLER SUPPLY START	21/8
-SB2	=OPT.00+PAE	1	4BT2-9001	ZBE102	1NC	EMERGENCY DISCONECT 1	21/2
-"-	=OPT.00+PAE	1	4BT2-190R	XB5AS542	emerg. stop s aretací, 1NC	-"-	21/2
-SB3	=OPT.00+PAE	1	4BT2-961R	ZB5AW0B42	Polosestava LED integrovaná 24V, červená, 1NC	Polosestava LED integrovaná 24V, červená, 1NC	
-"-	=OPT.00+PAE	1	4BT2-530R	ZB5CW343	Montáž s polosestavou objímky s LED, 24V, červená	CONTROLLER SUPPLY STOP	21/6
-SB4	=OPT.00+PAE	1	4BT2-970B	ZB5AW0B15	Polosestava LED integrovaná 24V, bílá, 1NO+1NC	Polosestava LED integrovaná 24V, bílá, 1NO+1NC	
-"-	=OPT.00+PAE	1	4BT2-4GNR	ZB5AW813743	Montáž s polosestavou objímky s LED, 24V	Montáž s polosestavou objímky s LED, 24V	
-"-	=OPT.00+PAE	1	4BT2-4080	ZBW-008	Dvojitá průhledná krytka na dvojici tlačítek	Dvojitá průhledná krytka na dvojici tlačítek	
-SB5	=OPT.00+PAE	1	4BT2-970B	ZB5AW0B15	Polosestava LED integrovaná 24V, bílá, 1NO+1NC	Polosestava LED integrovaná 24V, bílá, 1NO+1NC	
-"-	=OPT.00+PAE	1	4BT2-4GNR	ZB5AW813743	Montáž s polosestavou objímky s LED, 24V	Montáž s polosestavou objímky s LED, 24V	
-"-	=OPT.00+PAE	1	4BT2-4080	ZBW-008	Dvojitá průhledná krytka na dvojici tlačítek	Dvojitá průhledná krytka na dvojici tlačítek	
-SB6	=OPT.00+PAE	1	4BT2-530R	ZB5CW343	Montáž s polosestavou objímky s LED, 24V, červená	CETRAL WATER JETS STOP	22/9
-"-	=OPT.00+PAE	1	4BT2-961R	ZB5AW0B42	Polosestava LED integrovaná 24V, červená, 1NC	Polosestava LED integrovaná 24V, červená, 1NC	
-SB7	=OPT.50+PAE	1	4BT2-140B	XB5AW31B5	1NO + 1NC, LED integrovaná 24V, bílá, transp.	LOADING DEMAND	21/16
-HL1	=OPT.55+EXTm	1	OHP1-1000	LCE-302W-RYG	IP68, 24VAC/DC, RD+YE+GN	LIGHT-HOUSE	30/16
-SB8	=OPT.70+PAE	1	4BT2-290C	XB5AD33	černá, D22I, 2NO, 3 polohy	CATCHER WATER LEVEL CONTROL DOWN	22/13

SENSORS

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-SQ72	=AXS.A1+EXTm	1	OSA2-BES0	BES-517-398-V0-03	Indukční čidlo kvádrové PNP-NO; 24VDC/200mA; IP65	AXE A REFERENCE1	41/3
-SQ82	=AXS.B1+EXTm	1	OSA2-BES0	BES-517-398-V0-03	Indukční čidlo kvádrové PNP-NO; 24VDC/200mA; IP65	AXE B REFERENCE1	41/8
-SQ11	=AXS.X1+EXTm	1	OSI2-0101	IFA3004-APKG	IFA3004-APKG, PNP, M12X50, Kabel 2m PVR, 12-24VDC	AXE X REFERENCE1	35/3
-SQ12	=AXS.X1+EXTm	1	OST1-3210	XCM N2103L1	XCM N2103L1 s kladkou 1NC+1NO, 230V/6A, IP65	N_STOP X1	35/6
-SQ13	=AXS.X1+EXTm	1	OST1-3210	XCM N2103L1	XCM N2103L1 s kladkou 1NC+1NO, 230V/6A, IP65	P_STOP X1	35/9
-SQ18	=AXS.X1+EXTm	1	OSA4-BCS7	BCS00H7	Kapacitní čidlo kvádrové PNP-NO; 24VDC/50mA; IP67	HUMIDITY IN Z AXE	36/15
-SQ31	=AXS.Y1+EXTm	1	OST2-0110	XS612B1PBL2	XS612B1PBL2,NC,PNP, M12X50, Kabel 2m PVR, 12-24VDC	AXE Y REFERENCE1	37/3
-SQ32	=AXS.Y1+EXTm	1	OST1-3210	XCM N2103L1	XCM N2103L1 s kladkou 1NC+1NO, 230V/6A, IP65	N_STOP Y1	37/5
-SQ33	=AXS.Y1+EXTm	1	OST1-3210	XCM N2103L1	XCM N2103L1 s kladkou 1NC+1NO, 230V/6A, IP65	P_STOP Y1	37/8
-SQ41	=AXS.Y2+EXTm	1	OST2-0110	XS612B1PBL2	XS612B1PBL2,NC,PNP, M12X50, Kabel 2m PVR, 12-24VDC	AXE Y REFERENCE2	38/3
-SQ51	=AXS.Z1+EXTm	1	OSR2-1001	IAF08BBDKX-62647	PNP, 8x8mm, Kabel 2m (NO), 10-30VDC/150mA	AXE Z REFERENCE1	40/3
-SQ52	=AXS.Z1+EXTm	1	OST1-3210	XCM N2103L1	XCM N2103L1 s kladkou 1NC+1NO, 230V/6A, IP65	N_STOP Z1	40/5
-SQ53	=AXS.Z1+EXTm	1	OST1-3210	XCM N2103L1	XCM N2103L1 s kladkou 1NC+1NO, 230V/6A, IP65	P_STOP Z1	40/7
-SP1	=OPT.00+EXTm	1				PRESSURE OF THE AIR	34/3
-SQ20.1	=OPT.20+EXTm	1	OST2-1110	XS608B1PBL2	XS608B1PBL2, PNP, M8X50, Kabel 2m PVR, 12-24VDC	ABRASIVE FEEDER P_STOP1	50/3
-SQ20.2	=OPT.20+EXTm	1	OST2-1110	XS608B1PBL2	XS608B1PBL2, PNP, M8X50, Kabel 2m PVR, 12-24VDC	Z ABRASIVE FEEDER N_STOP1	50/6
-SQ14	=OPT.65+EXTm	1	OSF-4000	SMAT-8E-S50-IU-M8	SMAT-8E-S50-IU-M8, 24-30VDC, U=0-10V/I=0-20mA	HEIGHT CONTROL SYSTEM Z1	36/10
-SP17	=OPT.90+EXTm	1				CENTRAL LUBRICATION X1	36/19

DRIVERS, EM. VALVES

Part		PART LENGHT	CAT. NO	Type	DESCRIPTION	FUNCTION	PG.
-M7	=AXS.A1+EXTm	1	OMH1-2401	FHA-14C-100-D200-K-SP	FHA-14C-100-D200-K-SP	ELECTRIC DRIVE A1	47/1
-M8	=AXS.B1+EXTm	1	OMH1-2401	FHA-14C-100-D200-K-SP	FHA-14C-100-D200-K-SP	ELECTRIC DRIVE B1	48/1
-M1	=AXS.X1+EXTm	1		HPG-20A-XX-H-RES-SP		ELECTRIC DRIVE X1	43/3
-YV11	=AXS.X1+EXTm	1	Y0N1-A001	V60A413A-A2-13J	solenoid QM/48/127/21 - 24VDC/0,08A-2W	WATER Z1	35/16
-M3	=AXS.Y1+EXTm	1		HPG-20A-XX-H-RES-SP		ELECTRIC DRIVE Y1	44/3
-M4	=AXS.Y2+EXTm	1		HPG-20A-XX-H-RES-SP		ELECTRIC DRIVE Y2	45/3
-M5	=AXS.Z1+EXTm	1	OMK1-R003	AKM24C-NBB	240VA/320VDC,1620-2000ot , 1,42 (4,5) A	ELECTRIC DRIVE Z1	46/3
-MX3	=OPT.00+EXTm	1	4MR3-1500	SK 3303.100	Nástěnný typ,230VAC/In=2, 6A/FU=10A/Pchladici=500W	AIR CONDITION	16/2
-YV6	=OPT.00+EXTm	1	Y0N1-A001	V60A413A-A2-13J	solenoid QM/48/127/21 - 24VDC/0,08A-2W	FRONT PROTECTION VISOR	34/8
-M20	=OPT.20+EXTm	1	48FB-1000	IFA61/2CAN IS DS/3DCB68/O001RPP41	24-34VDC/6A/CANopen/IP68, stabilizace Uccint=24VDC	OPT20 Z AXIS ABRASIVE FEEDER1	50/4
-YV14	=OPT.65+EXTm	1	Y0N1-A002	V60A513A-A2-13J	solenoid QM/48/127/21 - 24VDC/0,008A-2W	Z AXIS HEIGHT CONTROL SYSTEM MOVE1	36/12
-YV7.1	=OPT.70+EXTm	1	Y0N1-A001	V60A413A-A2-13J	solenoid QM/48/127/21 - 24VDC/0,08A-2W	CATCHER WATER LEVEL CONTROL DOWN	34/12
-YV7.2	=OPT.70+EXTm	1	Y0N1-A001	V60A413A-A2-13J	solenoid QM/48/127/21 - 24VDC/0,08A-2W	CATCHER WATER LEVEL CONTROL UP	34/16

LIST OF CABLES
WIRING DIAGRAM

DRIVER SERVO-CABELS 1

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-GF2.7:4	=AXS.A1	+MX0	47/8	=AXS.A1+EXTe-WLM7:1WH	47/8	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM7:1	=AXS.A1	+MAB1	47/8
-GF2.7:5	=AXS.A1	+MX0	47/8	=AXS.A1+EXTe-WLM7:2WH	47/8	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM7:4	=AXS.A1	+MAB1	47/8
-GF2.7:6	=AXS.A1	+MX0	47/9	=AXS.A1+EXTe-WLM7:3WH	47/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM7:3	=AXS.A1	+MAB1	47/9
-GF2.7:3	=AXS.A1	+MX0	47/9	=AXS.A1+EXTe-WLM7:GNYE	47/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM7:2	=AXS.A1	+MAB1	47/9
-GF2.7:FB	=AXS.A1	+MX0	47/11	=AXS.A1+EXTe-WLM7:SHL	47/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM7:SHL	=AXS.A1	+MAB1	47/9
-XCM7:1	=AXS.A1	+MAB1	47/8	=AXS.A1+EXTm-WLM7:1WH	47/8	Part of M		-M7:WLM:RD	=AXS.A1	+EXTm	47/8
-XCM7:4	=AXS.A1	+MAB1	47/8	=AXS.A1+EXTm-WLM7:2WH	47/8	Part of M		-M7:WLM:WH	=AXS.A1	+EXTm	47/8
-XCM7:3	=AXS.A1	+MAB1	47/9	=AXS.A1+EXTm-WLM7:3WH	47/9	Part of M		-M7:WLM:BK	=AXS.A1	+EXTm	47/9
-XCM7:2	=AXS.A1	+MAB1	47/9	=AXS.A1+EXTm-WLM7:GNYE	47/9	Part of M		-M7:WLM:GNYE	=AXS.A1	+EXTm	47/9
-XCM7:SHL	=AXS.A1	+MAB1	47/9	=AXS.A1+EXTm-WLM7:SHL	47/9	Part of M		-M7:WLM:SHL	=AXS.A1	+EXTm	47/9
-GF2.8:4	=AXS.B1	+MX0	48/8	=AXS.B1+EXTe-WLM8:1WH	48/8	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM8:1	=AXS.B1	+MAB1	48/8
-GF2.8:5	=AXS.B1	+MX0	48/8	=AXS.B1+EXTe-WLM8:2WH	48/8	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM8:4	=AXS.B1	+MAB1	48/8
-GF2.8:6	=AXS.B1	+MX0	48/9	=AXS.B1+EXTe-WLM8:3WH	48/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM8:3	=AXS.B1	+MAB1	48/9
-GF2.8:3	=AXS.B1	+MX0	48/9	=AXS.B1+EXTe-WLM8:GNYE	48/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM8:2	=AXS.B1	+MAB1	48/9
-GF2.8:FB	=AXS.B1	+MX0	48/11	=AXS.B1+EXTe-WLM8:SHL	48/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM8:SHL	=AXS.B1	+MAB1	48/9
-XCM8:1	=AXS.B1	+MAB1	48/8	=AXS.B1+EXTm-WLM8:1WH	48/8	Part of M		-M8:WLM:RD	=AXS.B1	+EXTm	48/8
-XCM8:4	=AXS.B1	+MAB1	48/8	=AXS.B1+EXTm-WLM8:2WH	48/8	Part of M		-M8:WLM:WH	=AXS.B1	+EXTm	48/8
-XCM8:3	=AXS.B1	+MAB1	48/9	=AXS.B1+EXTm-WLM8:3WH	48/9	Part of M		-M8:WLM:BK	=AXS.B1	+EXTm	48/9
-XCM8:2	=AXS.B1	+MAB1	48/9	=AXS.B1+EXTm-WLM8:GNYE	48/9	Part of M		-M8:WLM:GNYE	=AXS.B1	+EXTm	48/9
-XCM8:SHL	=AXS.B1	+MAB1	48/9	=AXS.B1+EXTm-WLM8:SHL	48/9	Part of M		-M8:WLM:SHL	=AXS.B1	+EXTm	48/9
-GF1.1:4	=AXS.X1	+MX0	43/8	=AXS.X1+EXTe-WLM1:1WH	43/8	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM1:1	=AXS.X1	+MX1	43/8
-GF1.1:6	=AXS.X1	+MX0	43/8	=AXS.X1+EXTe-WLM1:2WH	43/8	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM1:2	=AXS.X1	+MX1	43/8
-GF1.1:5	=AXS.X1	+MX0	43/9	=AXS.X1+EXTe-WLM1:3WH	43/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM1:6	=AXS.X1	+MX1	43/9
-GF1.1:3	=AXS.X1	+MX0	43/9	=AXS.X1+EXTe-WLM1:GNYE	43/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM1:3	=AXS.X1	+MX1	43/9
-GF1.1:FB	=AXS.X1	+MX0	43/11	=AXS.X1+EXTe-WLM1:SHL	43/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM1:SH	=AXS.X1	+MX1	43/9
-XCM1:2	=AXS.X1	+MX1	43/8	=AXS.X1+EXTm-WLM1:BK	43/8	Part of M		-M1:XCM:V	=AXS.X1	+EXTm	43/8
-XCM1:3	=AXS.X1	+MX1	43/9	=AXS.X1+EXTm-WLM1:GNYE	43/9	Part of M		-M1:XCMPE	=AXS.X1	+EXTm	43/9
-XCM1:1	=AXS.X1	+MX1	43/8	=AXS.X1+EXTm-WLM1:RD	43/8	Part of M		-M1:XCM:U	=AXS.X1	+EXTm	43/8
-XCM1:SH	=AXS.X1	+MX1	43/9	=AXS.X1+EXTm-WLM1:SHL	43/9	Part of M		-M1:	=AXS.X1	+EXTm	43/9
-XCM1:6	=AXS.X1	+MX1	43/9	=AXS.X1+EXTm-WLM1:WH	43/9	Part of M		-M1:XCM:W	=AXS.X1	+EXTm	43/9
-GF1.3:4	=AXS.Y1	+MX0	44/8	=AXS.Y1+EXTe-WLM3:1WH	44/8	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM3:1	=AXS.Y1	+MY1	44/8
-GF1.3:6	=AXS.Y1	+MX0	44/8	=AXS.Y1+EXTe-WLM3:2WH	44/8	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM3:2	=AXS.Y1	+MY1	44/8
-GF1.3:5	=AXS.Y1	+MX0	44/9	=AXS.Y1+EXTe-WLM3:3WH	44/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM3:6	=AXS.Y1	+MY1	44/9
-GF1.3:3	=AXS.Y1	+MX0	44/9	=AXS.Y1+EXTe-WLM3:GNYE	44/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM3:3	=AXS.Y1	+MY1	44/9
-GF1.3:FB	=AXS.Y1	+MX0	44/11	=AXS.Y1+EXTe-WLM3:SHL	44/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM3:SH	=AXS.Y1	+MY1	44/9

DRIVER SERVO-CABELS 2

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-XCM3:1	=AXS.Y1	+MY1	44/8	=AXS.Y1+EXTm-WLM3:1WH	44/8	Part of M		-M3:XCM:U	=AXS.Y1	+EXTm	44/8
-XCM3:2	=AXS.Y1	+MY1	44/8	=AXS.Y1+EXTm-WLM3:2WH	44/8	Part of M		-M3:XCM:V	=AXS.Y1	+EXTm	44/8
-XCM3:6	=AXS.Y1	+MY1	44/9	=AXS.Y1+EXTm-WLM3:3WH	44/9	Part of M		-M3:XCM:W	=AXS.Y1	+EXTm	44/9
-XCM3:3	=AXS.Y1	+MY1	44/9	=AXS.Y1+EXTm-WLM3:GNYE	44/9	Part of M		-M3:XCMPE	=AXS.Y1	+EXTm	44/9
-XCM3:SH	=AXS.Y1	+MY1	44/9	=AXS.Y1+EXTm-WLM3:SHL	44/9	Part of M		-M3:	=AXS.Y1	+EXTm	44/9
-GF1.4:4	=AXS.Y2	+MX0	45/8	=AXS.Y2+EXTe-WLM4:1WH	45/8	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM4:1	=AXS.Y2	+MY2	45/8
-GF1.4:6	=AXS.Y2	+MX0	45/8	=AXS.Y2+EXTe-WLM4:2WH	45/8	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM4:2	=AXS.Y2	+MY2	45/8
-GF1.4:5	=AXS.Y2	+MX0	45/9	=AXS.Y2+EXTe-WLM4:3WH	45/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM4:6	=AXS.Y2	+MY2	45/9
-GF1.4:3	=AXS.Y2	+MX0	45/9	=AXS.Y2+EXTe-WLM4:GNYE	45/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM4:3	=AXS.Y2	+MY2	45/9
-GF1.4:FB	=AXS.Y2	+MX0	45/11	=AXS.Y2+EXTe-WLM4:SHL	45/9	Ölflex-FD 855CP 4G1	4WL4-504G	-XCM4:SH	=AXS.Y2	+MY2	45/9
-XCM4:1	=AXS.Y2	+MY2	45/8	=AXS.Y2+EXTm-WLM4:1WH	45/8	Part of M		-M4:XCM:U	=AXS.Y2	+EXTm	45/8
-XCM4:2	=AXS.Y2	+MY2	45/8	=AXS.Y2+EXTm-WLM4:2WH	45/8	Part of M		-M4:XCM:V	=AXS.Y2	+EXTm	45/8
-XCM4:6	=AXS.Y2	+MY2	45/9	=AXS.Y2+EXTm-WLM4:3WH	45/9	Part of M		-M4:XCM:W	=AXS.Y2	+EXTm	45/9
-XCM4:3	=AXS.Y2	+MY2	45/9	=AXS.Y2+EXTm-WLM4:GNYE	45/9	Part of M		-M4:XCMPE	=AXS.Y2	+EXTm	45/9
-XCM4:SH	=AXS.Y2	+MY2	45/9	=AXS.Y2+EXTm-WLM4:SHL	45/9	Part of M		-M4:	=AXS.Y2	+EXTm	45/9
-GF1.5:4	=AXS.Z1	+MX0	46/8	=AXS.Z1+EXTe-WLM5:1WH	46/8	Ölflex-FD 855CP 7G1	4WL4-507G	-XCM5:1	=AXS.Z1	+MZ1	46/8
-GF1.5:5	=AXS.Z1	+MX0	46/8	=AXS.Z1+EXTe-WLM5:2WH	46/8	Ölflex-FD 855CP 7G1	4WL4-507G	-XCM5:4	=AXS.Z1	+MZ1	46/8
-GF1.5:6	=AXS.Z1	+MX0	46/9	=AXS.Z1+EXTe-WLM5:3WH	46/9	Ölflex-FD 855CP 7G1	4WL4-507G	-XCM5:3	=AXS.Z1	+MZ1	46/9
-GF1.5:2	=AXS.Z1	+MX0	46/10	=AXS.Z1+EXTe-WLM5:4WH	46/10	Ölflex-FD 855CP 7G1	4WL4-507G	-XCM5:A	=AXS.Z1	+MZ1	46/10
-GF1.5:1	=AXS.Z1	+MX0	46/10	=AXS.Z1+EXTe-WLM5:5WH	46/10	Ölflex-FD 855CP 7G1	4WL4-507G	-XCM5:B	=AXS.Z1	+MZ1	46/10
-GF1.5:3	=AXS.Z1	+MX0	46/9	=AXS.Z1+EXTe-WLM5:GNYE	46/9	Ölflex-FD 855CP 7G1	4WL4-507G	-XCM5:PE	=AXS.Z1	+MZ1	46/9
-GF1.5:FB	=AXS.Z1	+MX0	46/11	=AXS.Z1+EXTe-WLM5:SHL	46/11	Ölflex-FD 855CP 7G1	4WL4-507G	-XCM5:SH	=AXS.Z1	+MZ1	46/9
-XCM5:1	=AXS.Z1	+MZ1	46/8	=AXS.Z1+EXTm-WLM5:1WH	46/8	Part of M		-M5:XCM:U	=AXS.Z1	+EXTm	46/8
-XCM5:4	=AXS.Z1	+MZ1	46/8	=AXS.Z1+EXTm-WLM5:2WH	46/8	Part of M		-M5:XCM:V	=AXS.Z1	+EXTm	46/8
-XCM5:3	=AXS.Z1	+MZ1	46/9	=AXS.Z1+EXTm-WLM5:3WH	46/9	Part of M		-M5:XCM1:W	=AXS.Z1	+EXTm	46/9
-XCM5:A	=AXS.Z1	+MZ1	46/10	=AXS.Z1+EXTm-WLM5:4WH	46/10	Part of M		-M5:XCM:BR+	=AXS.Z1	+EXTm	46/10
-XCM5:B	=AXS.Z1	+MZ1	46/10	=AXS.Z1+EXTm-WLM5:5WH	46/10	Part of M		-M5:XCM:BR-	=AXS.Z1	+EXTm	46/10
-XCM5:PE	=AXS.Z1	+MZ1	46/9	=AXS.Z1+EXTm-WLM5:GNYE	46/9	Part of M		-M5:XCM1:PE	=AXS.Z1	+EXTm	46/9
-XCM5:SH	=AXS.Z1	+MZ1	46/9	=AXS.Z1+EXTm-WLM5:SHL	46/11	Part of M					

SIGNAL CABELS 1

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-GF2.7:9	=AXS.A1	+MX0	47/3	=AXS.A1+EXTe-WSM7:1BN	47/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:2	=AXS.A1	+MAB1	47/3
-GF2.7:1	=AXS.A1	+MX0	47/3	=AXS.A1+EXTe-WSM7:1GN	47/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:1	=AXS.A1	+MAB1	47/3
-GF2.7:5	=AXS.A1	+MX0	47/5	=AXS.A1+EXTe-WSM7:2GY	47/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:3	=AXS.A1	+MAB1	47/5
-GF2.7:13	=AXS.A1	+MX0	47/5	=AXS.A1+EXTe-WSM7:2YE	47/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:4	=AXS.A1	+MAB1	47/5
-GF2.7:11	=AXS.A1	+MX0	47/4	=AXS.A1+EXTe-WSM7:3VT	47/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:6	=AXS.A1	+MAB1	47/4
-GF2.7:3	=AXS.A1	+MX0	47/4	=AXS.A1+EXTe-WSM7:3WH	47/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:5	=AXS.A1	+MAB1	47/4
-GF2.7:6	=AXS.A1	+MX0	47/5	=AXS.A1+EXTe-WSM7:4BK	47/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:7	=AXS.A1	+MAB1	47/5
-GF2.7:15	=AXS.A1	+MX0	47/6	=AXS.A1+EXTe-WSM7:4RD	47/6	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:8	=AXS.A1	+MAB1	47/6
-GF2.7:8	=AXS.A1	+MX0	47/6	=AXS.A1+EXTe-WSM7:5BU	47/6	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:9	=AXS.A1	+MAB1	47/6
-GF2.7:2	=AXS.A1	+MX0	47/3	=AXS.A1+EXTe-WSM7:6wh-gn	47/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:10	=AXS.A1	+MAB1	47/3
-GF2.7:4	=AXS.A1	+MX0	47/4	=AXS.A1+EXTe-WSM7:6wh-rd	47/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:12	=AXS.A1	+MAB1	47/4
-GF2.7:	=AXS.A1	+MX0	47/2	=AXS.A1+EXTe-WSM7:SHL	47/2	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:P	=AXS.A1	+MAB1	47/2
-XCBQ7:10	=AXS.A1	+MAB1	47/3	=AXS.A1+EXTm-WSM7.1:BK	47/3	Part of M		-M7:WSM:BK	=AXS.A1	+EXTm	47/3
-XCBQ7:7	=AXS.A1	+MAB1	47/5	=AXS.A1+EXTm-WSM7.1:BN	47/5	Part of M		-M7:WSM:LBU	=AXS.A1	+EXTm	47/5
-XCBQ7:9	=AXS.A1	+MAB1	47/6	=AXS.A1+EXTm-WSM7.1:BU	47/6	Part of M		-M7:WSM:BU	=AXS.A1	+EXTm	47/6
-XCBQ7:6	=AXS.A1	+MAB1	47/4	=AXS.A1+EXTm-WSM7.1:GN	47/4	Part of M		-M7:WSM:GN	=AXS.A1	+EXTm	47/4
-XCBQ7:2	=AXS.A1	+MAB1	47/3	=AXS.A1+EXTm-WSM7.1:GY	47/3	Part of M		-M7:WSM:GY	=AXS.A1	+EXTm	47/3
-XCBQ7:8	=AXS.A1	+MAB1	47/6	=AXS.A1+EXTm-WSM7.1:OG	47/6	Part of M		-M7:WSM:OG	=AXS.A1	+EXTm	47/6
-XCBQ7:12	=AXS.A1	+MAB1	47/4	=AXS.A1+EXTm-WSM7.1:RD	47/4	Part of M		-M7:WSM:CL	=AXS.A1	+EXTm	47/4
-XCBQ7:4	=AXS.A1	+MAB1	47/5	=AXS.A1+EXTm-WSM7.1:RD-BU (CL/WH-YE)	47/5	Part of M		-M7:WSM:BN	=AXS.A1	+EXTm	47/5
-XCBQ7:5	=AXS.A1	+MAB1	47/4	=AXS.A1+EXTm-WSM7.1:RD-GN (DG/WH-GN)	47/4	Part of M		-M7:WSM:DGN	=AXS.A1	+EXTm	47/4
-XCBQ7:P	=AXS.A1	+MAB1	47/2	=AXS.A1+EXTm-WSM7.1:SHL	47/2	Part of M		-M7:WSM:SHL	=AXS.A1	+EXTm	47/2
-XCBQ7:1	=AXS.A1	+MAB1	47/3	=AXS.A1+EXTm-WSM7.1:WH (WH-GY)	47/3	Part of M		-M7:WSM:WH	=AXS.A1	+EXTm	47/3
-XCBQ7:3	=AXS.A1	+MAB1	47/5	=AXS.A1+EXTm-WSM7.1:YE	47/5	Part of M		-M7:WSM:YE	=AXS.A1	+EXTm	47/5
-XT50.1:10	=AXS.Z1	+MZ1	39/2	=AXS.A1+MAB1-WS70.1:1	41/3	Semoflex D-PVC 7x0,5	4WB1-207X	-XC70.1:1	=AXS.A1	+MAB1	41/3
-XT50.1:12	=AXS.Z1	+MZ1	39/9	=AXS.A1+MAB1-WS70.1:GNYE	41/9	Semoflex D-PVC 7x0,5	4WB1-207X				
-XT50.1:11	=AXS.Z1	+MZ1	39/9	=AXS.A1+MAB1-WS70.1:2	41/4	Semoflex D-PVC 7x0,5	4WB1-207X	-XC70.1:2	=AXS.A1	+MAB1	41/4
-XT50.1:7	=AXS.Z1	+MZ1	39/7	=AXS.A1+MAB1-WS70.1:3	41/3	Semoflex D-PVC 7x0,5	4WB1-207X	-XC70.1:3	=AXS.A1	+MAB1	41/3
-XT50.1:4	=AXS.Z1	+MZ1	39/4	=AXS.A1+MAB1-WS70.1:4	41/8	Semoflex D-PVC 7x0,5	4WB1-207X	-XC70.1:6	=AXS.A1	+MAB1	41/8
-GF2.8:9	=AXS.B1	+MX0	48/3	=AXS.B1+EXTe-WSM8:1BN	48/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:2	=AXS.B1	+MAB1	48/3
-GF2.8:1	=AXS.B1	+MX0	48/3	=AXS.B1+EXTe-WSM8:1GN	48/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:1	=AXS.B1	+MAB1	48/3
-GF2.8:5	=AXS.B1	+MX0	48/5	=AXS.B1+EXTe-WSM8:2GY	48/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:3	=AXS.B1	+MAB1	48/5
-GF2.8:13	=AXS.B1	+MX0	48/5	=AXS.B1+EXTe-WSM8:2YE	48/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:4	=AXS.B1	+MAB1	48/5
-GF2.8:11	=AXS.B1	+MX0	48/4	=AXS.B1+EXTe-WSM8:3VT	48/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:6	=AXS.B1	+MAB1	48/4
-GF2.8:3	=AXS.B1	+MX0	48/4	=AXS.B1+EXTe-WSM8:3WH	48/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:5	=AXS.B1	+MAB1	48/4
-GF2.8:6	=AXS.B1	+MX0	48/5	=AXS.B1+EXTe-WSM8:4BK	48/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:7	=AXS.B1	+MAB1	48/5
-GF2.8:15	=AXS.B1	+MX0	48/6	=AXS.B1+EXTe-WSM8:4RD	48/6	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:8	=AXS.B1	+MAB1	48/6
-GF2.8:8	=AXS.B1	+MX0	48/6	=AXS.B1+EXTe-WSM8:5BU	48/6	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:9	=AXS.B1	+MAB1	48/6
-GF2.8:2	=AXS.B1	+MX0	48/3	=AXS.B1+EXTe-WSM8:6wh-gn	48/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:10	=AXS.B1	+MAB1	48/3
-GF2.8:4	=AXS.B1	+MX0	48/4	=AXS.B1+EXTe-WSM8:6wh-rd	48/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:12	=AXS.B1	+MAB1	48/4
-GF2.8:	=AXS.B1	+MX0	48/2	=AXS.B1+EXTe-WSM8:SHL	48/2	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:P	=AXS.B1	+MAB1	48/2

SIGNAL CABELS 2

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-XCBQ8:10	=AXS.B1	+MAB1	48/3	=AXS.B1+EXTm-WSM8.1:BK	48/3	Part of M		-M8:WSM:BK	=AXS.B1	+EXTm	48/3
-XCBQ8:7	=AXS.B1	+MAB1	48/5	=AXS.B1+EXTm-WSM8.1:BN	48/5	Part of M		-M8:WSM:LBU	=AXS.B1	+EXTm	48/5
-XCBQ8:9	=AXS.B1	+MAB1	48/6	=AXS.B1+EXTm-WSM8.1:BU	48/6	Part of M		-M8:WSM:BU	=AXS.B1	+EXTm	48/6
-XCBQ8:6	=AXS.B1	+MAB1	48/4	=AXS.B1+EXTm-WSM8.1:GN	48/4	Part of M		-M8:WSM:GN	=AXS.B1	+EXTm	48/4
-XCBQ8:2	=AXS.B1	+MAB1	48/3	=AXS.B1+EXTm-WSM8.1:GY	48/3	Part of M		-M8:WSM:GY	=AXS.B1	+EXTm	48/3
-XCBQ8:8	=AXS.B1	+MAB1	48/6	=AXS.B1+EXTm-WSM8.1:OG	48/6	Part of M		-M8:WSM:OG	=AXS.B1	+EXTm	48/6
-XCBQ8:12	=AXS.B1	+MAB1	48/4	=AXS.B1+EXTm-WSM8.1:RD	48/4	Part of M		-M8:WSM:CL	=AXS.B1	+EXTm	48/4
-XCBQ8:4	=AXS.B1	+MAB1	48/5	=AXS.B1+EXTm-WSM8.1:RD-BU (CL	48/5	Part of M		-M8:WSM:BN	=AXS.B1	+EXTm	48/5
-XCBQ8:5	=AXS.B1	+MAB1	48/4	=AXS.B1+EXTm-WSM8.1:RD-GN (DG	48/4	Part of M		-M8:WSM:DGN	=AXS.B1	+EXTm	48/4
-XCBQ8:P	=AXS.B1	+MAB1	48/2	=AXS.B1+EXTm-WSM8.1:SHL	48/2	Part of M		-M8:WSM:SHL	=AXS.B1	+EXTm	48/2
-XCBQ8:1	=AXS.B1	+MAB1	48/3	=AXS.B1+EXTm-WSM8.1:WH	48/3	Part of M		-M8:WSM:WH	=AXS.B1	+EXTm	48/3
-XCBQ8:3	=AXS.B1	+MAB1	48/5	=AXS.B1+EXTm-WSM8.1:YE	48/5	Part of M		-M8:WSM:YE	=AXS.B1	+EXTm	48/5
-GF1.1:7	=AXS.X1	+MX0	43/5	=AXS.X1+EXTe-WSM1.1:1BN	43/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:1	=AXS.X1	+MX1	43/5
-GF1.1:3	=AXS.X1	+MX0	43/5	=AXS.X1+EXTe-WSM1.1:1WH	43/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:2	=AXS.X1	+MX1	43/5
-GF1.1:8	=AXS.X1	+MX0	43/6	=AXS.X1+EXTe-WSM1.1:2GN	43/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:11	=AXS.X1	+MX1	43/6
-GF1.1:4	=AXS.X1	+MX0	43/6	=AXS.X1+EXTe-WSM1.1:2YE	43/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:12	=AXS.X1	+MX1	43/6
-GF1.1:9	=AXS.X1	+MX0	43/6	=AXS.X1+EXTe-WSM1.1:3GY	43/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:7	=AXS.X1	+MX1	43/6
-GF1.1:5	=AXS.X1	+MX0	43/6	=AXS.X1+EXTe-WSM1.1:3PK	43/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:10	=AXS.X1	+MX1	43/6
-GF1.1:6	=AXS.X1	+MX0	43/4	=AXS.X1+EXTe-WSM1.1:4BU	43/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:9	=AXS.X1	+MX1	43/4
-GF1.1:2	=AXS.X1	+MX0	43/5	=AXS.X1+EXTe-WSM1.1:4RD	43/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:8	=AXS.X1	+MX1	43/5
-GF1.1:1	=AXS.X1	+MX0	43/4	=AXS.X1+EXTe-WSM1.1:SHL	43/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:SH	=AXS.X1	+MX1	43/4
-XCBQ1.1:1	=AXS.X1	+MX1	43/5	=AXS.X1+EXTm-WSM1.1:1BN	43/5	Part of M		-M1:XCBQ:2	=AXS.X1	+EXTm	43/5
-XCBQ1.1:2	=AXS.X1	+MX1	43/5	=AXS.X1+EXTm-WSM1.1:1WH	43/5	Part of M		-M1:XCBQ:1	=AXS.X1	+EXTm	43/5
-XCBQ1.1:11	=AXS.X1	+MX1	43/6	=AXS.X1+EXTm-WSM1.1:2GN	43/6	Part of M		-M1:XCBQ:11	=AXS.X1	+EXTm	43/6
-XCBQ1.1:12	=AXS.X1	+MX1	43/6	=AXS.X1+EXTm-WSM1.1:2YE	43/6	Part of M		-M1:XCBQ:12	=AXS.X1	+EXTm	43/6
-XCBQ1.1:7	=AXS.X1	+MX1	43/6	=AXS.X1+EXTm-WSM1.1:3GY	43/6	Part of M		-M1:XCBQ:7	=AXS.X1	+EXTm	43/6
-XCBQ1.1:10	=AXS.X1	+MX1	43/6	=AXS.X1+EXTm-WSM1.1:3PK	43/6	Part of M		-M1:XCBQ:10	=AXS.X1	+EXTm	43/6
-XCBQ1.1:9	=AXS.X1	+MX1	43/4	=AXS.X1+EXTm-WSM1.1:4BU	43/4	Part of M		-M1:XCBQ:9	=AXS.X1	+EXTm	43/4
-XCBQ1.1:8	=AXS.X1	+MX1	43/5	=AXS.X1+EXTm-WSM1.1:4RD	43/5	Part of M		-M1:XCBQ:8	=AXS.X1	+EXTm	43/5
-XCBQ1.1:SH	=AXS.X1	+MX1	43/4	=AXS.X1+EXTm-WSM1.1:SHL	43/4	Part of M		-M1:XCBQ:SH	=AXS.X1	+EXTm	43/4
-XC10:1	=AXS.X1	+MX0	35/6	=AXS.X1+MX1-WS10.1:1BK	35/6	Part of XC		-XC10:01	=AXS.X1	+MX1	35/6
-XC10:2	=AXS.X1	+MX0	35/8	=AXS.X1+MX1-WS10.1:2BK	35/8	Part of XC		-XC10:02	=AXS.X1	+MX1	35/8
-XC10:3	=AXS.X1	+MX0	35/11	=AXS.X1+MX1-WS10.1:3BK	35/11	Part of XC		-XC10:03	=AXS.X1	+MX1	35/11
-XC10:4	=AXS.X1	+MX0	35/13	=AXS.X1+MX1-WS10.1:4BK	35/13	Part of XC		-XC10:04	=AXS.X1	+MX1	35/14
-XC10:5	=AXS.X1	+MX0	35/14	=AXS.X1+MX1-WS10.1:5BK	35/14	Part of XC		-XC10:12	=AXS.X1	+MX1	35/14
-XC10:6	=AXS.X1	+MX0	35/16	=AXS.X1+MX1-WS10.1:6BK	35/16	Part of XC		-XC10:05	=AXS.X1	+MX1	35/16
-XC10:8	=AXS.X1	+MX0	35/3	=AXS.X1+MX1-WS10.1:8BK	35/3	Part of XC		-XC10:17	=AXS.X1	+MX1	35/3
-XC10:9	=AXS.X1	+MX0	35/4	=AXS.X1+MX1-WS10.1:9BK	35/4	Part of XC		-XC10:18	=AXS.X1	+MX1	35/4
-XC10:7	=AXS.X1	+MX0	35/19	=AXS.X1+MX1-WS10.1:76BK	35/19	Part of XC		-XC10:06	=AXS.X1	+MX1	35/19
-XC10:10	=AXS.X1	+MX0	35/2	=AXS.X1+MX1-WS10.1:GNYE	35/2	Part of XC		-XC10:PE	=AXS.X1	+MX1	35/2

SIGNAL CABELS 3

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-XC10:11	=AXS.X1	+MX0	36/6	=AXS.X1+MX1-WS10.2:1BK	36/6	Part of XC		-XC11:01	=AXS.X1	+MX1	36/6
-XC10:12	=AXS.X1	+MX0	36/8	=AXS.X1+MX1-WS10.2:2BK	36/8	Part of XC		-XC11:02	=AXS.X1	+MX1	36/8
-XC10:13	=AXS.X1	+MX0	36/11	=AXS.X1+MX1-WS10.2:3BK	36/11	Part of XC		-XC11:03	=AXS.X1	+MX1	36/11
-XC10:14	=AXS.X1	+MX0	36/14	=AXS.X1+MX1-WS10.2:4BK	36/14	Part of XC		-XC11:04	=AXS.X1	+MX1	36/14
-XC10:15	=AXS.X1	+MX0	36/16	=AXS.X1+MX1-WS10.2:5BK	36/16	Part of XC		-XC11:05	=AXS.X1	+MX1	36/16
-XC10:16	=AXS.X1	+MX0	36/19	=AXS.X1+MX1-WS10.2:6BK	36/19	Part of XC		-XC11:06	=AXS.X1	+MX1	36/19
-XC10:17	=AXS.X1	+MX0	36/3	=AXS.X1+MX1-WS10.2:7BK	36/3	Part of XC		-XC11:17	=AXS.X1	+MX1	36/3
-XC10:18	=AXS.X1	+MX0	36/4	=AXS.X1+MX1-WS10.2:8BK	36/4	Part of XC		-XC11:18	=AXS.X1	+MX1	36/4
-XC10:19	=AXS.X1	+MX0	36/2	=AXS.X1+MX1-WS10.2:GNYE	36/2	Part of XC		-XC11:PE	=AXS.X1	+MX1	36/2
-GF1.3:7	=AXS.Y1	+MX0	44/5	=AXS.Y1+EXTe-WSM3.1:1BN	44/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:1	=AXS.Y1	+MY1	44/5
-GF1.3:3	=AXS.Y1	+MX0	44/5	=AXS.Y1+EXTe-WSM3.1:1WH	44/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:2	=AXS.Y1	+MY1	44/5
-GF1.3:8	=AXS.Y1	+MX0	44/6	=AXS.Y1+EXTe-WSM3.1:2GN	44/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:11	=AXS.Y1	+MY1	44/6
-GF1.3:4	=AXS.Y1	+MX0	44/6	=AXS.Y1+EXTe-WSM3.1:2YE	44/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:12	=AXS.Y1	+MY1	44/6
-GF1.3:9	=AXS.Y1	+MX0	44/6	=AXS.Y1+EXTe-WSM3.1:3GY	44/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:7	=AXS.Y1	+MY1	44/6
-GF1.3:5	=AXS.Y1	+MX0	44/6	=AXS.Y1+EXTe-WSM3.1:3PK	44/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:10	=AXS.Y1	+MY1	44/6
-GF1.3:6	=AXS.Y1	+MX0	44/4	=AXS.Y1+EXTe-WSM3.1:4BU	44/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:9	=AXS.Y1	+MY1	44/4
-GF1.3:2	=AXS.Y1	+MX0	44/5	=AXS.Y1+EXTe-WSM3.1:4RD	44/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:8	=AXS.Y1	+MY1	44/5
-GF1.3:1	=AXS.Y1	+MX0	44/4	=AXS.Y1+EXTe-WSM3.1:SHL	44/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:SH	=AXS.Y1	+MY1	44/4
-XCBQ3.1:1	=AXS.Y1	+MY1	44/5	=AXS.Y1+EXTm-WSM3.1:1BN	44/5	Part of M		-M3:XCBQ:2	=AXS.Y1	+EXTm	44/5
-XCBQ3.1:2	=AXS.Y1	+MY1	44/5	=AXS.Y1+EXTm-WSM3.1:1WH	44/5	Part of M		-M3:XCBQ:1	=AXS.Y1	+EXTm	44/5
-XCBQ3.1:11	=AXS.Y1	+MY1	44/6	=AXS.Y1+EXTm-WSM3.1:2GN	44/6	Part of M		-M3:XCBQ:11	=AXS.Y1	+EXTm	44/6
-XCBQ3.1:12	=AXS.Y1	+MY1	44/6	=AXS.Y1+EXTm-WSM3.1:2YE	44/6	Part of M		-M3:XCBQ:12	=AXS.Y1	+EXTm	44/6
-XCBQ3.1:7	=AXS.Y1	+MY1	44/6	=AXS.Y1+EXTm-WSM3.1:3GY	44/6	Part of M		-M3:XCBQ:7	=AXS.Y1	+EXTm	44/6
-XCBQ3.1:10	=AXS.Y1	+MY1	44/6	=AXS.Y1+EXTm-WSM3.1:3PK	44/6	Part of M		-M3:XCBQ:10	=AXS.Y1	+EXTm	44/6
-XCBQ3.1:9	=AXS.Y1	+MY1	44/4	=AXS.Y1+EXTm-WSM3.1:4BU	44/4	Part of M		-M3:XCBQ:9	=AXS.Y1	+EXTm	44/4
-XCBQ3.1:8	=AXS.Y1	+MY1	44/5	=AXS.Y1+EXTm-WSM3.1:4RD	44/5	Part of M		-M3:XCBQ:8	=AXS.Y1	+EXTm	44/5
-XCBQ3.1:SH	=AXS.Y1	+MY1	44/4	=AXS.Y1+EXTm-WSM3.1:SHL	44/4	Part of M		-M3:XCBQ:SH	=AXS.Y1	+EXTm	44/4
-XC30:1	=AXS.Y1	+MX0	37/6	=AXS.Y1+MY1-WS30:1BK	37/6	Part of XC		-XC30:01	=AXS.Y1	+MY1	37/6
-XC30:2	=AXS.Y1	+MX0	37/8	=AXS.Y1+MY1-WS30:2BK	37/8	Part of XC		-XC30:02	=AXS.Y1	+MY1	37/8
-XC30:3	=AXS.Y1	+MX0	37/9	=AXS.Y1+MY1-WS30:3BK	37/9	Part of XC		-XC30:03	=AXS.Y1	+MY1	37/9
-XC30:4	=AXS.Y1	+MX0	37/11	=AXS.Y1+MY1-WS30:4BK	37/11	Part of XC		-XC30:04	=AXS.Y1	+MY1	37/11
-XC30:5	=AXS.Y1	+MX0	37/12	=AXS.Y1+MY1-WS30:5BK	37/12	Part of XC		-XC30:12	=AXS.Y1	+MY1	37/11
-XC30:6	=AXS.Y1	+MX0	37/4	=AXS.Y1+MY1-WS30:6BK	37/4	Part of XC		-XC30:17	=AXS.Y1	+MY1	37/4
-XC30:7	=AXS.Y1	+MX0	37/5	=AXS.Y1+MY1-WS30:7BK	37/5	Part of XC		-XC30:18	=AXS.Y1	+MY1	37/5
-XC30:8	=AXS.Y1	+MX0	37/3	=AXS.Y1+MY1-WS30:GNYE	37/3	Part of XC		-XC30:PE	=AXS.Y1	+MY1	37/3

SIGNAL CABELS 4

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-GF1.4:7	=AXS.Y2	+MX0	45/5	=AXS.Y2+EXTe-WSM4.1:1BN	45/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:1	=AXS.Y2	+MY2	45/5
-GF1.4:3	=AXS.Y2	+MX0	45/5	=AXS.Y2+EXTe-WSM4.1:1WH	45/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:2	=AXS.Y2	+MY2	45/5
-GF1.4:8	=AXS.Y2	+MX0	45/6	=AXS.Y2+EXTe-WSM4.1:2GN	45/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:11	=AXS.Y2	+MY2	45/6
-GF1.4:4	=AXS.Y2	+MX0	45/6	=AXS.Y2+EXTe-WSM4.1:2YE	45/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:12	=AXS.Y2	+MY2	45/6
-GF1.4:9	=AXS.Y2	+MX0	45/6	=AXS.Y2+EXTe-WSM4.1:3GY	45/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:7	=AXS.Y2	+MY2	45/6
-GF1.4:5	=AXS.Y2	+MX0	45/6	=AXS.Y2+EXTe-WSM4.1:3PK	45/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:10	=AXS.Y2	+MY2	45/6
-GF1.4:6	=AXS.Y2	+MX0	45/4	=AXS.Y2+EXTe-WSM4.1:4BU	45/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:9	=AXS.Y2	+MY2	45/4
-GF1.4:2	=AXS.Y2	+MX0	45/5	=AXS.Y2+EXTe-WSM4.1:4RD	45/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:8	=AXS.Y2	+MY2	45/5
-GF1.4:1	=AXS.Y2	+MX0	45/4	=AXS.Y2+EXTe-WSM4.1:SHL	45/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:SH	=AXS.Y2	+MY2	45/4
-XCBQ4.1:1	=AXS.Y2	+MY2	45/5	=AXS.Y2+EXTm-WSM4.1:1BN	45/5	Part of M		-M4:XCBQ:2	=AXS.Y2	+EXTm	45/5
-XCBQ4.1:2	=AXS.Y2	+MY2	45/5	=AXS.Y2+EXTm-WSM4.1:1WH	45/5	Part of M		-M4:XCBQ:1	=AXS.Y2	+EXTm	45/5
-XCBQ4.1:11	=AXS.Y2	+MY2	45/6	=AXS.Y2+EXTm-WSM4.1:2GN	45/6	Part of M		-M4:XCBQ:11	=AXS.Y2	+EXTm	45/6
-XCBQ4.1:12	=AXS.Y2	+MY2	45/6	=AXS.Y2+EXTm-WSM4.1:2YE	45/6	Part of M		-M4:XCBQ:12	=AXS.Y2	+EXTm	45/6
-XCBQ4.1:7	=AXS.Y2	+MY2	45/6	=AXS.Y2+EXTm-WSM4.1:3GY	45/6	Part of M		-M4:XCBQ:7	=AXS.Y2	+EXTm	45/6
-XCBQ4.1:10	=AXS.Y2	+MY2	45/6	=AXS.Y2+EXTm-WSM4.1:3PK	45/6	Part of M		-M4:XCBQ:10	=AXS.Y2	+EXTm	45/6
-XCBQ4.1:9	=AXS.Y2	+MY2	45/4	=AXS.Y2+EXTm-WSM4.1:4BU	45/4	Part of M		-M4:XCBQ:9	=AXS.Y2	+EXTm	45/4
-XCBQ4.1:8	=AXS.Y2	+MY2	45/5	=AXS.Y2+EXTm-WSM4.1:4RD	45/5	Part of M		-M4:XCBQ:8	=AXS.Y2	+EXTm	45/5
-XCBQ4.1:SH	=AXS.Y2	+MY2	45/4	=AXS.Y2+EXTm-WSM4.1:SHL	45/4	Part of M		-M4:XCBQ:SH	=AXS.Y2	+EXTm	45/4
-XC40:1	=AXS.Y2	+MX0	38/6	=AXS.Y2+MY2-WS40:1BK	38/6	Part of XC		-XC40:01	=AXS.Y2	+MY2	38/6
-XC40:2	=AXS.Y2	+MX0	38/8	=AXS.Y2+MY2-WS40:2BK	38/8	Part of XC		-XC40:02	=AXS.Y2	+MY2	38/8
-XC40:3	=AXS.Y2	+MX0	38/9	=AXS.Y2+MY2-WS40:3BK	38/9	Part of XC		-XC40:03	=AXS.Y2	+MY2	38/9
-XC40:4	=AXS.Y2	+MX0	38/11	=AXS.Y2+MY2-WS40:4BK	38/11	Part of XC		-XC40:04	=AXS.Y2	+MY2	38/11
-XC40:5	=AXS.Y2	+MX0	38/12	=AXS.Y2+MY2-WS40:5BK	38/12	Part of XC		-XC40:12	=AXS.Y2	+MY2	38/11
-XC40:6	=AXS.Y2	+MX0	38/4	=AXS.Y2+MY2-WS40:6BK	38/4	Part of XC		-XC40:17	=AXS.Y2	+MY2	38/4
-XC40:7	=AXS.Y2	+MX0	38/5	=AXS.Y2+MY2-WS40:7BK	38/5	Part of XC		-XC40:18	=AXS.Y2	+MY2	38/5
-XC40:8	=AXS.Y2	+MX0	38/3	=AXS.Y2+MY2-WS40:GNYE	38/3	Part of XC		-XC40:PE	=AXS.Y2	+MY2	38/3
-GF1.5:7	=AXS.Z1	+MX0	46/5	=AXS.Z1+EXTe-WSM5.1:1BN	46/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:7	=AXS.Z1	+MZ1	46/5
-GF1.5:3	=AXS.Z1	+MX0	46/5	=AXS.Z1+EXTe-WSM5.1:1WH	46/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:3	=AXS.Z1	+MZ1	46/5
-GF1.5:8	=AXS.Z1	+MX0	46/6	=AXS.Z1+EXTe-WSM5.1:2GN	46/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:8	=AXS.Z1	+MZ1	46/6
-GF1.5:4	=AXS.Z1	+MX0	46/6	=AXS.Z1+EXTe-WSM5.1:2YE	46/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:4	=AXS.Z1	+MZ1	46/6
-GF1.5:9	=AXS.Z1	+MX0	46/6	=AXS.Z1+EXTe-WSM5.1:3GY	46/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:9	=AXS.Z1	+MZ1	46/6
-GF1.5:5	=AXS.Z1	+MX0	46/6	=AXS.Z1+EXTe-WSM5.1:3PK	46/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:5	=AXS.Z1	+MZ1	46/6
-GF1.5:6	=AXS.Z1	+MX0	46/4	=AXS.Z1+EXTe-WSM5.1:4BU	46/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:6	=AXS.Z1	+MZ1	46/4
-GF1.5:2	=AXS.Z1	+MX0	46/5	=AXS.Z1+EXTe-WSM5.1:4RD	46/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:2	=AXS.Z1	+MZ1	46/5
-GF1.5:1	=AXS.Z1	+MX0	46/4	=AXS.Z1+EXTe-WSM5.1:SHL	46/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:1	=AXS.Z1	+MZ1	46/4

SIGNAL CABELS 5

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-XCBQ5.1:7	=AXS.Z1	+MZ1	46/5	=AXS.Z1+EXTm-WSM5.1:1BN	46/5	Part of M		-M5:XCBQ:7	=AXS.Z1	+EXTm	46/5
-XCBQ5.1:3	=AXS.Z1	+MZ1	46/5	=AXS.Z1+EXTm-WSM5.1:1WH	46/5	Part of M		-M5:XCBQ:03	=AXS.Z1	+EXTm	46/5
-XCBQ5.1:8	=AXS.Z1	+MZ1	46/6	=AXS.Z1+EXTm-WSM5.1:2GN	46/6	Part of M		-M5:XCBQ:8	=AXS.Z1	+EXTm	46/6
-XCBQ5.1:4	=AXS.Z1	+MZ1	46/6	=AXS.Z1+EXTm-WSM5.1:2YE	46/6	Part of M		-M5:XCBQ:04	=AXS.Z1	+EXTm	46/6
-XCBQ5.1:9	=AXS.Z1	+MZ1	46/6	=AXS.Z1+EXTm-WSM5.1:3GY	46/6	Part of M		-M5:XCBQ:9	=AXS.Z1	+EXTm	46/6
-XCBQ5.1:5	=AXS.Z1	+MZ1	46/6	=AXS.Z1+EXTm-WSM5.1:3PK	46/6	Part of M		-M5:XCBQ:05	=AXS.Z1	+EXTm	46/6
-XCBQ5.1:6	=AXS.Z1	+MZ1	46/4	=AXS.Z1+EXTm-WSM5.1:4BU	46/4	Part of M		-M5:XCBQ:6	=AXS.Z1	+EXTm	46/4
-XCBQ5.1:2	=AXS.Z1	+MZ1	46/5	=AXS.Z1+EXTm-WSM5.1:4RD	46/5	Part of M		-M5:XCBQ:02	=AXS.Z1	+EXTm	46/5
-XCBQ5.1:1	=AXS.Z1	+MZ1	46/4	=AXS.Z1+EXTm-WSM5.1:SHL	46/4	Part of M		-M5:XCBQ:12	=AXS.Z1	+EXTm	46/4
-XC50:1	=AXS.Z1	+MX0	39/3	=AXS.Z1+MX0-WS50:1BK	39/3	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:1	=AXS.Z1	+MZ1	39/3
-XC50:2	=AXS.Z1	+MX0	39/3	=AXS.Z1+MX0-WS50:2BK	39/3	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:2	=AXS.Z1	+MZ1	39/3
-XC50:3	=AXS.Z1	+MX0	39/4	=AXS.Z1+MX0-WS50:3BK	39/4	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:3	=AXS.Z1	+MZ1	39/4
-XC50:4	=AXS.Z1	+MX0	39/4	=AXS.Z1+MX0-WS50:4BK	39/4	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:4	=AXS.Z1	+MZ1	39/4
-XC50:5	=AXS.Z1	+MX0	39/5	=AXS.Z1+MX0-WS50:5BK	39/5	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:5	=AXS.Z1	+MZ1	39/5
-XC50:6	=AXS.Z1	+MX0	39/5	=AXS.Z1+MX0-WS50:6BK	39/5	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:6	=AXS.Z1	+MZ1	39/5
-XC50:7	=AXS.Z1	+MX0	39/7	=AXS.Z1+MX0-WS50:7BK	39/7	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:7	=AXS.Z1	+MZ1	39/7
-XC50:8	=AXS.Z1	+MX0	39/7	=AXS.Z1+MX0-WS50:8BK	39/7	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:8	=AXS.Z1	+MZ1	39/7
-XC50:9	=AXS.Z1	+MX0	39/8	=AXS.Z1+MX0-WS50:9BK	39/8	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:9	=AXS.Z1	+MZ1	39/8
-XC50:10	=AXS.Z1	+MX0	39/2	=AXS.Z1+MX0-WS50:10BK	39/2	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:10	=AXS.Z1	+MZ1	39/2
-XC50:11	=AXS.Z1	+MX0	39/9	=AXS.Z1+MX0-WS50:11BK	39/9	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:11	=AXS.Z1	+MZ1	39/9
-XC50:12	=AXS.Z1	+MX0	39/9	=AXS.Z1+MX0-WS50:GNYE	39/9	Semoflex D-PVC 12x0,5	4WB1-212X	-XC50.1:12	=AXS.Z1	+MZ1	39/9
-XC6:1	=OPT.00	+MX0	34/3	=OPT.00+EXTe-WS1:1	34/3	Ölflex CLASIC 110 3G0,75	4WL8-403G	-SP1:2	=OPT.00	+EXTm	34/3
-XC6:3	=OPT.00	+MX0	34/3	=OPT.00+EXTe-WS1:GNYE	34/3	Ölflex CLASIC 110 3G0,75	4WL8-403G	-SP1:4	=OPT.00	+EXTm	34/3
-XC6:2	=OPT.00	+MX0	34/3	=OPT.00+EXTe-WS1:2	34/3	Ölflex CLASIC 110 3G0,75	4WL8-403G	-SP1:1	=OPT.00	+EXTm	34/3
-XC6:4	=OPT.00	+MX0	34/8	=OPT.00+EXTe-WS6:1	34/8	Ölflex CLASIC 110 3G0,75	4WL8-403G	-YV6:	=OPT.00	+EXTm	34/8
-XC6:6	=OPT.00	+MX0	34/8	=OPT.00+EXTe-WS6:GNYE	34/8	Ölflex CLASIC 110 3G0,75	4WL8-403G	-YV6:	=OPT.00	+EXTm	34/8
-XC6:5	=OPT.00	+MX0	34/8	=OPT.00+EXTe-WS6:2	34/8	Ölflex CLASIC 110 3G0,75	4WL8-403G	-YV6:	=OPT.00	+EXTm	34/8
-XC4:5	=OPT.00	+MX0	30/6	=OPT.20+EXTe-WS20:1BN	49/6	Semofl.Robschl. 2x1+(2x0,	4WB3-Z122	-XC20:4	=OPT.20	+MZ1	49/6
-XC4:4	=OPT.00	+MX0	30/5	=OPT.20+EXTe-WS20:1WH	49/6	Semofl.Robschl. 2x1+(2x0,	4WB3-Z122	-XC20:1	=OPT.20	+MZ1	49/6
-XC4:2	=OPT.00	+MX0	30/3	=OPT.20+EXTe-WS20:2BU	49/5	Semofl.Robschl. 2x1+(2x0,	4WB3-Z122	-XC20:2	=OPT.20	+MZ1	49/5
-XC4:1	=OPT.00	+MX0	30/2	=OPT.20+EXTe-WS20:2RD	49/4	Semofl.Robschl. 2x1+(2x0,	4WB3-Z122	-XC20:3	=OPT.20	+MZ1	49/4
-XC4:6	=OPT.00	+MX0	30/7	=OPT.20+EXTe-WS20:SHL	49/7	Semofl.Robschl. 2x1+(2x0,	4WB3-Z122	-XC20:5	=OPT.20	+MZ1	49/7
-XC5:6	=OPT.00	+MX0	25/4	=OPT.30+EXTe-WS30:1BN	25/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-A30:XCOM2:5	=OPT.30	+EXTe	26/14
-XC5:5	=OPT.00	+MX0	25/4	=OPT.30+EXTe-WS30:1WH	25/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-A30:XCOM2:15	=OPT.30	+EXTe	26/14
-XC5:8	=OPT.30	+MX0	25/7	=OPT.30+EXTe-WS30:2GN	25/7	Semoflex Roboschlepp 4x2x	4WB3-1420	-A30:XCOM2:5	=OPT.30	+EXTe	26/10
-XC5:9	=OPT.30	+MX0	25/8	=OPT.30+EXTe-WS30:2YE	25/8	Semoflex Roboschlepp 4x2x	4WB3-1420	-A30:XCOM2:9	=OPT.30	+EXTe	26/10
-XC5:10	=OPT.30	+MX0	25/8	=OPT.30+EXTe-WS30:3GY	25/8	Semoflex Roboschlepp 4x2x	4WB3-1420	-A30:XCOM2:10	=OPT.30	+EXTe	26/11
-XC5:11	=OPT.30	+MX0	25/9	=OPT.30+EXTe-WS30:3PK	25/9	Semoflex Roboschlepp 4x2x	4WB3-1420	-A30:XCOM2:4	=OPT.30	+EXTe	26/11
-XC5:12	=OPT.30	+MX0	25/10	=OPT.30+EXTe-WS30:4BU	25/10	Semoflex Roboschlepp 4x2x	4WB3-1420	-A30:XCOM2:12	=OPT.30	+EXTe	26/11
-XC5:13	=OPT.30	+MX0	25/10	=OPT.30+EXTe-WS30:4RD	25/10	Semoflex Roboschlepp 4x2x	4WB3-1420	-A30:XCOM2:6	=OPT.30	+EXTe	26/12
-XC5:14	=OPT.30	+MX0	25/11	=OPT.30+EXTe-WS30:SHL	25/11	Semoflex Roboschlepp 4x2x	4WB3-1420	-A30:XCOM2:FE	=OPT.30	+EXTe	26/10

SIGNAL CABELS 6

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-XC7:1	=OPT.47	+MX0	42/2	=OPT.47+EXTe-WS7:1	42/2	Ölflex CLASIC 110 25G0,75	4WL8-425G	:1 1	=OPT.47	+EXTm	42/2
-XC7:2	=OPT.47	+MX0	42/3	=OPT.47+EXTe-WS7:2	42/3	Ölflex CLASIC 110 25G0,75	4WL8-425G	:2 2	=OPT.47	+EXTm	42/3
-XC7:3	=OPT.47	+MX0	42/3	=OPT.47+EXTe-WS7:3	42/3	Ölflex CLASIC 110 25G0,75	4WL8-425G	:3 3	=OPT.47	+EXTm	42/3
-XC7:4	=OPT.47	+MX0	42/4	=OPT.47+EXTe-WS7:4	42/4	Ölflex CLASIC 110 25G0,75	4WL8-425G	:4 4	=OPT.47	+EXTm	42/4
-XC7:5	=OPT.47	+MX0	42/5	=OPT.47+EXTe-WS7:5	42/5	Ölflex CLASIC 110 25G0,75	4WL8-425G	:5 5	=OPT.47	+EXTm	42/5
-XC7:6	=OPT.47	+MX0	42/5	=OPT.47+EXTe-WS7:6	42/5	Ölflex CLASIC 110 25G0,75	4WL8-425G	:6 6	=OPT.47	+EXTm	42/5
-XC7:7	=OPT.47	+MX0	42/6	=OPT.47+EXTe-WS7:7	42/6	Ölflex CLASIC 110 25G0,75	4WL8-425G	:7 7	=OPT.47	+EXTm	42/6
-XC7:8	=OPT.47	+MX0	42/6	=OPT.47+EXTe-WS7:8	42/6	Ölflex CLASIC 110 25G0,75	4WL8-425G	:8 8	=OPT.47	+EXTm	42/6
				=OPT.47+EXTe-WS7:9	42/8	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:10	42/9	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:11	42/9	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:12	42/10	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:13	42/11	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:14	42/11	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:15	42/12	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:16	42/13	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:17	42/13	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:18	42/14	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:19	42/14	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:20	42/15	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:21	42/16	Ölflex CLASIC 110 25G0,75	4WL8-425G				
				=OPT.47+EXTe-WS7:22	42/16	Ölflex CLASIC 110 25G0,75	4WL8-425G				
-XC7:23	=OPT.47	+MX0	42/17	=OPT.47+EXTe-WS7:23	42/17	Ölflex CLASIC 110 25G0,75	4WL8-425G	:23 11	=OPT.47	+EXTm	42/17
-XC7:24	=OPT.47	+MX0	42/19	=OPT.47+EXTe-WS7:GNYE	42/19	Ölflex CLASIC 110 25G0,75	4WL8-425G	:24 12	=OPT.47	+EXTm	42/19
-XC5:18	=OPT.47	+MX0	25/16	=OPT.47+EXTe-WS47.1:1BN	25/16	Unitr.-FD CP(TP) 1x2x0,5	4WL7-3210	:	=OPT.47	+EXTm	42/20
-XC5:17	=OPT.47	+MX0	25/15	=OPT.47+EXTe-WS47.1:1WH	25/15	Unitr.-FD CP(TP) 1x2x0,5	4WL7-3210	:	=OPT.47	+EXTm	42/19
-XC5:19	=OPT.47	+MX0	25/16	=OPT.47+EXTe-WS47.1:SHL	25/16	Unitr.-FD CP(TP) 1x2x0,5	4WL7-3210	:	=OPT.47	+EXTm	42/20
-XC8:6	=OPT.51	+MX0	24/15	=OPT.51+EXTm-WSB2.1:1WH	24/15	Part of FB		-FB2.1:1	=OPT.51	+EXTm	24/15
-XC8:7	=OPT.51	+MX0	24/16	=OPT.51+EXTm-WSB2.1:2BN	24/16	Part of FB		-FB2.1:2	=OPT.51	+EXTm	24/16
-XC8:8	=OPT.51	+MX0	24/16	=OPT.51+EXTm-WSB2.1:3GN	24/16	Part of FB		-FB2.1:3	=OPT.51	+EXTm	24/16
-XC8:2	=OPT.51	+MX0	24/12	=OPT.51+EXTm-WSB2.1:4YE	24/12	Part of FB		-FB2.1:4	=OPT.51	+EXTm	24/12
-XC8:4	=OPT.51	+MX0	24/14	=OPT.51+EXTm-WSB2.1:5GY	24/14	Part of FB		-FB2.1:5	=OPT.51	+EXTm	24/14
-XC8:5	=OPT.51	+MX0	24/15	=OPT.51+EXTm-WSB2.1:6PK	24/15	Part of FB		-FB2.1:6	=OPT.51	+EXTm	24/15
-XC8:3	=OPT.51	+MX0	24/14	=OPT.51+EXTm-WSB2.1:7BU	24/14	Part of FB		-FB2.1:7	=OPT.51	+EXTm	24/14
-XC8:1	=OPT.51	+MX0	24/12	=OPT.51+EXTm-WSB2.1:8RD	24/12	Part of FB		-FB2.1:8	=OPT.51	+EXTm	24/12
-XC8:12	=OPT.51	+MX0	24/20	=OPT.51+EXTm-WSB2.2:1BN	24/20	Part of FB		-FB2.2:1	=OPT.51	+EXTm	24/20
-XC8:11	=OPT.51	+MX0	24/19	=OPT.51+EXTm-WSB2.2:2WH	24/19	Part of FB		-FB2.2:2	=OPT.51	+EXTm	24/19
-XC8:9	=OPT.51	+MX0	24/18	=OPT.51+EXTm-WSB2.2:3BU	24/18	Part of FB		-FB2.2:3	=OPT.51	+EXTm	24/18
-XC8:10	=OPT.51	+MX0	24/19	=OPT.51+EXTm-WSB2.2:4GK	24/19	Part of FB		-FB2.2:4	=OPT.51	+EXTm	24/19
-XC8:13	=OPT.51	+MX0	24/20	=OPT.51+EXTm-WSB2.2:5GN	24/20	Part of FB		-FB2.2:5	=OPT.51	+EXTm	24/20

SIGNAL CABELS 7

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-XC9:1	=OPT.55	+MX0	30/17	=OPT.55+EXTe-WS9:1	30/17	Ölflex-FD 855P 5G0,5	4WL3-305G	-XT9.1:1	=OPT.55	+MZ1	30/17
-XC9:2	=OPT.55	+MX0	30/18	=OPT.55+EXTe-WS9:2	30/18	Ölflex-FD 855P 5G0,5	4WL3-305G	-XT9.1:2	=OPT.55	+MZ1	30/18
-XC9:3	=OPT.55	+MX0	30/18	=OPT.55+EXTe-WS9:3	30/18	Ölflex-FD 855P 5G0,5	4WL3-305G	-XT9.1:3	=OPT.55	+MZ1	30/18
-XC9:4	=OPT.55	+MX0	30/19	=OPT.55+EXTe-WS9:4	30/19	Ölflex-FD 855P 5G0,5	4WL3-305G	-XT9.1:4	=OPT.55	+MZ1	30/19
-XC9:5	=OPT.55	+MX0	30/20	=OPT.55+EXTe-WS9:GNYE	30/20	Ölflex-FD 855P 5G0,5	4WL3-305G	-XT9.1:5	=OPT.55	+MZ1	30/20
-XC6:7	=OPT.70	+MX0	34/12	=OPT.70+EXTe-WS7.1:1	34/12	Ölflex CLASIC 110 3G0,75	4WL8-403G	-YV7.1:	=OPT.70	+EXTm	34/12
-XC6:9	=OPT.70	+MX0	34/13	=OPT.70+EXTe-WS7.1:GNYE	34/13	Ölflex CLASIC 110 3G0,75	4WL8-403G	-YV7.1:	=OPT.70	+EXTm	34/13
-XC6:8	=OPT.70	+MX0	34/12	=OPT.70+EXTe-WS7.1:2	34/12	Ölflex CLASIC 110 3G0,75	4WL8-403G	-YV7.1:	=OPT.70	+EXTm	34/12
-XC6:10	=OPT.70	+MX0	34/16	=OPT.70+EXTe-WS7.2:1	34/16	Ölflex CLASIC 110 3G0,75	4WL8-403G	-YV7.2:	=OPT.70	+EXTm	34/16
-XC6:12	=OPT.70	+MX0	34/17	=OPT.70+EXTe-WS7.2:GNYE	34/17	Ölflex CLASIC 110 3G0,75	4WL8-403G	-YV7.2:	=OPT.70	+EXTm	34/17
-XC6:11	=OPT.70	+MX0	34/16	=OPT.70+EXTe-WS7.2:2	34/16	Ölflex CLASIC 110 3G0,75	4WL8-403G	-YV7.2:	=OPT.70	+EXTm	34/16
				=OPT.90+EXTe-WS17:1BN	36/19	Ölflex CLASIC 110 2X0,5	4WL8-302X	-SP17:1	=OPT.90	+EXTm	36/19
				=OPT.90+EXTe-WS17:4BK	36/19	Ölflex CLASIC 110 2X0,5	4WL8-302X	-SP17:2	=OPT.90	+EXTm	36/19

SENSOR CABELS 1

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-XC70.1:3	=AXS.A1	+MAB1	41/3	=AXS.A1+EXTm-WSQ72:BK	41/3	Part of SQ		-SQ72:BK	=AXS.A1	+EXTm	41/3
-XC70.1:1	=AXS.A1	+MAB1	41/3	=AXS.A1+EXTm-WSQ72:BN	41/3	Part of SQ		-SQ72:BN	=AXS.A1	+EXTm	41/3
-XC70.1:2	=AXS.A1	+MAB1	41/4	=AXS.A1+EXTm-WSQ72:BU	41/4	Part of SQ		-SQ72:BU	=AXS.A1	+EXTm	41/4
-XC70.1:6	=AXS.A1	+MAB1	41/8	=AXS.B1+EXTm-WSQ82:BK	41/8	Part of SQ		-SQ82:BK	=AXS.B1	+EXTm	41/8
-XC70.1:4	=AXS.A1	+MAB1	41/8	=AXS.B1+EXTm-WSQ82:BN	41/8	Part of SQ		-SQ82:BN	=AXS.B1	+EXTm	41/8
-XC70.1:5	=AXS.A1	+MAB1	41/9	=AXS.B1+EXTm-WSQ82:BU	41/9	Part of SQ		-SQ82:BU	=AXS.B1	+EXTm	41/9
				=AXS.X1+EXTe-WSQ12:1BN	35/6	SAIL-M12G-5-1,5U	4YW2-5M01	-SQ12:BK	=AXS.X1	+EXTm	35/6
				=AXS.X1+EXTe-WSQ12:4BK	35/7	SAIL-M12G-5-1,5U	4YW2-5M01	-SQ12:BK-WH	=AXS.X1	+EXTm	35/6
				=AXS.X1+EXTe-WSQ13:1BN	35/9	SAIL-M12G-5-1,5U	4YW2-5M01	-SQ13:BK	=AXS.X1	+EXTm	35/9
				=AXS.X1+EXTe-WSQ13:4BK	35/10	SAIL-M12G-5-1,5U	4YW2-5M01	-SQ13:BK-WH	=AXS.X1	+EXTm	35/9
-XC11:01	=AXS.X1	+MX1	36/15	=AXS.X1+EXTe-WSQ18:1BN	36/15	SAIL-M12G-5-1,5U	4YW2-5M01	-SQ18:BN	=AXS.X1	+EXTm	36/15
-XC11:03	=AXS.X1	+MX1	36/16	=AXS.X1+EXTe-WSQ18:3BU	36/16	SAIL-M12G-5-1,5U	4YW2-5M01	-SQ18:BU	=AXS.X1	+EXTm	36/16
-XC11:04	=AXS.X1	+MX1	36/16	=AXS.X1+EXTe-WSQ18:4BK	36/16	SAIL-M12G-5-1,5U	4YW2-5M01	-SQ18:BK	=AXS.X1	+EXTm	36/15
				=AXS.X1+EXTm-WSQ11:BK	35/3	Part of SQ		-SQ11:BK	=AXS.X1	+EXTm	35/3
				=AXS.X1+EXTm-WSQ11:BN	35/3	Part of SQ		-SQ11:BN	=AXS.X1	+EXTm	35/3
				=AXS.X1+EXTm-WSQ11:BU	35/3	Part of SQ		-SQ11:BU	=AXS.X1	+EXTm	35/3
				=AXS.Y1+EXTe-WSQ32:1BN	37/5	SAIL-M12G-5-1,5U	4YW2-5M01	-SQ32:BK	=AXS.Y1	+EXTm	37/5
				=AXS.Y1+EXTe-WSQ32:4BK	37/6	SAIL-M12G-5-1,5U	4YW2-5M01	-SQ32:BK-WH	=AXS.Y1	+EXTm	37/5
				=AXS.Y1+EXTe-WSQ33:1BN	37/8	SAIL-M12G-5-1,5U	4YW2-5M01	-SQ33:BK	=AXS.Y1	+EXTm	37/8
				=AXS.Y1+EXTe-WSQ33:4BK	37/9	SAIL-M12G-5-1,5U	4YW2-5M01	-SQ33:BK-WH	=AXS.Y1	+EXTm	37/8
				=AXS.Y1+EXTm-WSQ31:BK	37/4	Part of SQ		-SQ31:BK	=AXS.Y1	+EXTm	37/3
				=AXS.Y1+EXTm-WSQ31:BN	37/3	Part of SQ		-SQ31:BN	=AXS.Y1	+EXTm	37/3
				=AXS.Y1+EXTm-WSQ31:BU	37/4	Part of SQ		-SQ31:BU	=AXS.Y1	+EXTm	37/4
				=AXS.Y2+EXTm-WSQ41:BK	38/4	Part of SQ		-SQ41:BK	=AXS.Y2	+EXTm	38/3
				=AXS.Y2+EXTm-WSQ41:BN	38/3	Part of SQ		-SQ41:BN	=AXS.Y2	+EXTm	38/3
				=AXS.Y2+EXTm-WSQ41:BU	38/4	Part of SQ		-SQ41:BU	=AXS.Y2	+EXTm	38/4
-XT50.1:1	=AXS.Z1	+MZ1	39/3	=AXS.Z1+EXTm-WSQ51:BK	40/3	Part of SQ		-SQ51:BK	=AXS.Z1	+EXTm	40/3
-XT50.1:13	=AXS.Z1	+MZ1	40/3	=AXS.Z1+EXTm-WSQ51:BN	40/3	Part of SQ		-SQ51:BN	=AXS.Z1	+EXTm	40/3
-XT50.1:16	=AXS.Z1	+MZ1	40/3	=AXS.Z1+EXTm-WSQ51:BU	40/3	Part of SQ		-SQ51:BU	=AXS.Z1	+EXTm	40/3
-XX52:	=AXS.Z1	+EXTe	40/5	=AXS.Z1+EXTm-WSQ52:BK	40/5	Part of SQ		-SQ52:BK	=AXS.Z1	+EXTm	40/5
-XX52:	=AXS.Z1	+EXTe	40/5	=AXS.Z1+EXTm-WSQ52:BK-WH	40/5	Part of SQ		-SQ52:BK-WH	=AXS.Z1	+EXTm	40/5
-XT50.1:15	=AXS.Z1	+MZ1	40/7	=AXS.Z1+EXTm-WSQ53:BK	40/7	Part of SQ		-SQ53:BK	=AXS.Z1	+EXTm	40/7
-XT50.1:3	=AXS.Z1	+MZ1	39/4	=AXS.Z1+EXTm-WSQ53:BK-WH	40/7	Part of SQ		-SQ53:BK-WH	=AXS.Z1	+EXTm	40/7

SENSOR CABELS 2

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-M20:CN4:03	=OPT.20	+EXTm	50/9	=OPT.20+EXTm-WSQ20.1:BK	50/3	Part of SQ		-SQ20.1:BK	=OPT.20	+EXTm	50/3
-M20:CN4:01	=OPT.20	+EXTm	50/8	=OPT.20+EXTm-WSQ20.1:BN	50/4	Part of SQ		-SQ20.1:BN	=OPT.20	+EXTm	50/3
-M20:CN4:04	=OPT.20	+EXTm	50/8	=OPT.20+EXTm-WSQ20.1:BU	50/4	Part of SQ		-SQ20.1:BU	=OPT.20	+EXTm	50/3
-M20:CN4:05	=OPT.20	+EXTm	50/10	=OPT.20+EXTm-WSQ20.2:BK	50/6	Part of SQ		-SQ20.2:BK	=OPT.20	+EXTm	50/6
-M20:CN4:01	=OPT.20	+EXTm	50/8	=OPT.20+EXTm-WSQ20.2:BN	50/7	Part of SQ		-SQ20.2:BN	=OPT.20	+EXTm	50/6
-M20:CN4:04	=OPT.20	+EXTm	50/8	=OPT.20+EXTm-WSQ20.2:BU	50/7	Part of SQ		-SQ20.2:BU	=OPT.20	+EXTm	50/6
				=OPT.65+EXTm-WSQ14:BN	36/10	Part of SQ		-SQ14:BN	=OPT.65	+EXTm	36/10
				=OPT.65+EXTm-WSQ14:BU	36/10	Part of SQ		-SQ14:BU	=OPT.65	+EXTm	36/10
				=OPT.65+EXTm-WSQ14:WH	36/10	Part of SQ		-SQ14:WH	=OPT.65	+EXTm	36/10

ACTION COMPONENTS CABELS 1

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
				=AXS.X1+EXTe-WSYV11:3BU	35/16	SAIL-M12G-5-1,5U	4YW2-5M01	-YV11:2	=AXS.X1	+EXTm	35/16
				=AXS.X1+EXTe-WSYV11:4BK	35/16	SAIL-M12G-5-1,5U	4YW2-5M01	-YV11:1	=AXS.X1	+EXTm	35/16
				=OPT.65+EXTe-WSYV14:1	36/12	SAIL-M12G-5-1,5U	4YW2-5M01	-YV14:	=OPT.65	+EXTm	36/12
				=OPT.65+EXTe-WSYV14:4	36/13	SAIL-M12G-5-1,5U	4YW2-5M01	-YV14:	=OPT.65	+EXTm	36/12
				=OPT.65+EXTe-WSYV14:5	36/13	SAIL-M12G-5-1,5U	4YW2-5M01	-YV14:	=OPT.65	+EXTm	36/12

RESOLVERS AND ENCODERS CABELS 1

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-GF2.7:9	=AXS.A1	+MX0	47/3	=AXS.A1+EXTe-WSM7:1BN	47/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:2	=AXS.A1	+MAB1	47/3
-GF2.7:1	=AXS.A1	+MX0	47/3	=AXS.A1+EXTe-WSM7:1GN	47/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:1	=AXS.A1	+MAB1	47/3
-GF2.7:5	=AXS.A1	+MX0	47/5	=AXS.A1+EXTe-WSM7:2GY	47/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:3	=AXS.A1	+MAB1	47/5
-GF2.7:13	=AXS.A1	+MX0	47/5	=AXS.A1+EXTe-WSM7:2YE	47/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:4	=AXS.A1	+MAB1	47/5
-GF2.7:11	=AXS.A1	+MX0	47/4	=AXS.A1+EXTe-WSM7:3VT	47/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:6	=AXS.A1	+MAB1	47/4
-GF2.7:3	=AXS.A1	+MX0	47/4	=AXS.A1+EXTe-WSM7:3WH	47/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:5	=AXS.A1	+MAB1	47/4
-GF2.7:6	=AXS.A1	+MX0	47/5	=AXS.A1+EXTe-WSM7:4BK	47/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:7	=AXS.A1	+MAB1	47/5
-GF2.7:15	=AXS.A1	+MX0	47/6	=AXS.A1+EXTe-WSM7:4RD	47/6	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:8	=AXS.A1	+MAB1	47/6
-GF2.7:8	=AXS.A1	+MX0	47/6	=AXS.A1+EXTe-WSM7:5BU	47/6	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:9	=AXS.A1	+MAB1	47/6
-GF2.7:2	=AXS.A1	+MX0	47/3	=AXS.A1+EXTe-WSM7:6wh-gn	47/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:10	=AXS.A1	+MAB1	47/3
-GF2.7:4	=AXS.A1	+MX0	47/4	=AXS.A1+EXTe-WSM7:6wh-rd	47/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:12	=AXS.A1	+MAB1	47/4
-GF2.7:	=AXS.A1	+MX0	47/2	=AXS.A1+EXTe-WSM7:SHL	47/2	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ7:P	=AXS.A1	+MAB1	47/2
-XCBQ7:10	=AXS.A1	+MAB1	47/3	=AXS.A1+EXTm-WSM7.1:BK	47/3	Part of M		-M7:WSM:BK	=AXS.A1	+EXTm	47/3
-XCBQ7:7	=AXS.A1	+MAB1	47/5	=AXS.A1+EXTm-WSM7.1:BN	47/5	Part of M		-M7:WSM:LBU	=AXS.A1	+EXTm	47/5
-XCBQ7:9	=AXS.A1	+MAB1	47/6	=AXS.A1+EXTm-WSM7.1:BU	47/6	Part of M		-M7:WSM:BU	=AXS.A1	+EXTm	47/6
-XCBQ7:6	=AXS.A1	+MAB1	47/4	=AXS.A1+EXTm-WSM7.1:GN	47/4	Part of M		-M7:WSM:GN	=AXS.A1	+EXTm	47/4
-XCBQ7:2	=AXS.A1	+MAB1	47/3	=AXS.A1+EXTm-WSM7.1:GY	47/3	Part of M		-M7:WSM:GY	=AXS.A1	+EXTm	47/3
-XCBQ7:8	=AXS.A1	+MAB1	47/6	=AXS.A1+EXTm-WSM7.1:OG	47/6	Part of M		-M7:WSM:OG	=AXS.A1	+EXTm	47/6
-XCBQ7:12	=AXS.A1	+MAB1	47/4	=AXS.A1+EXTm-WSM7.1:RD	47/4	Part of M		-M7:WSM:CL	=AXS.A1	+EXTm	47/4
-XCBQ7:4	=AXS.A1	+MAB1	47/5	=AXS.A1+EXTm-WSM7.1:RD-BU (CL/WH-YE)	47/5	Part of M		-M7:WSM:BN	=AXS.A1	+EXTm	47/5
-XCBQ7:5	=AXS.A1	+MAB1	47/4	=AXS.A1+EXTm-WSM7.1:RD-GN (DG/WH-GN)	47/4	Part of M		-M7:WSM:DGN	=AXS.A1	+EXTm	47/4
-XCBQ7:P	=AXS.A1	+MAB1	47/2	=AXS.A1+EXTm-WSM7.1:SHL	47/2	Part of M		-M7:WSM:SHL	=AXS.A1	+EXTm	47/2
-XCBQ7:1	=AXS.A1	+MAB1	47/3	=AXS.A1+EXTm-WSM7.1:WH (WH-GY)	47/3	Part of M		-M7:WSM:WH	=AXS.A1	+EXTm	47/3
-XCBQ7:3	=AXS.A1	+MAB1	47/5	=AXS.A1+EXTm-WSM7.1:YE	47/5	Part of M		-M7:WSM:YE	=AXS.A1	+EXTm	47/5
-GF2.8:9	=AXS.B1	+MX0	48/3	=AXS.B1+EXTe-WSM8:1BN	48/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:2	=AXS.B1	+MAB1	48/3
-GF2.8:1	=AXS.B1	+MX0	48/3	=AXS.B1+EXTe-WSM8:1GN	48/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:1	=AXS.B1	+MAB1	48/3
-GF2.8:5	=AXS.B1	+MX0	48/5	=AXS.B1+EXTe-WSM8:2GY	48/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:3	=AXS.B1	+MAB1	48/5
-GF2.8:13	=AXS.B1	+MX0	48/5	=AXS.B1+EXTe-WSM8:2YE	48/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:4	=AXS.B1	+MAB1	48/5
-GF2.8:11	=AXS.B1	+MX0	48/4	=AXS.B1+EXTe-WSM8:3VT	48/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:6	=AXS.B1	+MAB1	48/4
-GF2.8:3	=AXS.B1	+MX0	48/4	=AXS.B1+EXTe-WSM8:3WH	48/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:5	=AXS.B1	+MAB1	48/4
-GF2.8:6	=AXS.B1	+MX0	48/5	=AXS.B1+EXTe-WSM8:4BK	48/5	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:7	=AXS.B1	+MAB1	48/5
-GF2.8:15	=AXS.B1	+MX0	48/6	=AXS.B1+EXTe-WSM8:4RD	48/6	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:8	=AXS.B1	+MAB1	48/6
-GF2.8:8	=AXS.B1	+MX0	48/6	=AXS.B1+EXTe-WSM8:5BU	48/6	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:9	=AXS.B1	+MAB1	48/6
-GF2.8:2	=AXS.B1	+MX0	48/3	=AXS.B1+EXTe-WSM8:6wh-gn	48/3	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:10	=AXS.B1	+MAB1	48/3
-GF2.8:4	=AXS.B1	+MX0	48/4	=AXS.B1+EXTe-WSM8:6wh-rd	48/4	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:12	=AXS.B1	+MAB1	48/4
-GF2.8:	=AXS.B1	+MX0	48/2	=AXS.B1+EXTe-WSM8:SHL	48/2	(5x(2x0,14)+(2x0,5)) AWM	4WI1-1027	-XCBQ8:P	=AXS.B1	+MAB1	48/2

RESOLVERS AND ENCODERS CABELS 2

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-XCBQ8:10	=AXS.B1	+MAB1	48/3	=AXS.B1+EXTm-WSM8.1:BK	48/3	Part of M		-M8:WSM:BK	=AXS.B1	+EXTm	48/3
-XCBQ8:7	=AXS.B1	+MAB1	48/5	=AXS.B1+EXTm-WSM8.1:BN	48/5	Part of M		-M8:WSM:LBU	=AXS.B1	+EXTm	48/5
-XCBQ8:9	=AXS.B1	+MAB1	48/6	=AXS.B1+EXTm-WSM8.1:BU	48/6	Part of M		-M8:WSM:BU	=AXS.B1	+EXTm	48/6
-XCBQ8:6	=AXS.B1	+MAB1	48/4	=AXS.B1+EXTm-WSM8.1:GN	48/4	Part of M		-M8:WSM:GN	=AXS.B1	+EXTm	48/4
-XCBQ8:2	=AXS.B1	+MAB1	48/3	=AXS.B1+EXTm-WSM8.1:GY	48/3	Part of M		-M8:WSM:GY	=AXS.B1	+EXTm	48/3
-XCBQ8:8	=AXS.B1	+MAB1	48/6	=AXS.B1+EXTm-WSM8.1:OG	48/6	Part of M		-M8:WSM:OG	=AXS.B1	+EXTm	48/6
-XCBQ8:12	=AXS.B1	+MAB1	48/4	=AXS.B1+EXTm-WSM8.1:RD	48/4	Part of M		-M8:WSM:CL	=AXS.B1	+EXTm	48/4
-XCBQ8:4	=AXS.B1	+MAB1	48/5	=AXS.B1+EXTm-WSM8.1:RD-BU (CL	48/5	Part of M		-M8:WSM:BN	=AXS.B1	+EXTm	48/5
-XCBQ8:5	=AXS.B1	+MAB1	48/4	=AXS.B1+EXTm-WSM8.1:RD-GN (DG	48/4	Part of M		-M8:WSM:DGN	=AXS.B1	+EXTm	48/4
-XCBQ8:P	=AXS.B1	+MAB1	48/2	=AXS.B1+EXTm-WSM8.1:SHL	48/2	Part of M		-M8:WSM:SHL	=AXS.B1	+EXTm	48/2
-XCBQ8:1	=AXS.B1	+MAB1	48/3	=AXS.B1+EXTm-WSM8.1:WH	48/3	Part of M		-M8:WSM:WH	=AXS.B1	+EXTm	48/3
-XCBQ8:3	=AXS.B1	+MAB1	48/5	=AXS.B1+EXTm-WSM8.1:YE	48/5	Part of M		-M8:WSM:YE	=AXS.B1	+EXTm	48/5
-GF1.1:7	=AXS.X1	+MX0	43/5	=AXS.X1+EXTe-WSM1.1:1BN	43/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:1	=AXS.X1	+MX1	43/5
-GF1.1:3	=AXS.X1	+MX0	43/5	=AXS.X1+EXTe-WSM1.1:1WH	43/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:2	=AXS.X1	+MX1	43/5
-GF1.1:8	=AXS.X1	+MX0	43/6	=AXS.X1+EXTe-WSM1.1:2GN	43/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:11	=AXS.X1	+MX1	43/6
-GF1.1:4	=AXS.X1	+MX0	43/6	=AXS.X1+EXTe-WSM1.1:2YE	43/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:12	=AXS.X1	+MX1	43/6
-GF1.1:9	=AXS.X1	+MX0	43/6	=AXS.X1+EXTe-WSM1.1:3GY	43/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:7	=AXS.X1	+MX1	43/6
-GF1.1:5	=AXS.X1	+MX0	43/6	=AXS.X1+EXTe-WSM1.1:3PK	43/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:10	=AXS.X1	+MX1	43/6
-GF1.1:6	=AXS.X1	+MX0	43/4	=AXS.X1+EXTe-WSM1.1:4BU	43/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:9	=AXS.X1	+MX1	43/4
-GF1.1:2	=AXS.X1	+MX0	43/5	=AXS.X1+EXTe-WSM1.1:4RD	43/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:8	=AXS.X1	+MX1	43/5
-GF1.1:1	=AXS.X1	+MX0	43/4	=AXS.X1+EXTe-WSM1.1:SHL	43/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ1.1:SH	=AXS.X1	+MX1	43/4
-XCBQ1.1:1	=AXS.X1	+MX1	43/5	=AXS.X1+EXTm-WSM1.1:1BN	43/5	Part of M		-M1:XCBQ:2	=AXS.X1	+EXTm	43/5
-XCBQ1.1:2	=AXS.X1	+MX1	43/5	=AXS.X1+EXTm-WSM1.1:1WH	43/5	Part of M		-M1:XCBQ:1	=AXS.X1	+EXTm	43/5
-XCBQ1.1:11	=AXS.X1	+MX1	43/6	=AXS.X1+EXTm-WSM1.1:2GN	43/6	Part of M		-M1:XCBQ:11	=AXS.X1	+EXTm	43/6
-XCBQ1.1:12	=AXS.X1	+MX1	43/6	=AXS.X1+EXTm-WSM1.1:2YE	43/6	Part of M		-M1:XCBQ:12	=AXS.X1	+EXTm	43/6
-XCBQ1.1:7	=AXS.X1	+MX1	43/6	=AXS.X1+EXTm-WSM1.1:3GY	43/6	Part of M		-M1:XCBQ:7	=AXS.X1	+EXTm	43/6
-XCBQ1.1:10	=AXS.X1	+MX1	43/6	=AXS.X1+EXTm-WSM1.1:3PK	43/6	Part of M		-M1:XCBQ:10	=AXS.X1	+EXTm	43/6
-XCBQ1.1:9	=AXS.X1	+MX1	43/4	=AXS.X1+EXTm-WSM1.1:4BU	43/4	Part of M		-M1:XCBQ:9	=AXS.X1	+EXTm	43/4
-XCBQ1.1:8	=AXS.X1	+MX1	43/5	=AXS.X1+EXTm-WSM1.1:4RD	43/5	Part of M		-M1:XCBQ:8	=AXS.X1	+EXTm	43/5
-XCBQ1.1:SH	=AXS.X1	+MX1	43/4	=AXS.X1+EXTm-WSM1.1:SHL	43/4	Part of M		-M1:XCBQ:SH	=AXS.X1	+EXTm	43/4
-GF1.3:7	=AXS.Y1	+MX0	44/5	=AXS.Y1+EXTe-WSM3.1:1BN	44/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:1	=AXS.Y1	+MY1	44/5
-GF1.3:3	=AXS.Y1	+MX0	44/5	=AXS.Y1+EXTe-WSM3.1:1WH	44/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:2	=AXS.Y1	+MY1	44/5
-GF1.3:8	=AXS.Y1	+MX0	44/6	=AXS.Y1+EXTe-WSM3.1:2GN	44/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:11	=AXS.Y1	+MY1	44/6
-GF1.3:4	=AXS.Y1	+MX0	44/6	=AXS.Y1+EXTe-WSM3.1:2YE	44/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:12	=AXS.Y1	+MY1	44/6
-GF1.3:9	=AXS.Y1	+MX0	44/6	=AXS.Y1+EXTe-WSM3.1:3GY	44/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:7	=AXS.Y1	+MY1	44/6
-GF1.3:5	=AXS.Y1	+MX0	44/6	=AXS.Y1+EXTe-WSM3.1:3PK	44/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:10	=AXS.Y1	+MY1	44/6
-GF1.3:6	=AXS.Y1	+MX0	44/4	=AXS.Y1+EXTe-WSM3.1:4BU	44/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:9	=AXS.Y1	+MY1	44/4
-GF1.3:2	=AXS.Y1	+MX0	44/5	=AXS.Y1+EXTe-WSM3.1:4RD	44/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:8	=AXS.Y1	+MY1	44/5
-GF1.3:1	=AXS.Y1	+MX0	44/4	=AXS.Y1+EXTe-WSM3.1:SHL	44/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ3.1:SH	=AXS.Y1	+MY1	44/4

RESOLVERS AND ENCODERS CABELS 3

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-XCBQ3.1:1	=AXS.Y1	+MY1	44/5	=AXS.Y1+EXTm-WSM3.1:1BN	44/5	Part of M		-M3:XCBQ:2	=AXS.Y1	+EXTm	44/5
-XCBQ3.1:2	=AXS.Y1	+MY1	44/5	=AXS.Y1+EXTm-WSM3.1:1WH	44/5	Part of M		-M3:XCBQ:1	=AXS.Y1	+EXTm	44/5
-XCBQ3.1:11	=AXS.Y1	+MY1	44/6	=AXS.Y1+EXTm-WSM3.1:2GN	44/6	Part of M		-M3:XCBQ:11	=AXS.Y1	+EXTm	44/6
-XCBQ3.1:12	=AXS.Y1	+MY1	44/6	=AXS.Y1+EXTm-WSM3.1:2YE	44/6	Part of M		-M3:XCBQ:12	=AXS.Y1	+EXTm	44/6
-XCBQ3.1:7	=AXS.Y1	+MY1	44/6	=AXS.Y1+EXTm-WSM3.1:3GY	44/6	Part of M		-M3:XCBQ:7	=AXS.Y1	+EXTm	44/6
-XCBQ3.1:10	=AXS.Y1	+MY1	44/6	=AXS.Y1+EXTm-WSM3.1:3PK	44/6	Part of M		-M3:XCBQ:10	=AXS.Y1	+EXTm	44/6
-XCBQ3.1:9	=AXS.Y1	+MY1	44/4	=AXS.Y1+EXTm-WSM3.1:4BU	44/4	Part of M		-M3:XCBQ:9	=AXS.Y1	+EXTm	44/4
-XCBQ3.1:8	=AXS.Y1	+MY1	44/5	=AXS.Y1+EXTm-WSM3.1:4RD	44/5	Part of M		-M3:XCBQ:8	=AXS.Y1	+EXTm	44/5
-XCBQ3.1:SH	=AXS.Y1	+MY1	44/4	=AXS.Y1+EXTm-WSM3.1:SHL	44/4	Part of M		-M3:XCBQ:SH	=AXS.Y1	+EXTm	44/4
-GF1.4:7	=AXS.Y2	+MX0	45/5	=AXS.Y2+EXTe-WSM4.1:1BN	45/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:1	=AXS.Y2	+MY2	45/5
-GF1.4:3	=AXS.Y2	+MX0	45/5	=AXS.Y2+EXTe-WSM4.1:1WH	45/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:2	=AXS.Y2	+MY2	45/5
-GF1.4:8	=AXS.Y2	+MX0	45/6	=AXS.Y2+EXTe-WSM4.1:2GN	45/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:11	=AXS.Y2	+MY2	45/6
-GF1.4:4	=AXS.Y2	+MX0	45/6	=AXS.Y2+EXTe-WSM4.1:2YE	45/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:12	=AXS.Y2	+MY2	45/6
-GF1.4:9	=AXS.Y2	+MX0	45/6	=AXS.Y2+EXTe-WSM4.1:3GY	45/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:7	=AXS.Y2	+MY2	45/6
-GF1.4:5	=AXS.Y2	+MX0	45/6	=AXS.Y2+EXTe-WSM4.1:3PK	45/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:10	=AXS.Y2	+MY2	45/6
-GF1.4:6	=AXS.Y2	+MX0	45/4	=AXS.Y2+EXTe-WSM4.1:4BU	45/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:9	=AXS.Y2	+MY2	45/4
-GF1.4:2	=AXS.Y2	+MX0	45/5	=AXS.Y2+EXTe-WSM4.1:4RD	45/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:8	=AXS.Y2	+MY2	45/5
-GF1.4:1	=AXS.Y2	+MX0	45/4	=AXS.Y2+EXTe-WSM4.1:SHL	45/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ4.1:SH	=AXS.Y2	+MY2	45/4
-XCBQ4.1:1	=AXS.Y2	+MY2	45/5	=AXS.Y2+EXTm-WSM4.1:1BN	45/5	Part of M		-M4:XCBQ:2	=AXS.Y2	+EXTm	45/5
-XCBQ4.1:2	=AXS.Y2	+MY2	45/5	=AXS.Y2+EXTm-WSM4.1:1WH	45/5	Part of M		-M4:XCBQ:1	=AXS.Y2	+EXTm	45/5
-XCBQ4.1:11	=AXS.Y2	+MY2	45/6	=AXS.Y2+EXTm-WSM4.1:2GN	45/6	Part of M		-M4:XCBQ:11	=AXS.Y2	+EXTm	45/6
-XCBQ4.1:12	=AXS.Y2	+MY2	45/6	=AXS.Y2+EXTm-WSM4.1:2YE	45/6	Part of M		-M4:XCBQ:12	=AXS.Y2	+EXTm	45/6
-XCBQ4.1:7	=AXS.Y2	+MY2	45/6	=AXS.Y2+EXTm-WSM4.1:3GY	45/6	Part of M		-M4:XCBQ:7	=AXS.Y2	+EXTm	45/6
-XCBQ4.1:10	=AXS.Y2	+MY2	45/6	=AXS.Y2+EXTm-WSM4.1:3PK	45/6	Part of M		-M4:XCBQ:10	=AXS.Y2	+EXTm	45/6
-XCBQ4.1:9	=AXS.Y2	+MY2	45/4	=AXS.Y2+EXTm-WSM4.1:4BU	45/4	Part of M		-M4:XCBQ:9	=AXS.Y2	+EXTm	45/4
-XCBQ4.1:8	=AXS.Y2	+MY2	45/5	=AXS.Y2+EXTm-WSM4.1:4RD	45/5	Part of M		-M4:XCBQ:8	=AXS.Y2	+EXTm	45/5
-XCBQ4.1:SH	=AXS.Y2	+MY2	45/4	=AXS.Y2+EXTm-WSM4.1:SHL	45/4	Part of M		-M4:XCBQ:SH	=AXS.Y2	+EXTm	45/4
-GF1.5:7	=AXS.Z1	+MX0	46/5	=AXS.Z1+EXTe-WSM5.1:1BN	46/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:7	=AXS.Z1	+MZ1	46/5
-GF1.5:3	=AXS.Z1	+MX0	46/5	=AXS.Z1+EXTe-WSM5.1:1WH	46/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:3	=AXS.Z1	+MZ1	46/5
-GF1.5:8	=AXS.Z1	+MX0	46/6	=AXS.Z1+EXTe-WSM5.1:2GN	46/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:8	=AXS.Z1	+MZ1	46/6
-GF1.5:4	=AXS.Z1	+MX0	46/6	=AXS.Z1+EXTe-WSM5.1:2YE	46/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:4	=AXS.Z1	+MZ1	46/6
-GF1.5:9	=AXS.Z1	+MX0	46/6	=AXS.Z1+EXTe-WSM5.1:3GY	46/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:9	=AXS.Z1	+MZ1	46/6
-GF1.5:5	=AXS.Z1	+MX0	46/6	=AXS.Z1+EXTe-WSM5.1:3PK	46/6	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:5	=AXS.Z1	+MZ1	46/6
-GF1.5:6	=AXS.Z1	+MX0	46/4	=AXS.Z1+EXTe-WSM5.1:4BU	46/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:6	=AXS.Z1	+MZ1	46/4
-GF1.5:2	=AXS.Z1	+MX0	46/5	=AXS.Z1+EXTe-WSM5.1:4RD	46/5	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:2	=AXS.Z1	+MZ1	46/5
-GF1.5:1	=AXS.Z1	+MX0	46/4	=AXS.Z1+EXTe-WSM5.1:SHL	46/4	Semoflex Roboschlepp 4x2x	4WB3-1420	-XCBQ5.1:1	=AXS.Z1	+MZ1	46/4

RESOLVERS AND ENCODERS CABELS 4

FROM				CABLE				TO			
BEGIN	REFERENCE		PG.	MARKING	PG.	Type	CAT. NO	END	REFERENCE		PG.
-XCBQ5.1:7	=AXS.Z1	+MZ1	46/5	=AXS.Z1+EXTm-WSM5.1:1BN	46/5	Part of M		-M5:XCBQ:7	=AXS.Z1	+EXTm	46/5
-XCBQ5.1:3	=AXS.Z1	+MZ1	46/5	=AXS.Z1+EXTm-WSM5.1:1WH	46/5	Part of M		-M5:XCBQ:03	=AXS.Z1	+EXTm	46/5
-XCBQ5.1:8	=AXS.Z1	+MZ1	46/6	=AXS.Z1+EXTm-WSM5.1:2GN	46/6	Part of M		-M5:XCBQ:8	=AXS.Z1	+EXTm	46/6
-XCBQ5.1:4	=AXS.Z1	+MZ1	46/6	=AXS.Z1+EXTm-WSM5.1:2YE	46/6	Part of M		-M5:XCBQ:04	=AXS.Z1	+EXTm	46/6
-XCBQ5.1:9	=AXS.Z1	+MZ1	46/6	=AXS.Z1+EXTm-WSM5.1:3GY	46/6	Part of M		-M5:XCBQ:9	=AXS.Z1	+EXTm	46/6
-XCBQ5.1:5	=AXS.Z1	+MZ1	46/6	=AXS.Z1+EXTm-WSM5.1:3PK	46/6	Part of M		-M5:XCBQ:05	=AXS.Z1	+EXTm	46/6
-XCBQ5.1:6	=AXS.Z1	+MZ1	46/4	=AXS.Z1+EXTm-WSM5.1:4BU	46/4	Part of M		-M5:XCBQ:6	=AXS.Z1	+EXTm	46/4
-XCBQ5.1:2	=AXS.Z1	+MZ1	46/5	=AXS.Z1+EXTm-WSM5.1:4RD	46/5	Part of M		-M5:XCBQ:02	=AXS.Z1	+EXTm	46/5
-XCBQ5.1:1	=AXS.Z1	+MZ1	46/4	=AXS.Z1+EXTm-WSM5.1:SHL	46/4	Part of M		-M5:XCBQ:12	=AXS.Z1	+EXTm	46/4

LIST OF TERMINALS DIAGRAM OF CONNECTION

TABLE XT1

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)					INTERNAL CONNECTION	
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
=OPT.00-WL1:1BN	=OPT.00:U		15/3	=OPT.00+MX0-XT1:U	ZDU 4	4XW5-821S	15/3		=OPT.00-ZB1:U1	
=OPT.00-WL1:2BK	=OPT.00:V		15/3	=OPT.00+MX0-XT1:V	ZDU 4	4XW5-821S	15/3		=OPT.00-ZB1:V1	
=OPT.00-WL1:3BK	=OPT.00:W		15/3	=OPT.00+MX0-XT1:W	ZDU 4	4XW5-821S	15/3		=OPT.00-ZB1:W1	
=OPT.00-WL1:4BU	=OPT.00:N		15/4	=OPT.00+MX0-XT1:N	ZDU 4BL	4XW5-821M	15/4		=OPT.00-ZB1:N1	
=OPT.00-WL1:GNYE	=OPT.00:PE		15/4	=OPT.00+MX0-XT1:PE:1	ZPE 4	4XW6-821Z	15/4		=OPT.00-ZB1:PE	
				=OPT.00+MX0-XT1:PE:2	ZPE 4	4XW6-821Z	18/3		=OPT.00-XT3:1	
	=OPT.00-XT1:PE:3		15/9	=OPT.00+MX0-XT1:PE:3	ZPE 4	4XW6-821Z	15/9		=OPT.00-XT1:PE:3	
	=OPT.00-XT1:PE:3		15/9	=OPT.00+MX0-XT1:PE:4	ZPE 4	4XW6-821Z	15/9		=OPT.00-XT1:PE:3	
	=OPT.00-XT1:PE:3		15/9	=OPT.00+MX0-XT1:PE:5	ZPE 4	4XW6-821Z	15/9		=OPT.00-XT1:PE:3	
	=OPT.00-XT1:PE:3		15/9	=OPT.00+MX0-XT1:PE:6	ZPE 4	4XW6-821Z	15/16		=OPT.00-XC1:	

TABLE XT2

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)					INTERNAL CONNECTION	
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
	=OPT.00-MX3:PE	FE	16/4	=OPT.00+MX0-XT2:1	ZPE 2.5	4XW6-720Z	15/9	FE	=OPT.00-XT1:PE:2	
	=OPT.00-U2:PE	FE	16/7	=OPT.00+MX0-XT2:2	ZPE 2.5	4XW6-720Z	27/5	FE	=AXS.X1-GF1.1:3	
	=AXS.X1-GF1.1:PE	FE	27/9	=OPT.00+MX0-XT2:3	ZPE 2.5	4XW6-720Z	27/16	FE	=AXS.A1-GF2.7:4	
	=AXS.A1-GF2.7:PE	FE	27/20	=OPT.00+MX0-XT2:4	ZPE 2.5	4XW6-720Z		FE		
				=OPT.00+MX0-XT2:5	ZPE 2.5	4XW6-720Z				
	=OPT.00-U1:N		16/17	=OPT.00+MX0-XT2:6	ZPE 2.5	4XW6-720Z				
	=OPT.00-MX3:N	N	16/4	=OPT.00+MX0-XT2:7	ZDU 2.5 BL	4XW5-722M	15/14	N	=OPT.00-FI1:N	
	=OPT.00-U2:N	N	16/7	=OPT.00+MX0-XT2:8	ZDU 2.5 BL	4XW5-722M		N		
				=OPT.00+MX0-XT2:9	ZDU 2.5 BL	4XW5-722M				
	=OPT.00-U1:PE		16/16	=OPT.00+MX0-XT2:10	ZDU 2.5 BL	4XW5-722M	27/15		=AXS.A1-GF2.7:10	
	=OPT.00-U1:L		16/16	=OPT.00+MX0-XT2:11	ZDU 2.5	4XW5-722S	16/16		=OPT.00-QF5:2	
				=OPT.00+MX0-XT2:12	ZDU 2.5 BL	4XW5-722M	17/11		=OPT.90-XT2.1:5	
				=OPT.00+MX0-XT2:13	ZPE 2.5	4XW6-720Z	17/12		=OPT.90-XT2.1:6	
=OPT.90-WL90:1	=OPT.90-A90:U		17/11	=OPT.90+MX0-XT2.1:4	ZDU 2.5	4XW5-722S	17/11		=OPT.90-KM5:6	
=OPT.90-WL90:2	=OPT.90-A90:N		17/11	=OPT.90+MX0-XT2.1:5	ZDU 2.5 BL	4XW5-722M	17/3		=OPT.00-XT2:12	
=OPT.90-WL90:GNYE	=OPT.90-A90:PE		17/12	=OPT.90+MX0-XT2.1:6	ZPE 2.5	4XW6-720Z	17/5		=OPT.00-XT2:13	
=OPT.90-WL90:3				=OPT.90+MX0-XT2.1:7	ZDU 2.5	4XW5-722S	17/7		=OPT.90-KM5:A2	
=OPT.90-WL90:4	=OPT.90-A90:3		17/14	=OPT.90+MX0-XT2.1:8	ZDU 2.5	4XW5-722S	17/14		=OPT.90-KM5:21	
=OPT.90-WL90:5	=OPT.90-A90:1		17/14	=OPT.90+MX0-XT2.1:9	ZDU 2.5	4XW5-722S				
=OPT.90-WL90:6	=OPT.90-A90:2		17/13	=OPT.90+MX0-XT2.1:10	ZDU 2.5	4XW5-722S	36/3		=AXS.X1-XT10:17	

TABLE XT3

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)			INTERNAL CONNECTION			
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
	=OPT.00-XT3:2		18/3	=OPT.00+MX0-XT3:1	ZPE 2,5/3AN	4XW6-730Z	15/9		=OPT.00-XT1:PE:2	
				=OPT.00+MX0-XT3:2	ZDU 2.5/3AN	4XW5-731S	18/3		=OPT.00-XT3:1	
	=OPT.00-U2:-	100	16/7	=OPT.00+MX0-XT3:2A	ZDU 2.5/3AN	4XW5-731S		100		
				=OPT.00+MX0-XT3:2B	ZDU 2.5/3AN	4XW5-731S	18/3		=OPT.00-XT3:2A	
				=OPT.00+MX0-XT3:3	ZDU 2.5/3AN	4XW5-731S				
	=OPT.90-KM5:A2	100	17/7	=OPT.00+MX0-XT3:3A	ZDU 2.5/3AN	4XW5-731S		100		
	=OPT.00-SB2:31	100	21/4	=OPT.00+MX0-XT3:3B	ZDU 2.5/3AN	4XW5-731S	18/5	100	=OPT.00-XT3:3A	
				=OPT.00+MX0-XT3:4	ZDU 2.5/3AN	4XW5-731S	35/4		=AXS.X1-XT10:9	
	=AXS.X1-GF1.1:4	100	27/8	=OPT.00+MX0-XT3:4A	ZDU 2.5/3AN	4XW5-731S		100		
	=OPT.00-KM1:A2	100	23/15	=OPT.00+MX0-XT3:4B	ZDU 2.5/3AN	4XW5-731S	18/6	100	=OPT.00-XT3:4A	
				=OPT.00+MX0-XT3:5	ZDU 2.5/3AN	4XW5-731S				
	=AXS.A1-GF2.7:2	100	27/14	=OPT.00+MX0-XT3:5A	ZDU 2.5/3AN	4XW5-731S		100		
	=AXS.X1-GF1.1:2	100	27/3	=OPT.00+MX0-XT3:5B	ZDU 2.5/3AN	4XW5-731S	18/8	100	=OPT.00-XT3:5A	
				=OPT.00+MX0-XT3:6	ZDU 2.5/3AN	4XW5-731S	37/5		=AXS.Y1-XT30:7	
	=OPT.50-A5:X:11	100	29/5	=OPT.00+MX0-XT3:6A	ZDU 2.5/3AN	4XW5-731S		100		
	=OPT.00-A2:GND	100	29/17	=OPT.00+MX0-XT3:6B	ZDU 2.5/3AN	4XW5-731S	18/10	100	=OPT.00-XT3:6A	
				=OPT.00+MX0-XT3:7	ZDU 2.5/3AN	4XW5-731S	39/9		=AXS.Z1-XT50:11	
				=OPT.00+MX0-XT3:7	ZDU 2.5/3AN	4XW5-731S				
				=OPT.00+MX0-XT3:7	ZDU 2.5/3AN	4XW5-731S				
				=OPT.00+MX0-XT3:7A	ZDU 2.5/3AN	4XW5-731S				
	=OPT.65-A3:37	100	32/5	=OPT.00+MX0-XT3:7B	ZDU 2.5/3AN	4XW5-731S	18/12	100	=OPT.00-XT3:7A	
				=OPT.00+MX0-XT3:8	ZDU 2.5/3AN	4XW5-731S				
	=OPT.65-A3:SG	100	32/5	=OPT.00+MX0-XT3:8A	ZDU 2.5/3AN	4XW5-731S		100		
	=OPT.00-XT6:5	100	34/8	=OPT.00+MX0-XT3:8B	ZDU 2.5/3AN	4XW5-731S	18/14	100	=OPT.00-XT3:8A	
				=OPT.00+MX0-XT3:9	ZDU 2.5/3AN	4XW5-731S	30/3		=OPT.00-XT4:2	
	=OPT.30-XT5:7	100	25/6	=OPT.00+MX0-XT3:9A	ZDU 2.5/3AN	4XW5-731S		100		
	=OPT.47-XT7:23	100	42/17	=OPT.00+MX0-XT3:9B	ZDU 2.5/3AN	4XW5-731S	18/15	100	=OPT.00-XT3:9A	
				=OPT.00+MX0-XT3:10	ZDU 2.5/3AN	4XW5-731S				
	=OPT.51-XT8:4	100	24/14	=OPT.00+MX0-XT3:10A	ZDU 2.5/3AN	4XW5-731S		100		
	=OPT.55-XT9:4	100	30/19	=OPT.00+MX0-XT3:10B	ZDU 2.5/3AN	4XW5-731S	18/17	100	=OPT.00-XT3:10A	

TABLE XT4

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)			INTERNAL CONNECTION			
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
				=OPT.00+MX0-XT4:1	ZT 2.5/2AN/1	4XW7-212S	18/16		=OPT.20-FU10:	
				=OPT.00+MX0-XT4:2	ZT 2.5/2AN/1	4XW7-212S	18/15		=OPT.00-XT3:9	
				=OPT.00+MX0-XT4:3	ZT 2.5/2AN/1	4XW7-212S	19/7		=OPT.00-A1:X2:3	=OPT.00-WSA1.2:2GN
				=OPT.00+MX0-XT4:4	ZT 2.5/2AN/1	4XW7-212S	19/6		=OPT.00-A1:X2:2	=OPT.00-WSA1.2:1WH
				=OPT.00+MX0-XT4:4	ZT 2.5/2AN/1	4XW7-212S	29/17		=OPT.00-A2:L/-	
				=OPT.00+MX0-XT4:5	ZT 2.5/2AN/1	4XW7-212S	19/6		=OPT.00-A1:X2:7	=OPT.00-WSA1.2:1BN
				=OPT.00+MX0-XT4:5	ZT 2.5/2AN/1	4XW7-212S	29/17		=OPT.00-A2:H/+	
				=OPT.00+MX0-XT4:6	ZTPE 2.5/2AN/1	4XW8-212Z	19/6		=OPT.00-A1:X2:FE	=OPT.00-WSA1.2:SHL
				=OPT.00+MX0-XT4:6	ZTPE 2.5/2AN/1	4XW8-212Z				

TABLE XT5

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)				INTERNAL CONNECTION			
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
				=OPT.00+MX0-XT5:1	ZT 2.5/2AN/1	4XW7-212S	42/3		=OPT.47-XT7:2	
				=OPT.00+MX0-XT5:2	ZT 2.5/2AN/1	4XW7-212S	21/2		=OPT.00-SB2:11	
				=OPT.00+MX0-XT5:3	ZT 2.5/2AN/1	4XW7-212S	21/6		=OPT.00-SB3:11	
				=OPT.00+MX0-XT5:4	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.00+MX0-XT5:5	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.00+MX0-XT5:6	ZT 2.5/2AN/1	4XW7-212S	42/5		=OPT.47-XT7:5	
				=OPT.30+MX0-XT5:7	ZT 2.5/2AN/1	4XW7-212S	25/8		=OPT.30-A30:-	
				=OPT.30+MX0-XT5:8	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.30+MX0-XT5:9	ZT 2.5/2AN/1	4XW7-212S	25/8		=OPT.30-A30:+	
				=OPT.30+MX0-XT5:10	ZT 2.5/2AN/1	4XW7-212S	25/9		=OPT.30-A30:9	
				=OPT.30+MX0-XT5:11	ZT 2.5/2AN/1	4XW7-212S	25/10		=OPT.30-A30:10	
				=OPT.30+MX0-XT5:12	ZT 2.5/2AN/1	4XW7-212S	25/10		=OPT.30-A30:13	
				=OPT.30+MX0-XT5:13	ZT 2.5/2AN/1	4XW7-212S	25/10		=OPT.30-A30:14	
				=OPT.30+MX0-XT5:14	ZTPE 2.5/2AN/1	4XW8-212Z	19/12		=OPT.00-A1:XCOM2:FE	=OPT.30-WSA1.4:SHL
				=OPT.47+MX0-XT5:15	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.47+MX0-XT5:16	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.47+MX0-XT5:17	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.47+MX0-XT5:18	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.47+MX0-XT5:19	ZTPE 2.5/2AN/1	4XW8-212Z				
				=OPT.47+MX0-XT5:22	ZTPE 2.5/2AN/1	4XW8-212Z	19/9		=OPT.00-A1:XCOM1:FE	=OPT.47-WSA1.3:SHL

TABLE XT6

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)			INTERNAL CONNECTION			
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
				=OPT.00+MX0-XT6:1	ZT 2.5/2AN/1	4XW7-212S	31/7		=OPT.00-A2:17	
				=OPT.00+MX0-XT6:2	ZT 2.5/2AN/1	4XW7-212S	18/7		=OPT.00-FU5:	
				=OPT.00+MX0-XT6:3	ZTPE 2.5/2AN/1	4XW8-212Z				
				=OPT.00+MX0-XT6:4	ZT 2.5/2AN/1	4XW7-212S	31/12		=OPT.00-A2:26	
				=OPT.00+MX0-XT6:5	ZT 2.5/2AN/1	4XW7-212S	18/14		=OPT.00-XT3:8B	
				=OPT.00+MX0-XT6:6	ZTPE 2.5/2AN/1	4XW8-212Z				
				=OPT.70+MX0-XT6:7	ZT 2.5/2AN/1	4XW7-212S	22/13		=OPT.70-SB8:14	
				=OPT.70+MX0-XT6:8	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.70+MX0-XT6:9	ZTPE 2.5/2AN/1	4XW8-212Z				
				=OPT.70+MX0-XT6:10	ZT 2.5/2AN/1	4XW7-212S	22/14		=OPT.70-SB8:24	
				=OPT.70+MX0-XT6:11	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.70+MX0-XT6:12	ZTPE 2.5/2AN/1	4XW8-212Z				

TABLE XT7

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)				INTERNAL CONNECTION		
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
				=OPT.47+MX0-XT7:1	ZT 2.5/2AN/1	4XW7-212S	31/3		=OPT.00-A2:39	
				=OPT.47+MX0-XT7:2	ZT 2.5/2AN/1	4XW7-212S	25/2		=OPT.00-XT5:1	
				=OPT.47+MX0-XT7:3	ZT 2.5/2AN/1	4XW7-212S	21/2		=OPT.00-SB2:21	
				=OPT.47+MX0-XT7:4	ZT 2.5/2AN/1	4XW7-212S	21/2		=OPT.00-SB2:22	
				=OPT.47+MX0-XT7:5	ZT 2.5/2AN/1	4XW7-212S	25/4		=OPT.00-XT5:6	
				=OPT.47+MX0-XT7:6	ZT 2.5/2AN/1	4XW7-212S	23/7		=OPT.00-FB1:A2	
				=OPT.47+MX0-XT7:7	ZT 2.5/2AN/1	4XW7-212S	21/5		=OPT.00-SB2:41	
				=OPT.47+MX0-XT7:8	ZT 2.5/2AN/1	4XW7-212S	21/5		=OPT.00-SB2:42	
				=OPT.47+MX0-XT7:21	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.47+MX0-XT7:22	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.47+MX0-XT7:23	ZT 2.5/2AN/1	4XW7-212S	18/15		=OPT.00-XT3:9B	
				=OPT.47+MX0-XT7:24	ZTPE 2.5/2AN/1	4XW8-212Z				

TABLE XC7

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)					INTERNAL CONNECTION	
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
				=OPT.47+MX0-XC7:1	ZP 2.5/1AN/12	4XW7-25CS	42/2		=OPT.47:1 1	=OPT.47-WS7:1
				=OPT.47+MX0-XC7:2	ZP 2.5/1AN/12	4XW7-25CS	42/3		=OPT.47:2 2	=OPT.47-WS7:2
				=OPT.47+MX0-XC7:3	ZP 2.5/1AN/12	4XW7-25CS	42/3		=OPT.47:3 3	=OPT.47-WS7:3
				=OPT.47+MX0-XC7:4	ZP 2.5/1AN/12	4XW7-25CS	42/4		=OPT.47:4 4	=OPT.47-WS7:4
				=OPT.47+MX0-XC7:5	ZP 2.5/1AN/12	4XW7-25CS	42/5		=OPT.47:5 5	=OPT.47-WS7:5
				=OPT.47+MX0-XC7:6	ZP 2.5/1AN/12	4XW7-25CS	42/5		=OPT.47:6 6	=OPT.47-WS7:6
				=OPT.47+MX0-XC7:7	ZP 2.5/1AN/12	4XW7-25CS	42/6		=OPT.47:7 7	=OPT.47-WS7:7
				=OPT.47+MX0-XC7:8	ZP 2.5/1AN/12	4XW7-25CS	42/6		=OPT.47:8 8	=OPT.47-WS7:8
				=OPT.47+MX0-XC7:21	ZP 2.5/1AN/12	4XW7-25CS				
				=OPT.47+MX0-XC7:22	ZP 2.5/1AN/12	4XW7-25CS				
				=OPT.47+MX0-XC7:23	ZP 2.5/1AN/12	4XW7-25CS	42/17		=OPT.47:23 11	=OPT.47-WS7:23
				=OPT.47+MX0-XC7:24	ZP 2.5/1AN/1 GN	4XW8-251Z	42/19		=OPT.47:24 12	=OPT.47-WS7:GNYE

TABLE XT8, XC8

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)			INTERNAL CONNECTION			
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
=OPT.51-WSB2.1:8RD	=OPT.51-FB2.1:8	523	24/12	=OPT.51+MX0-XC8:1	ZP 2.5/1AN/12	4XW7-25CS		523		
=OPT.51-WSB2.1:4YE	=OPT.51-FB2.1:4	524	24/12	=OPT.51+MX0-XC8:2	ZP 2.5/1AN/12	4XW7-25CS		524		
=OPT.51-WSB2.1:7BU	=OPT.51-FB2.1:7	500	24/14	=OPT.51+MX0-XC8:3	ZP 2.5/1AN/12	4XW7-25CS		500		
=OPT.51-WSB2.1:5GY	=OPT.51-FB2.1:5	100	24/14	=OPT.51+MX0-XC8:4	ZP 2.5/1AN/12	4XW7-25CS		100		
=OPT.51-WSB2.1:6PK	=OPT.51-FB2.1:6	100	24/15	=OPT.51+MX0-XC8:5	ZP 2.5/1AN/12	4XW7-25CS		100		
=OPT.51-WSB2.1:1WH	=OPT.51-FB2.1:1	131	24/15	=OPT.51+MX0-XC8:6	ZP 2.5/1AN/12	4XW7-25CS		131		
=OPT.51-WSB2.1:2BN	=OPT.51-FB2.1:2	100	24/16	=OPT.51+MX0-XC8:7	ZP 2.5/1AN/12	4XW7-25CS		100		
=OPT.51-WSB2.2:3BU	=OPT.51-FB2.2:3	520	24/18	=OPT.51+MX0-XC8:9	ZP 2.5/1AN/12	4XW7-25CS		520		
=OPT.51-WSB2.2:4GK	=OPT.51-FB2.2:4	555	24/19	=OPT.51+MX0-XC8:10	ZP 2.5/1AN/12	4XW7-25CS		555		
=OPT.51-WSB2.2:2WH	=OPT.51-FB2.2:2	131	24/19	=OPT.51+MX0-XC8:11	ZP 2.5/1AN/12	4XW7-25CS		131		
=OPT.51-WSB2.2:1BN	=OPT.51-FB2.2:1	100	24/20	=OPT.51+MX0-XC8:12	ZP 2.5/1AN/12	4XW7-25CS		100		
=OPT.51-WSB2.1:3GN	=OPT.51-FB2.1:3	FE	24/16	=OPT.51+MX0-XC8:8	ZP 2.5/1AN/1 GN	4XW8-251Z		FE		
=OPT.51-WSB2.2:5GN	=OPT.51-FB2.2:5	FE	24/20	=OPT.51+MX0-XC8:13	ZP 2.5/1AN/1 GN	4XW8-251Z		FE		
				=OPT.51+MX0-XT8:1	ZT 2.5/2AN/1	4XW7-212S	24/12		=OPT.51-FB2:S12	
				=OPT.51+MX0-XT8:2	ZT 2.5/2AN/1	4XW7-212S	24/12		=OPT.51-FB2:S22	
				=OPT.51+MX0-XT8:3	ZT 2.5/2AN/1	4XW7-212S	33/4		=OPT.50-A5:19	
				=OPT.51+MX0-XT8:4	ZT 2.5/2AN/1	4XW7-212S	18/17		=OPT.00-XT3:10A	
				=OPT.51+MX0-XT8:5	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.51+MX0-XT8:6	ZT 2.5/2AN/1	4XW7-212S	24/4		=OPT.51-FB2:33	
				=OPT.51+MX0-XT8:7	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.51+MX0-XT8:8	ZTPE 2.5/2AN/1	4XW8-212Z				
				=OPT.51+MX0-XT8:9	ZT 2.5/2AN/1	4XW7-212S	33/15		=OPT.50-A5:21	
				=OPT.51+MX0-XT8:10	ZT 2.5/2AN/1	4XW7-212S	33/15		=OPT.50-A5:23	
				=OPT.51+MX0-XT8:11	ZT 2.5/2AN/1	4XW7-212S	24/9		=OPT.51-FB2:A1	
				=OPT.51+MX0-XT8:12	ZT 2.5/2AN/1	4XW7-212S				
				=OPT.51+MX0-XT8:13	ZTPE 2.5/2AN/1	4XW8-212Z				

TABLE XT9

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)					INTERNAL CONNECTION	
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
				=OPT.55+MX0-XT9:1	ZT 2.5/2AN/1	4XW7-212S	33/8		=OPT.50-A5:33	
				=OPT.55+MX0-XT9:2	ZT 2.5/2AN/1	4XW7-212S	33/10		=OPT.50-A5:29	
				=OPT.55+MX0-XT9:3	ZT 2.5/2AN/1	4XW7-212S	33/13		=OPT.50-A5:26	
				=OPT.55+MX0-XT9:4	ZT 2.5/2AN/1	4XW7-212S	18/17		=OPT.00-XT3:10B	
				=OPT.55+MX0-XT9:5	ZTPE 2.5/2AN/1	4XW8-212Z				
				=OPT.55+MZ1-XT9.1:1	ZT 2.5/2AN/1	4XW7-212S	30/17		=OPT.55-XC9:1	=OPT.55-WS9:1
				=OPT.55+MZ1-XT9.1:2	ZT 2.5/2AN/1	4XW7-212S	30/18		=OPT.55-XC9:2	=OPT.55-WS9:2
				=OPT.55+MZ1-XT9.1:3	ZT 2.5/2AN/1	4XW7-212S	30/18		=OPT.55-XC9:3	=OPT.55-WS9:3
				=OPT.55+MZ1-XT9.1:4	ZT 2.5/2AN/1	4XW7-212S	30/19		=OPT.55-XC9:4	=OPT.55-WS9:4
				=OPT.55+MZ1-XT9.1:5	ZTPE 2.5/2AN/1	4XW8-212Z	30/20		=OPT.55-XC9:5	=OPT.55-WS9:GNYE

TABLE XT10, XC10

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)				INTERNAL CONNECTION		
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
				=AXS.X1+MX0-XC10:1	ZP 2.5/1AN/12	4XW7-25CS	35/6		=AXS.X1-XC10:01	=AXS.X1-WS10.1:1BK
				=AXS.X1+MX0-XC10:2	ZP 2.5/1AN/12	4XW7-25CS	35/8		=AXS.X1-XC10:02	=AXS.X1-WS10.1:2BK
				=AXS.X1+MX0-XC10:3	ZP 2.5/1AN/12	4XW7-25CS	35/11		=AXS.X1-XC10:03	=AXS.X1-WS10.1:3BK
				=AXS.X1+MX0-XC10:4	ZP 2.5/1AN/12	4XW7-25CS	35/14		=AXS.X1-XC10:04	=AXS.X1-WS10.1:4BK
				=AXS.X1+MX0-XC10:5	ZP 2.5/1AN/12	4XW7-25CS	35/14		=AXS.X1-XC10:12	=AXS.X1-WS10.1:5BK
				=AXS.X1+MX0-XC10:6	ZP 2.5/1AN/12	4XW7-25CS	35/16		=AXS.X1-XC10:05	=AXS.X1-WS10.1:6BK
				=AXS.X1+MX0-XC10:7	ZP 2.5/1AN/12	4XW7-25CS	35/19		=AXS.X1-XC10:06	=AXS.X1-WS10.1:76BK
				=AXS.X1+MX0-XC10:8	ZP 2.5/1AN/12	4XW7-25CS	35/3		=AXS.X1-XC10:17	=AXS.X1-WS10.1:8BK
				=AXS.X1+MX0-XC10:9	ZP 2.5/1AN/12	4XW7-25CS	35/4		=AXS.X1-XC10:18	=AXS.X1-WS10.1:9BK
				=AXS.X1+MX0-XC10:10	ZP 2.5/1AN/1 GN	4XW8-251Z	35/2		=AXS.X1-XC10:PE	=AXS.X1-WS10.1:GNYE
				=AXS.X1+MX0-XC10:11	ZP 2.5/1AN/12	4XW7-25CS	36/6		=AXS.X1-XC11:01	=AXS.X1-WS10.2:1BK
				=AXS.X1+MX0-XC10:12	ZP 2.5/1AN/12	4XW7-25CS	36/8		=AXS.X1-XC11:02	=AXS.X1-WS10.2:2BK
				=AXS.X1+MX0-XC10:13	ZP 2.5/1AN/12	4XW7-25CS	36/11		=AXS.X1-XC11:03	=AXS.X1-WS10.2:3BK
				=AXS.X1+MX0-XC10:14	ZP 2.5/1AN/12	4XW7-25CS	36/14		=AXS.X1-XC11:04	=AXS.X1-WS10.2:4BK
				=AXS.X1+MX0-XC10:15	ZP 2.5/1AN/12	4XW7-25CS	36/16		=AXS.X1-XC11:05	=AXS.X1-WS10.2:5BK
				=AXS.X1+MX0-XC10:16	ZP 2.5/1AN/12	4XW7-25CS	36/19		=AXS.X1-XC11:06	=AXS.X1-WS10.2:6BK
				=AXS.X1+MX0-XC10:17	ZP 2.5/1AN/12	4XW7-25CS	36/3		=AXS.X1-XC11:17	=AXS.X1-WS10.2:7BK
				=AXS.X1+MX0-XC10:18	ZP 2.5/1AN/12	4XW7-25CS	36/4		=AXS.X1-XC11:18	=AXS.X1-WS10.2:8BK
				=AXS.X1+MX0-XC10:19	ZP 2.5/1AN/1 GN	4XW8-251Z	36/2		=AXS.X1-XC11:PE	=AXS.X1-WS10.2:GNYE
				=AXS.X1+MX0-XT10:1	ZT 2.5/2AN/1	4XW7-212S	28/4		=AXS.X1-GF1.1:4	
				=AXS.X1+MX0-XT10:2	ZT 2.5/2AN/1	4XW7-212S	28/3		=AXS.X1-GF1.1:7	
				=AXS.X1+MX0-XT10:3	ZT 2.5/2AN/1	4XW7-212S	28/2		=AXS.X1-GF1.1:6	
				=AXS.X1+MX0-XT10:4	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.X1+MX0-XT10:5	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.X1+MX0-XT10:6	ZT 2.5/2AN/1	4XW7-212S	31/8		=OPT.00-A2:33	
				=AXS.X1+MX0-XT10:7	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.X1+MX0-XT10:8	ZT 2.5/2AN/1	4XW7-212S	18/9		=OPT.00-FU6:	
				=AXS.X1+MX0-XT10:9	ZT 2.5/2AN/1	4XW7-212S	18/6		=OPT.00-XT3:4	
				=AXS.X1+MX0-XT10:10	ZTPE 2.5/2AN/1	4XW8-212Z				
				=AXS.X1+MX0-XT10:11	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.X1+MX0-XT10:12	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.X1+MX0-XT10:13	ZT 2.5/2AN/1	4XW7-212S	32/5		=OPT.65-A3:39	
				=AXS.X1+MX0-XT10:14	ZT 2.5/2AN/1	4XW7-212S	32/5		=OPT.65-A3:Y0	
				=AXS.X1+MX0-XT10:15	ZT 2.5/2AN/1	4XW7-212S	32/11		=OPT.00-A3:X0	
				=AXS.X1+MX0-XT10:16	ZT 2.5/2AN/1	4XW7-212S	17/16		=OPT.90-KM5:14	
				=AXS.X1+MX0-XT10:17	ZT 2.5/2AN/1	4XW7-212S	17/13		=OPT.90-XT2.1:10	
				=AXS.X1+MX0-XT10:18	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.X1+MX0-XT10:19	ZTPE 2.5/2AN/1	4XW8-212Z				

TABLE XT20, XC20

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)			INTERNAL CONNECTION			
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
				=OPT.20+MZ1-XC20:1	HDC Kit HA 04.406 M	4YW1-12S0				
	=OPT.20-M20:CN3:6		50/13	=OPT.20+MZ1-XC20:1	HDC Kit HA 04.406 M	4YW1-12S0	30/5		=OPT.00-XC4:4	=OPT.20-WS20:1WH
				=OPT.20+MZ1-XC20:2	HDC Kit HA 04.406 M	4YW1-12S0				
	=OPT.20-M20:CN1:2	100	50/15	=OPT.20+MZ1-XC20:2	HDC Kit HA 04.406 M	4YW1-12S0	30/3	100	=OPT.00-XC4:2	=OPT.20-WS20:2BU
				=OPT.20+MZ1-XC20:3	HDC Kit HA 04.406 M	4YW1-12S0				
	=OPT.20-M20:CN1:1	130	50/14	=OPT.20+MZ1-XC20:3	HDC Kit HA 04.406 M	4YW1-12S0	30/2	130	=OPT.00-XC4:1	=OPT.20-WS20:2RD
				=OPT.20+MZ1-XC20:4	HDC Kit HA 04.406 M	4YW1-12S0	30/6		=OPT.00-XC4:5	=OPT.20-WS20:1BN
	=OPT.20-M20:CN3:1		50/13	=OPT.20+MZ1-XC20:4	HDC Kit HA 04.406 M	4YW1-12S0				
				=OPT.20+MZ1-XC20:5	HDC Kit HA 04.406 M	4YW1-12S0				
	=OPT.20-M20:CN3:4		50/12	=OPT.20+MZ1-XC20:5	HDC Kit HA 04.406 M	4YW1-12S0	30/7		=OPT.00-XC4:6	=OPT.20-WS20:SHL

TABLE XT30, XC30

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)					INTERNAL CONNECTION	
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
				=AXS.Y1+MX0-XC30:1	ZP 2.5/1AN/13	4XW7-25DS	37/6		=AXS.Y1-XC30:01	=AXS.Y1-WS30:1BK
				=AXS.Y1+MX0-XC30:2	ZP 2.5/1AN/13	4XW7-25DS	37/8		=AXS.Y1-XC30:02	=AXS.Y1-WS30:2BK
				=AXS.Y1+MX0-XC30:3	ZP 2.5/1AN/13	4XW7-25DS	37/9		=AXS.Y1-XC30:03	=AXS.Y1-WS30:3BK
				=AXS.Y1+MX0-XC30:4	ZP 2.5/1AN/13	4XW7-25DS	37/11		=AXS.Y1-XC30:04	=AXS.Y1-WS30:4BK
				=AXS.Y1+MX0-XC30:5	ZP 2.5/1AN/13	4XW7-25DS	37/11		=AXS.Y1-XC30:12	=AXS.Y1-WS30:5BK
				=AXS.Y1+MX0-XC30:6	ZP 2.5/1AN/13	4XW7-25DS	37/4		=AXS.Y1-XC30:17	=AXS.Y1-WS30:6BK
				=AXS.Y1+MX0-XC30:7	ZP 2.5/1AN/13	4XW7-25DS	37/5		=AXS.Y1-XC30:18	=AXS.Y1-WS30:7BK
				=AXS.Y1+MX0-XC30:8	ZP 2.5/1AN/1 GN	4XW8-251Z	37/3		=AXS.Y1-XC30:PE	=AXS.Y1-WS30:GNYE
				=AXS.Y1+MX0-XT30:1	ZT 2.5/2AN/1	4XW7-212S	28/14		=AXS.Y1-GF1.3:4	
				=AXS.Y1+MX0-XT30:2	ZT 2.5/2AN/1	4XW7-212S	28/19		=AXS.Y2-GF1.4:7	
				=AXS.Y1+MX0-XT30:3	ZT 2.5/2AN/1	4XW7-212S	28/18		=AXS.Y2-GF1.4:6	
				=AXS.Y1+MX0-XT30:4	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.Y1+MX0-XT30:5	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.Y1+MX0-XT30:6	ZT 2.5/2AN/1	4XW7-212S	38/4		=AXS.Y2-XT40:6	
				=AXS.Y1+MX0-XT30:6	ZT 2.5/2AN/1	4XW7-212S	18/10		=OPT.00-FU7:	
				=AXS.Y1+MX0-XT30:7	ZT 2.5/2AN/1	4XW7-212S	18/10		=OPT.00-XT3:6	
				=AXS.Y1+MX0-XT30:7	ZT 2.5/2AN/1	4XW7-212S	38/5		=AXS.Y2-XT40:7	
				=AXS.Y1+MX0-XT30:8	ZTPE 2.5/2AN/1	4XW8-212Z	38/3		=AXS.Y2-XT40:8	
				=AXS.Y1+MX0-XT30:8	ZTPE 2.5/2AN/1	4XW8-212Z				

TABLE XT50, XC50

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)					INTERNAL CONNECTION	
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
				=AXS.Z1+MX0-XT50:1	ZT 2.5/2AN/1	4XW7-212S	28/4		=AXS.Z1-GF1.5:4	
				=AXS.Z1+MX0-XT50:2	ZT 2.5/2AN/1	4XW7-212S	28/3		=AXS.Z1-GF1.5:7	
				=AXS.Z1+MX0-XT50:3	ZT 2.5/2AN/1	4XW7-212S	28/2		=AXS.Z1-GF1.5:6	
				=AXS.Z1+MX0-XT50:4	ZT 2.5/2AN/1	4XW7-212S	28/7		=AXS.B1-GF2.8:6	
				=AXS.Z1+MX0-XT50:5	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.Z1+MX0-XT50:6	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.Z1+MX0-XT50:7	ZT 2.5/2AN/1	4XW7-212S	28/2		=AXS.A1-GF2.7:6	
				=AXS.Z1+MX0-XT50:8	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.Z1+MX0-XT50:9	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.Z1+MX0-XT50:10	ZT 2.5/2AN/1	4XW7-212S	18/11		=OPT.00-FU8:	
				=AXS.Z1+MX0-XT50:11	ZT 2.5/2AN/1	4XW7-212S	18/12		=OPT.00-XT3:7	
				=AXS.Z1+MX0-XT50:12	ZTPE 2.5/2AN/1	4XW8-212Z				
				=AXS.Z1+MZ1-XC50.1:1	ZP 2.5/1AN/13	4XW7-25DS	39/3		=AXS.Z1-XC50:1	=AXS.Z1-WS50:1BK
				=AXS.Z1+MZ1-XC50.1:2	ZP 2.5/1AN/13	4XW7-25DS	39/3		=AXS.Z1-XC50:2	=AXS.Z1-WS50:2BK
				=AXS.Z1+MZ1-XC50.1:3	ZP 2.5/1AN/13	4XW7-25DS	39/4		=AXS.Z1-XC50:3	=AXS.Z1-WS50:3BK
				=AXS.Z1+MZ1-XC50.1:4	ZP 2.5/1AN/13	4XW7-25DS	39/4		=AXS.Z1-XC50:4	=AXS.Z1-WS50:4BK
				=AXS.Z1+MZ1-XC50.1:5	ZP 2.5/1AN/13	4XW7-25DS	39/5		=AXS.Z1-XC50:5	=AXS.Z1-WS50:5BK
				=AXS.Z1+MZ1-XC50.1:6	ZP 2.5/1AN/13	4XW7-25DS	39/5		=AXS.Z1-XC50:6	=AXS.Z1-WS50:6BK
				=AXS.Z1+MZ1-XC50.1:7	ZP 2.5/1AN/13	4XW7-25DS	39/7		=AXS.Z1-XC50:7	=AXS.Z1-WS50:7BK
				=AXS.Z1+MZ1-XC50.1:8	ZP 2.5/1AN/13	4XW7-25DS	39/7		=AXS.Z1-XC50:8	=AXS.Z1-WS50:8BK
				=AXS.Z1+MZ1-XC50.1:9	ZP 2.5/1AN/13	4XW7-25DS	39/8		=AXS.Z1-XC50:9	=AXS.Z1-WS50:9BK
				=AXS.Z1+MZ1-XC50.1:10	ZP 2.5/1AN/13	4XW7-25DS	39/2		=AXS.Z1-XC50:10	=AXS.Z1-WS50:10BK
				=AXS.Z1+MZ1-XC50.1:11	ZP 2.5/1AN/13	4XW7-25DS	39/9		=AXS.Z1-XC50:11	=AXS.Z1-WS50:11BK
				=AXS.Z1+MZ1-XC50.1:12	ZP 2.5/1AN/1 GN	4XW8-251Z	39/9		=AXS.Z1-XC50:12	=AXS.Z1-WS50:GNYE

TABLE XT50.1, XC50.1

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)					INTERNAL CONNECTION	
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
				=AXS.Z1+MZ1-XC50.1:1	ZP 2.5/1AN/13	4XW7-25DS	39/3		=AXS.Z1-XC50:1	=AXS.Z1-WS50:1BK
				=AXS.Z1+MZ1-XC50.1:2	ZP 2.5/1AN/13	4XW7-25DS	39/3		=AXS.Z1-XC50:2	=AXS.Z1-WS50:2BK
				=AXS.Z1+MZ1-XC50.1:3	ZP 2.5/1AN/13	4XW7-25DS	39/4		=AXS.Z1-XC50:3	=AXS.Z1-WS50:3BK
				=AXS.Z1+MZ1-XC50.1:4	ZP 2.5/1AN/13	4XW7-25DS	39/4		=AXS.Z1-XC50:4	=AXS.Z1-WS50:4BK
				=AXS.Z1+MZ1-XC50.1:5	ZP 2.5/1AN/13	4XW7-25DS	39/5		=AXS.Z1-XC50:5	=AXS.Z1-WS50:5BK
				=AXS.Z1+MZ1-XC50.1:6	ZP 2.5/1AN/13	4XW7-25DS	39/5		=AXS.Z1-XC50:6	=AXS.Z1-WS50:6BK
				=AXS.Z1+MZ1-XC50.1:7	ZP 2.5/1AN/13	4XW7-25DS	39/7		=AXS.Z1-XC50:7	=AXS.Z1-WS50:7BK
				=AXS.Z1+MZ1-XC50.1:8	ZP 2.5/1AN/13	4XW7-25DS	39/7		=AXS.Z1-XC50:8	=AXS.Z1-WS50:8BK
				=AXS.Z1+MZ1-XC50.1:9	ZP 2.5/1AN/13	4XW7-25DS	39/8		=AXS.Z1-XC50:9	=AXS.Z1-WS50:9BK
				=AXS.Z1+MZ1-XC50.1:10	ZP 2.5/1AN/13	4XW7-25DS	39/2		=AXS.Z1-XC50:10	=AXS.Z1-WS50:10BK
				=AXS.Z1+MZ1-XC50.1:11	ZP 2.5/1AN/13	4XW7-25DS	39/9		=AXS.Z1-XC50:11	=AXS.Z1-WS50:11BK
				=AXS.Z1+MZ1-XC50.1:12	ZP 2.5/1AN/1 GN	4XW8-251Z	39/9		=AXS.Z1-XC50:12	=AXS.Z1-WS50:GNYE
				=AXS.Z1+MZ1-XT50.1:1	ZT 2.5/2AN/1	4XW7-212S	40/3		=AXS.Z1-SQ51:BK	=AXS.Z1-WSQ51:BK
				=AXS.Z1+MZ1-XT50.1:2	ZT 2.5/2AN/1	4XW7-212S	40/5		=AXS.Z1-XX52:	
				=AXS.Z1+MZ1-XT50.1:3	ZT 2.5/2AN/1	4XW7-212S	40/7		=AXS.Z1-SQ53:BK-WH	=AXS.Z1-WSQ53:BK-WH
				=AXS.Z1+MZ1-XT50.1:4	ZT 2.5/2AN/1	4XW7-212S	41/8		=AXS.A1-XC70.1:6	=AXS.A1-WS70.1:4
				=AXS.Z1+MZ1-XT50.1:5	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.Z1+MZ1-XT50.1:6	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.Z1+MZ1-XT50.1:7	ZT 2.5/2AN/1	4XW7-212S	41/3		=AXS.A1-XC70.1:3	=AXS.A1-WS70.1:3
				=AXS.Z1+MZ1-XT50.1:8	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.Z1+MZ1-XT50.1:9	ZT 2.5/2AN/1	4XW7-212S				
				=AXS.Z1+MZ1-XT50.1:10	ZT 2.5/2AN/1	4XW7-212S	41/3		=AXS.A1-XC70.1:1	=AXS.A1-WS70.1:1
				=AXS.Z1+MZ1-XT50.1:11	ZT 2.5/2AN/1	4XW7-212S	41/4		=AXS.A1-XC70.1:2	=AXS.A1-WS70.1:2
				=AXS.Z1+MZ1-XT50.1:12	ZTPE 2.5/2AN/1	4XW8-212Z				=AXS.A1-WS70.1:GNYE
=AXS.Z1-WSQ51:BN	=AXS.Z1-SQ51:BN	128	40/3	=AXS.Z1+MZ1-XT50.1:13	ZT 2.5/2AN/1	4XW7-212S		128		
	=AXS.Z1-XX52:		40/5	=AXS.Z1+MZ1-XT50.1:14	ZT 2.5/2AN/1	4XW7-212S				
=AXS.Z1-WSQ53:BK	=AXS.Z1-SQ53:BK	128	40/7	=AXS.Z1+MZ1-XT50.1:15	ZT 2.5/2AN/1	4XW7-212S		128		
=AXS.Z1-WSQ51:BU	=AXS.Z1-SQ51:BU	100	40/3	=AXS.Z1+MZ1-XT50.1:16	ZT 2.5/2AN/1	4XW7-212S		100		

TABLE XC70.1

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)					INTERNAL CONNECTION	
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
=AXS.A1-WSQ72:BN	=AXS.A1-SQ72:BN	128	41/3	=AXS.A1+MAB1-XC70.1:1	72/VDE	4XE1-600B	41/8	128	=AXS.A1-XC70.1:4	
=AXS.A1-WSQ72:BU	=AXS.A1-SQ72:BU	100	41/4	=AXS.A1+MAB1-XC70.1:2	72/VDE	4XE1-600B	41/9	100	=AXS.A1-XC70.1:5	
=AXS.A1-WSQ72:BK	=AXS.A1-SQ72:BK	178	41/3	=AXS.A1+MAB1-XC70.1:3	72/VDE	4XE1-600B	39/7	178	=AXS.Z1-XT50.1:7	=AXS.A1-WS70.1:3
=AXS.B1-WSQ82:BN	=AXS.B1-SQ82:BN	128	41/8	=AXS.A1+MAB1-XC70.1:4	72/VDE	4XE1-600B	41/3	128	=AXS.A1-XC70.1:1	
=AXS.B1-WSQ82:BU	=AXS.B1-SQ82:BU	100	41/9	=AXS.A1+MAB1-XC70.1:5	72/VDE	4XE1-600B	41/4	100	=AXS.A1-XC70.1:2	
=AXS.B1-WSQ82:BK	=AXS.B1-SQ82:BK	179	41/8	=AXS.A1+MAB1-XC70.1:6	72/VDE	4XE1-600B	39/4	179	=AXS.Z1-XT50.1:4	=AXS.A1-WS70.1:4

TABLE XCBQ1, XCM1

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)				INTERNAL CONNECTION			
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
=AXS.X1-WSM1.1:1BN	=AXS.X1-M1:XCBQ:2		43/5	=AXS.X1+MX1-XCBQ1.1:1	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	43/5		=AXS.X1-GF1.1:7	=AXS.X1-WSM1.1:1BN
=AXS.X1-WSM1.1:1WH	=AXS.X1-M1:XCBQ:1		43/5	=AXS.X1+MX1-XCBQ1.1:2	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	43/5		=AXS.X1-GF1.1:3	=AXS.X1-WSM1.1:1WH
=AXS.X1-WSM1.1:3GY	=AXS.X1-M1:XCBQ:7		43/6	=AXS.X1+MX1-XCBQ1.1:7	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	43/6		=AXS.X1-GF1.1:9	=AXS.X1-WSM1.1:3GY
=AXS.X1-WSM1.1:4RD	=AXS.X1-M1:XCBQ:8		43/5	=AXS.X1+MX1-XCBQ1.1:8	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	43/5		=AXS.X1-GF1.1:2	=AXS.X1-WSM1.1:4RD
=AXS.X1-WSM1.1:4BU	=AXS.X1-M1:XCBQ:9		43/4	=AXS.X1+MX1-XCBQ1.1:9	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	43/4		=AXS.X1-GF1.1:6	=AXS.X1-WSM1.1:4BU
=AXS.X1-WSM1.1:3PK	=AXS.X1-M1:XCBQ:10		43/6	=AXS.X1+MX1-XCBQ1.1:10	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	43/6		=AXS.X1-GF1.1:5	=AXS.X1-WSM1.1:3PK
=AXS.X1-WSM1.1:2GN	=AXS.X1-M1:XCBQ:11		43/6	=AXS.X1+MX1-XCBQ1.1:11	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	43/6		=AXS.X1-GF1.1:8	=AXS.X1-WSM1.1:2GN
=AXS.X1-WSM1.1:2YE	=AXS.X1-M1:XCBQ:12		43/6	=AXS.X1+MX1-XCBQ1.1:12	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	43/6		=AXS.X1-GF1.1:4	=AXS.X1-WSM1.1:2YE
=AXS.X1-WSM1.1:SHL	=AXS.X1-M1:XCBQ:SH		43/4	=AXS.X1+MX1-XCBQ1.1:SH	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	43/4		=AXS.X1-GF1.1:1	=AXS.X1-WSM1.1:SHL
=AXS.X1-WLM1:RD	=AXS.X1-M1:XCM:U		43/8	=AXS.X1+MX1-XCM1:1	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	43/8		=AXS.X1-GF1.1:4	=AXS.X1-WLM1:1WH
=AXS.X1-WLM1:BK	=AXS.X1-M1:XCM:V		43/8	=AXS.X1+MX1-XCM1:2	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	43/8		=AXS.X1-GF1.1:6	=AXS.X1-WLM1:2WH
=AXS.X1-WLM1:GNYE	=AXS.X1-M1:XCMPE		43/9	=AXS.X1+MX1-XCM1:3	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	43/9		=AXS.X1-GF1.1:3	=AXS.X1-WLM1:GNYE
=AXS.X1-WLM1:WH	=AXS.X1-M1:XCM:W		43/9	=AXS.X1+MX1-XCM1:6	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	43/9		=AXS.X1-GF1.1:5	=AXS.X1-WLM1:3WH
=AXS.X1-WLM1:SHL	=AXS.X1-M1:		43/9	=AXS.X1+MX1-XCM1:SH	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	43/11		=AXS.X1-GF1.1:FB	=AXS.X1-WLM1:SHL

TABLE XCBQ3, XCM3

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)				INTERNAL CONNECTION			
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
=AXS.Y1-WSM3.1:1BN	=AXS.Y1-M3:XCBQ:2		44/5	=AXS.Y1+MY1-XCBQ3.1:1	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	44/5		=AXS.Y1-GF1.3:7	=AXS.Y1-WSM3.1:1BN
=AXS.Y1-WSM3.1:1WH	=AXS.Y1-M3:XCBQ:1		44/5	=AXS.Y1+MY1-XCBQ3.1:2	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	44/5		=AXS.Y1-GF1.3:3	=AXS.Y1-WSM3.1:1WH
=AXS.Y1-WSM3.1:3GY	=AXS.Y1-M3:XCBQ:7		44/6	=AXS.Y1+MY1-XCBQ3.1:7	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	44/6		=AXS.Y1-GF1.3:9	=AXS.Y1-WSM3.1:3GY
=AXS.Y1-WSM3.1:4RD	=AXS.Y1-M3:XCBQ:8		44/5	=AXS.Y1+MY1-XCBQ3.1:8	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	44/5		=AXS.Y1-GF1.3:2	=AXS.Y1-WSM3.1:4RD
=AXS.Y1-WSM3.1:4BU	=AXS.Y1-M3:XCBQ:9		44/4	=AXS.Y1+MY1-XCBQ3.1:9	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	44/4		=AXS.Y1-GF1.3:6	=AXS.Y1-WSM3.1:4BU
=AXS.Y1-WSM3.1:3PK	=AXS.Y1-M3:XCBQ:10		44/6	=AXS.Y1+MY1-XCBQ3.1:10	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	44/6		=AXS.Y1-GF1.3:5	=AXS.Y1-WSM3.1:3PK
=AXS.Y1-WSM3.1:2GN	=AXS.Y1-M3:XCBQ:11		44/6	=AXS.Y1+MY1-XCBQ3.1:11	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	44/6		=AXS.Y1-GF1.3:8	=AXS.Y1-WSM3.1:2GN
=AXS.Y1-WSM3.1:2YE	=AXS.Y1-M3:XCBQ:12		44/6	=AXS.Y1+MY1-XCBQ3.1:12	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	44/6		=AXS.Y1-GF1.3:4	=AXS.Y1-WSM3.1:2YE
=AXS.Y1-WSM3.1:SHL	=AXS.Y1-M3:XCBQ:SH		44/4	=AXS.Y1+MY1-XCBQ3.1:SH	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	44/4		=AXS.Y1-GF1.3:1	=AXS.Y1-WSM3.1:SHL
=AXS.Y1-WLM3:1WH	=AXS.Y1-M3:XCM:U		44/8	=AXS.Y1+MY1-XCM3:1	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	44/8		=AXS.Y1-GF1.3:4	=AXS.Y1-WLM3:1WH
=AXS.Y1-WLM3:2WH	=AXS.Y1-M3:XCM:V		44/8	=AXS.Y1+MY1-XCM3:2	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	44/8		=AXS.Y1-GF1.3:6	=AXS.Y1-WLM3:2WH
=AXS.Y1-WLM3:GNYE	=AXS.Y1-M3:XCMPE		44/9	=AXS.Y1+MY1-XCM3:3	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	44/9		=AXS.Y1-GF1.3:3	=AXS.Y1-WLM3:GNYE
=AXS.Y1-WLM3:3WH	=AXS.Y1-M3:XCM:W		44/9	=AXS.Y1+MY1-XCM3:6	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	44/9		=AXS.Y1-GF1.3:5	=AXS.Y1-WLM3:3WH
=AXS.Y1-WLM3:SHL	=AXS.Y1-M3:		44/9	=AXS.Y1+MY1-XCM3:SH	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	44/11		=AXS.Y1-GF1.3:FB	=AXS.Y1-WLM3:SHL

TABLE XCBQ4, XCM4

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)				INTERNAL CONNECTION			
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
=AXS.Y2-WSM4.1:1BN	=AXS.Y2-M4:XCBQ:2		45/5	=AXS.Y2+MY2-XCBQ4.1:1	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	45/5		=AXS.Y2-GF1.4:7	=AXS.Y2-WSM4.1:1BN
=AXS.Y2-WSM4.1:1WH	=AXS.Y2-M4:XCBQ:1		45/5	=AXS.Y2+MY2-XCBQ4.1:2	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	45/5		=AXS.Y2-GF1.4:3	=AXS.Y2-WSM4.1:1WH
=AXS.Y2-WSM4.1:3GY	=AXS.Y2-M4:XCBQ:7		45/6	=AXS.Y2+MY2-XCBQ4.1:7	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	45/6		=AXS.Y2-GF1.4:9	=AXS.Y2-WSM4.1:3GY
=AXS.Y2-WSM4.1:4RD	=AXS.Y2-M4:XCBQ:8		45/5	=AXS.Y2+MY2-XCBQ4.1:8	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	45/5		=AXS.Y2-GF1.4:2	=AXS.Y2-WSM4.1:4RD
=AXS.Y2-WSM4.1:4BU	=AXS.Y2-M4:XCBQ:9		45/4	=AXS.Y2+MY2-XCBQ4.1:9	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	45/4		=AXS.Y2-GF1.4:6	=AXS.Y2-WSM4.1:4BU
=AXS.Y2-WSM4.1:3PK	=AXS.Y2-M4:XCBQ:10		45/6	=AXS.Y2+MY2-XCBQ4.1:10	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	45/6		=AXS.Y2-GF1.4:5	=AXS.Y2-WSM4.1:3PK
=AXS.Y2-WSM4.1:2GN	=AXS.Y2-M4:XCBQ:11		45/6	=AXS.Y2+MY2-XCBQ4.1:11	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	45/6		=AXS.Y2-GF1.4:8	=AXS.Y2-WSM4.1:2GN
=AXS.Y2-WSM4.1:2YE	=AXS.Y2-M4:XCBQ:12		45/6	=AXS.Y2+MY2-XCBQ4.1:12	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	45/6		=AXS.Y2-GF1.4:4	=AXS.Y2-WSM4.1:2YE
=AXS.Y2-WSM4.1:SHL	=AXS.Y2-M4:XCBQ:SH		45/4	=AXS.Y2+MY2-XCBQ4.1:SH	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	45/4		=AXS.Y2-GF1.4:1	=AXS.Y2-WSM4.1:SHL
=AXS.Y2-WLM4:1WH	=AXS.Y2-M4:XCM:U		45/8	=AXS.Y2+MY2-XCM4:1	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	45/8		=AXS.Y2-GF1.4:4	=AXS.Y2-WLM4:1WH
=AXS.Y2-WLM4:2WH	=AXS.Y2-M4:XCM:V		45/8	=AXS.Y2+MY2-XCM4:2	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	45/8		=AXS.Y2-GF1.4:6	=AXS.Y2-WLM4:2WH
=AXS.Y2-WLM4:GNYE	=AXS.Y2-M4:XCMPE		45/9	=AXS.Y2+MY2-XCM4:3	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	45/9		=AXS.Y2-GF1.4:3	=AXS.Y2-WLM4:GNYE
=AXS.Y2-WLM4:3WH	=AXS.Y2-M4:XCM:W		45/9	=AXS.Y2+MY2-XCM4:6	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	45/9		=AXS.Y2-GF1.4:5	=AXS.Y2-WLM4:3WH
=AXS.Y2-WLM4:SHL	=AXS.Y2-M4:		45/9	=AXS.Y2+MY2-XCM4:SH	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	45/11		=AXS.Y2-GF1.4:FB	=AXS.Y2-WLM4:SHL

TABLE XCBQ5, XCM5

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)					INTERNAL CONNECTION	
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
=AXS.Z1-WSM5.1:SHL	=AXS.Z1-M5:XCBQ:12		46/4	=AXS.Z1+MZ1-XCBQ5.1:1	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	46/4		=AXS.Z1-GF1.5:1	=AXS.Z1-WSM5.1:SHL
=AXS.Z1-WSM5.1:4RD	=AXS.Z1-M5:XCBQ:02		46/5	=AXS.Z1+MZ1-XCBQ5.1:2	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	46/5		=AXS.Z1-GF1.5:2	=AXS.Z1-WSM5.1:4RD
=AXS.Z1-WSM5.1:1WH	=AXS.Z1-M5:XCBQ:03		46/5	=AXS.Z1+MZ1-XCBQ5.1:3	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	46/5		=AXS.Z1-GF1.5:3	=AXS.Z1-WSM5.1:1WH
=AXS.Z1-WSM5.1:2YE	=AXS.Z1-M5:XCBQ:04		46/6	=AXS.Z1+MZ1-XCBQ5.1:4	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	46/6		=AXS.Z1-GF1.5:4	=AXS.Z1-WSM5.1:2YE
=AXS.Z1-WSM5.1:3PK	=AXS.Z1-M5:XCBQ:05		46/6	=AXS.Z1+MZ1-XCBQ5.1:5	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	46/6		=AXS.Z1-GF1.5:5	=AXS.Z1-WSM5.1:3PK
=AXS.Z1-WSM5.1:4BU	=AXS.Z1-M5:XCBQ:6		46/4	=AXS.Z1+MZ1-XCBQ5.1:6	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	46/4		=AXS.Z1-GF1.5:6	=AXS.Z1-WSM5.1:4BU
=AXS.Z1-WSM5.1:1BN	=AXS.Z1-M5:XCBQ:7		46/5	=AXS.Z1+MZ1-XCBQ5.1:7	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	46/5		=AXS.Z1-GF1.5:7	=AXS.Z1-WSM5.1:1BN
=AXS.Z1-WSM5.1:2GN	=AXS.Z1-M5:XCBQ:8		46/6	=AXS.Z1+MZ1-XCBQ5.1:8	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	46/6		=AXS.Z1-GF1.5:8	=AXS.Z1-WSM5.1:2GN
=AXS.Z1-WSM5.1:3GY	=AXS.Z1-M5:XCBQ:9		46/6	=AXS.Z1+MZ1-XCBQ5.1:9	ASSEMBLY EPIC M23 F6 N7-10	$YB3-S004	46/6		=AXS.Z1-GF1.5:9	=AXS.Z1-WSM5.1:3GY
=AXS.Z1-WLM5:1WH	=AXS.Z1-M5:XCM:U		46/8	=AXS.Z1+MZ1-XCM5:1	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	46/8		=AXS.Z1-GF1.5:4	=AXS.Z1-WLM5:1WH
=AXS.Z1-WLM5:3WH	=AXS.Z1-M5:XCM1:W		46/9	=AXS.Z1+MZ1-XCM5:3	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	46/9		=AXS.Z1-GF1.5:6	=AXS.Z1-WLM5:3WH
=AXS.Z1-WLM5:2WH	=AXS.Z1-M5:XCM:V		46/8	=AXS.Z1+MZ1-XCM5:4	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	46/8		=AXS.Z1-GF1.5:5	=AXS.Z1-WLM5:2WH
=AXS.Z1-WLM5:GNYE	=AXS.Z1-M5:XCM1:PE		46/9	=AXS.Z1+MZ1-XCM5:PE	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	46/9		=AXS.Z1-GF1.5:3	=AXS.Z1-WLM5:GNYE
=AXS.Z1-WLM5:SHL	=AXS.Z1-M5:XCM1:SH		46/9	=AXS.Z1+MZ1-XCM5:SH	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	46/11		=AXS.Z1-GF1.5:FB	=AXS.Z1-WLM5:SHL
=AXS.Z1-WLM5:4WH	=AXS.Z1-M5:XCM:BR+		46/10	=AXS.Z1+MZ1-XCM5:A	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	46/10		=AXS.Z1-GF1.5:2	=AXS.Z1-WLM5:4WH
=AXS.Z1-WLM5:5WH	=AXS.Z1-M5:XCM:BR-		46/10	=AXS.Z1+MZ1-XCM5:B	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	4YB3-3ZD7	46/10		=AXS.Z1-GF1.5:1	=AXS.Z1-WLM5:5WH

TABLE XCBQ7, XCM7

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)					INTERNAL CONNECTION	
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
=AXS.A1-WSM7.1:WH (WH-GY)	=AXS.A1-M7:WSM:WH		47/3	=AXS.A1+MAB1-XCBQ7:1	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/3		=AXS.A1-GF2.7:1	=AXS.A1-WSM7:1GN
=AXS.A1-WSM7.1:GY	=AXS.A1-M7:WSM:GY		47/3	=AXS.A1+MAB1-XCBQ7:2	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/3		=AXS.A1-GF2.7:9	=AXS.A1-WSM7:1BN
=AXS.A1-WSM7.1:YE	=AXS.A1-M7:WSM:YE		47/5	=AXS.A1+MAB1-XCBQ7:3	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/5		=AXS.A1-GF2.7:5	=AXS.A1-WSM7:2GY
=AXS.A1-WSM7.1:RD-BU (CL) (WH-YE)	=AXS.A1-M7:WSM:BN		47/5	=AXS.A1+MAB1-XCBQ7:4	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/5		=AXS.A1-GF2.7:13	=AXS.A1-WSM7:2YE
=AXS.A1-WSM7.1:RD-GN (DGN) (WH-GN)	=AXS.A1-M7:WSM:DGN		47/4	=AXS.A1+MAB1-XCBQ7:5	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/4		=AXS.A1-GF2.7:3	=AXS.A1-WSM7:3WH
=AXS.A1-WSM7.1:GN	=AXS.A1-M7:WSM:GN		47/4	=AXS.A1+MAB1-XCBQ7:6	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/4		=AXS.A1-GF2.7:11	=AXS.A1-WSM7:3VT
=AXS.A1-WSM7.1:BN	=AXS.A1-M7:WSM:LBU		47/5	=AXS.A1+MAB1-XCBQ7:7	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/5		=AXS.A1-GF2.7:6	=AXS.A1-WSM7:4BK
=AXS.A1-WSM7.1:OG	=AXS.A1-M7:WSM:OG		47/6	=AXS.A1+MAB1-XCBQ7:8	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/6		=AXS.A1-GF2.7:15	=AXS.A1-WSM7:4RD
=AXS.A1-WSM7.1:BU	=AXS.A1-M7:WSM:BU		47/6	=AXS.A1+MAB1-XCBQ7:9	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/6		=AXS.A1-GF2.7:8	=AXS.A1-WSM7:5BU
=AXS.A1-WSM7.1:BK	=AXS.A1-M7:WSM:BK		47/3	=AXS.A1+MAB1-XCBQ7:10	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/3		=AXS.A1-GF2.7:2	=AXS.A1-WSM7:6wh-gn
=AXS.A1-WSM7.1:RD	=AXS.A1-M7:WSM:CL		47/4	=AXS.A1+MAB1-XCBQ7:12	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/4		=AXS.A1-GF2.7:4	=AXS.A1-WSM7:6wh-rd
=AXS.A1-WSM7.1:SHL	=AXS.A1-M7:WSM:SHL		47/2	=AXS.A1+MAB1-XCBQ7:P	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	47/2		=AXS.A1-GF2.7:	=AXS.A1-WSM7:SHL
=AXS.A1-WLM7:1WH	=AXS.A1-M7:WLM:RD		47/8	=AXS.A1+MAB1-XCM7:1	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	4YB3-3VF7	47/8		=AXS.A1-GF2.7:4	=AXS.A1-WLM7:1WH
=AXS.A1-WLM7:GNYE	=AXS.A1-M7:WLM:GNYE		47/9	=AXS.A1+MAB1-XCM7:2	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	4YB3-3VF7	47/9		=AXS.A1-GF2.7:3	=AXS.A1-WLM7:GNYE
=AXS.A1-WLM7:3WH	=AXS.A1-M7:WLM:BK		47/9	=AXS.A1+MAB1-XCM7:3	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	4YB3-3VF7	47/9		=AXS.A1-GF2.7:6	=AXS.A1-WLM7:3WH
=AXS.A1-WLM7:2WH	=AXS.A1-M7:WLM:WH		47/8	=AXS.A1+MAB1-XCM7:4	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	4YB3-3VF7	47/8		=AXS.A1-GF2.7:5	=AXS.A1-WLM7:2WH
=AXS.A1-WLM7:SHL	=AXS.A1-M7:WLM:SHL		47/9	=AXS.A1+MAB1-XCM7:SHL	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	4YB3-3VF7	47/11		=AXS.A1-GF2.7:FB	=AXS.A1-WLM7:SHL

TABLE XCBQ8, XCM8

EXTERNAL CONNECTION				TERMINALS /(CONNECTOR)				INTERNAL CONNECTION			
CABLE	FROM	Drw. No.	PG.	TO	Type	CAT. NO	PG.	Drw. No.	FROM	CABLE
=AXS.B1-WSM8.1:WH	=AXS.B1-M8:WSM:WH		48/3	=AXS.B1+MAB1-XCBQ8:1	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/3		=AXS.B1-GF2.8:1	=AXS.B1-WSM8:1GN
=AXS.B1-WSM8.1:GY	=AXS.B1-M8:WSM:GY		48/3	=AXS.B1+MAB1-XCBQ8:2	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/3		=AXS.B1-GF2.8:9	=AXS.B1-WSM8:1BN
=AXS.B1-WSM8.1:YE	=AXS.B1-M8:WSM:YE		48/5	=AXS.B1+MAB1-XCBQ8:3	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/5		=AXS.B1-GF2.8:5	=AXS.B1-WSM8:2GY
=AXS.B1-WSM8.1:RD-BU (GE)	=AXS.B1-M8:WSM:BN		48/5	=AXS.B1+MAB1-XCBQ8:4	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/5		=AXS.B1-GF2.8:13	=AXS.B1-WSM8:2YE
=AXS.B1-WSM8.1:RD-GN (DGN)	=AXS.B1-M8:WSM:DGN		48/4	=AXS.B1+MAB1-XCBQ8:5	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/4		=AXS.B1-GF2.8:3	=AXS.B1-WSM8:3WH
=AXS.B1-WSM8.1:GN	=AXS.B1-M8:WSM:GN		48/4	=AXS.B1+MAB1-XCBQ8:6	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/4		=AXS.B1-GF2.8:11	=AXS.B1-WSM8:3VT
=AXS.B1-WSM8.1:BN	=AXS.B1-M8:WSM:LBU		48/5	=AXS.B1+MAB1-XCBQ8:7	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/5		=AXS.B1-GF2.8:6	=AXS.B1-WSM8:4BK
=AXS.B1-WSM8.1:OG	=AXS.B1-M8:WSM:OG		48/6	=AXS.B1+MAB1-XCBQ8:8	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/6		=AXS.B1-GF2.8:15	=AXS.B1-WSM8:4RD
=AXS.B1-WSM8.1:BU	=AXS.B1-M8:WSM:BU		48/6	=AXS.B1+MAB1-XCBQ8:9	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/6		=AXS.B1-GF2.8:8	=AXS.B1-WSM8:5BU
=AXS.B1-WSM8.1:BK	=AXS.B1-M8:WSM:BK		48/3	=AXS.B1+MAB1-XCBQ8:10	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/3		=AXS.B1-GF2.8:2	=AXS.B1-WSM8:6wh-gn
=AXS.B1-WSM8.1:RD	=AXS.B1-M8:WSM:CL		48/4	=AXS.B1+MAB1-XCBQ8:12	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/4		=AXS.B1-GF2.8:4	=AXS.B1-WSM8:6wh-rd
=AXS.B1-WSM8.1:SHL	=AXS.B1-M8:WSM:SHL		48/2	=AXS.B1+MAB1-XCBQ8:P	ASSEMBLY EPIC M23 D6-F6	$YB3-S006	48/2		=AXS.B1-GF2.8:	=AXS.B1-WSM8:SHL
=AXS.B1-WLM8:1WH	=AXS.B1-M8:WLM:RD		48/8	=AXS.B1+MAB1-XCM8:1	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	4YB3-3VF7	48/8		=AXS.B1-GF2.8:4	=AXS.B1-WLM8:1WH
=AXS.B1-WLM8:GNYE	=AXS.B1-M8:WLM:GNYE		48/9	=AXS.B1+MAB1-XCM8:2	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	4YB3-3VF7	48/9		=AXS.B1-GF2.8:3	=AXS.B1-WLM8:GNYE
=AXS.B1-WLM8:3WH	=AXS.B1-M8:WLM:BK		48/9	=AXS.B1+MAB1-XCM8:3	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	4YB3-3VF7	48/9		=AXS.B1-GF2.8:6	=AXS.B1-WLM8:3WH
=AXS.B1-WLM8:2WH	=AXS.B1-M8:WLM:WH		48/8	=AXS.B1+MAB1-XCM8:4	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	4YB3-3VF7	48/8		=AXS.B1-GF2.8:5	=AXS.B1-WLM8:2WH
=AXS.B1-WLM8:SHL	=AXS.B1-M8:WLM:SHL		48/9	=AXS.B1+MAB1-XCM8:SHL	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	4YB3-3VF7	48/11		=AXS.B1-GF2.8:FB	=AXS.B1-WLM8:SHL

COMPONENT LIST

COMPONENT LIST 1

PART OF TYPE			PART LENGHT	CAT. NO	PART NUMBER	Type	DESCRIPTION	PRODUCER
A	=OPT.00	+PAE	1	9A31-0001	IPC 6606 CZ	IPC 6606 CZ	Sestava průmyslového PC	Advantech
A	=OPT.00	+MX0	2	EA12-5852	EI 5852.22	CBIO-12	Jednotka dig. vstupů a výstupů	Elsaco
A	=OPT.00	+MX0	1	EA12-9202	EI 5892.00	In-Co02	Připoj. svorkovnice pro EI58xx	Elsaco
A	=OPT.00	+MX0	1	EA12-5842	EI 5842.00	CAIO-12	Jednotka anal.vstupů a výstupů	Elsaco
A	=OPT.00	+MX0	2	EA12-5712	EI 5971.20	EBI-12	Modul zásuvný 2 binár. vstupů	Elsaco
A	=OPT.00	+MX0	2	EA12-5210	EI 5972.10	EBO-10	Modul zásuvný 1 binár. výstupu	Elsaco
A	=OPT.00	+MX0	2	EA12-9201	EI 5891.00	In-Co01	Propojovací můstek pro EI58xx	Elsaco
A	=OPT.30	+EXTe	1	AAP8-1886	AHW886	AHW886	Ruční ovladač CNC	AREM PRO, s.r.o.
A	=OPT.30	+MX0	1	EA13-1130	EI 6011.30	SLC 31	Převodník RS232 (+USB) /RS422	Elsaco
A	=OPT.65	+MX0	1	EA12-5952	EI 5952.12	EAII-12	Modul zásuvný anal. vstupu I	Elsaco
FB	=OPT.00	+MX0	1	4PT3-5121	XPS-AC5121	XPS-AC5121	Bezpečnostní modul PREVENTA	Telemecanique
FB	=OPT.51	+MX0	1	4PT3-5130	XPS-AFL5130	XPS-AFL5130	Bezpečnostní modul PREVENTA	Telemecanique
FI	=OPT.00	+MX0	1	4DK7-G253	000263644	PHF7-25/4/003-G	Chránič proudový 3F+N	Moeller
FU	=OPT.00	+MX0	2	4FE1-0010	T 1A	T 1A	Pojistka skleněná 5x20	Elkas spol. s r.o.
FU	=OPT.00	+MX0	1	4FE1-0002	T 250mA	T 250mA	Pojistka skleněná 5x20	Elkas spol. s r.o.
FU	=OPT.00	+MX0	1	4FE1-0040	T 4A	T 4A	Pojistka skleněná 5x20	Elkas spol. s r.o.
FU	=OPT.00	+MX0	2	4FE1-0031	T 3,15A	T 3,15A	Pojistka skleněná 5x20	Elkas spol. s r.o.
FU	=OPT.00	+MX0	3	4FE1-0020	T 2A	T 2A	Pojistka skleněná 5x20	Elkas spol. s r.o.
FU	=OPT.00	+MX0	2	4FE1-0008	T 0,8A	T 0,8A	Pojistka skleněná 5x20	Elkas spol. s r.o.
FU	=OPT.20	+MX0	1	4FE1-0063	T 6,3A	T 6,3A	Pojistka skleněná 5x20	Elkas spol. s r.o.
GF	=AXS.A1	+MX0	2	8F13-403M	701217	SERVOSTAR 403M-C	Servozesilovač 1x230/3x400VAC	Kollmorgen
GF	=AXS.B1	+MX0	4	8F13-403A	701199	SERVOSTAR 403A-C	Servozesilovač 1x230/3x400VAC	Kollmorgen
GF	=AXS.X1	+MX0	1	8F13-443M	701198	SERVOSTAR 443M-C	Servozesilovač 1x230/3x400VAC	Kollmorgen
GF	=OPT.20	+EXTm	1	48FB-1000	IFA61/2CAN IS DS/3DCB68/O001RPP41	IFA61/2CAN IS DS/3DCB68/O001RPP41	Servozesilovač kompaktní IFA62	Berger Lahr
HL	=OPT.00	+PAE	2	4BT2-961R	ZB5AW0B42	ZB5AW0B42	Objímka LED+1NC-RD	Telemecanique
HL	=OPT.00	+PAE	2	4BT2-970B	ZB5AW0B15	ZB5AW0B15	Objímka LED+1NO+1NC-WH	Telemecanique
HL	=OPT.55	+EXTm	1	OHP1-1000	LCE-302W-RYG	LCE-302W-RYG	Signalizační sloup kompletní	PATLITE
IM	=OPT.00	+MX0	2	4IA1-8025	05183	05183	Žlab instalační do rozv. 25x80	ABB Elektro
IM	=OPT.00	+MX0	3	4IA1-8040	05185	05185	Žlab instalační do rozv. 40x80	ABB Elektro
IM	=OPT.00	+MX0	2	4IA1-8080	05189	05189	Žlab instalační do rozv. 80x80	ABB Elektro
KM	=OPT.00	+MX0	5	4KT4-2182	LC1D18BD	LC1D18BD	Stykač 3MNO+1NO+1NC	Telemecanique
M	=AXS.A1	+EXTm	2	OMH1-2401	FHA-14C-100-D200-K-SP	FHA-14C-100-D200-K-SP	Servomotor FHA 230VAC	Kolmorgen
M	=AXS.Z1	+EXTm	1	OMK1-R003	AKM24C-NBB	AKM24C-NBB	Synchronní servomotor s brzdou	Kolmorgen
MX	=OPT.00	+EXTm	1	4MR3-1500	SK 3303.100	SK 3303.100	Chladící zařízení	Rittal
QF	=OPT.00	+MX0	1	4QK3-C130	263408	PL7-C13/3	Jistič třípólový	Moeller
QF	=OPT.00	+MX0	2	4QK9-1NHK	248437	ZP-NHK	Kontakt signalizační jističe	Moeller
QF	=OPT.00	+MX0	3	4QK1-C100	262702	PL7-C10/1	Jistič jednopólový	Moeller
QF	=OPT.00	+MX0	1	4QK1-C060	262701	PL7-C6/1	Jistič jednopólový	Moeller
QM	=OPT.90	+MX0	1	4RK1-2005	248393	Z-MS-1,0/2	Spouštěč motorový	Moeller
QS	=OPT.00	+MX0	1	4CY1-0160	NLT 16/3E/Z33	NLT 16/3E/Z33	Hlavní vypínač nouzový	SONHEIMER
SA	=OPT.70	+PAE	1	4BT2-290C	XB5AD33	XB5AD33	Hlavice otočná-komplet-BK-3	Telemecanique
SB	=OPT.00	+PAE	1	4BT2-530Z	ZB5CW333	ZB5CW333	Hlavice stisk-polosest-GN-TR	Telemecanique
SB	=OPT.00	+PAE	1	4BT2-960Z	ZB5AW0B31	ZB5AW0B31	Objímka LED+1NO-GN	Telemecanique
SB	=OPT.00	+PAE	1	4BT2-190R	XB5AS542	XB5AS542	Hlavice hřibová-komplet-RD	Telemecanique
SB	=OPT.00	+PAE	1	4BT2-9001	ZBE102	ZBE102	Jednotka spínací 1NC	Telemecanique
SB	=OPT.00	+PAE	2	4BT2-530R	ZB5CW343	ZB5CW343	Hlavice stisk-polosest-RD-TR	Telemecanique
SB	=OPT.00	+PAE	2	4BT2-4GNR	ZB5AW813743	ZB5AW813743	Hlavice 2-stisk-polosest-GN-RD	Telemecanique
SB	=OPT.00	+PAE	2	4BT2-4080	ZBW-008	ZBW-008	Dvojitá průhledná krytka	Telemecanique

COMPONENT LIST 2

PART OF TYPE			PART LENGHT	CAT. NO	PART NUMBER	Type	DESCRIPTION	PRODUCER
SB	=OPT.50	+PAE	1	4BT2-140B	XB5AW31B5	XB5AW31B5	Hlavice stisk-komplet-WH-TR	Telemecanique
SQ	=AXS.X1	+EXTm	1	OSI2-0101	IFA3004-APKG	IFA3004-APKG	Indukční čidlo, 1NC,12-24V	ifm electronic
SQ	=AXS.X1	+EXTm	6	OST1-3210	021481	XCM N2103L1	Koncový snímač polohy miniatur	Telemecanique
SQ	=AXS.Y1	+EXTm	2	OST2-0110	XS612B1PBL2	XS612B1PBL2	Indukční čidlo PNP, 1NC, 12-24V	Telemecanique
SQ	=AXS.Z1	+EXTm	1	OSR2-1001	0.3.001.30 (Item)	IAF08BBDKX-62647	Indukční čidlo PNP, 1NO, 10-30V	Nordela
SQ	=OPT.20	+EXTm	2	OST2-1110	XS608B1PBL2	XS608B1PBL2	Indukční čidlo PNP, 1NC, 12-24V	Telemecanique
SQ	=OPT.51	+EXTm	1	OST5-1Z00	XUSLZ	XUSLZ	Optická závora PŘIJIMAČ	Telemecanique
SQ	=OPT.51	+EXTm	1	OST5-1B00	XUSLB	XUSLB	Optická závora VYSILAČ	Telemecanique
SQ	=OPT.65	+EXTm	1	OSF-4000	SMAT-8E-S50-IU-M8	SMAT-8E-S50-IU-M8	Analogový senzor 0-10V/0-20mA	Festo
U	=OPT.00	+MX0	1	4UV1-1650	APC Back-UPS CS 650	APC Back-UPS CS650	Záložní zdroj UPS	APC American Power Conversion
U	=OPT.00	+MX0	1	4UV1-1310	DNR240PS24-I	DNR240PS24-I	Zdroj spínaný 1f-24VDC/10A	XP (XPerts in Power)
UX	=OPT.00	+MX0	1	4UXB1-6092	609.2	609.2	Počítadlo motohodin 24VDC	BAUSER
W	=AXS.A1	+EXTe	5	4WL4-504G	0027 637	Olflex-FD 855CP 4G1	Kabel vys.ohebný stíněný, čis.	LAPP KABEL
W	=AXS.A1	+MAB1	1	4WB1-207X	Semoflex D-PVC 7x0,5	Semoflex D-PVC 7x0,5	Kabel vys.ohebný, číslovaný	BAUDE
W	=AXS.A1	+EXTe	2	4WI1-1027	CF211.027 E113308 Chainflex	(5x(2x0,14)+(2x0,5)) AWM 2464	Kabel vys.ohebný-datový	IGUS
W	=AXS.X1	+EXTe	5	4WB3-1420	Semoflex Roboschlepp 4x2x0,25	Semoflex Roboschlepp 4x2x0,25	Kabel vys.oheb., čísl., stíněný	BAUDE
W	=AXS.Z1	+EXTe	1	4WL4-507G	0027 639	Olflex-FD 855CP 7G1	Kabel vys.ohebný stíněný, čis.	LAPP KABEL
W	=AXS.Z1	+MX0	1	4WB1-212X	Semoflex D-PVC 12x0,5	Semoflex D-PVC 12x0,5	Kabel vys.ohebný, číslovaný	BAUDE
W	=OPT.00	+MX0	5	4WK1-705C	CMSM 5x2,5 C	CMSM 5Cx2,5	Kabel ohebný PVC	KABLO ELEKTRO a.s.
W	=OPT.00	+EXTe	4	4WL8-403G	1119 103	Olflex CLASIC 110 3G0,75	Kabel ohebný číslovaný	LAPP KABEL
W	=OPT.00	+MX0	2	4WB3-1220	Semoflex Roboschlepp 2x2x0,25	Semoflex Roboschlepp 2x2x0,25	Kabel vys.oheb., čísl., stíněný	BAUDE
W	=OPT.20	+EXTe	1	4WB3-Z122	Semofl.Robschl. 2x1+(2x0,25)	Semofl.Robschl. 2x1+(2x0,25)	Kabel vys.oheb., čísl., stíněný	BAUDE
W	=OPT.30	+MX0	2	4WB3-1320	Semoflex Roboschlepp 3x2x0,25	Semoflex Roboschlepp 3x2x0,25	Kabel vys.oheb., čísl., stíněný	BAUDE
W	=OPT.47	+EXTe	1	4WL8-425G	1119 125	Olflex CLASIC 110 25G0,75	Kabel ohebný číslovaný	LAPP KABEL
W	=OPT.47	+EXTe	1	4WL7-3210	0035 926	Unitr.-FD CP(TP) 1x2x0,5	Kabel vys.ohebný stíněný twist	LAPP KABEL
W	=OPT.55	+EXTe	1	4WL3-305G	0027 532	Olflex-FD 855P 5G0,5	Kabel vys.ohebný, číslovaný	LAPP KABEL
W	=OPT.90	+EXTe	1	4WL8-407G	1119 107	Olflex CLASIC 110 7G0,75	Kabel ohebný číslovaný	LAPP KABEL
W	=OPT.90	+EXTe	1	4WL8-302X	1119 752	Olflex CLASIC 110 2X0,5	Kabel ohebný číslovaný	LAPP KABEL
WO	=OPT.00	+MX0	150	4VK1-301T	H05V-K 0,5 DBU	H05V-K 0,5 DBU	Vodič ohebný 0,5mm tm. modrý	KABLO ELEKTRO a.s.
WO	=OPT.00	+MX0	20	4VK1-601C	H07V-K 1,5 BK	H07V-K 1,5 BK	Vodič ohebný 1,5mm černý	KABLO ELEKTRO a.s.
WO	=OPT.00	+MX0	7	4VK1-601M	H07V-K 1,5 LBU	H07V-K 1,5 LBU	Vodič ohebný 1,5mm sv. modrý	KABLO ELEKTRO a.s.
WO	=OPT.00	+MX0	15	4VK1-601Z	H07V-K 1,5 GNYE	H05V-K 1,5 GNYE	Vodič ohebný 1,5mm zel. žlutý	KABLO ELEKTRO a.s.
WO	=OPT.00	+MX0	30	4VK1-801Z	H07V-K 4 GNYE	H05V-K 4 GNYE	Vodič ohebný 4mm zel. žlutý	KABLO ELEKTRO a.s.
WO	=OPT.00	+MX0	30	4VK1-901Z	H07V-K 6 GNYE	H05V-K 6 GNYE	Vodič ohebný 6mm zel. žlutý	KABLO ELEKTRO a.s.
WO	=OPT.00	+MX0	30	4VK1-501O	H05V-K 1 OG	H05V-K 1 OG	Vodič ohebný 1mm oranžový	KABLO ELEKTRO a.s.
XB	=OPT.00	+MX0	1	4IG5-SPP4	SPP 4	SPP 4	Svazkovací spirála	GPH spol. s r.o.
XB	=OPT.00	+MX0	1	4IG5-SP10	SPP 10	SPP 10	Svazkovací spirála	GPH spol. s r.o.
XB	=OPT.00	+MX0	1	4IG5-SPP8	SPP 8	SPP 8	Svazkovací spirála	GPH spol. s r.o.
XB	=OPT.30	+EXTe	8	4IG3-201C	SB C 1,6/0,8	SB C 1,6/0,8	Bužirka smršťovací	GPH spol. s r.o.
XC	=AXS.A1	+EXTm	2	OSA2-BES0	BES-517-398-NO-C-03	BES-517-398-V0-03	Indukční čidlo PNP, 1NO, 10-30V	Balluff
XC	=AXS.A1	+MAB1	2	4YB3-4I12	73002712	P (anti clockwise)=12, 73002712	Izolační vložka vidlice D6 M23	LAPP KABEL
XC	=AXS.A1	+MAB1	6	4YB3-4I18	73002718	E (clockwise)=12, 73002718	Izolační vložka zásuvky F6 M23	LAPP KABEL
XC	=AXS.A1	+MAB1	72	4YB3-4MD1	74200600	EPIC M23 BCEMS 1MM 1.0 AU	Dutinka zásuvky F6 M23	LAPP KABEL
XC	=AXS.A1	+MAB1	24	4YB3-4MK1	72400000	EPIC M23 BCEMS 1MM 1.0 AU	Kolík vidlice D6 M23	LAPP KABEL
XC	=AXS.A1	+MAB1	2	4YB3-4V00	72044030	EPIC M23 D6 N7-10	Kryt vidlice D6 M23	LAPP KABEL
XC	=AXS.A1	+MAB1	6	4YB3-4Z00	72064030	EPIC M23 F6 N7-10	Kryt zásuvky F6 M23	LAPP KABEL
XC	=AXS.A1	+MAB1	2	4YB3-3VF7	73000000	EPIC CIRCON LS1 D6 3+PE+4K 8,5-11	Vidlice LS1 D6 3+PE+4 K přímá	LAPP KABEL
XC	=AXS.A1	+MAB1	7	4YB3-3ZD7	73000008	EPIC CIRCON LS1 F6 3+PE+4K 8,5-11	Zásuvka LS1 D6 3+PE+4 K přímá	LAPP KABEL

COMPONENT LIST 3

PART OF TYPE			PART LENGHT	CAT. NO	PART NUMBER	Type	DESCRIPTION	PRODUCER
XC	=AXS.B1	+MX0	4	4YF1-200M	FL15P7	FL15P7	Vidlice Dsub 15 (M)-prázdná	FCT
XC	=AXS.B1	+MX0	64	4YFP-202M	FK20PL-02V	FK20PL-02V	Lisovací pin pro D-sub (M)	FCT
XC	=AXS.B1	+MX0	4	4YFP-1015	FMK2	FMK2	Kryt konektoru kovový	FCT
XC	=AXS.B1	+MX0	8	4YFP-1200	F52M041M963	F52M041M963	Šroub UNC4-40	FCT
XC	=AXS.X1	+EXTm	1	OSA4-BCS7	BCS Z05AA02-GSCFNZ01-DT02	BCS00H7	Kapacitní čidlo PN, 1NO, 18-30V	Balluff
XC	=AXS.X1	+EXTe	7	4YW2-5M01	9457610150	SAIL-M12G-5-1,5U	Konektor M12 s kabelem	Weidmüller
XC	=AXS.X1	+MX1	2	4YWR-2S64	1701240000	SAI-6-M 5P M12	Integrátor pasivní 6x5-pole	Weidmüller
XC	=AXS.X1	+MX1	1	4YWR-M120	9456940000	SAIS-5/7	Konektor M12/5 pole	Weidmüller
XC	=AXS.Y1	+MY1	2	4YWR-2S44	1701230000	SAI-4-M 5P M12	Integrátor pasivní 4x5-pole	Weidmüller
XC	=OPT.00	+PAE	3	4YC9-R091	801-104	KRYT CAN 9	Kryt konektoru	CANNON
XC	=OPT.00	+PAE	2	4YC1-V090	801-036	CAN 9 V	Vidlice CAN 9 V pájecí	CANNON
XC	=OPT.00	+PAE	2	4YC1-Z090	801-040	CAN 9 Z	Zásuvka CAN 9 Z pájecí	CANNON
XC	=OPT.00	+MX0	1	4YH1-Z230	266875	Z-SD230	Zásuvka 1f 16A	Moeller
XC	=OPT.20	+MZ1	1	4YW1-12S0	1802720000	HDC Kit HA 04.406 M	Kit konektorový 4x10A+PE	Weidmüller
XC	=OPT.30	+EXTe	1	4YC1-Z150	801-009	CAN 15 Z	Zásuvka CAN 15 Z pájecí	CANNON
XC	=OPT.30	+EXTe	1	4YK1-1P01	CR 15 AD1	CR 15 AD1	Deska konektoru CR 15 AD1	ILME
XC	=OPT.30	+EXTe	1	4YK1-1Z01	CHI 06 LS	CHI 06 LS	Kryt zásuvky CHI 06 LS	ILME
XI	=OPT.00	+MX0	2	4II1-0000	42330	KEL-FG B4	Kabelový přírubový systém	ICOTEK
XI	=OPT.00	+MX0	1	4II9-1080	32262	KZL80	Systém odlehčení tahu KZL	ICOTEK
XI	=OPT.00	+MX0	1	4IIP-1BTK	41251	BTK (šedý)	Segment těsnící BTK	ICOTEK
XI	=OPT.00	+MX0	4	4IIP-107G	41207	KT7 (šedý)	Segment těsnící KT	ICOTEK
XI	=OPT.00	+MX0	4	4IIP-111G	41211	KT11 (šedý)	Segment těsnící KT	ICOTEK
XL	=OPT.00	+PAE	1	41G1-0700	GES05500184	FEC 5,0	Feritové jádro na kulatý kabel	Nedefinován
XT	=AXS.A1	+MAB1	1	4XE1-600B	72/VDE	72/VDE	Svorkovnice přístrojová 12x1,5	Elkas spol. s r.o.
XT	=AXS.X1	+MX0	9	4XW7-25CS	1815580000	ZP 2.5/1AN/12	Svorka konektor. 12p 2,5 šedá	Weidmüller
XT	=AXS.X1	+MX0	15	4XW8-251Z	1820580000	ZP 2.5/1AN/1 GN	Svorka konekt. 1p 2,5 zel. žlut	Weidmüller
XT	=AXS.X1	+MX0	36	4XW5-PZEW	9540000000	ZEW	Svěrka koncová pro ZDU	Weidmüller
XT	=AXS.X1	+MX0	7	4XW7-2W1S	1816030000	ZAP/TW ZT2.5/2AN	Bočnice šedá. pro ZT 2, 5/2AN1	Weidmüller
XT	=AXS.X1	+MX0	7	4XW7-2X00	1816130000	ZVR ZP2.5	Aretační prvek	Weidmüller
XT	=AXS.X1	+MX0	14	4XW7-2X01	1816150000	KOSF ZT2.5	Kodovací prvek	Weidmüller
XT	=AXS.X1	+MX0	7	4XW7-2X02	1816140000	ZZE ZP2.5	Zachycovač tahu	Weidmüller
XT	=AXS.X1	+MX0	117	4XW7-212S	1815070000	ZT 2.5/2AN/1	Svorka konektor. spodek šedá	Weidmüller
XT	=AXS.X1	+MX0	19	4XW8-212Z	1815080000	ZTPE 2.5/2AN/1	Svorka 2,5 zel.ži s konektorem	Weidmüller
XT	=AXS.Y1	+MX0	8	4XW7-25DS	1815590000	ZP 2.5/1AN/13	Svorka konektor. 13p 2,5 šedá	Weidmüller
XT	=AXS.Y1	+MX0	2	4XW7-2QVL	1693890000	ZQV 2.5N/50 GE	Propojovací můstek 2,5 / 50x	Weidmüller
XT	=OPT.00	+MX0	11	4XW9-1S30	7921560000	SIHA 3/G20	Pojistkový vršek pro 5x20	Weidmüller
XT	=OPT.00	+MX0	11	4XW9-1T3S	8731720000	ZTR 2.5/3AN	Svorka 2,5 šedá pojist.2 výst.	Weidmüller
XT	=OPT.00	+MX0	1	4XW5-8QV3	1608960000	ZQV 4/3 GE	Propojovací můstek 4 / 3x	Weidmüller
XT	=OPT.00	+MX0	1	4XW5-8W1S	1632090000	ZAP/TW 4 DB	Bočnice šedá pro ZDU 4	Weidmüller
XT	=OPT.00	+MX0	1	4XW5-821M	1632060000	ZDU 4BL	Svorka 4 modrá	Weidmüller
XT	=OPT.00	+MX0	3	4XW5-821S	1632050000	ZDU 4	Svorka 4 šedá	Weidmüller
XT	=OPT.00	+MX0	6	4XW6-821Z	1632080000	ZPE 4	Svorka 4 zel.žlutá	Weidmüller
XT	=OPT.00	+MX0	6	4XW5-7W1S	1608740000	ZAP/TW 1	Bočnice šedá pro ZDU 2,5	Weidmüller
XT	=OPT.00	+MX0	5	4XW5-722M	1608520000	ZDU 2.5 BL	Svorka 2,5 modrá	Weidmüller
XT	=OPT.00	+MX0	6	4XW5-722S	1608510000	ZDU 2.5	Svorka 2,5 šedá	Weidmüller
XT	=OPT.00	+MX0	7	4XW6-720Z	1608640000	ZPE 2.5	Svorka 2,5 zel.žlutá	Weidmüller
XT	=OPT.00	+MX0	3	4XW5-7W2S	1608770000	ZAP/TW 2 DB	Bočnice šedá pro ZDU 2, 5/3AN	Weidmüller
XT	=OPT.00	+MX0	9	4XW5-731S	1608540000	ZDU 2.5/3AN	Svorka 2,5 šedá	Weidmüller

COMPONENT LIST 4

PART OF TYPE			PART LENGHT	CAT. NO	PART NUMBER	Type	DESCRIPTION	PRODUCER
XT	=OPT.00	+MX0	1	4XW6-730Z	1608650000	ZPE 2,5/3AN	Svorka 2,5 zel.žlutá	Weidmüller
XT	=OPT.00	+MX0	6	4XW5-7QVL	1697540000	ZQV 2.5/50	Propojovací můstek 2,5 / 50x	Weidmüller
XT	=OPT.00	+MX0	2	4IW1-00WH	1635000000	WS 10/5 MC	Značení svorek WS	Weidmüller
XT	=OPT.00	+MX0	1	4IW1-01WH	1610000000	ZS 10/5 MC	Značení svorek ZS	Weidmüller
XW	=OPT.00	+MX0	400	4IW2-12WH	1711350001	1711350001	Značení vodičů SF	Weidmüller
XX	=AXS.Z1	+EXTe	2	4IG1-4A01	PL 1,5	PL 1,5	Kabelová spojka lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-1000	DI 0,14-6; GY	DI 0,14-6	Jednodutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-1600	DI 1,5-8; RD	DI 1,5-8	Jednodutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-2300	DID 0,5-8; OG	DID 0,5-8	Dvojdutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3104	RF-M4	RF-M4	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3208	BF-M8	BF-M8	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-2400	DID 0,75-8; WH	DID 0,75-8	Dvojdutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3105	RF-M5	RF-M5	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3504	GF-M4	GF-M4	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-1100	DI 0,25-8; LBU	DI 0,25-8	Jednodutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-1700	DI 2,5-8; DBU	DI 2,5-8	Jednodutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-2500	DID 1,0-8; YE	DID 1,0-8	Dvojdutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3106	RF-M6	RF-M6	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3505	GF-M5	GF-M5	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-1200	DI 0,34-8; LGN	DI 0,34-8	Jednodutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	100	4IG1-1800	DI 4-10; GY	DI 4-10	Jednodutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-2600	DID 1,5-8; RD	DID 1,5-8	Dvojdutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3108	RF-M8	RF-M8	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3506	GF-M6	GF-M6	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-1300	DI 0,5-8; OG	DI 0,5-8	Jednodutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-2700	DID 2,5-10; BU	DID 2,5-10	Dvojdutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3204	BF-M4	BF-M4	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3508	GF-M8	GF-M8	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-1400	DI 0,75-8; WH	DI 0,75-8	Jednodutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3205	BF-M5	BF-M5	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3510	GF-M10	GF-M10	Oko kabelové lisovací	GPH spol. s r.o.
XX	=OPT.00	+MX0	200	4IG1-1500	DI 1-8; YE	DI 1-8	Jednodutinka izolovaná	GPH spol. s r.o.
XX	=OPT.00	+MX0	20	4IG1-3206	BF-M6	BF-M6	Oko kabelové lisovací	GPH spol. s r.o.
YV	=AXS.X1	+EXTm	4	Y0N1-A001	V60A413A-A2-13J	V60A413A-A2-13J	EMG-Pneumatický ventil XFV-60	Norgren
YV	=OPT.65	+EXTm	1	Y0N1-A002	V60A513A-A2-13J	V60A513A-A2-13J	EMG-Pneumatický ventil XFV-60	Norgren
Z	=OPT.00	+MX0	1	4ZF4-16VY	4ELF16VY/D	4ELF16VY/D	Filtr síťový	Elfis spol. s r.o.

PTV, spol. s r. o.
Csl. armády 23
253 01 Hostivice
Czech Republic

PTV-V52-N-0001

WJ3020B
1Z-PJ-NL

6.11.2012 13:39:14