interface - top side
black bar = diode cathode, "+" = electrolytic +, red "1" = pin 1, no mark = either way;
black corner = hand-fitted, dashed = large part, colour = value (key on the last pages)

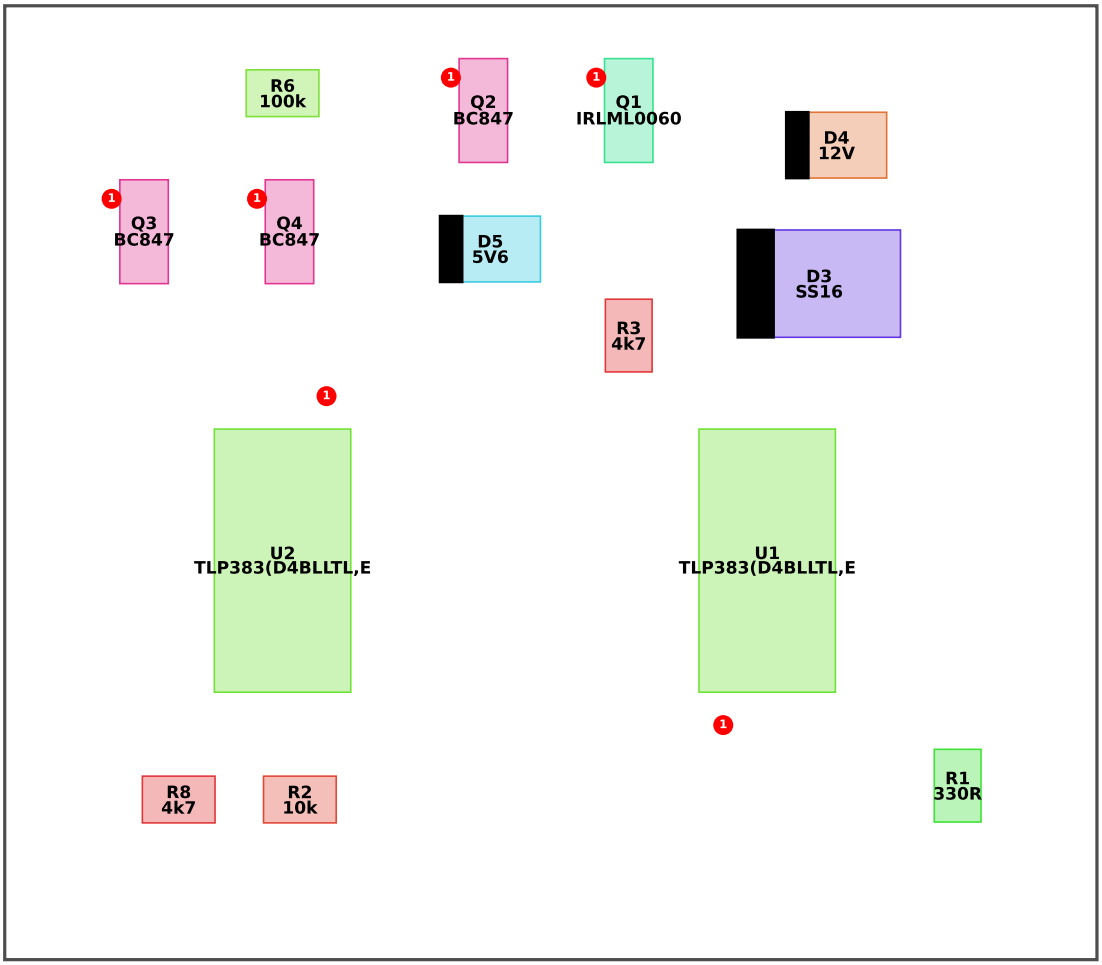

interface - bottom side (mirrored, seen from below)
black bar = diode cathode, "+" = electrolytic +, red "1" = pin 1, no mark = either way;
black corner = hand-fitted, dashed = large part, colour = value (key on the last pages)

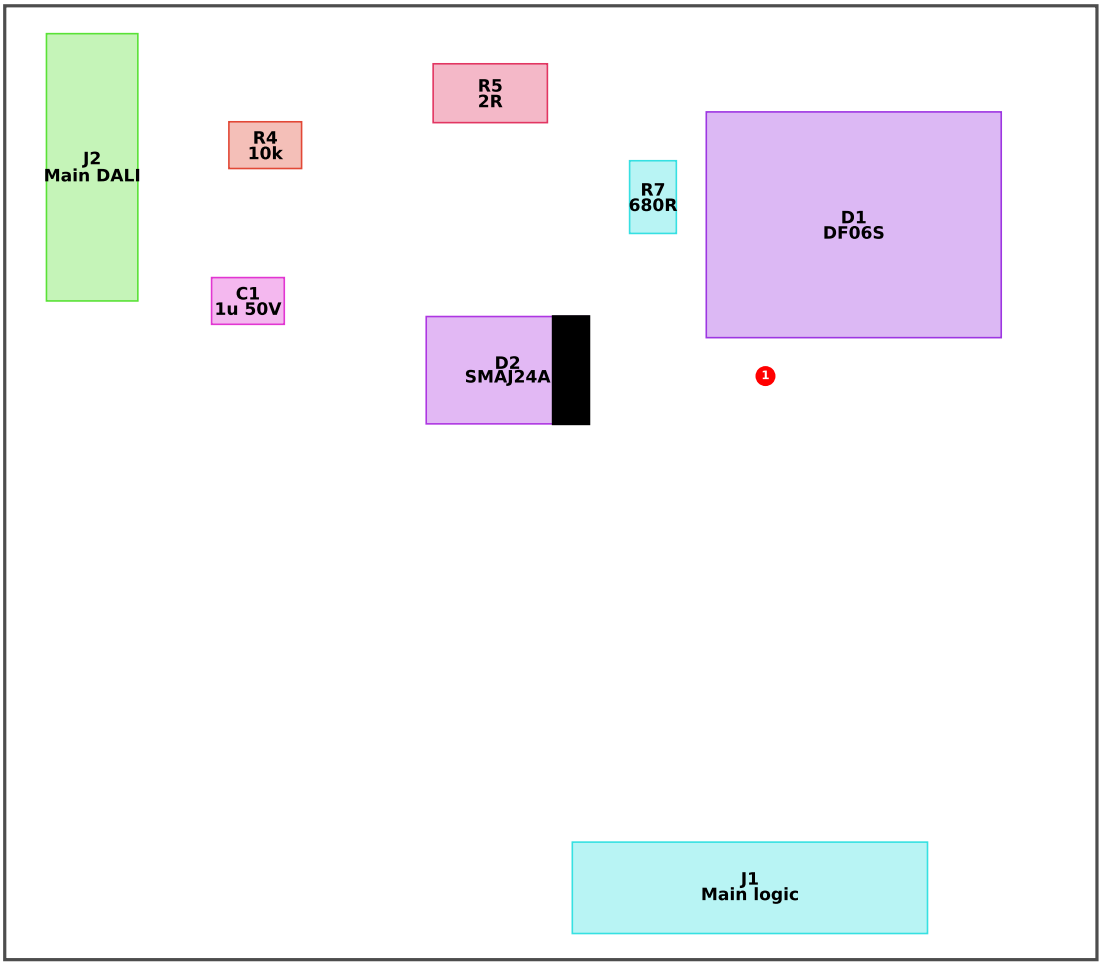

interface - values (22 parts)

10k	x1	bottom	R4
1u 50V	x1	bottom	C1
2R	x1	bottom	R5
680R	x1	bottom	R7
DF06S	x1	bottom	D1
Main DALI	x1	bottom	J2
Main logic	x1	bottom	J1
SMAJ24A	x1	bottom	D2
100k	x1	top	R6
10k	x1	top	R2
12V	x1	top	D4
330R	x1	top	R1
4k7	x2	top	R3, R8
5V6	x1	top	D5
BC847	x3	top	Q2, Q3, Q4
IRLML0060	x1	top	Q1
SS16	x1	top	D3
TLP383(D4BLLTL,E	x2	top	U1, U2

interface - how to read this drawing and the parts

Black bar = diode cathode (K). The diode body carries a band on that end.

"+" = electrolytic capacitor + pad. The can has a dark stripe (or "-" marks) on the other side.

Red dot "1" = pin 1 of ICs, transistors, LEDs, optocouplers, connectors and modules:

- SOT-23 / SOT-23-5 / TSOT-23-6 / SC-70-6: pin 1 is marked by a dot or bevel, or follow the leg pattern (SOT-23: the single leg is pin 3, opposite pins 1 and 2).
- SO-6 optocouplers, the NCN5130 (QFN) and the supervisor: a dot or notch at pin 1 on the package.
- WS2812B-MINI-V3J: a notch / marked corner on the body is pin 1 (VDD); the legs differ, so the footprint only fits one way.
- The XIAO, DC-DC converters and the REC3 module: their silkscreen / pin-1 marking and the socket shape.

No mark = fits either way (resistors, ceramic capacitors, inductors, fuse, crystal, pin strips, buttons).

Black corner = fitted by hand (not placed by the assembler); dashed outline = large part.

Same colour = same value (see the values page).

Tools: a 3-5x head magnifier or a 10x loupe and good light are enough to read the bands and pin-1 dots on SOT-23 and 0805 parts; a USB microscope helps for the NCN5130 QFN and SC-70-6.