

main - top side

black bar = diode cathode, "+" = electrolytic +, red "1" = pin 1, no mark = either way;
black corner = hand-fitted, dashed = large part, colour = value (key on the last pages)

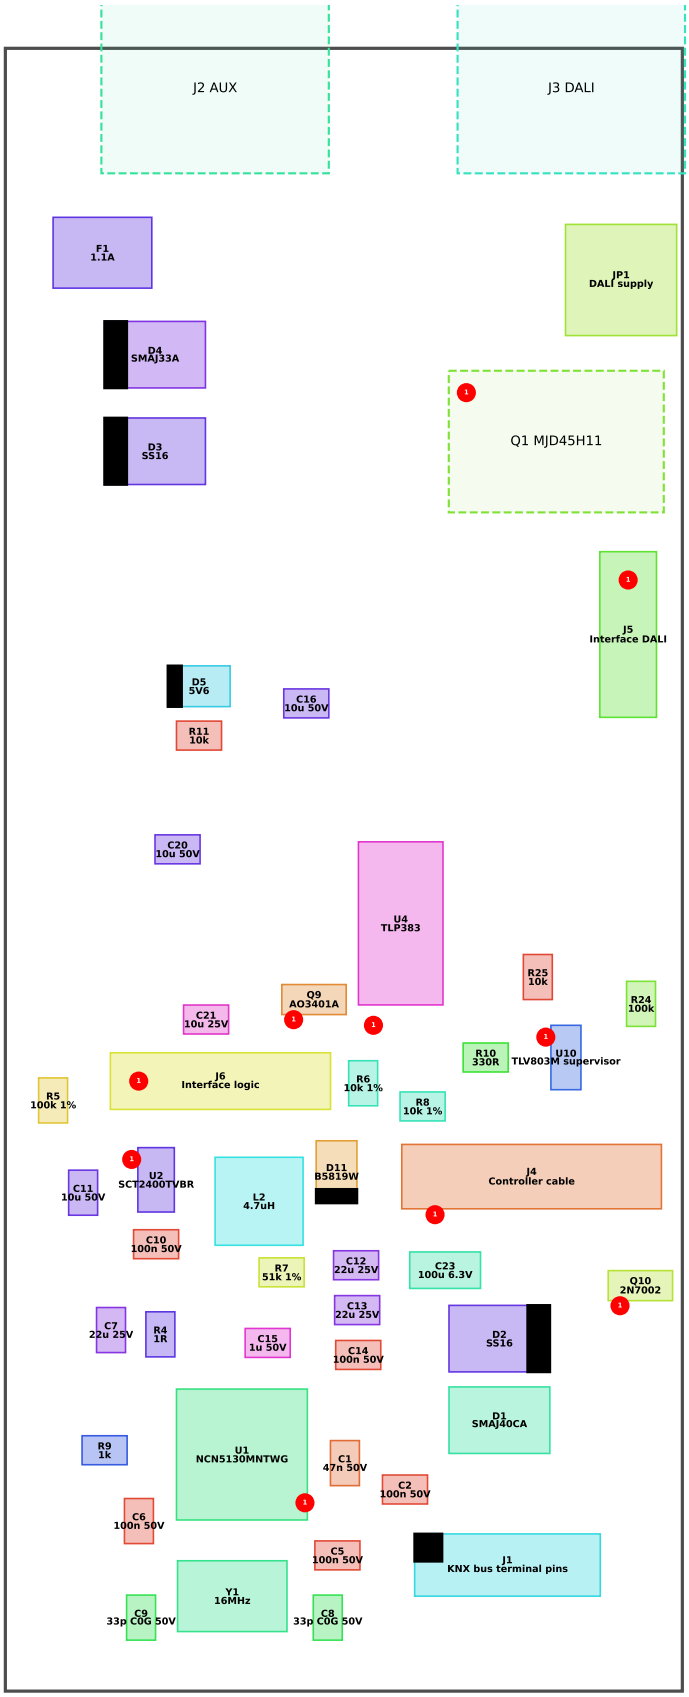


main - bottom side (mirrored, seen from below)
black bar = diode cathode, "+" = electrolytic +, red "1" = pin 1, no mark = either way;
black corner = hand-fitted, dashed = large part, colour = value (key on the last pages)

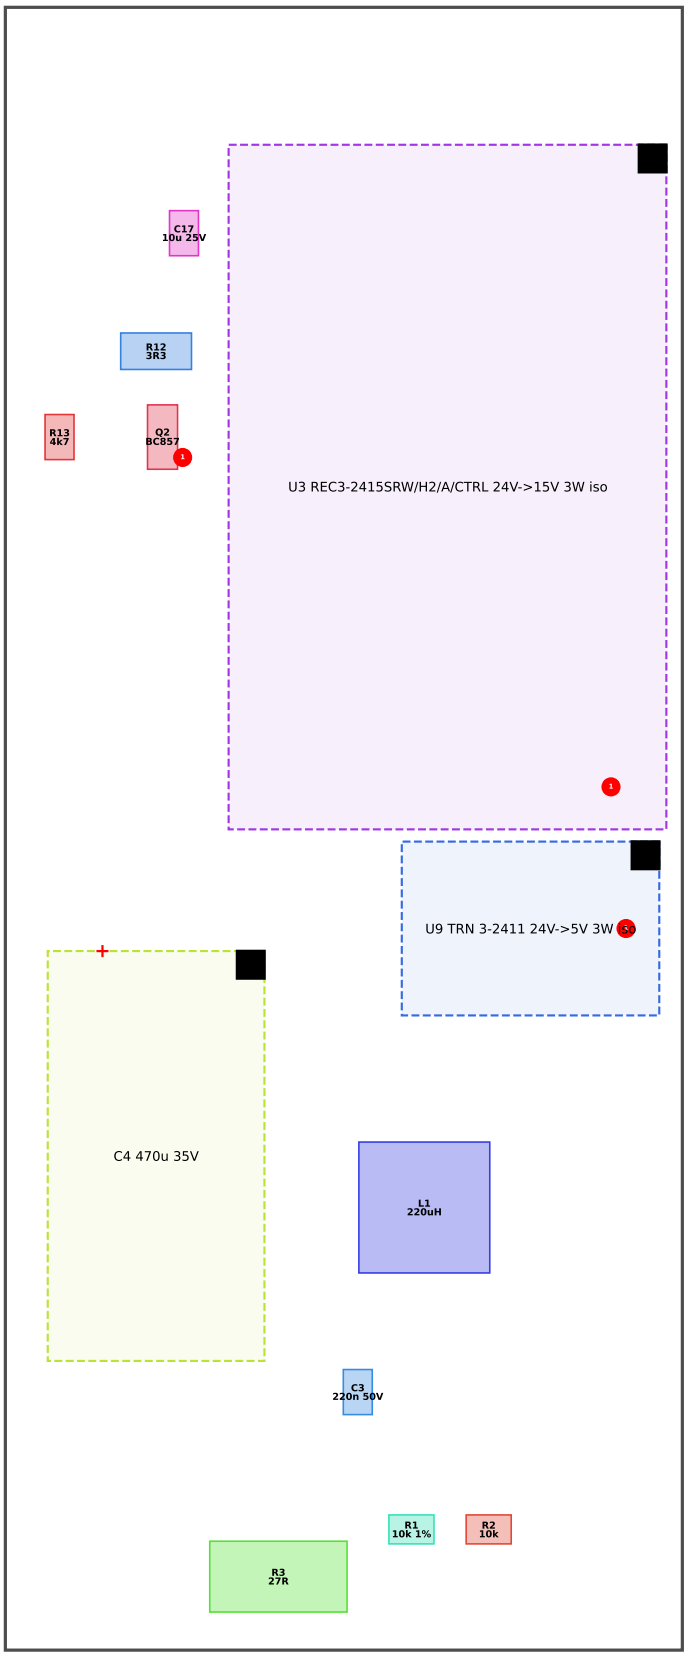

main - values (62 parts)

10k	x1	bottom	R2
10k 1%	x1	bottom	R1
10u 25V	x1	bottom	C17
220n 50V	x1	bottom	C3
220uH	x1	bottom	L1
27R	x1	bottom	R3
3R3	x1	bottom	R12
470u 35V	x1	bottom	C4
4k7	x1	bottom	R13
BC857	x1	bottom	Q2
REC3-2415SRW/H2/A/CTRL 24V->15V 3W iso	x1	bottom	U3
TRN 3-2411 24V->5V 3W iso	x1	bottom	U9
1.1A	x1	top	F1
100k	x1	top	R24
100k 1%	x1	top	R5
100n 50V	x5	top	C2, C5, C6, C10, C14
100u 6.3V	x1	top	C23
10k	x2	top	R11, R25
10k 1%	x2	top	R6, R8
10u 25V	x1	top	C21
10u 50V	x3	top	C11, C16, C20
16MHz	x1	top	Y1
1R	x1	top	R4
1k	x1	top	R9
1u 50V	x1	top	C15
22u 25V	x3	top	C7, C12, C13
2N7002	x1	top	Q10
330R	x1	top	R10
33p C0G 50V	x2	top	C8, C9
4.7uH	x1	top	L2
47n 50V	x1	top	C1
51k 1%	x1	top	R7
5V6	x1	top	D5
AO3401A	x1	top	Q9
AUX	x1	top	J2
B5819W	x1	top	D11
Controller cable	x1	top	J4
DALI	x1	top	J3
DALI supply	x1	top	JP1
Interface DALI	x1	top	J5



Interface logic	x1	top	J6
KNX bus terminal pins	x1	top	J1
MJD45H11	x1	top	Q1
NCN5130MNTWG	x1	top	U1
SCT2400TVBR	x1	top	U2
SMAJ33A	x1	top	D4
SMAJ40CA	x1	top	D1
SS16	x2	top	D2, D3
TLP383	x1	top	U4
TLV803M supervisor	x1	top	U10

main - how to read this drawing and the parts

Black bar = diode cathode (K). The diode body carries a band on that end.

"+" = electrolytic capacitor + pad. The can has a dark stripe (or "-" marks) on the other side.

Red dot "1" = pin 1 of ICs, transistors, LEDs, optocouplers, connectors and modules:

- SOT-23 / SOT-23-5 / TSOT-23-6 / SC-70-6: pin 1 is marked by a dot or bevel, or follow the leg pattern (SOT-23: the single leg is pin 3, opposite pins 1 and 2).
- SO-6 optocouplers, the NCN5130 (QFN) and the supervisor: a dot or notch at pin 1 on the package.
- WS2812B-MINI-V3J: a notch / marked corner on the body is pin 1 (VDD); the legs differ, so the footprint only fits one way.
- The XIAO, DC-DC converters and the REC3 module: their silkscreen / pin-1 marking and the socket shape.

No mark = fits either way (resistors, ceramic capacitors, inductors, fuse, crystal, pin strips, buttons).

Black corner = fitted by hand (not placed by the assembler); dashed outline = large part.

Same colour = same value (see the values page).

Tools: a 3-5x head magnifier or a 10x loupe and good light are enough to read the bands and pin-1 dots on SOT-23 and 0805 parts; a USB microscope helps for the NCN5130 QFN and SC-70-6.