

STEPS TO BE FOLLOWED TO CREATE A NEW PROJECT IN KEIL4 FOR ARM7 (LPC2129)


STEP1: Open windows OS through virtual box and open **Keil uVision4** which is there on desktop.

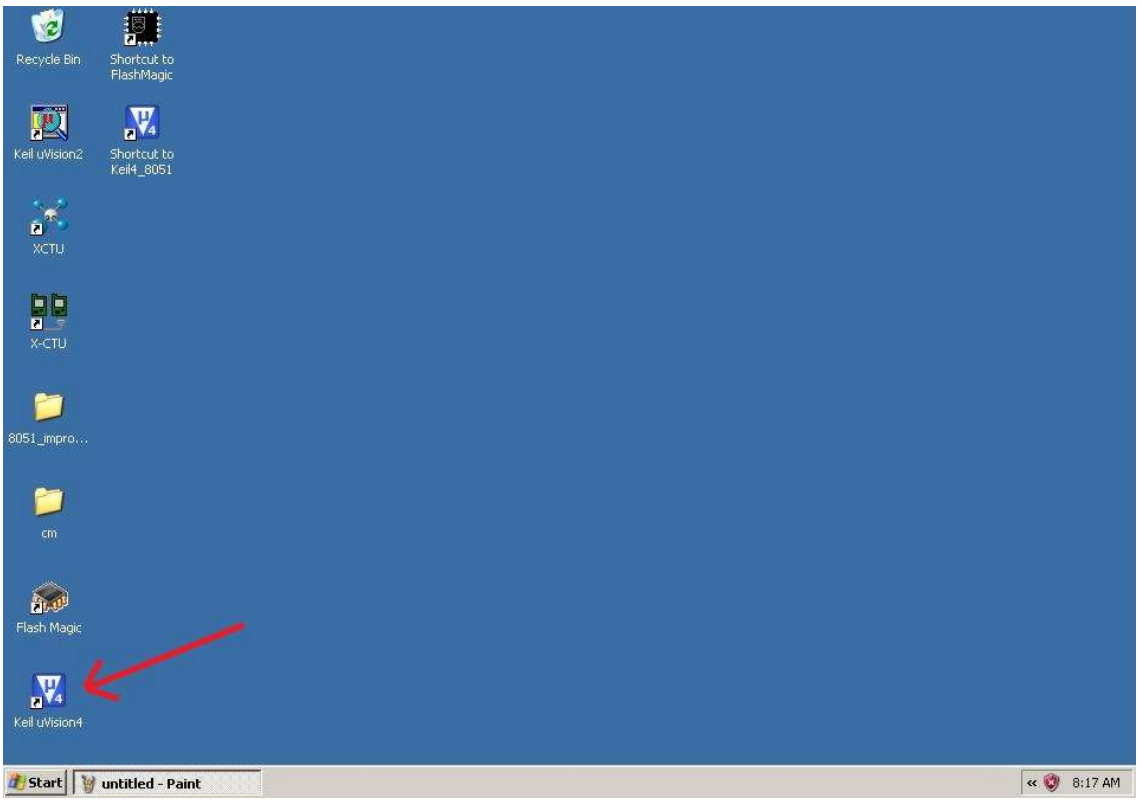


STEP2: After open the Keil, if any project is opened close that project by selecting Project→Close project. Now Keil4 application is ready to create the new project.

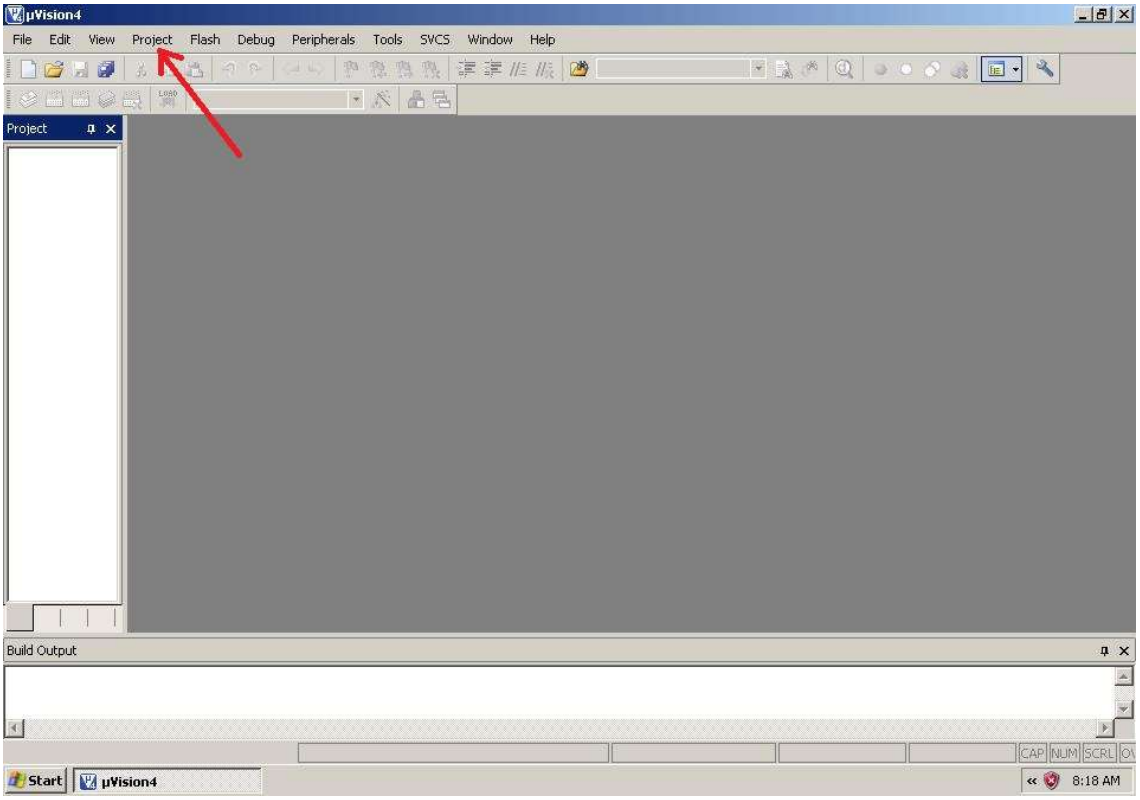


STEP3: Select Project → New uVision Project…

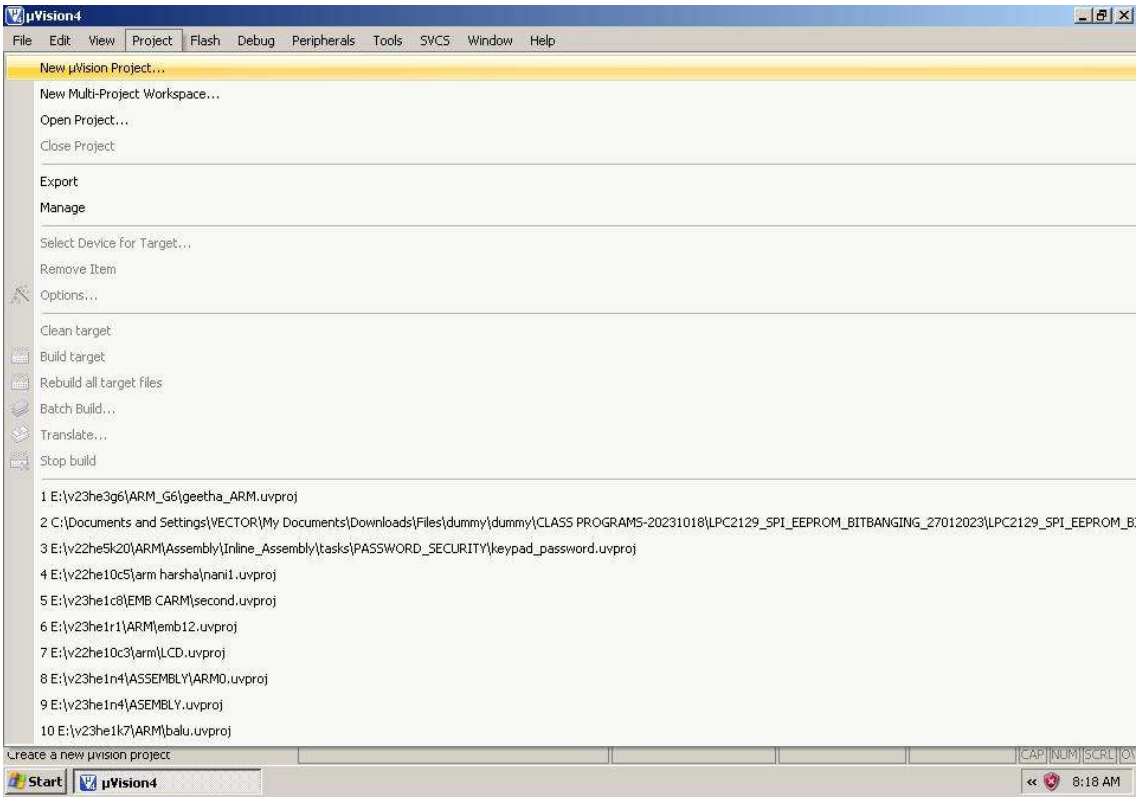

STEP4: Then select the path where you want to save the project. First select and open the "home on 'vBoxsrv' [E:]"

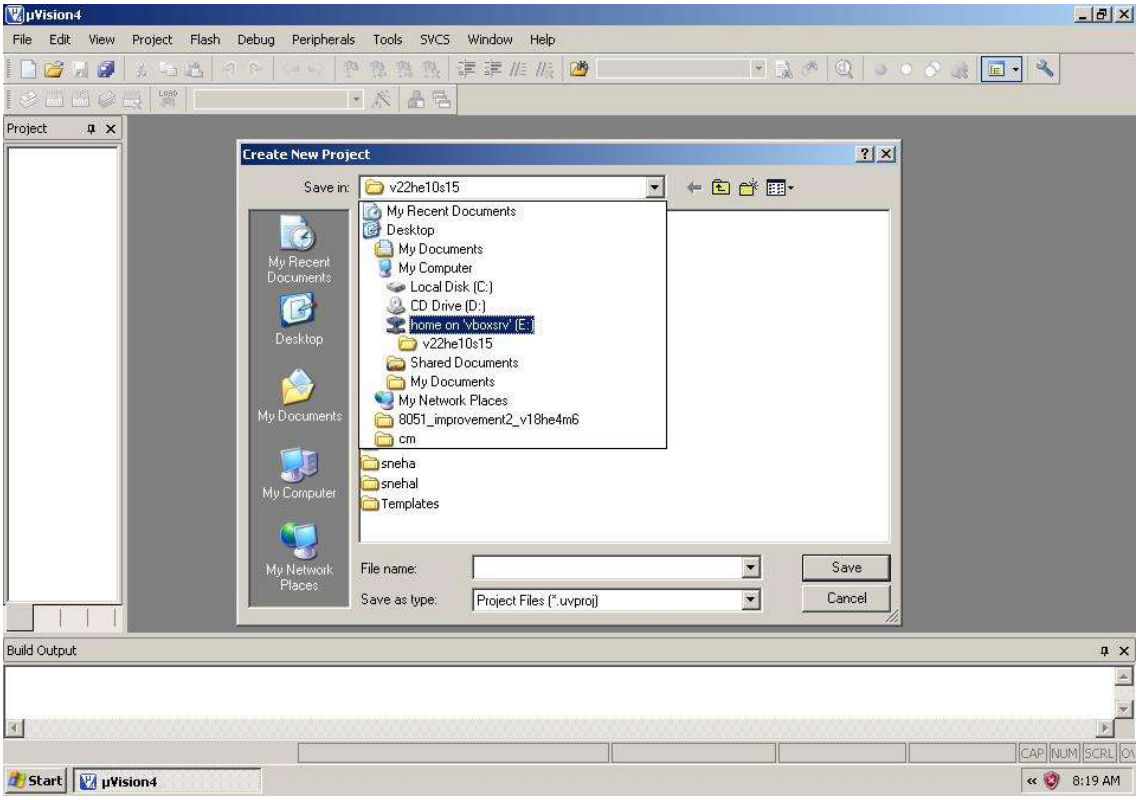


STEP5: After open “home on ‘vBoxsrv’ [E:]” drive then open your ID related folder.

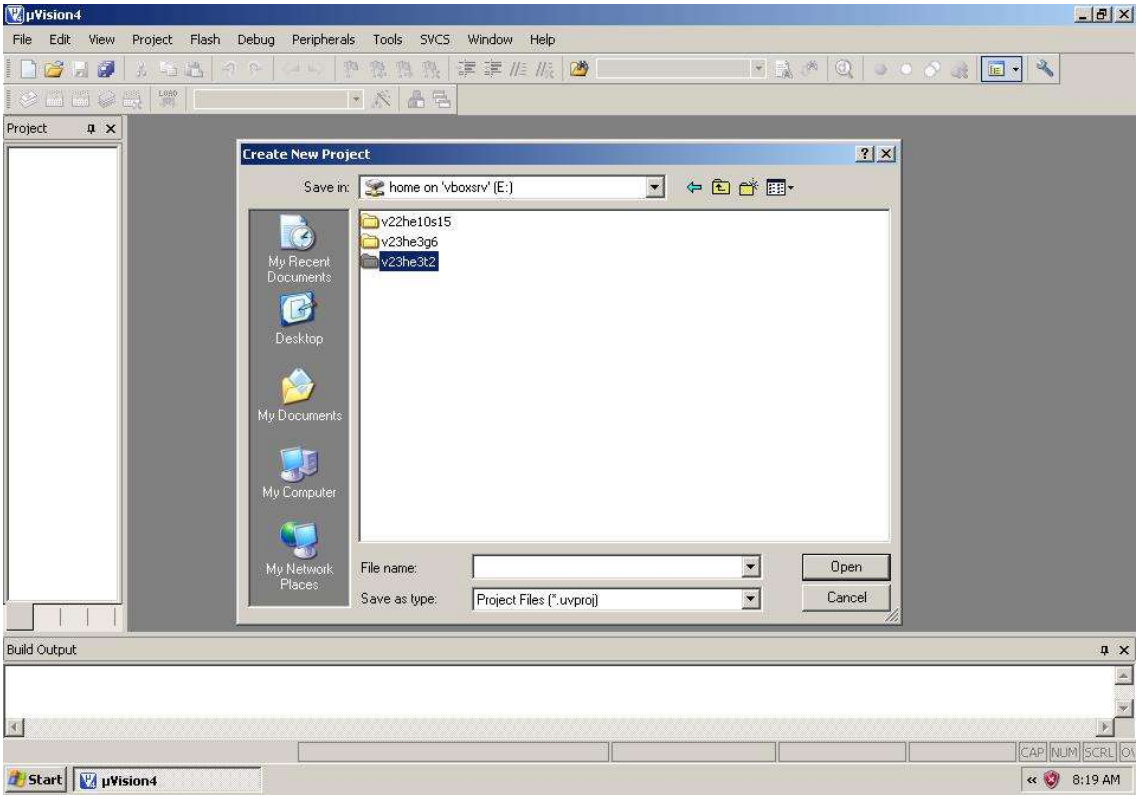


STEP6: Create new folder.


Right click then select New → Floder

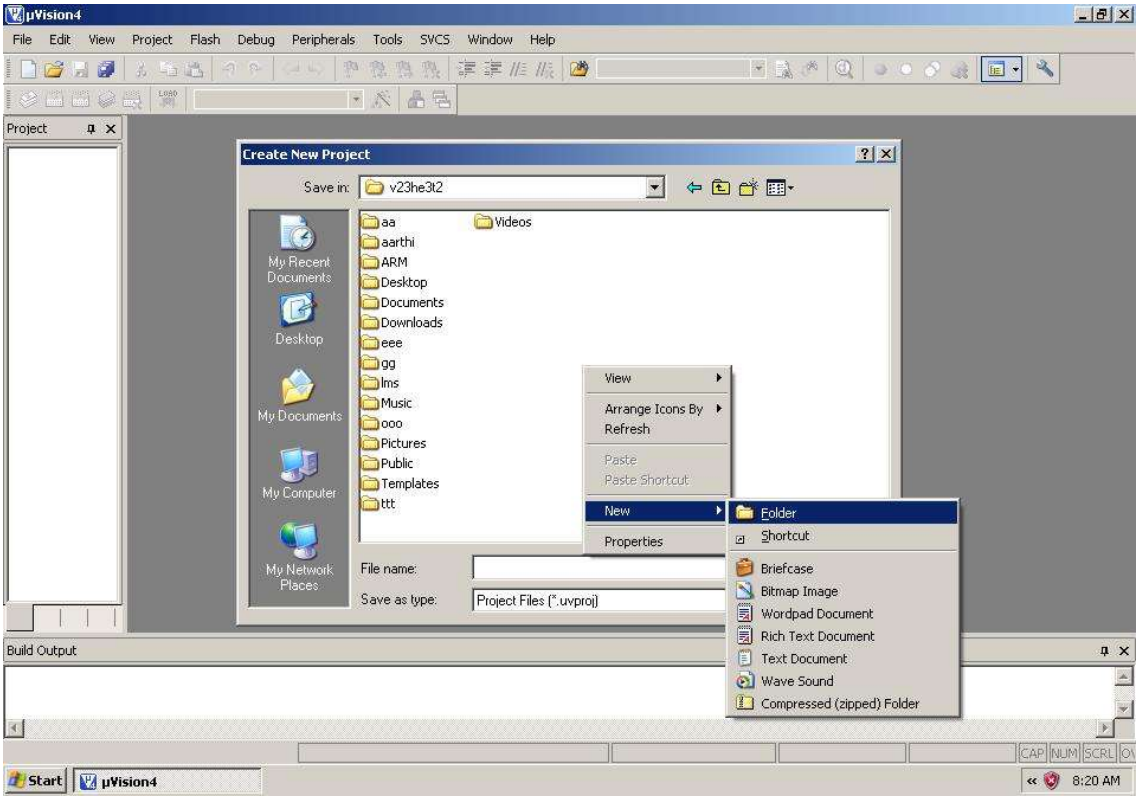

STEP7: Now “New Folder” name need to change based on your interest.

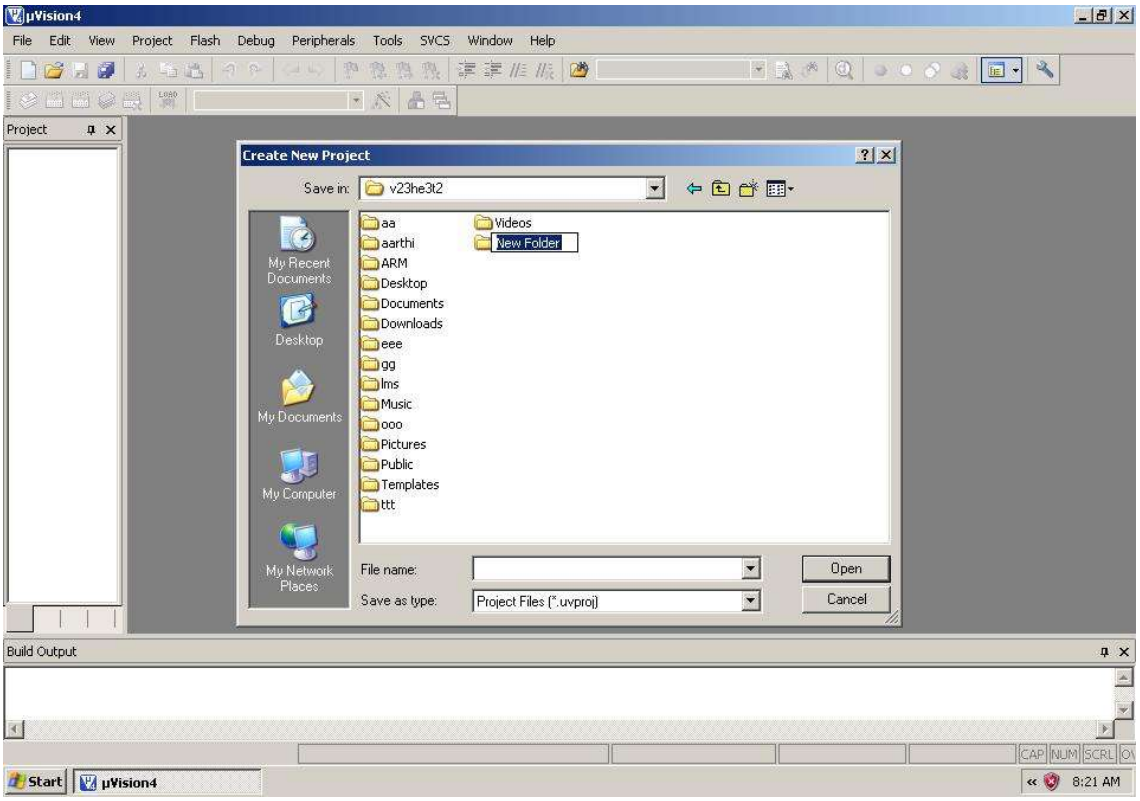


STEP8: Better give the Folder name as “ARM/ARM_PRACTICE” and try to use same folder till end of the ARM module practice.

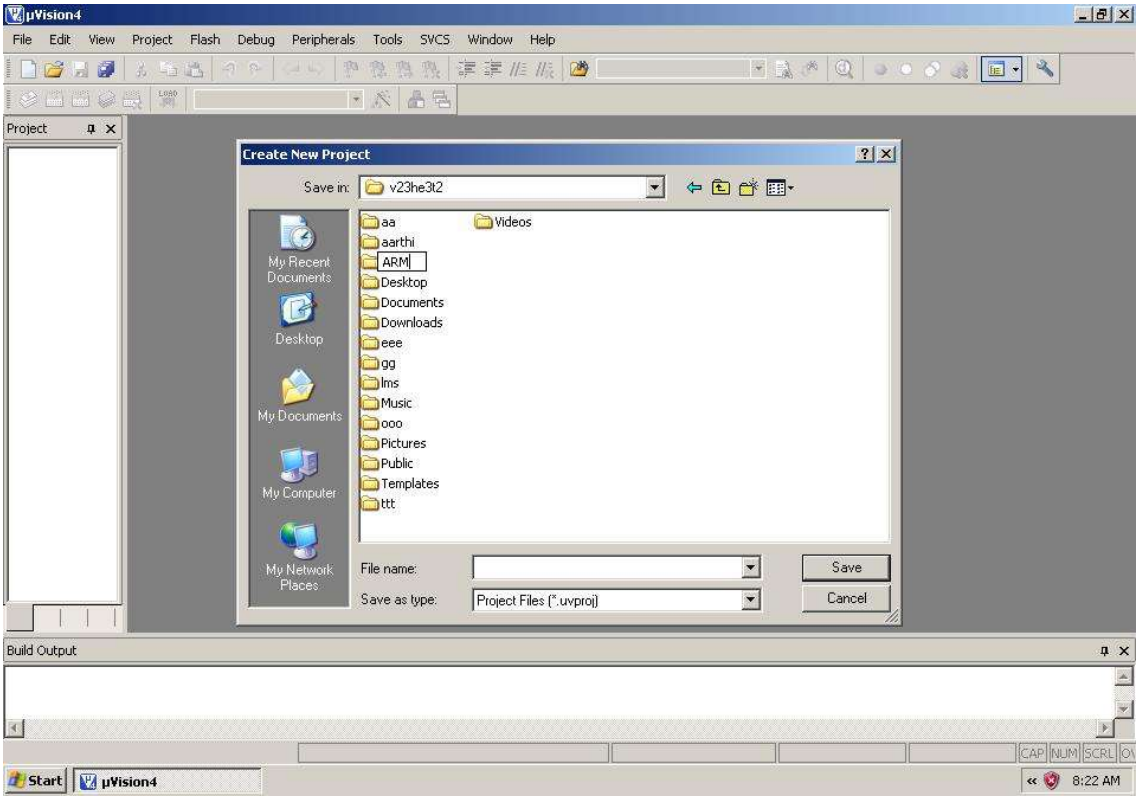


STEP9: Open ARM folder then gives the project name (Don't give any spaces in the project name)


Note: No need to give any extension

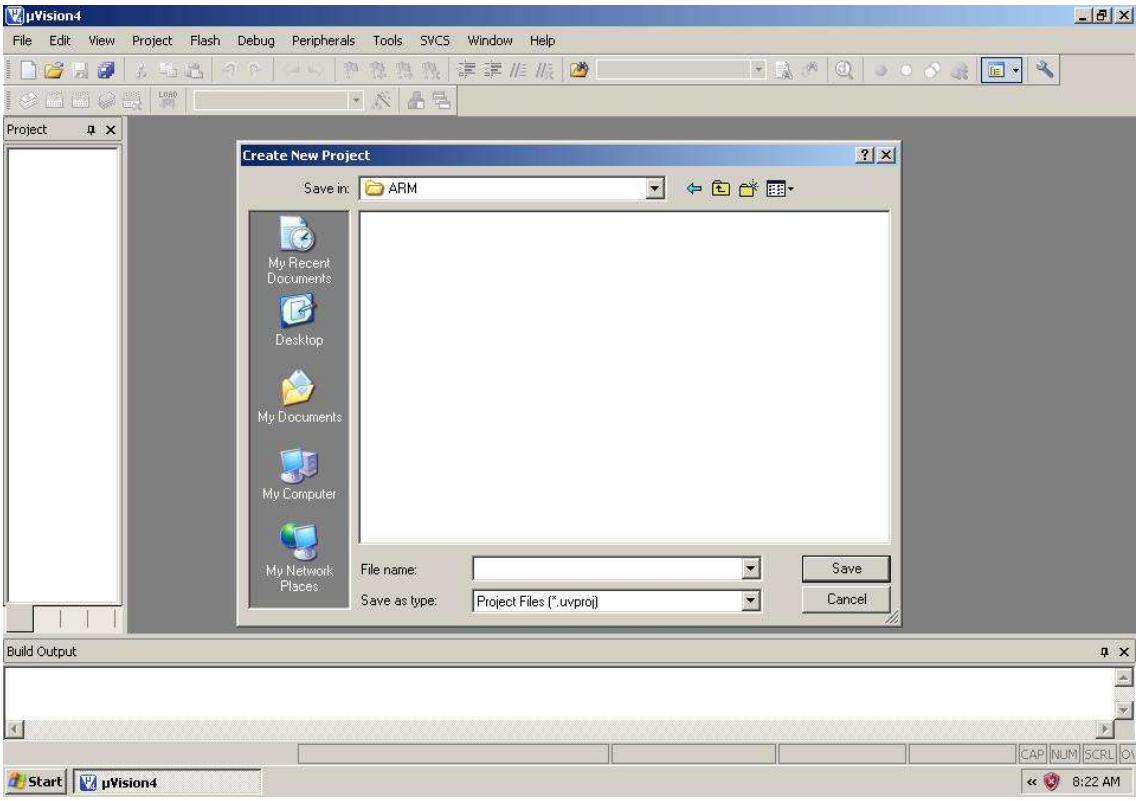


STEP10: Then select the Device for Target ‘Target 1’…

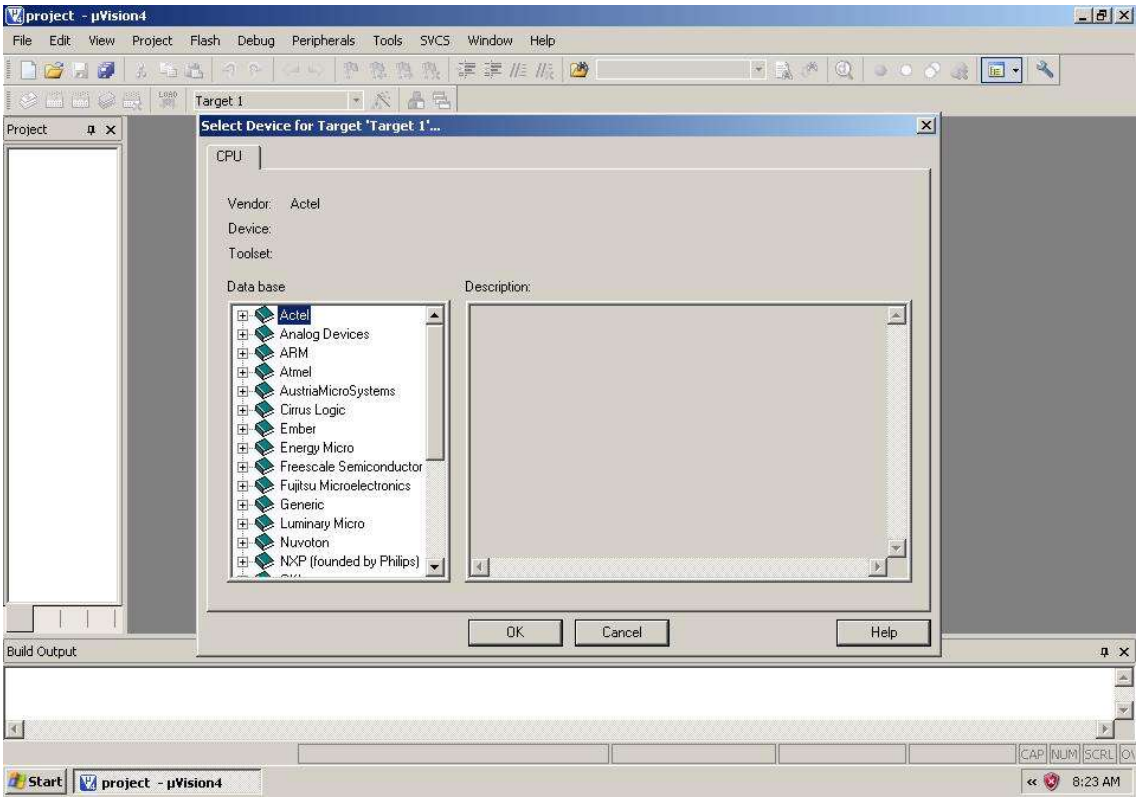


STEP11: Select NXP (founded by Philips) from the Data base

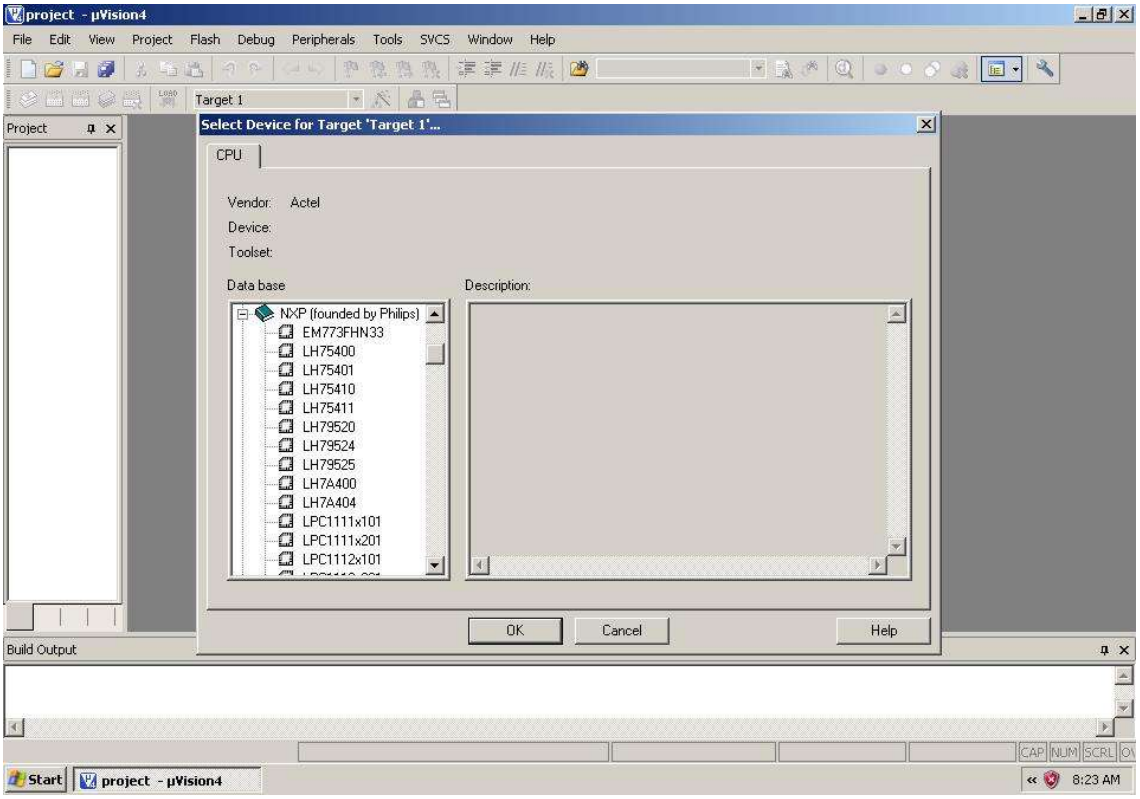


STEP12: Select LPC2129 CPU then click on **OK**

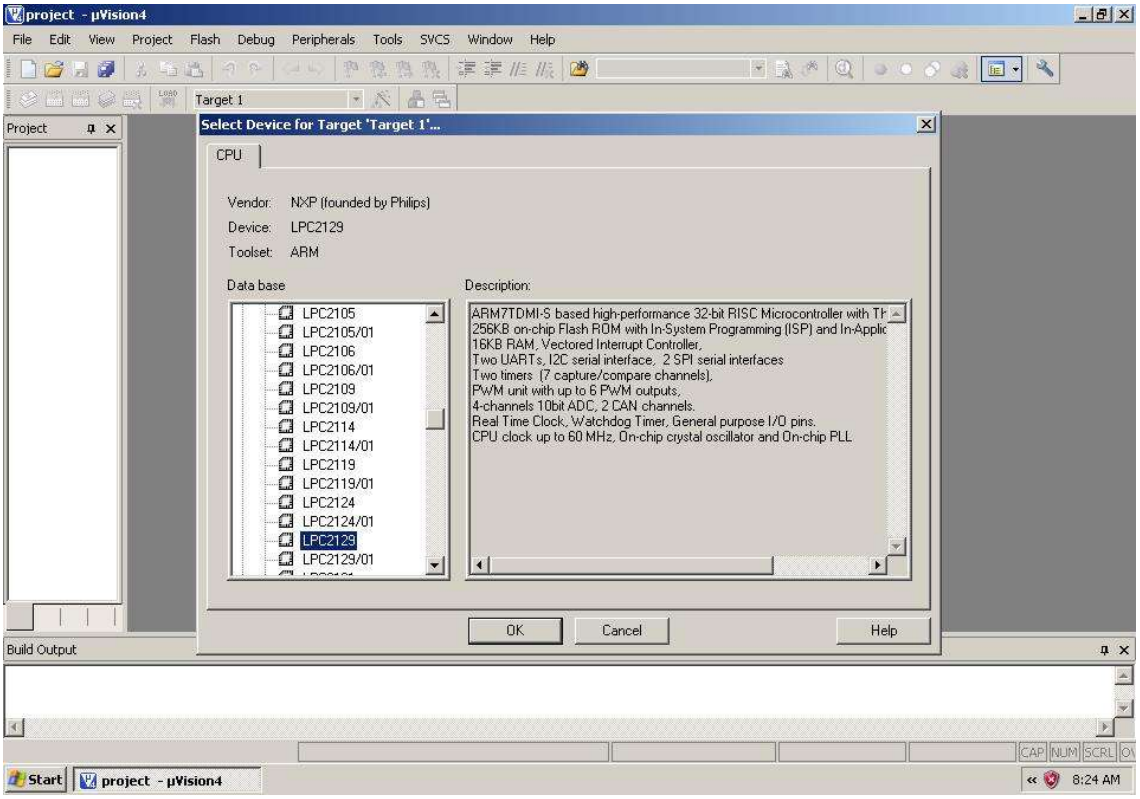


STEP13: “Copy Philips LPC2100 Startup Code to Project Folder and Add File to Project?” Option needs to select by selecting option “Yes”

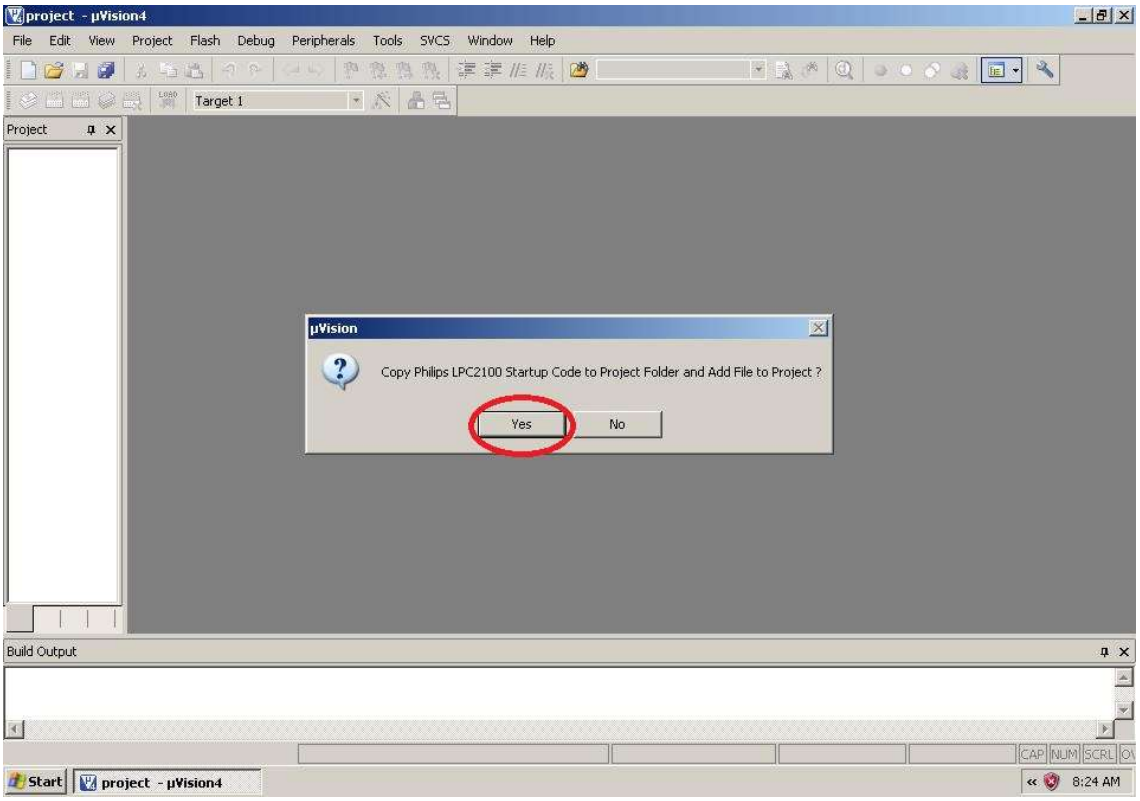


STEP14: Now target is created for LPC2129 CPU and double click on target then you will get the startup code under the source group.

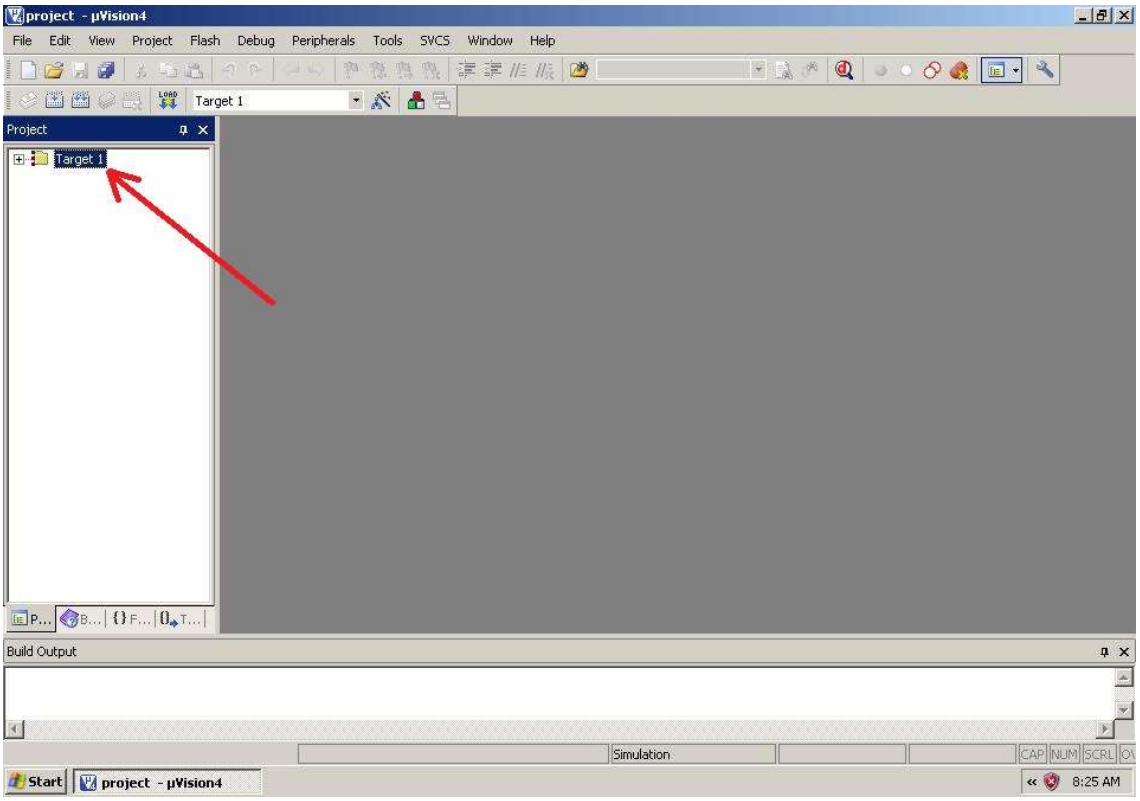


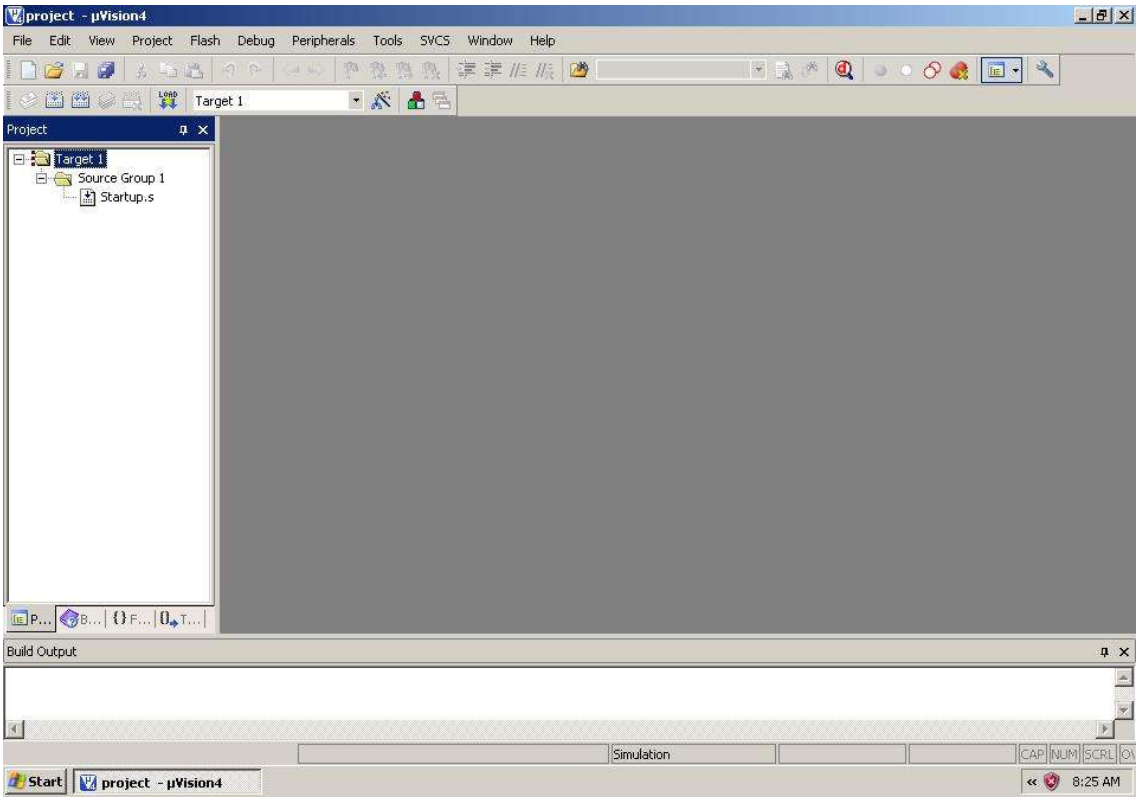


STEP15: Now create the source file by selecting File →New…

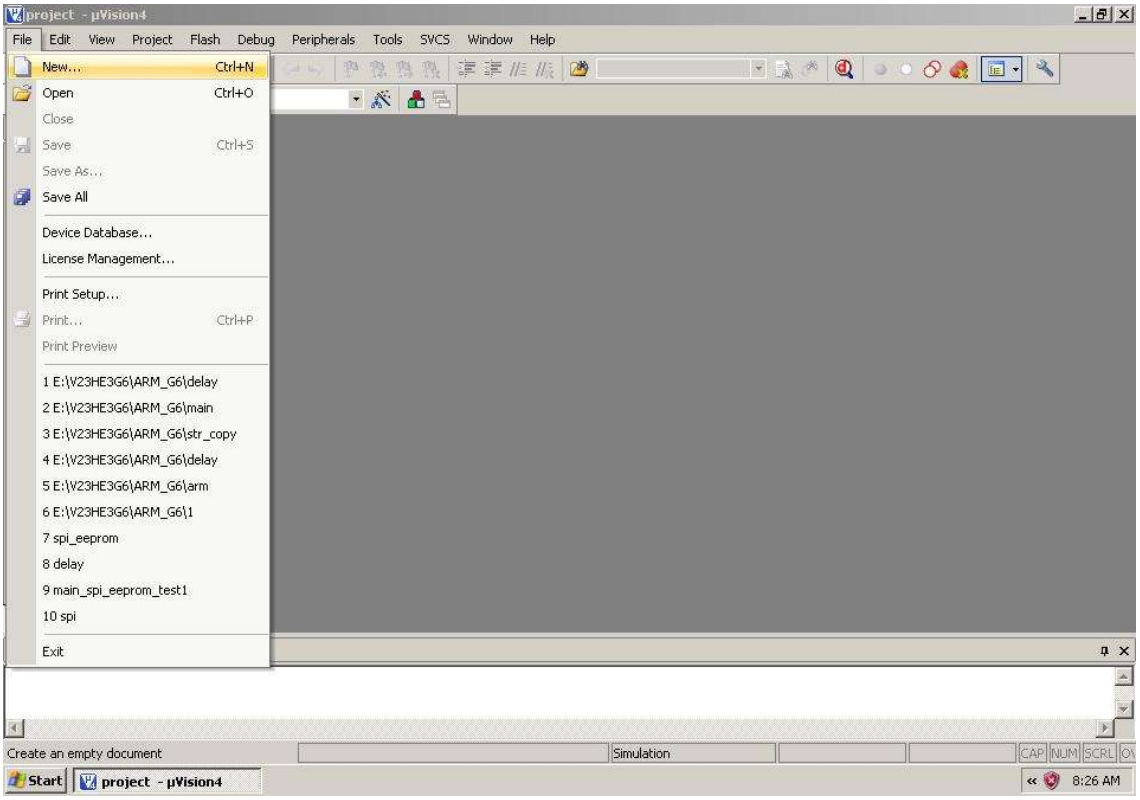



STEP16: One Test1 file will be opened. Save that file by selecting File → save to write the program

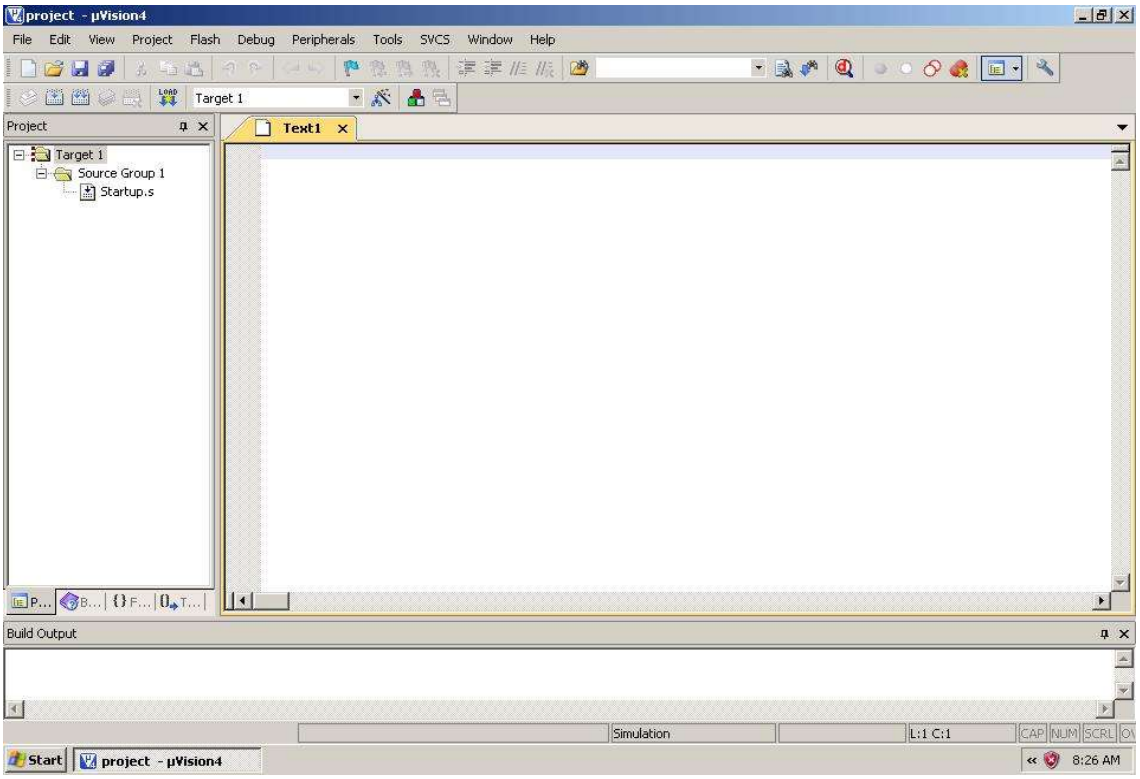


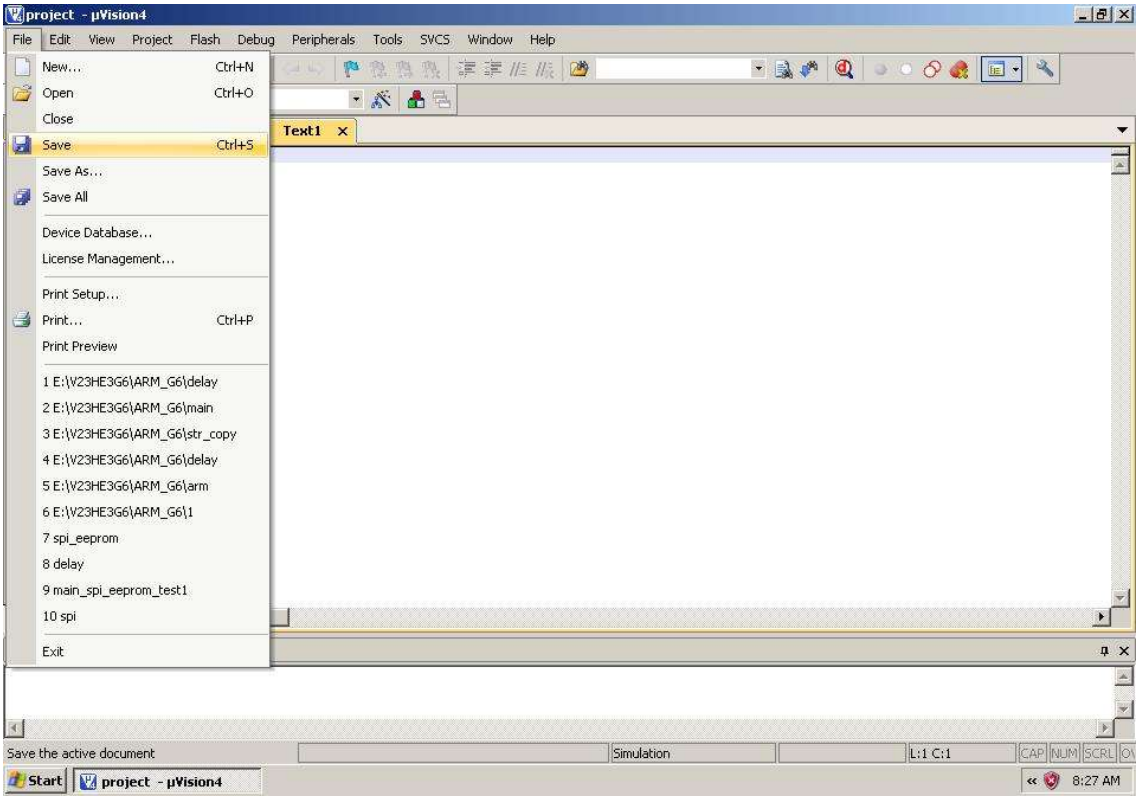


STEP17: Give the file name (.c/.h extension must based on the requirement) and save that file in the same folder where project is created. And then add that source file to source group 1

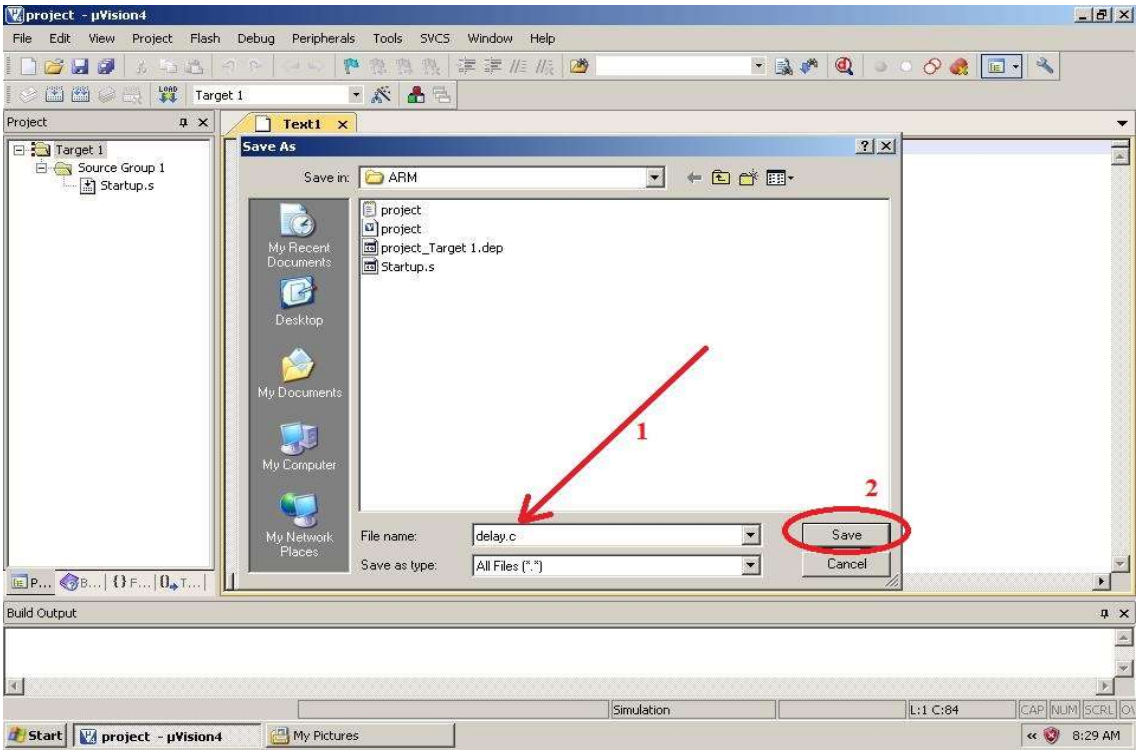


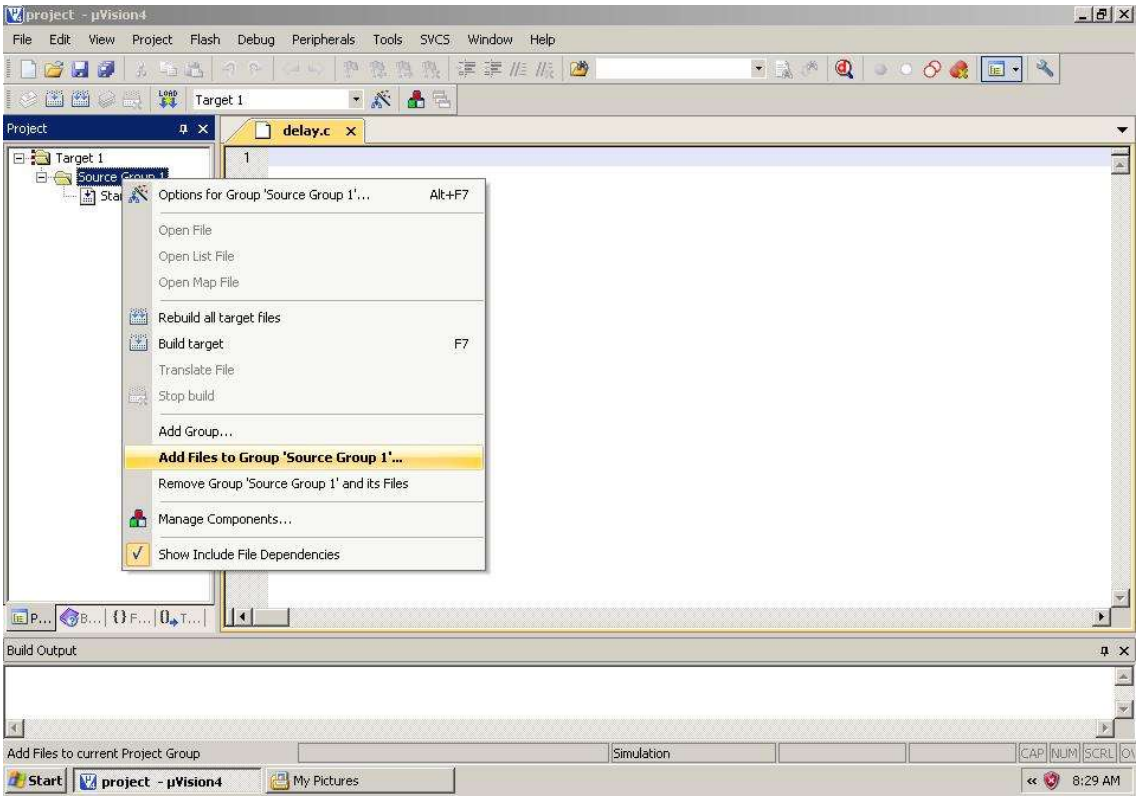


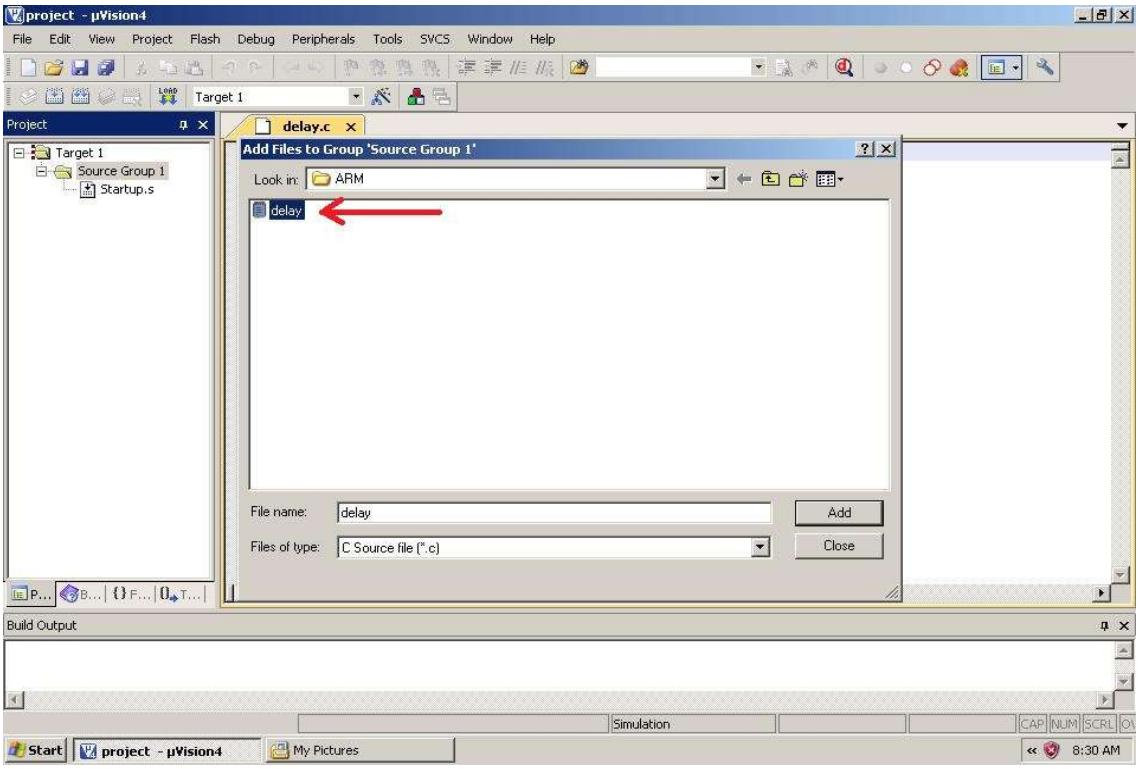

STEP18: Write the code in source file and compile the program by using Build target. Then check the result in the build output window.

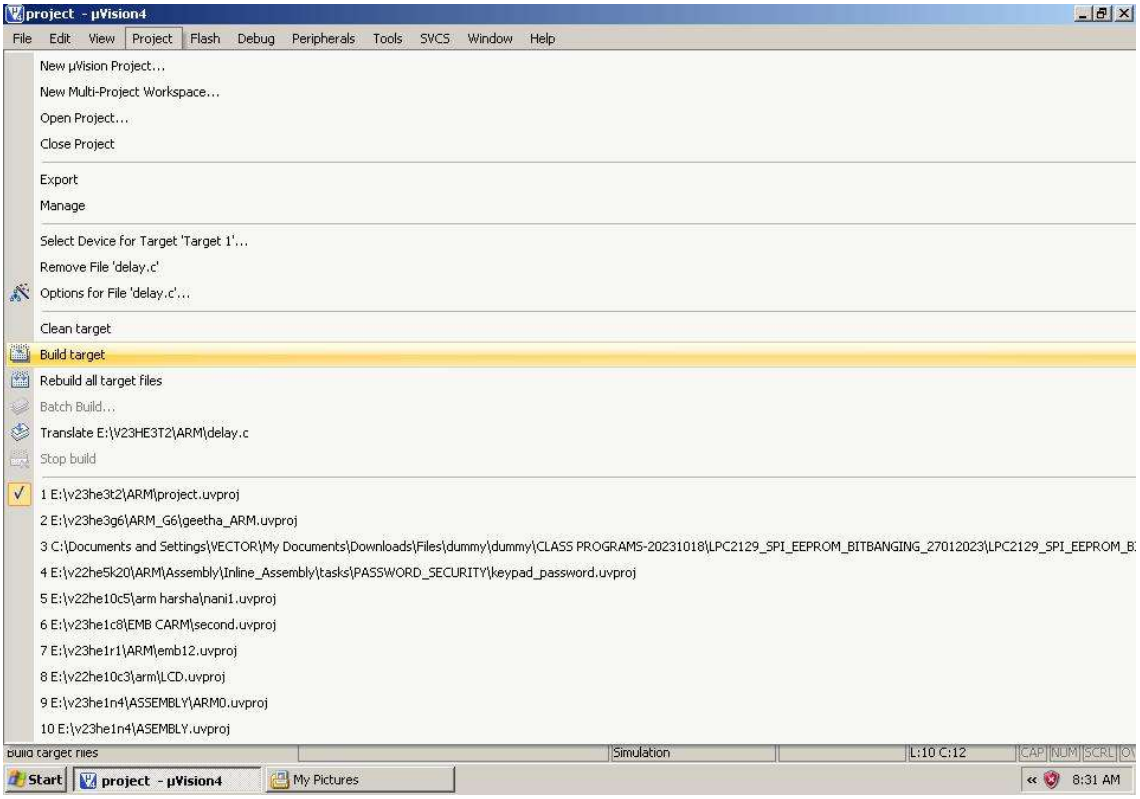

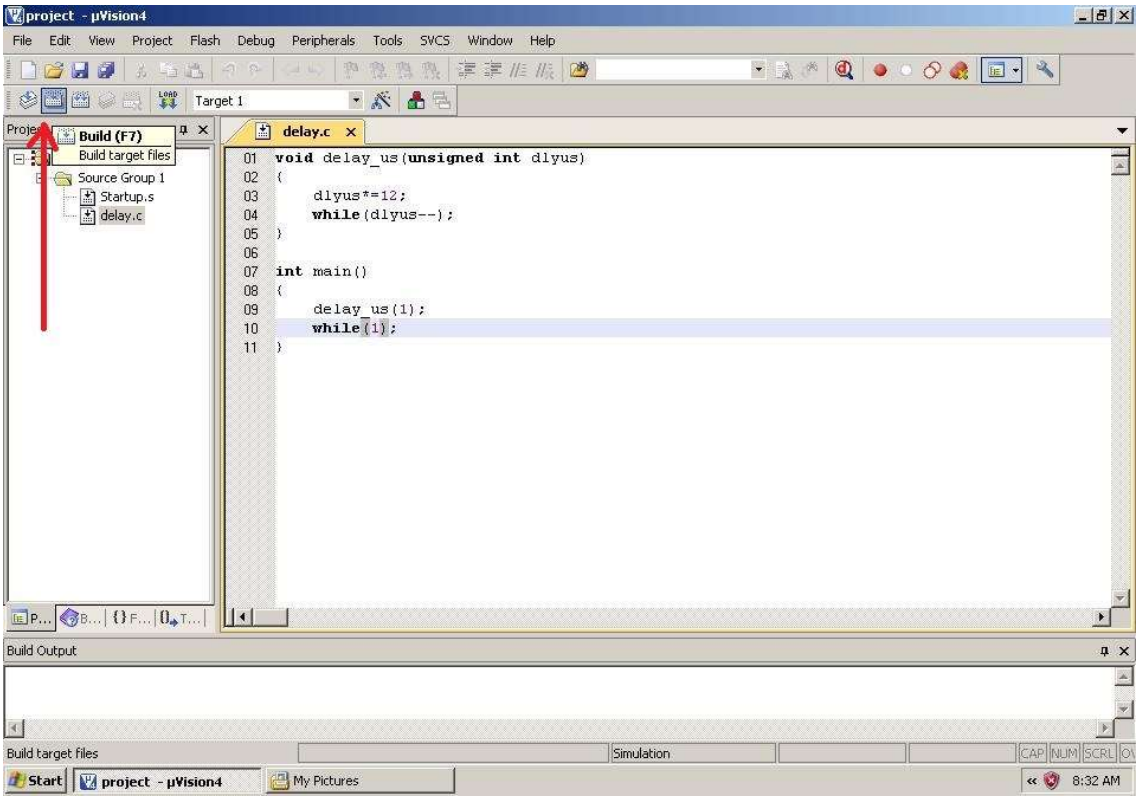

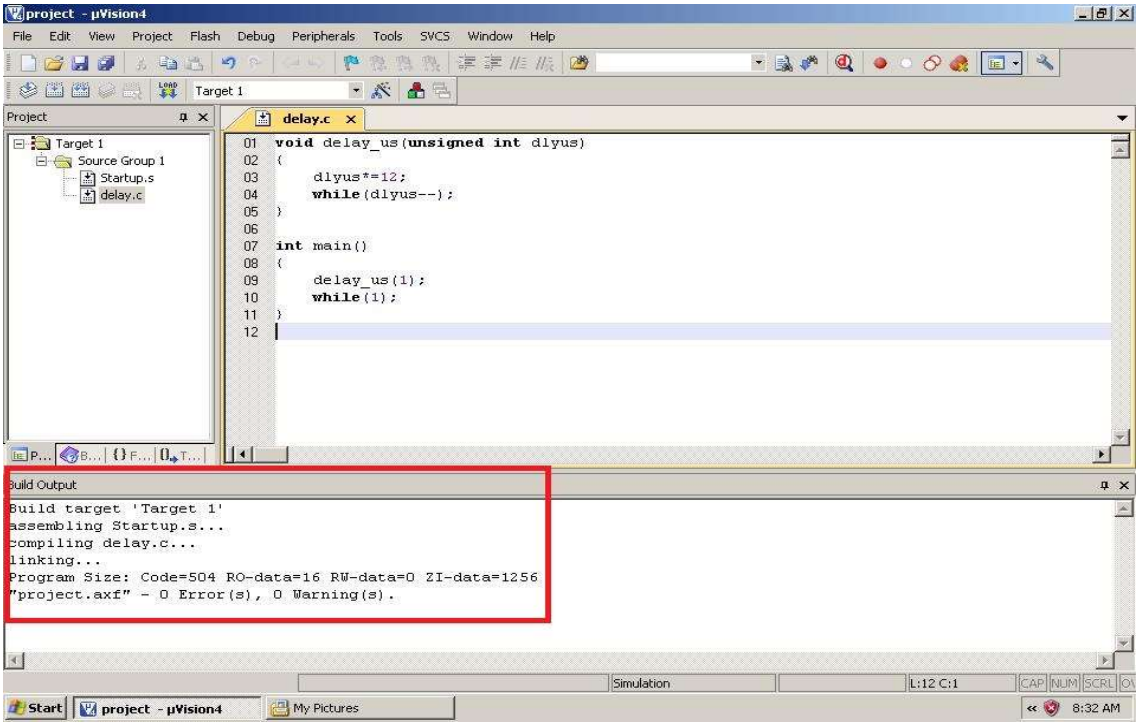

If any errors/warnings are there, need to solve to get the required result.