

Retrofitting a commercial RF induction generator into a computer-controlled, vacuum-integrated annealing system for reactive-metal grain growth

Sterling G. Baird, Ryan Weber, Christopher Nyborg, Ronnie Guymon, Gage Erickson, and Oliver Johnson
Department of Mechanical Engineering, Brigham Young University, Provo, Utah 84602, USA

(Dated: 22 July 2026)

High-temperature vacuum annealing near a metal’s melting point drives controlled grain growth, but it normally requires an expensive turn-key vacuum induction furnace. We describe an open retrofit (the added control, vacuum, and temperature-feedback hardware and software) that converts a bare commercial radio-frequency (RF) induction generator into a computer-controlled, vacuum-integrated annealing system with pyrometer feedback. The retrofit consists of analog power control through LabVIEW and a data-acquisition (DAQ) device, dual-wavelength optical temperature feedback, a high-vacuum quartz-tube chamber, and an in-house machined graphite crucible that serves as a susceptor (an RF-absorbing element that heats the charge it encloses) for metal specimens. Because its only requirement is a monotonic analog power-control input, the retrofit transfers between generators; the reference build uses a 6 kW solid-state generator. The system produced a fixed-geometry power–temperature calibration with $R^2 = 0.991$ over 1200–1400 °C. Eight nickel anneals at 1200 °C for 12 h reproduced their soak temperature (the constant-temperature hold) to 1201.2 ± 1.3 °C, and soaks up to 40 h at 1325 °C remained stable. In the annealed nickel, optical metallography and scanning electron microscopy (SEM) resolve equiaxed grains and deep thermal grooves, several spanning the full sheet thickness; electron backscatter diffraction (EBSD) maps index hundreds of grains, quantifying grain size and texture. A modified sample assembly (the specimen, susceptor, and supports inside the chamber) extends the furnace to non-coupling ceramics, demonstrated by coarsening yttria-stabilized zirconia (YSZ) grains in 45 min at 2500 °C. Complete design files, bill of materials, control software, and data are openly available.

Keywords: induction furnace; grain growth; vacuum annealing; LabVIEW; pyrometer; open-source hardware

I. INTRODUCTION

High-temperature annealing near a metal’s melting point drives controlled grain growth. This is central to studying microstructure–property relationships in metals such as nickel and iron^{1–5}. Growing grains without oxidizing the sample requires temperatures of 1400 to 1500 °C along with high vacuum or an inert atmosphere^{6,7}. Commercial vacuum induction furnaces that meet these requirements are closed, turn-key systems costing \$50k to \$200k or more. Resistive tube and box furnaces do not heat the charge directly. They heat only by radiation from the furnace elements, so heat transfer into the charge is limited, and they reach lower temperatures with slower ramps. Bare industrial induction generators are widely available, but they ship without vacuum, optical temperature feedback, or computer set-point control.

This work adds those missing subsystems as an open, documented retrofit. A bare RF induction generator^{8,9} is retrofitted into a full annealing system with computer power control, closed-loop optical temperature feedback, a high-vacuum quartz-tube chamber, and a machined graphite crucible that doubles as a susceptor. The retrofit is deliberately generator-agnostic. Its only requirement is an analog power-control input with a monotonic command-to-power response. The pyrometer feedback and proportional–integral–derivative (PID) calibration absorb any nonlinearity in that response. The gener-

ator internals are not reproduced, so a compatible generator needs to be supplied. The graphite crucible couples strongly to the RF field and is used for the metal grain-growth anneals. Non-coupling ceramics such as YSZ use a modified sample assembly in which graphite or tantalum serves as the susceptor, chosen for chemical compatibility with the specimen (Sec. V A).

The reproducible build documented here is anchored on a modern, USA-sourced 6 kW solid-state generator whose controller accepts a standard analog power set-point. The reference generator is a CEIA “Power Cube” PW3-90/50 with its matching controller, heating head, and chiller, itemized in the supplementary material. That package was quoted at approximately \$16.5k. The retrofit components are itemized in the bill of materials in the supplementary material. This is a small fraction of turn-key cost, in a form the user can repair and modify.

II. SYSTEM DESIGN AND DESCRIPTION

The system comprises five subsystems: heating, vacuum and gas handling, optical temperature sensing, computer control, and mechanical support (Fig. 1(a)). Figure 1(b) shows the assembled system at operating power.

The heating subsystem is a 6 kW solid-state induction generator driving a liquid-cooled copper work coil. The coil is approximately 3 in tall with a 2.5 in inner diameter and 6.5 turns^{10,11}. The coil is modular, and

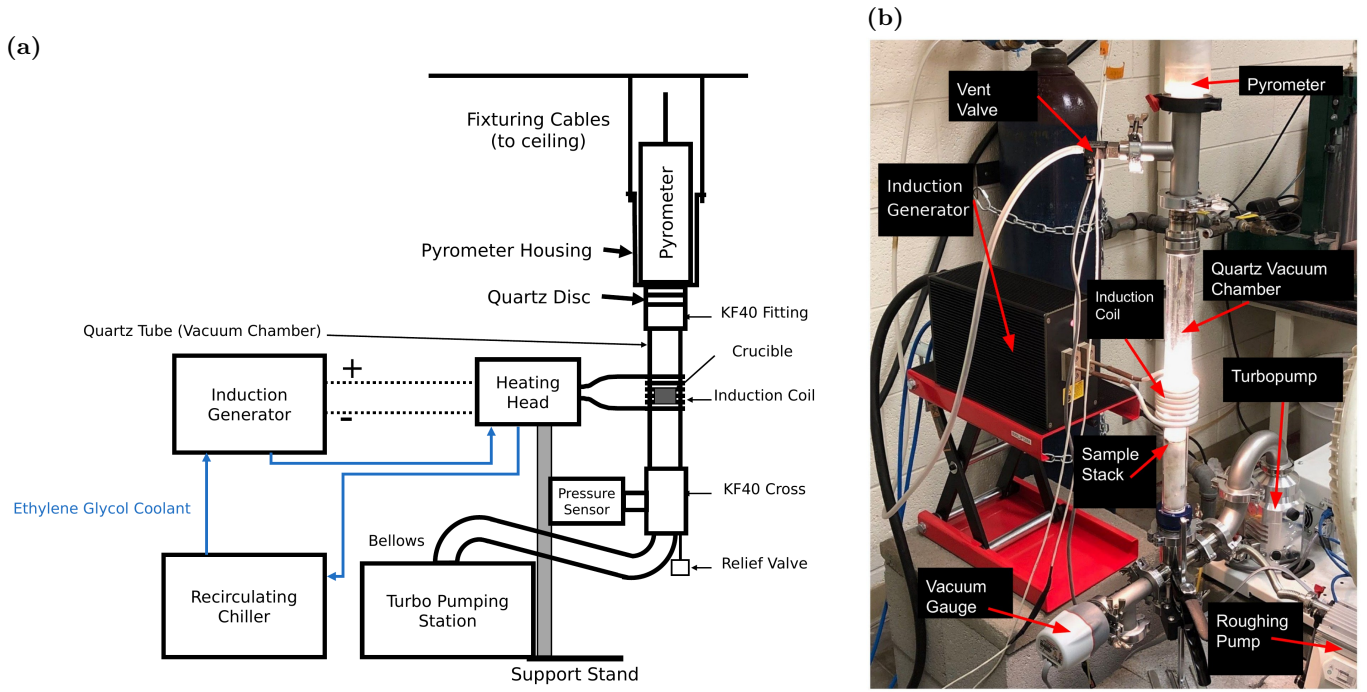


FIG. 1. The annealing system. (a) System overview. The generator drives the liquid-cooled heating head and work coil around the vertically suspended quartz-tube chamber. The quartz tube is joined by KF40 flanges to the ceiling-suspended pyrometer housing above and to the vacuum hardware below. An overpressure relief valve and a flexible bellows lead past the pressure sensor to the turbo pumping station. (b) The assembled, functioning furnace with the main components labeled. This shows the quartz chamber glowing at the sample-assembly position. The pyrometer sights down the chamber axis, and the vent valve admits the argon backfill. The gauge, turbopump, and separately supported roughing pump complete the vacuum path. Relative to closed turn-key vacuum induction furnaces, this design costs far less, is modular (hand-clamped KF-flanged vacuum hardware and an interchangeable sample assembly), and is transparent (open LabVIEW control software and design files), and it reaches a high-purity annealing environment by pumping the chamber to high vacuum and then backfilling with flowing argon.

this geometry was chosen to fit our sample geometry. The coil conductors carry both the RF current and the coolant. Ethylene glycol coolant flows in series from the chiller through the generator and then through the heating head and work coil before returning to the chiller. The vacuum and gas subsystem starts from the 35 mm inner-diameter fused-quartz tube that forms the chamber. The tube connects through a KF40 flange (a standard clamp-sealed vacuum flange) and a flexible bellows to a compact turbo pumping station that reaches 10^{-6} to 10^{-8} Torr. An automated, electrically triggered vent valve fed from an inert-gas regulator allows controlled venting and backfilling^{12,13}. These components support a range of operating atmospheres. The furnace can run at low or high vacuum, and the chamber can instead be backfilled with inert gas and continuously supplied either at a precisely controlled rate, for example 20 standard cubic centimeters per minute (SCCM), or as a large purge flow. The turbopump can be left running during backfilled operation or stopped. The atmosphere matters for graphite-crucible anneals. The best results were achieved by pumping to high vacuum and then backfilling with argon through the vent valve. The chamber was purged first, and a constant argon flow of 20 SCCM was then

maintained for the duration of the anneal. The nickel grain-growth anneals reported below all ran under this continuous flow. Heating under vacuum alone tended to sublime graphite onto the chamber walls. The highest-temperature ceramic work (Sec. V A) used the same continuous argon supply, with the chamber evacuated and then filled with argon while the turbopump was running. This helped avoid oxidation during heating.

Temperature is sensed optically. A dual-wavelength ratio pyrometer^{14,15} with an 800 to 2500 °C sensing range views the sample through a quartz optical window. This provides a non-contact signal that is robust to emissivity changes and to the RF field that would corrupt thermocouples^{16–18}. Control is implemented in LabVIEW, with virtual instruments (VIs) for manual control, automated ramping, PID tuning, and email alerts. The generator's power setpoint can be commanded either by a 0–5 V voltage signal or by a 4–20 mA current-loop signal. Which input is used depends on user preference and on how the manufacturer configures the generator, which is typically customizable. In this build, the DAQ device's 0–5 V analog output drives a voltage-to-current loop conditioner, and the conditioner's 4–20 mA output drives the generator's power-setpoint input. The pyrometer's

analog output returns to a DAQ input, which closes the PID loop. Below the pyrometer's 800 °C detection floor, the VI ramps open-loop. Once the pyrometer returns a sustained valid reading, the VI switches to closed-loop PID control based on the optically-measured temperature^{19,20}. Mechanically, a bolted support stand carries the generator's heating head and centers the work coil on the crucible position. The quartz tube and the vacuum hardware below it are joined by KF40 flanges to the pyrometer housing, which is suspended from the ceiling by cables, so the vertical column of vacuum hardware hangs from above. The sample assembly is not attached to any of these flanges. It simply sits inside the quartz tube, resting on a retaining ring of a KF40 flange.

Metal charges in the graphite crucible reach the nickel and iron grain-growth range of 1400 to 1500 °C, with demonstrated soaks from minutes to 40 h. The modified ceramic sample assembly extends the working range to 2500 °C. The retrofit transfers to any generator that exposes a monotonic analog power input, supports a liquid-cooled head and coil of the documented geometry, delivers enough RF power for the target charge, and allows electrical isolation of the DAQ and control path. When the retrofit is moved to a different generator, the command scaling, calibration, PID gains, alignment, and interlock behavior are re-established.

A. Graphite crucible / susceptor

Metal specimens are held in a two-piece graphite crucible machined in-house from 3000 °C-grade graphite stock. It consists of a cup body and a lidded cap with a central bore, which contains the charge while leaving an optical path for the pyrometer. Figure 2(a) shows the disassembled parts. The graphite couples strongly to the induction field and acts as a susceptor, heating the contained metal specimen by conduction and radiation. The specimen is sandwiched between two alumina discs in the cup, the lid sits on top, and a sapphire window closes the lid bore (Fig. 2(b–d)). Sapphire is used for the window to increase transmittance in the wavelength ranges emitted from the sample relative to the pyrometer. The measured dimensions of every piece are given in the supplementary material. Inside the vacuum chamber the crucible rests on an alumina support tube that positions it at coil height. The tube has holes bored laterally along its outer perimeter to aid evacuation, and its lower end seats in a teflon tube at the KF40 fitting below. The crucible is used primarily for the metal grain-growth anneals. Graphite also works as a susceptor for some ceramic charges when the contact chemistry permits. Sec. V A describes how a compatible susceptor is selected for refractory ceramics.

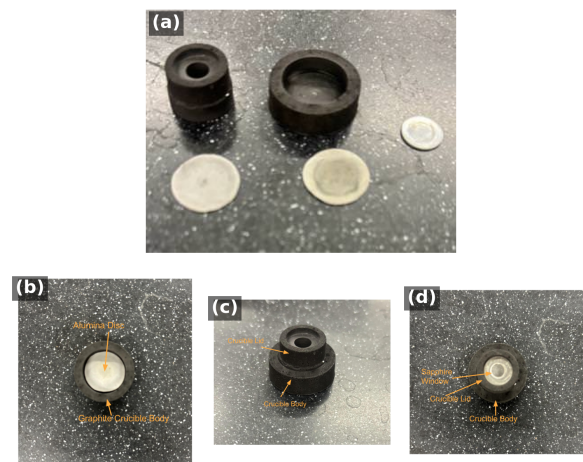


FIG. 2. The two-piece graphite crucible/susceptor used for the nickel anneals reported in this work. (a) Fully disassembled. Top left is the crucible lid, top middle is the bottom of the crucible that acts as the specimen carrier, far right is the sapphire window, bottom left and middle are the alumina sample-surrounding sheets. (b–d) Specimen-loading sequence. (b) The specimen is placed between two alumina sheets in the crucible body. (c) The graphite lid is seated on top. (d) The sapphire window closes the lid bore, leaving an optical path for the pyrometer.

III. CONSTRUCTION AND OPERATION

Following the heating path, the generator's heating head mounts on an adjustable platform on the bolted support stand so the coil centers on the crucible position of the vertically suspended quartz tube. The vacuum path begins at the quartz tube, which is open at both ends. Its lower end joins the vacuum hardware below through a KF40 flange. Its upper end mates to the pyrometer housing, a custom 3D-printed part that terminates in a KF40-sized fitting. At that joint the chamber is sealed not by the printed part but by a 55 mm quartz optical disc pressed against an O-ring, and the pyrometer sights through this disc down the chamber axis. Every flanged joint compresses an elastomer O-ring carried on a centering ring, so the vacuum hardware assembles with hand-tightened clamps and no tools. These seals support the 10^{-6} to 10^{-8} Torr operating vacuum. From the bottom of the vacuum column, a tee carries a 0.5 psi overpressure relief valve that protects the quartz tube during backfilling. A flexible bellows continues through the wide-range vacuum gauge to the turbo pumping station. The roughing pump sits on a separate support, mechanically decoupled so its vibration does not reach the chamber or the pyrometer sight line. Photographs of the pumping station as installed, together with the relief valve at the base of the vacuum column, are given in the supplementary material. On the gas path, the argon regulator feeds the automated, electrically triggered vent valve. This is a specialized commercial component

that admits gas in a controlled way rather than dumping atmospheric pressure into the chamber, which could damage the spinning turbopump. A mass flow controller between them is helpful when continuous inert gas flow is required. On the control path, electrical isolation is maintained between the DAQ wiring and the generator interface. Manual control is verified before automated ramping and soaking are enabled.

A run begins with the chamber vented, which is done only after the turbo pump has stopped spinning. The specimen is loaded into the crucible (Fig. 2(b–d)), the sample assembly is lowered into the quartz tube, and the chamber is pumped down. The LabVIEW profile ramps open-loop below the pyrometer floor, switches to closed-loop PID, and runs the programmed soak. Afterwards the sample cools under vacuum, and the chamber is vented only once the turbo pump has stopped.

IV. PERFORMANCE VALIDATION

The furnace has completed more than one hundred logged anneals of Ni200 and Ni (4N5, i.e., 99.995 % purity) nickel charges at 900 to 1400 °C, with soaks from minutes to 40 h. The supplementary material links each result below to its underlying run log.

Four steady-state anneals spanning 1200 to 1400 °C were run with one fixed configuration of Ni (4N5) specimen, quartz tube, graphite crucible, and optics. Across these anneals, the soak-mean pyrometer temperature follows the soak-mean analog power command monotonically and approximately linearly. The relation is well described by $T = 931 + 632I$, with T in °C and I in mA, and $R^2 = 0.991$ (Fig. S4 of the supplementary material). The fit is specific to this fixed setup. Its coefficients shift with the charge, crucible, and optical configuration, so any modification to the system calls for recalibration. The point is that a fairly linear operational calibration exists for a given setup, not that there is a universal command-temperature law. A Ni (4N5) anneal at a nominal 1300 °C and 12 h condition serves as the representative closed-loop run. The full annealing curve, including the ramp to temperature, is specified by the user in the control software in advance. The recorded trace is given in Fig. S5 of the supplementary material. The soak held 1302.1 ± 3.0 °C over the 12 h plateau.

Eight Ni (4N5) anneals at a nominal 1200 °C and 12 h condition were run under the same gas-flow configuration. They reproduced their soak temperature to 1201.2 ± 1.3 °C, a coefficient of variation of 0.11 % (Fig. S6 of the supplementary material). Long-duration stability was demonstrated with two Ni200 anneals at 1325 °C. The first held for 20 h at 1326.5 ± 1.5 °C with a drift of -0.004 °C per hour, and the second held for 40 h. Both traces are shown in Fig. S7 of the supplementary material. Reported temperatures are specific to our setup. Slight variations to the optical pathway or other conditions can affect the temperature readings. By extension,

absolute specimen temperature still depends on emissivity and surface condition^{16,21,22}.

V. MICROSTRUCTURAL VALIDATION

The furnace exists to change microstructure, so the decisive test is what the anneals do to real specimens. A striking feature of that test is that it required no metallographic sample preparation at all. The EBSD specimens shown here were never ground, polished, or etched. Each went straight from the furnace to the SEM, pulled directly from the furnace chamber and placed directly into the EBSD chamber, and each still returned high-quality diffraction patterns. Figure 3 shows such a high-quality raw EBSD pattern, also called a Kikuchi pattern, from an unprepared furnace-annealed nickel specimen, reproduced exactly as the EBSD detector saved it during orientation mapping. Even at the coarse 8×8 binning used for mapping, the bands and zone axes are crisply resolved. Preparation-free EBSD works here for two reasons. EBSD diffracts from only the top tens of nanometers of the surface, and the long near-solidus anneal removes the deformed near-surface layer that polishing normally exists to remove²³. In addition, the evacuated, argon-flowing, graphite-enclosed environment holds the oxygen potential low, which plausibly keeps the surface free of an EBSD-obscuring nickel oxide scale²⁴. Rapid nickel surface diffusion at these temperatures can further smooth the surface^{25,26}. The same surface transport produces the deep boundary grooves described below, which can locally reduce indexing right at the boundaries²⁷. Inverse-pole-figure maps built from such patterns resolve hundreds of indexed grains per specimen (Fig. 4). Each indexed color in the map is a crystallographic orientation, so a single map records both the grain sizes and the texture of the annealed specimen. Thermal grooving is itself a record of the anneal. Figure 5 shows edge-on views of a Ni (4N5) specimen annealed at 1200 °C for 12 h and cleaned only ultrasonically. The grooves have deepened enough that they delineate the grain structure on their own, with no etching. Several grain boundaries traverse the full sheet thickness.

Figure 6 shows the microstructure such an anneal produces for a Ni (4N5) specimen soaked 20 h at 1300 °C under the constant 20 SCCM argon flow, with a measured soak of approximately 1301 °C. The grains are equiaxed, and thermal grooving allows for the full grain boundary network to be observed under an optical microscope.

A. Extension to ceramic charges: YSZ

The same induction furnace can also be used to process refractory ceramics by modifying only the materials directly in contact with the specimen while leaving the generator, vacuum system, pyrometer, cooling system, and control software unchanged. Materials that do not




FIG. 3. Raw EBSD Kikuchi pattern from a furnace-annealed nickel specimen that received no sample preparation whatsoever — no grinding, polishing, or etching. The specimen was pulled directly from the furnace chamber and placed directly into the EBSD chamber. The pattern is reproduced exactly as saved by the EBSD detector during orientation mapping (the detector’s 8×8 -binned output). Even so, the crisply resolved bands and zone axes index directly to the nickel lattice.

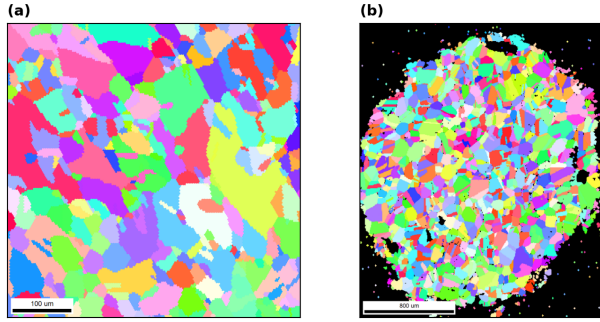


FIG. 4. EBSD inverse-pole-figure (IPF) orientation maps of two furnace-annealed Ni (4N5, 99.995 % purity) specimens, rendered from the recorded EBSD scans. Neither specimen received any sample preparation. (a) A furnace-annealed specimen (100 μm scale bar). (b) A second furnace-annealed specimen (800 μm scale bar). This specimen was masked, which is why indexed points fill only the circular unmasked region against the black surround. The maps resolve hundreds of grains for grain-size and texture analysis. The supplementary material links each specimen to its furnace run.

couple directly to the RF field require a susceptor. At the temperatures required for grains to coarsen on refractory ceramics, the primary consideration in selecting a susceptor is its chemical compatibility with the specimen and surrounding support materials rather than its RF heating performance. Graphite and tantalum both serve effectively as susceptors, with the preferred choice depending on the operating temperature and the materials in contact with the susceptor.

Grain growth in refractory ceramics follows Arrhenius kinetics and is therefore highly sensitive to annealing temperature. For the 8mol% YSZ specimens investigated here, grain growth from approximately 10 μm to 90 μm required 228 h at 1600 $^{\circ}\text{C}$ in a conventional box furnace, whereas comparable grain growth was achieved in only 45 min at 2500 $^{\circ}\text{C}$ using the induction furnace (Fig. 7). Achieving these temperatures required only minor modifications to the sample assembly (Fig. 8). For

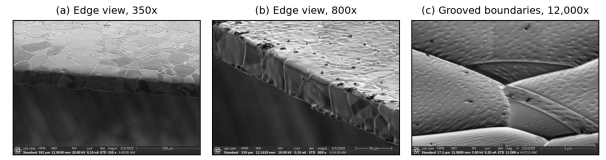


FIG. 5. Grain-boundary thermal grooving on a Ni (4N5) specimen after a 1200 $^{\circ}\text{C}$ / 12 h anneal, imaged edge-on in the as-annealed condition after only an ultrasonic ethanol clean. The grooves have deepened enough that they delineate the grain structure on their own. (a) Edge view at 350 $\times$ (200 μm scale bar). Several grain boundaries traverse the full sheet thickness. (b) Edge and top surface at 800 $\times$ (50 μm scale bar). The grooves outline the surface grain structure. (c) Grooved boundaries at 12,000 $\times$ (5 μm scale bar). Multiple boundaries are grooved, and grooving is visible at several triple junctions. The trenches deepen as grain-boundary energy equilibrates against surface energy at the soak temperature.

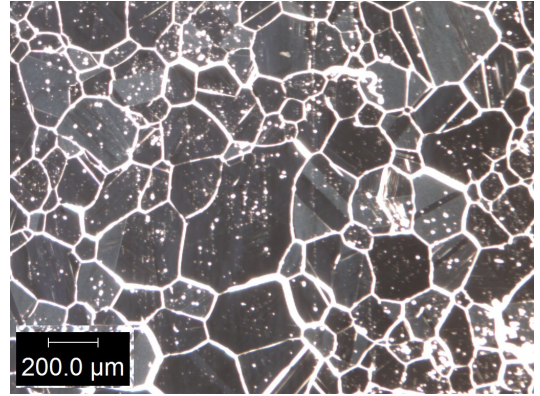


FIG. 6. Optical grain map of a Ni (4N5) specimen after a 1300 $^{\circ}\text{C}$ / 20 h anneal under a constant 20 SCCM argon flow (200 μm scale bar). The equiaxed grain network is delineated by thermal grooving alone.

example, direct contact between graphite and alumina was eliminated because they undergo a eutectic reaction that lowers the interface melting temperature to approximately 1800 $^{\circ}\text{C}$. This was accomplished by introducing a boron nitride diffusion barrier between the two materials. Alternatively, replacing the graphite with tantalum avoids this compatibility issue while still providing efficient RF coupling.

VI. CONCLUSIONS

A bare commercial RF induction generator can be converted into a computer-controlled, vacuum-integrated, pyrometer-feedback annealing system with a documented, generator-agnostic retrofit. On a modern solid-state generator, the system demonstrated a power-temperature calibration with $R^2 = 0.991$, soak temperatures reproducible to 0.11 %, and stable closed-loop soaks up to 40 h. The anneals it delivers are clean enough that



FIG. 7. As-recorded optical micrograph of the YSZ specimen after the 2500 °C / 45 min tantalum-susceptor anneal, which coarsened the grains from approximately 20 to 90 μm. The red traces are the microscope software’s multi-grain size measurements (100 μm scale bar).

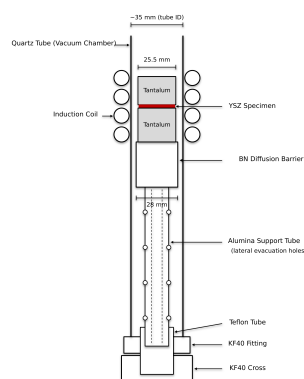


FIG. 8. Sample-assembly configuration for the high-temperature ceramic anneals. The YSZ specimen is sandwiched between two 25.5 mm tantalum susceptor blocks inside the quartz tube. The blocks rest on a boron nitride stub that acts as a diffusion barrier. It prevents reaction between the tantalum and the alumina support tube below, which raises the sample assembly to coil height. The alumina tube has holes bored laterally along its outer perimeter to aid evacuation, and a teflon tube couples its lower end to the KF40 fitting. The coil, vacuum, pyrometer, and control paths are unchanged from the metal configuration.

the nickel specimens needed no metallographic preparation at all. They went straight from the furnace chamber into the EBSD chamber and returned high-quality orientation maps with no grinding, polishing, or etching, while showing the controlled grain growth the system was built to produce.

The same furnace also reaches refractory ceramics without redesign. Exchanging only the materials in contact with the specimen carries the system from metal anneals in the graphite crucible to YSZ grain growth at 2500 °C. The trial-and-error survey behind that result identified chemistry, not power, as the governing constraint at extreme temperature. Every failure mode was a contact reaction among the charge, the susceptor, and the support materials. The interchangeable sample as-

sembly lets a user iterate on those material choices run by run. Because the retrofit requires only a monotonic analog power-control input, the design transfers across generators and is directly reusable at a small fraction of turn-key cost. In the annealed nickel, grains and their boundaries span the full sheet thickness, and the deep thermal grooves that mark those boundaries point to columnar grain-growth studies as a natural next application²⁸.

SUPPLEMENTARY MATERIAL

See the supplementary material for the measured crucible part dimensions, the work-coil drawing, the power-temperature calibration and the representative-soak, repeatability, and long-soak traces, the raw Kikuchi-pattern survey, the tantalum-susceptor heat curves, the YSZ micrographs, the specimen-thermal-history linkage table with links to every raw run log, the itemized bill of materials, and the design-file inventory.

ACKNOWLEDGMENTS

The authors thank Kevin Cole for his supervision and support of the original retrofit, and acknowledge the Johnson group and the Brigham Young University Department of Mechanical Engineering, which funded the capital equipment cost.

AUTHOR DECLARATIONS

Conflict of Interest

The authors have no conflicts to disclose.

Ethics Approval

This work did not involve human or animal subjects; ethics approval is not applicable.

Author Contributions

— provisional: **Sterling G. Baird:** Conceptualization, Software, Investigation, Writing – original draft. **Ryan Weber:** Investigation, Methodology, Data curation, Visualization. **Christopher Nyborg:** Investigation, Methodology, Data curation, Visualization. **Ronnie Guymon:** Visualization, Writing – review & editing. **Gage Erickson:** Visualization, Writing – review & editing. **Oliver Johnson:** Supervision, Project administration.

DATA AVAILABILITY

The data that support the findings of this study are openly available in the development repository (<https://github.com/vertical-cloud-lab/custom-induction-furnace>); an archival snapshot is deposited at Zenodo, <https://doi.org/10.5281/zenodo.20878017>.

- ¹Y.-X. Liu, Z.-J. Ke, R.-H. Li, J.-Q. Song, and J.-J. Ruan, "Study of grain growth in a ni-based superalloy by experiments and cellular automaton model," *Materials* **14**, 6922 (2021).
- ²H. Mohrbacher, "Application of microalloying for controlling recrystallization and grain growth during downstream steel processing," *Metallurgical and Materials Transactions A* **57**, 2548–2571 (2026).
- ³K. Alogab, D. Matlock, J. Speer, and H. Kleebe, "The influence of niobium microalloying on austenite grain coarsening behavior of ti-modified sae 8620 steel," *Isij International* **47**, 307–316 (2007).
- ⁴G. Tian, C. Jia, J. Liu, and B. Hu, "Experimental and simulation on the grain growth of p/m nickel-base superalloy during the heat treatment process," *Materials & Design* **30**, 433–439 (2009).
- ⁵I. Moore, J. Taylor, M. Tracy, M. Burke, and E. Palmiere, "Grain coarsening behaviour of solution annealed alloy 625 between 600–800 °c," *Materials Science and Engineering A-structural Materials Properties Microstructure and Processing* **682**, 402–409 (2017).
- ⁶A. F. Zhorniyak and V. E. Olier, "Reduction and decarburization during the annealing of atomized iron-carbon alloy powders," *Soviet Powder Metallurgy and Metal Ceramics* **21**, 84–93 (1982).
- ⁷Y. Muramatsu, S. Wanikawa, M. Ohtaguchi, H. Okada, and F. Abe, "Gas contamination due to milling atmospheres of mechanical alloying and its effect on impact strength," *Materials Transactions* **46**, 681–686 (2005).
- ⁸V. Rudnev, D. Loveless, R. L. Cook, and M. Black, "Handbook of induction heating," *ArXiv* (2017), 10.1201/9781420028904.
- ⁹O. Lucia, P. Maussion, E. J. Dede, and J. M. Burdío, "Induction heating technology and its applications: Past developments, current technology, and future challenges," *IEEE Transactions on Industrial Electronics* **61**, 2509–2520 (2014).
- ¹⁰W. Vankan, N. van Hoorn, A. de Wit, and T. Koenis, "Electromagnetic induction heating of TP-CFRP laminates: FEM modelling and validation," in *Proceedings of the 34th Congress of the International Council of the Aeronautical Sciences (ICAS)* (The International Council of the Aeronautical Sciences (ICAS), 2024).
- ¹¹Y. Xu, A. Leonhardt, P. Birnbaum, J. Gruner, A. Kunke, and T. Clausmeyer, "Design and optimization of induction coil for improved temperature uniformity in fast heating of sheet metal," *Discover Mechanical Engineering* **5** (2026), 10.1007/s44245-026-00228-5.
- ¹²K. KANDA and H. HASHIMOTO, "Development of high-temperature and low-oxygen atmosphere controlled furnace and its application to metal jointing technology," *Journal of Advanced Mechanical Design Systems and Manufacturing* **1**, 763–774 (2007).
- ¹³M. Inaba, Y. Honma, T. Hatanaka, and Y. Otake, "Effects of the annealing conditions on the oxidation behavior of fe-36ni alloys," *Applied Surface Science* **27**, 164–179 (1986).
- ¹⁴A. Tapetado, J. Diaz-Alvarez, M. H. Miguelez, and C. Vazquez, "Two-color pyrometer for process temperature measurement during machining," *Journal of Lightwave Technology* **34**, 1380–1386 (2016).
- ¹⁵R. Belikov, D. Merges, D. Varentsov, Z. Major, P. Neumayer, P. Hesselbach, M. Schanz, and B. Winkler, "Fast multi-wavelength pyrometer for dynamic temperature measurements," *International Journal of Thermophysics* **45**, 1–12 (2024).
- ¹⁶S. H. Ham, M. Ferte, G. Fricout, L. Depalo, and C. Carteret, "In-situ spectral emissivity measurement of alloy steels during annealing in controlled atmosphere," *Quantitative InfraRed Thermography* (2016), 10.21611/qirt.2016.041.
- ¹⁷F. Suleiman, "Improving pyrometry of advanced high strength steels during intercritical annealing," *Unknown journal* (2025).
- ¹⁸R. Usamentiaga, P. Venegas, J. Guerediaga, L. Vega, J. Molleda, and F. Bulnes, "Infrared thermography for temperature measurement and non-destructive testing," *Sensors* **14**, 12305–12348 (2014).
- ¹⁹J. Meng, H. Gao, M. Ruan, H. Guo, X. Zhou, and D. Zhang, "Design of vacuum annealing furnace temperature control system based on ga-fuzzy-pid algorithm," *PLOS ONE* **18**, e0293823 (2023).
- ²⁰E. Rapoport and Y. Pleshivtseva, "Optimal control of induction heating processes," *ArXiv* (2006), 10.1201/9781420019490.
- ²¹N. Giuliotti, G. Cosoli, R. Napolitano, G. Pandarese, G. M. Revel, and P. Chiariotti, "Spectral emissivity measurement for high-temperature applications: a systematic review," *Acta IMEKO* **14**, 1–17 (2025).
- ²²P. Kieruj, D. Przestacki, and T. Chwalczuk, "Determination of emissivity coefficient of heat-resistant super alloys and cemented carbide," *Archives of Mechanical Technology and Materials* **36**, 30–34 (2016).
- ²³J. I. Goldstein, D. E. Newbury, J. R. Michael, N. W. M. Ritchie, J. H. J. Scott, and D. C. Joy, "Characterizing crystalline materials in the SEM," in *Scanning Electron Microscopy and X-Ray Microanalysis* (Springer New York, 2018) pp. 491–515.
- ²⁴M. Wolf, "Thermodynamic assessment of the stability of bulk and nanoparticulate cobalt and nickel during dry and steam reforming of methane," *RSC Advances* **11**, 18187–18197 (2021).
- ²⁵P. S. Maiya and J. M. Blakely, "Surface self-diffusion and surface energy of nickel," *Journal of Applied Physics* **38**, 698–704 (1967).
- ²⁶C. V. Thompson, "Solid-state dewetting of thin films," *Annual Review of Materials Research* **42**, 399–434 (2012).
- ²⁷T. A. Gladstone, J. C. Moore, A. J. Wilkinson, and C. R. M. Grovenor, "Grain boundary misorientation and thermal grooving in cube-textured Ni and Ni–Cr tape," *IEEE Transactions on Applied Superconductivity* **11**, 2923–2926 (2001).
- ²⁸Z. Zhang, G. Chen, and G. Chen, "Dynamics and mechanism of columnar grain growth of pure iron under directional annealing," *Acta Materialia* **55**, 5988–5998 (2007).