

Retrofitting a commercial RF induction generator into a computer-controlled, vacuum-integrated annealing system for reactive-metal grain growth

Sterling G. Baird, Ryan Weber, Christopher Nyborg, Ronnie Guymon, Gage Erickson, and Oliver Johnson
Department of Mechanical Engineering, Brigham Young University, Provo, Utah 84602, USA

(Dated: 16 July 2026)

High-temperature vacuum annealing near a metal’s melting point drives controlled grain growth, but it normally requires an expensive turn-key vacuum induction furnace. We describe an open modernization stack (the added layer of control, vacuum, and temperature-feedback hardware and software) that converts a bare commercial radio-frequency (RF) induction generator into a computer-controlled, vacuum-integrated annealing system with pyrometer feedback. The stack consists of analog power control through LabVIEW and a data-acquisition (DAQ) device, dual-wavelength optical temperature feedback, a high-vacuum quartz-tube chamber, and an in-house machined graphite crucible that serves as a susceptor (an RF-absorbing element that heats the charge it encloses) for metal specimens. The stack transfers between generators because its only requirement is a monotonic analog power-control input. The reproducible build is anchored on a current 6 kW solid-state generator. In operation, the system produced a fixed-geometry power–temperature calibration with $R^2 = 0.991$ over 1200–1400 °C. Eight nickel anneals at 1200 °C for 12 h reproduced their soak temperature (the constant temperature held for the duration of the anneal) to 1201.2 ± 1.3 °C, and soaks up to 40 h at 1325 °C remained stable. The annealed nickel microstructures were characterized by optical metallography, scanning electron microscopy (SEM), and electron backscatter diffraction (EBSD). A modified charge stack (the stacked specimen, susceptor, and supports inside the chamber) extends the furnace to non-coupling ceramics at temperatures up to 2500 °C, demonstrated with yttria-stabilized zirconia (YSZ) grain growth. Complete design files, the bill of materials, the control software, and the data are openly available.

Keywords: induction furnace; grain growth; vacuum annealing; LabVIEW; pyrometer; open-source hardware

I. INTRODUCTION

High-temperature annealing near a metal’s melting point drives controlled grain growth. This is central to studying microstructure–property relationships in metals such as nickel and iron^{1–5}. Growing grains without oxidizing the sample requires temperatures of 1400 to 1500 °C along with high vacuum or an inert atmosphere^{6,7}. Commercial vacuum induction furnaces that meet these requirements are closed, turn-key systems costing \$50k to \$200k or more. Resistive tube and box furnaces reach lower temperatures with slower ramps, and they offer no susceptor route to charges that do not couple to the radio-frequency (RF) field. A susceptor is a material that absorbs RF energy and transfers the heat to such a charge. Bare industrial induction generators are widely available, but they ship without vacuum, optical temperature feedback, or computer setpoint control.

This work adds that missing layer. A bare RF induction generator^{8,9} is retrofitted into a full annealing system with computer power control, closed-loop optical temperature feedback, a high-vacuum quartz-tube chamber, and a machined graphite crucible that doubles as a susceptor. The stack (the retrofit layer as a whole) is deliberately generator-agnostic. Its only requirement is an analog power-control input, such as 4–20 mA or 0–5 V, with a monotonic command-to-power response. The pyrometer feedback and proportional–integral–derivative (PID) calibration absorb any nonlinearity in that

response. The generator internals are not reproduced, so a compatible generator needs to be supplied. The graphite crucible couples strongly to the RF field and serves the metal grain-growth charges. Non-coupling ceramics such as yttria-stabilized zirconia (YSZ) use a modified charge stack (the stacked specimen, susceptor, and supports inside the chamber) in which graphite or tantalum serves as the susceptor, chosen for chemical compatibility with the specimen (Sec. V A).

The reproducible build documented here is anchored on a current, USA-sourced 6 kW solid-state generator whose controller accepts a standard 4–20 mA power setpoint. The package of generator, heating head, controller, and chiller was quoted at approximately \$16.5k. The retrofit components are itemized in the bill of materials in the supplementary material. This is a small fraction of turn-key cost, in a form the user can repair and modify.

II. SYSTEM DESIGN AND DESCRIPTION

The system comprises five subsystems (Fig. 1). Figure 2 shows the assembled system at operating power.

The heating subsystem is a 6 kW solid-state induction generator driving a liquid-cooled copper work coil. The coil is approximately 3 in tall and 2.5 in in inner diameter, with 6.5 turns tuned to the sample and crucible stack^{10,11}. The coil conductors carry both the RF current and the coolant. Ethylene glycol coolant flows

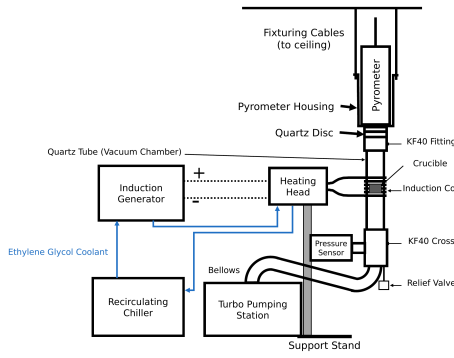


FIG. 1. System overview. The generator drives the liquid-cooled heating head and work coil around the vertically suspended quartz-tube chamber. The chamber stack is joined by KF40 flanges to the ceiling-suspended pyrometer housing. An overpressure relief valve and a flexible bellows lead past the pressure sensor to the turbo pumping station.

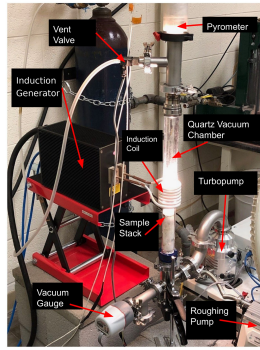


FIG. 2. The assembled, functioning furnace with the main components labeled. The quartz chamber glows at the sample-stack position. The pyrometer sights down the chamber axis, and the vent valve admits the argon backfill. The gauge, turbopump, and separately supported roughing pump complete the vacuum path.

in series from the chiller through the generator and then through the heating head and work coil before returning to the chiller. The vacuum and gas subsystem starts from the 35 mm inner-diameter fused-quartz tube that forms the chamber. The tube connects through a KF40 flange (a standard clamp-sealed vacuum flange) and a flexible bellows to a compact turbo pumping station that reaches 10^{-6} to 10^{-8} Torr. A manual vent valve fed from an inert-gas regulator allows controlled venting and backfilling^{12,13}. The atmosphere matters for graphite-crucible anneals. The best results were achieved by pumping to high vacuum and then backfilling with argon through the vent valve. The chamber was purged first, and a constant argon flow of 20 standard cubic centimeters per minute (SCCM) was then maintained for the duration of the anneal. The nickel grain-growth anneals reported below all ran under this continuous flow. Heating under vacuum alone tended to sublime graphite onto the chamber walls. The highest-

temperature ceramic work (Sec. V A) used the same continuous argon supply, with the chamber evacuated and then filled with argon while the turbopump was running. This helped avoid oxidation during heating.

Temperature is sensed optically. A dual-wavelength ratio pyrometer^{14,15} with an 800 to 2500 °C sensing range views the sample through a KF40 optical window. This provides a non-contact signal that is robust to emissivity changes and to the RF field that would corrupt thermocouples^{16–18}. Control is implemented in LabVIEW, with virtual instruments (VIs) for manual control, automated ramping, PID tuning, and email alerts. The data-acquisition (DAQ) device's 0–5 V analog output drives a voltage-to-current loop conditioner, and the conditioner's 4–20 mA output lands on the generator's power-setpoint input. The pyrometer's analog output returns to a DAQ input, which closes the PID loop. Below the pyrometer's detection floor of approximately 700 °C, the VI ramps open-loop. Once the pyrometer returns a sustained valid reading, control hands over to closed-loop PID on the optical temperature^{19,20}. Mechanically, a bolted support stand carries the generator's heating head and centers the work coil on the crucible position. The vacuum chamber itself has no support stand. The chamber stack (the vertical column of vacuum hardware) is joined by KF40 flanges to the pyrometer housing, which is suspended from the ceiling by cables, so the vertical stack hangs from above.

Metal charges in the graphite crucible reach the nickel and iron grain-growth range of 1400 to 1500 °C, with demonstrated soaks (constant-temperature holds) from minutes to 40 h. The modified ceramic charge stack extends the working range to 2500 °C. The layer transfers to any generator that exposes a monotonic analog power input, supports a liquid-cooled head and coil of the documented geometry, delivers enough RF power for the target charge, and allows electrical isolation of the DAQ and control path. When porting, the command scaling, calibration, PID gains, alignment, and interlock behavior are re-established.

A. Graphite crucible / susceptor

Metal specimens are held in a two-piece graphite crucible machined in-house from 3000 °C-grade graphite stock. It consists of a cup body and a lidded cap with a central bore, which contains the charge while leaving an optical path for the pyrometer. Figure 3 shows the disassembled parts. The graphite couples strongly to the induction field and acts as a susceptor, heating the contained metal specimen by conduction and radiation. The specimen is sandwiched between two alumina discs in the cup, the lid seats on top, and a sapphire window closes the lid bore (Fig. 4). Sapphire is used for the window to increase transmittance in the wavelength ranges emitted from the sample relative to the pyrometry. When fully assembled the stack stands 13 mm tall, and

the measured dimensions of every piece are given in the supplementary material. Inside the vacuum chamber the crucible rests on an alumina support rod that positions it at coil height. Crucibles are repaired with graphite cement rather than discarded. The crucible primarily serves the metal grain-growth charges. Graphite also works as a susceptor for some ceramic charges when the contact chemistry permits. Sec. VA describes how a compatible susceptor is selected for refractory ceramics.



FIG. 3. Fully disassembled graphite crucible. Top left is the crucible lid, top middle is the bottom of the crucible that acts as the specimen carrier, far right is the sapphire window, bottom left and middle are the alumina sample-surrounding sheets.

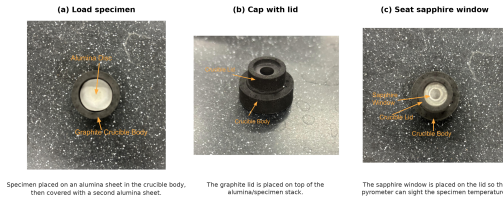


FIG. 4. Specimen-loading sequence for the graphite crucible/susceptor. (a) The specimen is placed between two alumina sheets in the crucible body. (b) The graphite lid is seated on top. (c) The sapphire window closes the lid bore, leaving an optical path for the pyrometer.

III. CONSTRUCTION AND OPERATION

Following the heating path, the generator's heating head mounts on an adjustable platform on the bolted support stand so the coil centers on the crucible position of the vertically suspended quartz tube. The vacuum path begins at the quartz tube, whose open end terminates in a KF40 flange closed by a 55 mm quartz optical disc. Every flanged joint compresses an elastomer O-ring carried on a centering ring, so the stack assembles with hand-tightened clamps and no tools. These seals support the 10^{-6} to 10^{-8} Torr operating vacuum. From the bottom of the stack, a tee carries a 0.5 psi overpressure relief valve that protects the quartz tube during backfilling. A flexible bellows continues

through the wide-range vacuum gauge to the turbo pumping station. The roughing pump sits on a separate support, mechanically decoupled so its vibration does not reach the chamber or the pyrometer sight line. Figure 5 shows the pumping station as installed, together with the relief valve at the base of the stack. On the gas path, the argon regulator feeds the manual vent valve. A mass flow controller between them is helpful when continuous inert gas flow is required. On the control path, electrical isolation is maintained between the DAQ wiring and the generator interface. Manual control is verified before automated ramping and soaking are enabled.

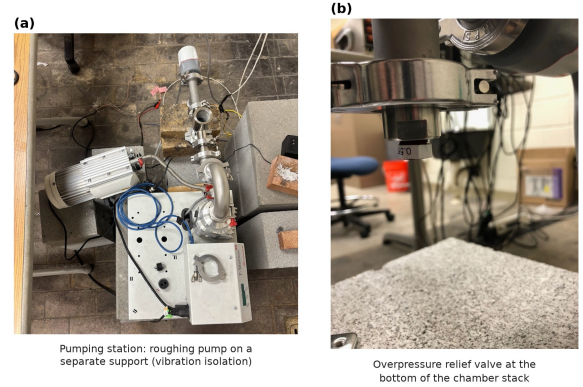


FIG. 5. Vacuum and gas-handling details. (a) Turbo pumping station with the roughing pump mounted on a separate support. The pump couples to the pumping station only through a flexible hose, so its vibration is not transmitted into the chamber. (b) Overpressure relief valve (0.5 psi cracking pressure) at the bottom of the vacuum chamber stack.

A run begins with the chamber vented, which is done only after the turbo pump has stopped spinning. The specimen is loaded into the crucible (Fig. 4), the stack is inserted, and the chamber is pumped down. The LabVIEW profile ramps open-loop below the pyrometer floor, hands over to closed-loop PID, and runs the programmed soak. Afterwards the sample cools under vacuum, and the chamber is vented only once the turbo pump has stopped.

IV. PERFORMANCE VALIDATION

The furnace has completed more than one hundred logged anneals of Ni200 and Ni4N5 nickel and palladium (Pd) thermal-evaporation charges at 900 to 1400 °C, with soaks from minutes to 40 h. The supplementary material links each result below to its underlying run log.

For one fixed configuration of Ni4N5 specimen, quartz tube, graphite crucible, and optics, four steady-state anneals spanning 1200 to 1400 °C give a monotonic relation between the soak-mean analog power command and the soak-mean pyrometer temperature. The relation is well described by $T = 931 + 632 I$, with T in °C and I in mA, and $R^2 = 0.991$. The offset shifts with charge and

optical configuration, so this is an operational calibration for a given setup, not a universal command–temperature law. A Ni4N5 anneal at a nominal 1300 °C and 12 h condition serves as the representative closed-loop run, and its trace is given in the supplementary material. The soak held 1302.1 ± 3.0 °C over the 12 h plateau. The 10–90 % rise time was approximately 1135 s, the overshoot was approximately 12 °C, and the drift was a negligible -0.02 °C per hour.

Eight Ni4N5 anneals at a nominal 1200 °C and 12 h condition were run under the same gas-flow configuration. They reproduced their soak temperature to 1201.2 ± 1.3 °C, a coefficient of variation of 0.11 %. Long-duration stability was demonstrated with two Ni200 anneals at 1325 °C. The first held for 20 h at 1326.5 ± 1.5 °C with a drift of -0.004 °C per hour, and the second held for 40 h. Figures for both are in the supplementary material. Reported temperatures are closed-loop ratio-pyrometer readings in a fixed optical geometry. Absolute specimen temperature still depends on emissivity and surface condition^{16,21,22}.

V. MICROSTRUCTURAL VALIDATION

The furnace exists to change microstructure, so the decisive test is what the anneals do to real specimens. Figure 6 shows a raw electron backscatter diffraction (EBSD) pattern, also called a Kikuchi pattern, from a furnace-annealed nickel specimen, reproduced exactly as the EBSD detector saved it during orientation mapping. Even at the coarse 8×8 binning used for mapping, the bands and zone axes are crisply resolved. Inverse-pole-figure maps built from such patterns resolve hundreds of indexed grains per specimen (Fig. 7). Each indexed color in the map is a crystallographic orientation, so a single map records both the grain sizes and the texture of the annealed specimen. Thermal grooving is itself a record of the anneal. Figure 8 shows edge-on views of a Ni4N5 specimen annealed at 1200 °C for 12 h and cleaned only ultrasonically. The grooves are deep, and several boundaries traverse the full sheet thickness. This is a step toward columnar grain structures²³.




FIG. 6. Raw electron backscatter diffraction (EBSD) Kikuchi pattern from a furnace-annealed nickel specimen, exactly as saved by the EBSD detector during orientation mapping (the detector’s 8×8 -binned output). The crisply resolved bands and zone axes index directly to the nickel lattice.

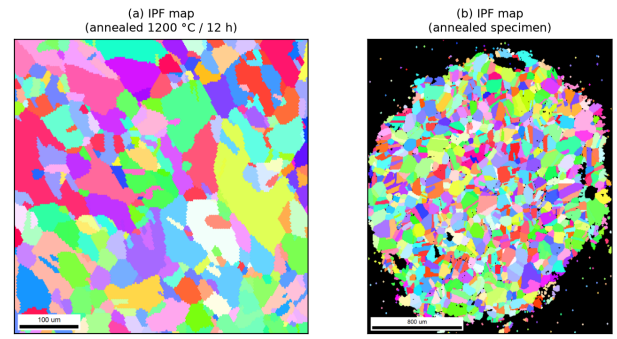


FIG. 7. EBSD inverse-pole-figure (IPF) orientation maps of two furnace-annealed Ni4N5 specimens, rendered from the recorded EBSD scans. (a) A specimen annealed at 1200 °C for 12 h (100 μm scale bar). (b) A second annealed specimen (800 μm scale bar). The maps resolve hundreds of grains for grain-size and texture analysis.

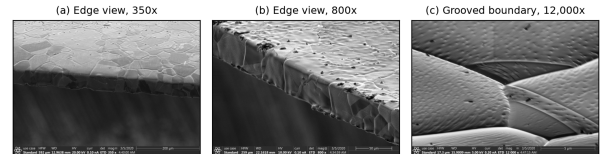


FIG. 8. Grain-boundary thermal grooving on a Ni4N5 specimen after a 1200 °C / 12 h anneal, imaged edge-on in the as-annealed condition after only an ultrasonic ethanol clean. (a) Edge view at 350× (200 μm scale bar). Several grain boundaries traverse the full sheet thickness. (b) Edge and top surface at 800× (50 μm scale bar). The grooves outline the surface grain structure. (c) A single grooved boundary at 12,000× (5 μm scale bar). The deep trench develops as grain-boundary energy equilibrates against surface energy at the soak temperature.

Figure 9 shows the microstructure such an anneal produces for a Ni4N5 specimen soaked 20 h at 1300 °C under the constant 20 SCCM argon flow, with a measured soak of approximately 1301 °C. The optical grain map resolves an equiaxed grain network delineated by thermal grooving alone. Grain-size measurements were made directly in the image against its 200 μm scale bar. The scanning electron microscopy (SEM) detail resolves an individual boundary groove at the micrometer scale²⁴.

A. Extension to ceramic charges: YSZ

The same induction furnace can also be used to process refractory ceramics by modifying only the materials directly in contact with the specimen while leaving the generator, vacuum system, pyrometer, cooling system, and control software unchanged. Materials that do not couple directly to the RF field require a susceptor to absorb RF energy and transfer heat to the specimen. At the temperatures required for grains to coarsen on refractory ceramics, the primary consideration in

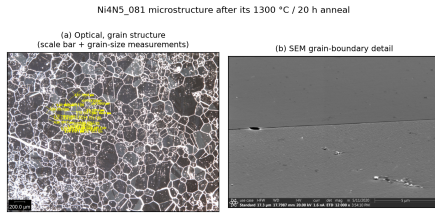


FIG. 9. Microstructure of a Ni4N5 specimen after a 1300 °C / 20 h anneal under a constant 20 SCCM argon flow. (a) Optical grain map with in-image grain-size measurements (200 μm scale bar); (b) high-magnification SEM grain-boundary detail.

selecting a susceptor is its chemical compatibility with the specimen and surrounding support materials rather than its RF heating performance. Graphite and tantalum both serve effectively as susceptors, with the preferred choice depending on the operating temperature and the materials in contact with the susceptor.

Grain growth in refractory ceramics follows Arrhenius kinetics and is therefore highly sensitive to annealing temperature. For the 8 mol% YSZ specimens investigated here, grain growth from approximately 10 μm to 90 μm required 228 h at 1600 °C in a conventional box furnace, whereas comparable grain growth was achieved in only 45 min at 2500 °C using the induction furnace (Fig. 10). Achieving these temperatures required only minor modifications to the charge stack (Fig. 11). For example, direct contact between graphite and alumina was eliminated because they undergo a eutectic reaction that lowers the interface melting temperature to approximately 1800 °C. This was accomplished by introducing a boron nitride diffusion barrier between the two materials. Alternatively, replacing the graphite with tantalum avoids this compatibility issue while still providing efficient RF coupling.



FIG. 10. As-recorded optical micrograph of the YSZ specimen after the 2500 °C / 45 min tantalum-susceptor anneal, which coarsened the grains from approximately 20 to 90 μm . The red multi-grain measurement traces and the 100 μm scale bar are part of the original microscope record.

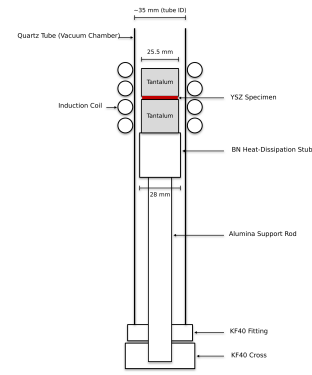


FIG. 11. Charge-stack configuration for the high-temperature ceramic anneals. The YSZ specimen is sandwiched between two 25.5 mm tantalum susceptor blocks inside the quartz tube. The blocks rest on a boron nitride heat-dissipation stub, which sits on the alumina support rod that raises the stack to coil height. The coil, vacuum, pyrometer, and control paths are unchanged from the metal configuration.

VI. CONCLUSIONS

A bare commercial RF induction generator can be converted into a computer-controlled, vacuum-integrated, pyrometer-feedback annealing system with a documented, generator-agnostic modernization layer. On a current solid-state generator the stack demonstrated a power-temperature calibration with $R^2 = 0.991$, high soak repeatability, stable closed-loop soaks up to 40 h, and annealed nickel whose surfaces index directly in the EBSD and show controlled grain growth.

The ceramic extension shows how far the same furnace stretches without redesign. Exchanging only the materials in contact with the specimen carries the system from metal anneals in the graphite crucible to ceramic grain growth at 2500 °C. The trial-and-error survey behind that result identified chemistry, not power, as the governing constraint at extreme temperature. Every failure mode was a contact reaction among the charge, the susceptor, and the support materials. The interchangeable stack lets a user iterate on those material choices run by run. Because the modernization layer requires only a monotonic analog power-control input, the design ports across generators and is directly reusable at a small fraction of turn-key cost. The through-thickness boundary grooving points to columnar grain-growth studies as a natural next application.

SUPPLEMENTARY MATERIAL

See the supplementary material for the measured crucible part dimensions, the work-coil drawing, the power-temperature calibration and the representative-soak, repeatability, and long-soak traces, the raw

Kikuchi-pattern survey, the tantalum-susceptor heat curves, the YSZ micrographs, the specimen-thermal-history linkage table with links to every raw run log, the itemized bill of materials, and the design-file inventory.

ACKNOWLEDGMENTS

The authors thank Kevin Cole for his supervision and support of the original retrofit, and acknowledge the BYU Mechanical Engineering Department and the Johnson group.

AUTHOR DECLARATIONS

Conflict of Interest

The authors have no conflicts to disclose.

Ethics Approval

This work did not involve human or animal subjects; ethics approval is not applicable.

Author Contributions

— provisional: **Sterling G. Baird:** Conceptualization, Software, Investigation, Writing – original draft. **Ryan Weber:** Investigation, Methodology, Data curation, Visualization. **Christopher Nyborg:** Investigation, Methodology, Data curation, Visualization. **Ronnie Guymon:** Visualization, Writing – review & editing. **Gage Erickson:** Visualization, Writing – review & editing. **Oliver Johnson:** Supervision, Project administration.

DATA AVAILABILITY

The data that support the findings of this study are openly available in the development repository (<https://github.com/vertical-cloud-lab/custom-induction-furnace>); an archival snapshot is deposited at Zenodo, <https://doi.org/10.5281/zenodo.20878017>.

¹Y.-X. Liu, Z.-J. Ke, R.-H. Li, J.-Q. Song, and J.-J. Ruan, “Study of grain growth in a ni-based superalloy by experiments and cellular automaton model,” *Materials* **14**, 6922 (2021).

²H. Mohrbacher, “Application of microalloying for controlling recrystallization and grain growth during downstream steel processing,” *Metallurgical and Materials Transactions A* **57**, 2548–2571 (2026).

³K. Alogab, D. Matlock, J. Speer, and H. Kleebe, “The influence of niobium microalloying on austenite grain coarsening behavior of ti-modified sae 8620 steel,” *Isij International* **47**, 307–316 (2007).

⁴G. Tian, C. Jia, J. Liu, and B. Hu, “Experimental and simulation on the grain growth of p/m nickel-base superalloy during the heat treatment process,” *Materials & Design* **30**, 433–439 (2009).

⁵I. Moore, J. Taylor, M. Tracy, M. Burke, and E. Palmiere, “Grain coarsening behaviour of solution annealed alloy 625 between 600–800 °c,” *Materials Science and Engineering A-structural Materials Properties Microstructure and Processing* **682**, 402–409 (2017).

⁶A. F. Zhorniyak and V. E. Olikier, “Reduction and decarburization during the annealing of atomized iron-carbon alloy powders,” *Soviet Powder Metallurgy and Metal Ceramics* **21**, 84–93 (1982).

⁷Y. Muramatsu, S. Wanikawa, M. Ohtaguchi, H. Okada, and F. Abe, “Gas contamination due to milling atmospheres of mechanical alloying and its effect on impact strength,” *Materials Transactions* **46**, 681–686 (2005).

⁸V. Rudnev, D. Loveless, R. L. Cook, and M. Black, “Handbook of induction heating,” *ArXiv* (2017), 10.1201/9781420028904.

⁹O. Lucia, P. Maussion, E. J. Dede, and J. M. Burdío, “Induction heating technology and its applications: Past developments, current technology, and future challenges,” *IEEE Transactions on Industrial Electronics* **61**, 2509–2520 (2014).

¹⁰W. Vankan, N. van Hoorn, A. de Wit, and T. Koenis, “Electromagnetic induction heating of TP-CFRP laminates: FEM modelling and validation,” in *Proceedings of the 34th Congress of the International Council of the Aeronautical Sciences (ICAS)* (The International Council of the Aeronautical Sciences (ICAS), 2024).

¹¹Y. Xu, A. Leonhardt, P. Birnbaum, J. Gruner, A. Kunke, and T. Clausmeyer, “Design and optimization of induction coil for improved temperature uniformity in fast heating of sheet metal,” *Discover Mechanical Engineering* **5** (2026), 10.1007/s44245-026-00228-5.

¹²K. KANDA and H. HASHIMOTO, “Development of high-temperature and low-oxygen atmosphere controlled furnace and its application to metal jointing technology,” *Journal of Advanced Mechanical Design Systems and Manufacturing* **1**, 763–774 (2007).

¹³M. Inaba, Y. Honma, T. Hatanaka, and Y. Otake, “Effects of the annealing conditions on the oxidation behavior of fe-36ni alloys,” *Applied Surface Science* **27**, 164–179 (1986).

¹⁴A. Tapetado, J. Diaz-Alvarez, M. H. Miguelez, and C. Vazquez, “Two-color pyrometer for process temperature measurement during machining,” *Journal of Lightwave Technology* **34**, 1380–1386 (2016).

¹⁵R. Belikov, D. Merges, D. Varentsov, Z. Major, P. Neumayer, P. Hesselbach, M. Schanz, and B. Winkler, “Fast multi-wavelength pyrometer for dynamic temperature measurements,” *International Journal of Thermophysics* **45**, 1–12 (2024).

¹⁶S. H. Ham, M. Ferte, G. Fricout, L. Depalo, and C. Carteret, “In-situ spectral emissivity measurement of alloy steels during annealing in controlled atmosphere,” *Quantitative InfraRed Thermography* (2016), 10.21611/qirt.2016.041.

¹⁷F. Suleiman, “Improving pyrometry of advanced high strength steels during intercritical annealing,” *Unknown journal* (2025).

¹⁸R. Usamentiaga, P. Venegas, J. Guerediaga, L. Vega, J. Molleda, and F. Bulnes, “Infrared thermography for temperature measurement and non-destructive testing,” *Sensors* **14**, 12305–12348 (2014).

¹⁹J. Meng, H. Gao, M. Ruan, H. Guo, X. Zhou, and D. Zhang, “Design of vacuum annealing furnace temperature control system based on ga-fuzzy-pid algorithm,” *PLOS ONE* **18**, e0293823 (2023).

²⁰E. Rapoport and Y. Pleshivtseva, “Optimal control of induction heating processes,” *ArXiv* (2006), 10.1201/9781420019490.

²¹N. Giuletta, G. Cosoli, R. Napolitano, G. Pandarese, G. M. Revel, and P. Chiariotti, “Spectral emissivity measurement for high-temperature applications: a systematic review,” *Acta IMEKO* **14**, 1–17 (2025).

²²P. Kieruj, D. Przestacki, and T. Chwalczuk, “Determination of emissivity coefficient of heat-resistant super alloys and cemented

carbide,” [Archives of Mechanical Technology and Materials](#) **36**, 30–34 (2016).

²³Z. Zhang, G. Chen, and G. Chen, “Dynamics and mechanism of columnar grain growth of pure iron under directional annealing,” [Acta Materialia](#) **55**, 5988–5998 (2007).

²⁴B. Bramfitt and A. Benschoter, “Metallographer’s guide: practice and procedures for irons and steels,” Unknown journal (2001).